

# Core Animation Programming Guide

# Contents

## **Introduction to Core Animation Programming Guide** 8

Organization of This Document 8

See Also 9

## **What Is Core Animation?** 10

Core Animation Classes 10

Layer Classes 11

Animation and Timing Classes 13

Layout Manager Classes 14

Transaction Management Classes 14

## **Core Animation Rendering Architecture** 15

## **Layer Geometry and Transforms** 17

Layer Coordinate System 17

Specifying a Layer's Geometry 17

Transforming a Layer's Geometry 21

Transform Functions 21

Modifying the Transform Data Structure 23

Modifying a Transform Using Key Paths 24

## **Layer-Tree Hierarchy** 26

What Is a Layer-Tree Hierarchy? 26

Displaying Layers in Views 26

Adding and Removing Layers from a Hierarchy 27

Repositioning and Resizing Layers 28

Autoresizing Layers 28

Clipping Sublayers 30

## **Providing Layer Content** 31

Providing CALayer Content 31

Setting the Contents Property 31

Using a Delegate to Provide Content 32

Providing CALayer Content by Subclassing 33

---

Positioning Content Within a Layer 35

## **Animation** 38

Animation Classes and Timing 38

Implicit Animation 39

Explicit Animation 40

Starting and Stopping Explicit Animations 42

## **Layer Actions** 43

The Role of Action Objects 43

Defined Search Pattern for Action Keys 43

Adopting the CAAction Protocol 44

Overriding an Implied Animation 45

Temporarily Disabling Actions 46

## **Transactions** 47

Implicit transactions 47

Explicit Transactions 47

    Temporarily Disabling Layer Actions 48

    Overriding the Duration of Implied Animations 48

    Nesting Transactions 49

## **Laying Out Core Animation Layers** 50

Constraints Layout Manager 50

## **Core Animation Extensions To Key-Value Coding** 55

Key-Value Coding Compliant Container Classes 55

Default Value Support 55

Wrapping Conventions 56

Key Path Support for Structure Fields 56

## **Layer Style Properties** 59

Geometry Properties 59

Background Properties 60

Layer Content 61

Sublayers Content 62

Border Attributes 63

Filters Property 64

Shadow Properties 65

Opacity Property 66

---

Composite Property 67

Mask Properties 68

## **Example: Core Animation Kiosk Menu Style Application** 69

The User Interface 69

Examining the Nib File 70

The Layer Hierarchy 70

Examining the Application's Nib 72

Examining the Application's Code 73

QCCoreAnimationKioskStyleMenu.h and QCCoreAnimationKioskStyleMenu.m Files 73

Examining SelectionView.h 73

Examining SelectionView.m 74

Performance Considerations 82

## **Animatable Properties** 84

CALayer Animatable Properties 84

CIFilter Animatable Properties 86

## **Document Revision History** 87

# Figures, Tables, and Listings

## What Is Core Animation? 10

Figure 1 Core Animation class hierarchy 11

## Core Animation Rendering Architecture 15

Figure 1 Core Animation Rendering Architecture 15

## Layer Geometry and Transforms 17

Figure 1 CALayer geometry properties 18

Figure 2 Three anchorPoint values 19

Figure 3 Anchor Point of (0.5,0.5) 20

Figure 4 Layer Origin of (0.0,0.0) 20

Table 1 CATransform3D transform functions for translation, rotation, and scaling 22

Table 2 CATransform3D transform functions for CGAffineTransform conversion 22

Table 3 CATransform3D transform functions for testing equality 23

Table 4 CATransform3D key paths 24

Listing 1 CATransform3D structure 23

Listing 2 Modifying the CATransform3D data structure directly 24

## Layer-Tree Hierarchy 26

Figure 1 Layer autoresizing mask constants 29

Figure 2 Example Values of the masksToBounds property 30

Table 1 Layer-tree management methods. 27

Table 2 Autoresizing mask values and descriptions 28

Listing 1 Inserting a layer into a view 27

## Providing Layer Content 31

Figure 1 Position constants for a layer's contentsGravity property 36

Figure 2 Scaling constants for a layer's contentsGravity property 37

Table 1 Positioning constants for a layer's contentsGravity property 35

Table 2 Scaling Constants For A Layer's contentsGravity Property 36

Listing 1 Setting a layer's contents property 31

Listing 2 Example implementation of the delegate method displayLayer: 32

Listing 3 Example implementation of the delegate method drawLayer:inContext: 33

Listing 4 Example override of the CALayer display method 34

---

Listing 5      Example override of the `CALayer drawInContext:` method 34

## **Animation** 38

Listing 1      Implicitly animating a layer's position property 39

Listing 2      Implicitly animating multiple properties of multiple layers 39

Listing 3      Explicit animation 40

Listing 4      Continuous explicit animation example 40

## **Layer Actions** 43

Table 1      Action triggers and their corresponding identifiers 43

Listing 1      `runActionForKey:object:arguments:` implementation that initiates an animation 44

Listing 2      Implied animation for the `contents` property 45

Listing 3      Implied animation for the `sublayers` property 46

## **Transactions** 47

Listing 1      Animation using an implicit transaction 47

Listing 2      Temporarily disabling a layer's actions 48

Listing 3      Overriding the animation duration 48

Listing 4      Nesting explicit transactions 49

## **Laying Out Core Animation Layers** 50

Figure 1      Constraint layout manager attributes 51

Figure 2      Example constraints based layout 52

Listing 1      Configuring a layer's constraints 52

## **Core Animation Extensions To Key-Value Coding** 55

Listing 1      Example implementation of `defaultValueForKey:` 56

## **Layer Style Properties** 59

Figure 1      Layer geometry 59

Figure 2      Layer with background color 60

Figure 3      Layer displaying a content image 61

Figure 4      Layer displaying the sublayers content 62

Figure 5      Layer displaying the border attributes content 63

Figure 6      Layer displaying the filters properties 64

Figure 7      Layer displaying the shadow properties 65

Figure 8      Layer including the opacity property 66

Figure 9      Layer composited using the `compositingFilter` property 67

Figure 10      Layer composited with the `mask` property 68

---

## **Example: Core Animation Kiosk Menu Style Application** 69

Figure 1	Core Animation Kiosk Menu Interface	70
Figure 2	Layer Hierarchy For QCCoreAnimationKioskStyleMenu Application	70
Figure 3	MainMenu.nib File	72
Figure 4	Alternate Interface With Black Background.	83
Listing 1	SelectionView.h File Listing	73
Listing 2	Implementation of awakeFromNib	75
Listing 3	Configuration of the Background rootLayer	76
Listing 4	Setup menuLayers Array. The Selectable Menu Items.	77
Listing 5	Setup selectionLayer. Used to Display the Currently Selected Item.	79
Listing 6	Handle Changes in Selection	80
Listing 7	Handling Up and Down Key Presses	81
Listing 8	Dealloc and Cleanup	81

## **Animatable Properties** 84

Table 1	Default Implied Basic Animation	86
Table 2	Default Implied Transition	86

# Introduction to Core Animation Programming Guide

This document describes the fundamental concepts involved in using Core Animation. Core Animation is an Objective-C framework that combines a high-performance compositing engine with a simple to use animation programming interface.

You should read this document to gain an understanding of working with Core Animation in a Cocoa application. *The Objective-C Programming Language* should be considered a prerequisite because Core Animation makes extensive use of Objective-C properties. You should also be familiar with key-value coding as described in *Key-Value Coding Programming Guide*. Familiarity with the Quartz 2D imaging technologies described in *Quartz 2D Programming Guide* is also helpful, although not required.

You can build Cocoa applications for two platforms: the OS X operating system and iOS, the operating system for multi-touch devices such as iPhone and iPod touch. Core Animation Programming Guide presents Cocoa-related information for both platforms, integrating the information as much as possible and pointing out platform differences when necessary.

## Organization of This Document

*Core Animation Programming Guide* consists of the following articles:

- [“What Is Core Animation?”](#) (page 10) provides an overview of Core Animation’s capabilities.
- [“Layer Geometry and Transforms”](#) (page 17) describes layer geometry and transformations.
- [“Layer-Tree Hierarchy”](#) (page 26) describes the layer-tree and how an application can manipulate it.
- [“Providing Layer Content”](#) (page 31) describes how to provide basic layer content.
- [“Animation”](#) (page 38) describes the Core Animation animation model.
- [“Layer Actions”](#) (page 43) describes layer actions and how to implement implicit animations.
- [“Transactions”](#) (page 47) describes how to group animations using transactions.
- [“Laying Out Core Animation Layers”](#) (page 50) describes the constraints layout manager
- [“Core Animation Extensions To Key-Value Coding”](#) (page 55) describes the key-value coding extensions that Core Animation provides.
- [“Layer Style Properties”](#) (page 59) describes the layer style properties and provides examples of their visual effects.



- [“Example: Core Animation Kiosk Menu Style Application”](#) (page 69) dissects a Core Animation driven user interface.
- [“Animatable Properties”](#) (page 84) summarizes the animatable properties of layers and filters.

## See Also

These programming guides discuss some of the technologies that are used by Core Animation:

- *Animation Types and Timing Programming Guide* describes the animation classes and timing features used by Core Animation.
- *Core Animation Cookbook* contains code fragments that demonstrate common Core Animation tasks.
- *Quartz 2D Programming Guide* describes the two-dimensional drawing engine used to draw the content of a `CALayer` instance.
- *Core Image Programming Guide* describes the OS X image processing technology and shows how to use the Core Image API.

# What Is Core Animation?

Core Animation is a collection of Objective-C classes for graphics rendering, projection, and animation. It provides fluid animations using advanced compositing effects while retaining a hierarchical layer abstraction that is familiar to developers using the Application Kit and Cocoa Touch view architectures.

Dynamic, animated user interfaces are hard to create, but Core Animation makes creating these interfaces easier by providing:

- High performance compositing with a simple approachable programming model.
- A familiar view-like abstraction that allows you to create complex user interfaces using a hierarchy of layer objects.
- A lightweight data structure. You can display and animate hundreds of layers simultaneously.
- An abstract animation interface that allows animations to run on a separate thread, independent of your application's run loop. Once an animation is configured and starts, Core Animation assumes full responsibility for running it at frame rate.
- Improved application performance. Applications need only redraw content when it changes. Minimal application interaction is required for resizing and providing layout services layers. Core Animation also eliminates application code that runs at the animation frame-rate.
- A flexible layout manager model, including a manager that allows the position and size of a layer to be set relative to attributes of sibling layers.

Using Core Animation, developers can create dynamic user interfaces for their applications without having to use low-level graphics APIs such as OpenGL to get respectable animation performance.


## Core Animation Classes

Core Animation classes can be grouped into several categories:

- Layer classes that provide content for display
- Animation and timing classes
- Layout and constraint classes
- A transaction class that groups multiple layer changes into an atomic update

The basic Core Animation classes are contained in the Quartz Core framework, although additional layer classes can be defined in other frameworks. “Core Animation Classes” shows the class hierarchy of Core Animation.

Figure 1 Core Animation class hierarchy

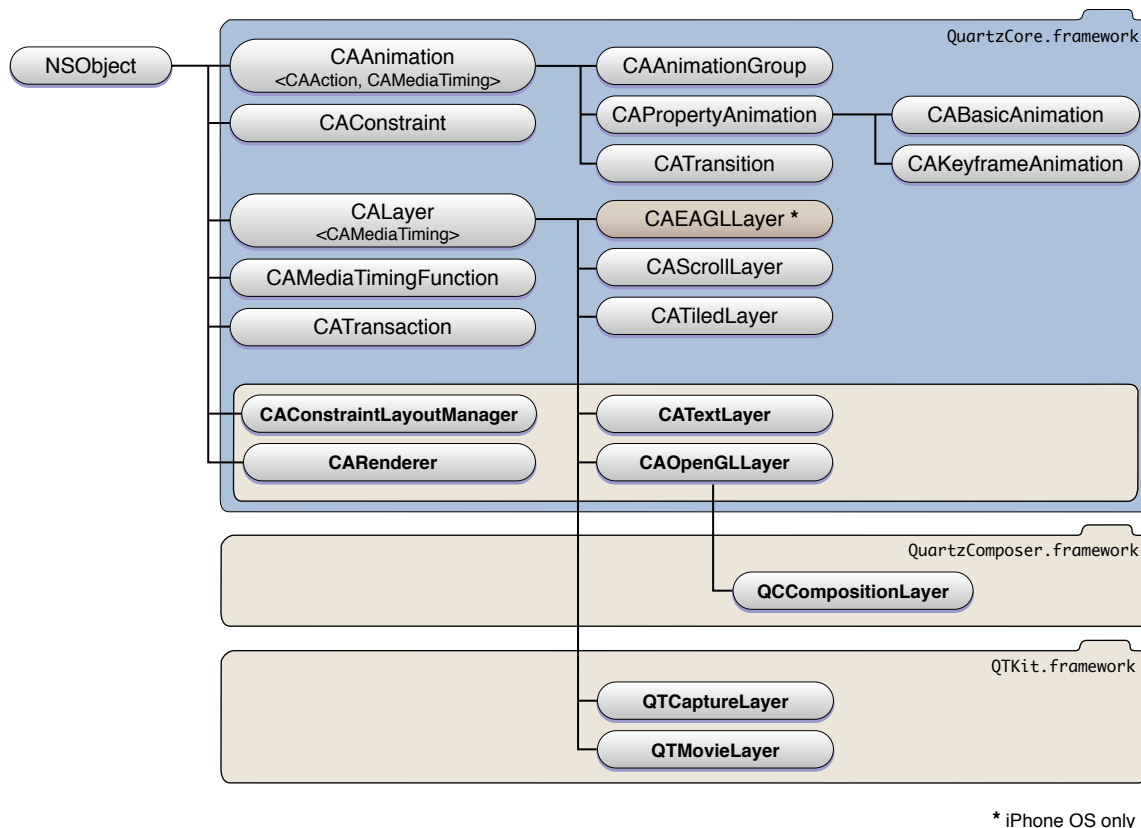

## Layer Classes

The layer classes are the foundation of Core Animation and provide an abstraction that should be familiar to developers who have used `NSView` or `UIView`. Basic layer functionality is provided by the `CALayer` class, which is the parent class for all types of Core Animation layers.

As with an instance of a view class, a `CALayer` instance has a single parent layer (the superlayer) and a collection of sublayers, creating a hierarchy of layers that is referred to as the layer tree. Layers are drawn from back to front just like views and specify their geometry relative to their superlayer, creating a local coordinate system. However, layers allow a more complex visual display by incorporating transform matrices that allow you to rotate, skew, scale, and project the layer content. “[Layer Geometry and Transforms](#)” (page 17) discusses layer geometry and transforms in more detail.

`CALayer` diverges from the Application Kit and Cocoa Touch view classes in that it is not necessary to subclass `CALayer` in order to display content. The content displayed by a `CALayer` instance can be provided by:

- Setting the layer's content property to a Core Graphics image representation directly, or through delegation.
- Providing a delegate that draws directly into a Core Graphics image context.
- Setting any of the number of visual style properties that all layer types have in common, for example, background colors, opacity, and masking. Mac apps also have access to visual properties that make use of Core Image filters.
- Subclassing `CALayer` and implementing any of the above techniques in a more encapsulated manner.

[“Providing Layer Content”](#) (page 31) describes the available techniques for providing the content for a layer. The visual style properties and the order in which they are applied to the content of a layer is discussed in [“Layer Style Properties”](#) (page 59).

In addition to the `CALayer` class, the Core Animation class collection provides additional classes that allow applications to display other types of content. The available classes differ slightly between OS X and iOS. The following classes are available on both OS X and iOS:

- `CAScrollViewLayer` class is a subclass of `CALayer` that simplifies displaying a portion of a layer. The extent of the scrollable area of a `CAScrollViewLayer` object is defined by the layout of its sublayers. `CAScrollViewLayer` does not provide keyboard or mouse event-handling, nor does it provide visible scrollers.
- `CATextLayer` is a convenience class that creates a layer's content from a string or attributed string.
- `CATiledLayer` allows the display of large and complex images in incremental stages.

OS X provides these additional classes:

- `CAOpenGLLayer` provides an OpenGL rendering environment. You must subclass this class to provide content using OpenGL. The content can be static or can be updated over time.
- `QCCompositionLayer` (provided by the Quartz Composer framework) animates a Quartz Composer composition as its content.
- `QTMovieLayer` and `QTCaptureLayer` (provided by the QTKit framework) provides playback of QuickTime movies and live video.

iOS adds the following class:

- `CAEAGLLayer` provides an OpenGL ES rendering environment.

The `CALayer` class introduces the concept of a **key-value coding compliant container class**—that is, a class that can store arbitrary values, using key-value coding compliant methods, without having to create a subclass. `CALayer` also extends the `NSKeyValueCoding` informal protocol, adding support for default key values and automatic object wrapping for the additional structure types (`CGPoint`, `CGSize`, `CGRect`, `CGAffineTransform` and `CATransform3D`) and provides access to many of the fields of those structures by key path.

`CALayer` also manages the animations and actions that are associated with a layer. Layers receive action triggers in response to layers being inserted and removed from the layer tree, modifications being made to layer properties, or explicit developer requests. These actions typically result in an animation occurring. See [“Animation”](#) (page 38) and [“Layer Actions”](#) (page 43) for more information.

## Animation and Timing Classes

Many of the visual properties of a layer are implicitly animatable. By simply changing the value of an animatable property the layer will automatically animate from the current value to the new value. For example, setting a layer's `hidden` property to `YES` triggers an animation that causes the layer to gradually fade away. Most animatable properties have an associated default animation which you can easily customize and replace. A complete list of the animatable properties and their default animations are listed in [“Animatable Properties”](#) (page 84).

Animatable properties can also be explicitly animated. To explicitly animate a property you create an instance of one of Core Animation's animation classes and specify the required visual effects. An explicit animation doesn't change the value of the property in the layer, it simply animates it in the display.

Core Animation provides animation classes that can animate the entire contents of a layer or selected attributes using both basic animation and key-frame animation. All Core Animation's animation classes descend from the abstract class `CAAnimation`. `CAAnimation` adopts the `CAMediaTiming` protocol which provides the simple duration, speed, and repeat count for an animation. `CAAnimation` also adopts the `CAAction` protocol. This protocol provides a standardized means for starting an animation in response to an action triggered by a layer.

The animation classes also define a timing function that describes the pacing of the animation as a simple Bezier curve. For example, a linear timing function specifies that the animation's pace is even across its duration, while an ease-out timing function causes an animation to slow down as it nears its duration.

Core Animation provides a number of additional abstract and concrete animation classes:

- `CATransition` provides a transition effect that affects the entire layer's content. It fades, pushes, or reveals layer content when animating. The stock transition effects can be extended by providing your own custom Core Image filters.
- `CAAnimationGroup` allows an array of animation objects to be grouped together and run concurrently.

- `CAPropertyAnimation` is an abstract subclass that provides support for animating a layer property specified by a key path.
- `CABasicAnimation` provides simple interpolation for a layer property.
- `CAKeyframeAnimation` provides support for key frame animation. You specify the key path of the layer property to be animated, an array of values that represent the value at each stage of the animation, as well as arrays of key frame times and timing functions. As the animation runs, each value is set in turn using the specified interpolation.

These animation classes are used by both Core Animation and Cocoa Animation proxies. [“Animation”](#) (page 38) describes the classes as they pertain to Core Animation, *Animation Types and Timing Programming Guide* contains a more in-depth exploration of their capabilities.

## Layout Manager Classes

Application Kit view classes provide the classic "struts and springs" model of positioning layers relative to their superlayer. While layers support this model, Core Animation on OS X also provides a more flexible layout manager mechanism that allows developers to write their own layout managers.

Core Animation's `CAConstraint` class is a layout manager that arranges sublayers using a set of constraints that you specify. Each constraint (encapsulated by instances of the `CAConstraint` class) describes the relationship of one geometric attribute of a layer (the left, right, top, or bottom edge or the horizontal or vertical center) in relation to a geometric attribute of one of its sibling layers or its superlayer.

Layout managers in general, and the constraint layout manager are discussed in [“Laying Out Core Animation Layers”](#) (page 50)

## Transaction Management Classes

Every modification to an animatable property of a layer must be part of a transaction. `CATransaction` is the Core Animation class responsible for batching multiple animation operations into atomic updates to the display. Nested transactions are supported.

Core Animation supports two types of transactions: implicit transactions and explicit transactions. Implicit transactions are created automatically when an animatable property of a layer is modified by a thread without an active transaction and are committed automatically when the thread's run-loop next iterates. Explicit transactions occur when the application sends the `CATransaction` class a begin message before modifying the layer, and a commit message afterwards.

Transaction management is discussed in [“Transactions”](#) (page 47).


# Core Animation Rendering Architecture

While there are obvious similarities between Core Animation layers and Cocoa views the biggest conceptual divergence is that layers do not render directly to the screen.

Where `NSView` and `UIView` are clearly view objects in the model-view-controller design pattern, Core Animation layers are actually model objects. They encapsulate geometry, timing and visual properties, and they provide the content that is displayed, but the actual display is not the layer's responsibility.

Each visible layer tree is backed by two corresponding trees: a presentation tree and a render tree. Figure 1 shows an example layer-tree using the Core Animation layer classes available in OS X.

Figure 1 Core Animation Rendering Architecture

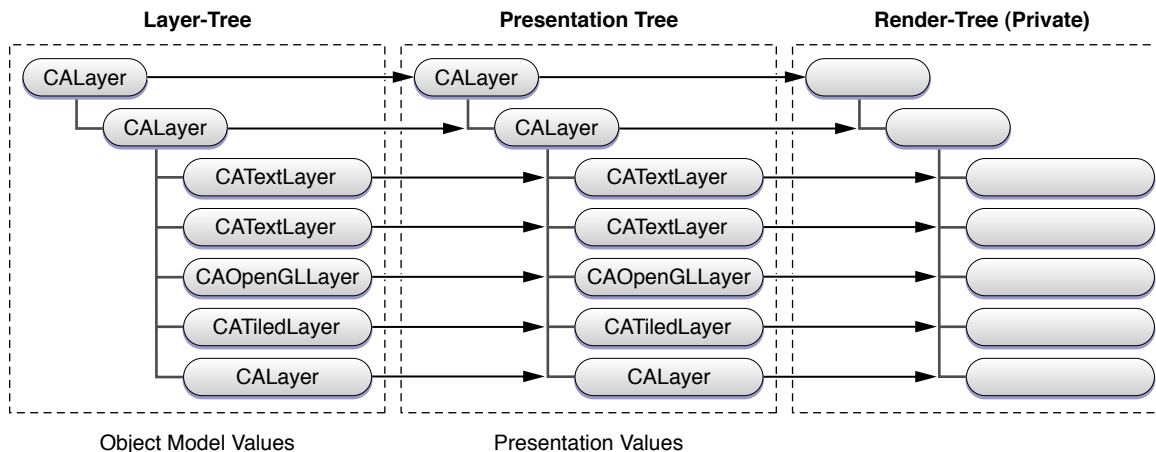

The layer tree contains the object model values for each layer. These are the values you set when you assign a value to a layer property.

The presentation tree contains the values that are currently being presented to the user as an animation takes place. For example, setting a new value for the `backgroundColor` of a layer immediately changes the value in the layer tree. However, the `backgroundColor` value in the corresponding layer in the presentation tree will be updated with the interpolated colors as they are displayed to the user.

The render-tree uses the value in the presentation-tree when rendering the layer. The render-tree is responsible for performing the compositing operations independent of application activity; rendering is done in a separate process or thread so that it has minimal impact on the application's run loop.

You can query an instance of `CALayer` for its corresponding presentation layer while an animation transaction is in process. This is most useful if you intend to change the current animation and want to begin the new animation from the currently displayed state.



# Layer Geometry and Transforms

This chapter describes the components of a layer's geometry, how they interrelate, and how transform matrices can produce complex visual effects.

## Layer Coordinate System

The coordinate system for layers differs depending on the current platform. In iOS, the default coordinate system origin is in the top-left corner of the layer and positive values extend down and to the right of that origin point. In OS X, the default coordinate system origin is in the lower-left corner of the layer and positive values extend up and to the right of that point. All coordinate values are specified as floating-point numbers. And any layers you create on a given platform use the default coordinate system associated with that platform.

Every layer object defines and maintains its own coordinate system, and all content in a layer is positioned relative to this coordinate system. This is true both for the layer contents itself and for any sublayers. Because each layer defines its own coordinate system, the `CALayer` class provides methods to convert point, rectangle and size values from the coordinate system of one layer to another.


Some layer-related properties measure their values using the unit coordinate space. The unit coordinate space is a way of specifying values relative to the bounds of the layer but without tying that property to the exact bounds values. A given x or y coordinate in the unit coordinate space is always in the range of 0.0 to 1.0. Specifying a value of 0.0 along the x axis yields a point on the left edge of the layer while specifying a value of 1.0 yields a point on the right edge of the layer. (For y values, which value is along the top edge and which value is along the bottom edge depends on the underlying platform and follows the same rules as previously described.) A point of (0.5, 0.5) yields a point in the exact center of the layer.

## Specifying a Layer's Geometry

While layers and the layer-tree are analogous to views and view hierarchies in many ways, a layer's geometry is specified in a different, and often simpler, manner. All of a layer's geometric properties, including the layer's transform matrices, can be implicitly and explicitly animated.

Figure 1 shows the properties used to specify a layer's geometry in context.

**Figure 1** CALayer geometry properties

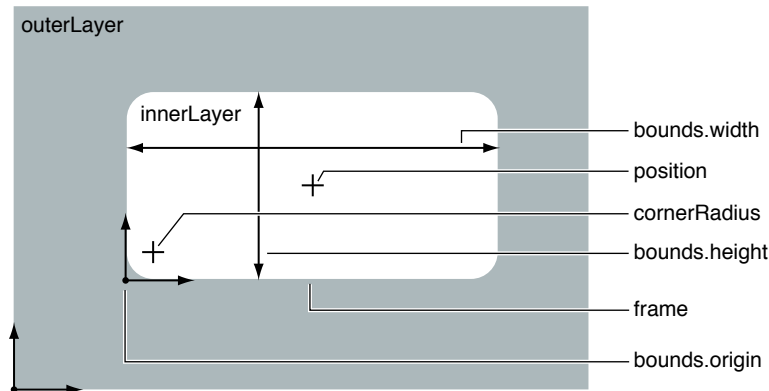

The `position` property is a `CGPoint` that specifies the position of the layer relative to its superlayer, and is expressed in the superlayer's coordinate system.

The `bounds` property is a `CGRect` that provides the size of the layer (`bounds.size`) and the origin (`bounds.origin`). The bounds origin is used as the origin of the graphics context when you override a layer's drawing methods.

Layers have an implicit `frame` that is a function of the `position`, `bounds`, `anchorPoint`, and `transform` properties. Setting a new frame rectangle changes the layer's `position` and `bounds` properties appropriately, but the frame itself is not stored. When a new frame rectangle is specified the bounds origin is undisturbed, while the bounds size is set to the size of the frame. The layer's position is set to the proper location relative to the anchor point. When you get the `frame` property value, it is calculated relative to the `position`, `bounds`, and `anchorPoint` properties.

The `anchorPoint` property is a `CGPoint` that specifies a location within the bounds of a layer that corresponds with the position coordinate. The anchor point specifies how the bounds are positioned relative to the `position` property, as well as serving as the point that transforms are applied around. It is expressed in the unit coordinate system-the (0.0,0.0) value is located closest to the layer's origin and (1.0,1.0) is located in the opposite corner. Applying a transform to the layer's parent (if one exists) can alter the `anchorPoint` orientation, depending on the parent's coordinate system on the y-axis.


When you specify the frame of a layer, `position` is set relative to the anchor point. When you specify the `position` of the layer, `bounds` is set relative to the anchor point.

**iOS Note** The following examples show a layer in OS X, where the default coordinate system origin is located in the lower-left corner. On iOS, the layer's origin would be in the upper-left corner and positive values would extend down and to the right. This changes the specific values shown, but not the concepts.

---

Figure 2 shows three example values for an anchor point.


**Figure 2** Three anchorPoint values

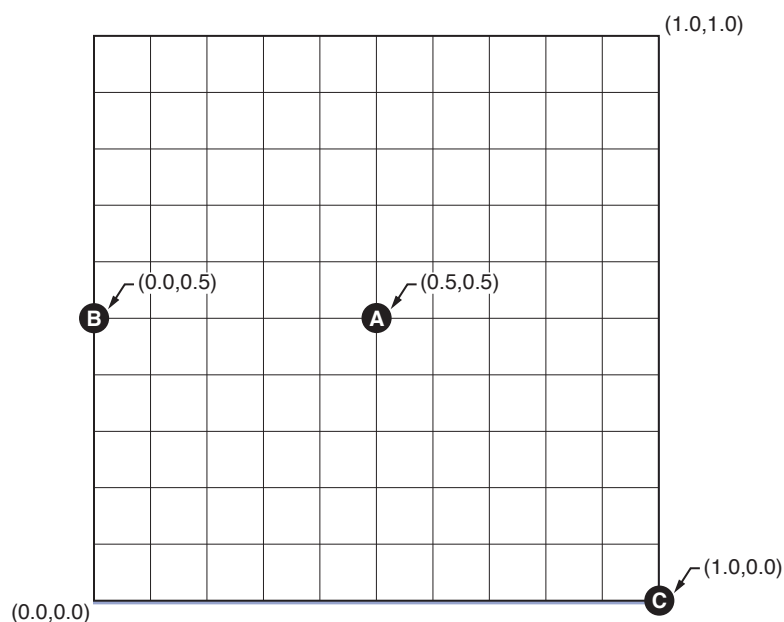

The default value for `anchorPoint` is (0.5,0.5) which corresponds to the center of the layer's bounds (shown as point A in Figure 2). Point B shows the position of an anchor point set to (0.0,0.5). Finally, point C (1.0,0.0) specifies that the layer's position is set to the bottom right corner of the frame. This diagram is specific to layers in OS X. In iOS, layers use a different default coordinate system, where (0.0,0.0) is in the top-left corner and (1.0,1.0) is in the lower-right.

The relationship of the `frame`, `bounds`, `position`, and `anchorPoint` properties is shown in Figure 3.

**Figure 3** Anchor Point of (0.5,0.5)

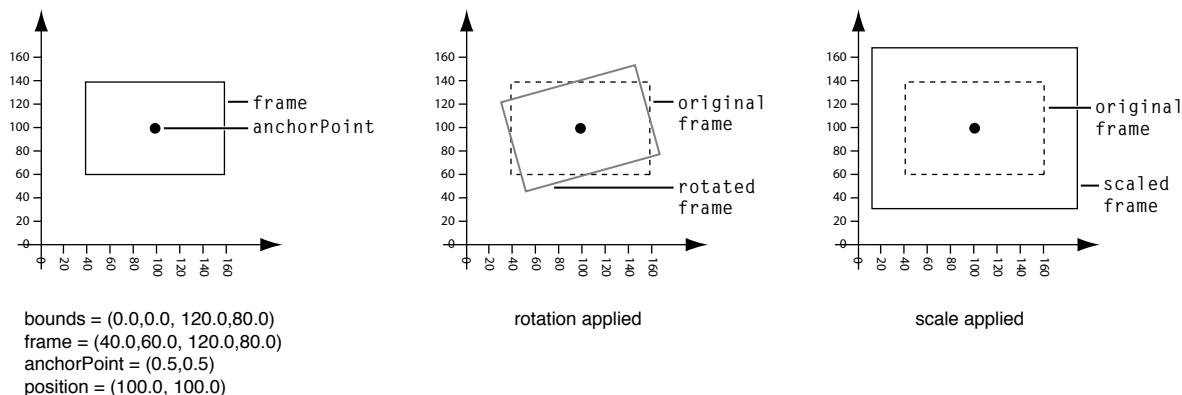


In this example the `anchorPoint` is set to the default value of (0.5,0.5), which corresponds to the center of the layer. The `position` of the layer is set to (100.0,100.0), and the `bounds` is set to the rectangle (0.0, 0.0, 120.0, 80.0). This causes the `frame` property to be calculated as (40.0, 60.0, 120.0, 80.0).

If you created a new layer, and set only the layer's `frame` property to (40.0, 60.0, 120.0, 80.0), the `position` property would be automatically set to (100.0,100.0), and the `bounds` property to (0.0, 0.0, 120.0, 80.0).

Figure 4 shows a layer with the same `frame` rectangle as the layer in Figure 3. However, in this case the `anchorPoint` of the layer is set to (0.0,0.0), which corresponds with the bottom left corner of the layer.

**Figure 4** Layer Origin of (0.0,0.0)

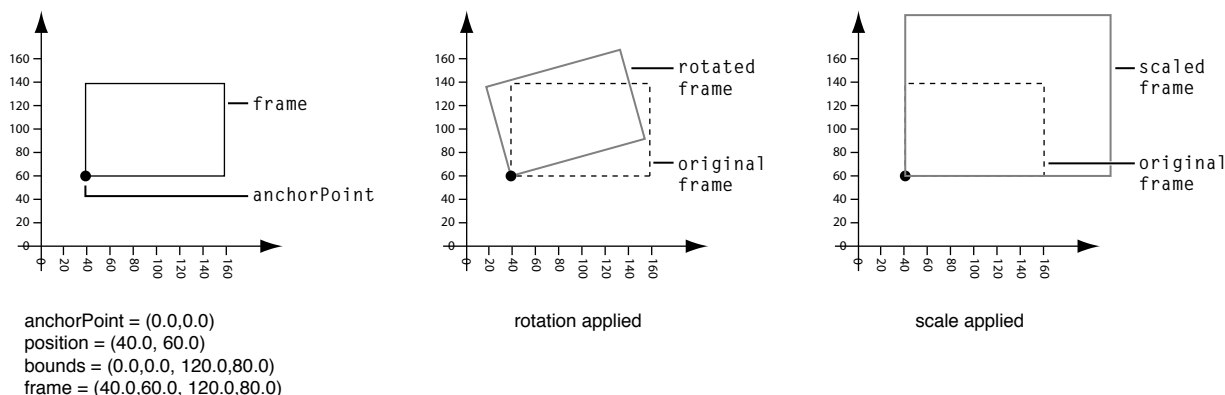

With the `frame` set to (40.0, 60.0, 120.0, 80.0), the value of the `bounds` property is the same, but the value of the `position` property has changed.

Another aspect of layer geometry that differs from Cocoa views is that you can specify a radius that is used to round the corners of the layer. The `cornerRadius` property specifies a radius the layer uses when drawing content, clipping sublayers, and drawing the border and shadow.

The `zPosition` property specifies the z-axis component of the layer's position. The `zPosition` is intended to be used to set the visual position of the layer relative to its sibling layers. It should not be used to specify the order of layer siblings, instead reorder the layer in the sublayer array.

## Transforming a Layer's Geometry

Once established, you can transform a layer's geometry using matrix transformations. The `CATransform3D` data structure defines a homogenous three-dimensional transform (a 4 by 4 matrix of `CGFloat` values) that is used to rotate, scale, offset, skew, and apply perspective transformations to a layer.

Two layer properties specify transform matrices: `transform` and `sublayerTransform`. The matrix specified by the `transform` property is applied to the layer and its sublayers relative to the layer's `anchorPoint`. Figure 3 shows how rotation and scaling transforms affect a layer when using an `anchorPoint` of (0.5,0.5), the default value. Figure 4 shows how the same transform matrices affect a layer when using an `anchorPoint` of (0.0,0.0). The matrix specified by the `sublayerTransform` property is applied only to the layer's sublayers, rather than to the layer itself.

You create and modify `CATransform3D` data structures in one of the following ways:

- using the `CATransform3D` functions
- modifying the data structure members directly
- using key-value coding and key paths.

The constant `CATransform3DIdentity` is the identity matrix, a matrix that has no scale, rotation, skewing, or perspective applied. Applying the identity matrix to a layer causes it to be displayed with its default geometry.

## Transform Functions

The transform functions available in Core Animation operate on matrices. You can use these functions (shown in Table 1) to construct a matrix that you later apply to a layer or its sublayers by modifying the `transform` or `sublayerTransform` properties respectively. The transform functions either operate on, or return, a `CATransform3D` data structure. This enables you to construct simple or complex transforms that you can readily reuse.

**Table 1** CATransform3D transform functions for translation, rotation, and scaling

Function	Use
CATransform3DMakeTranslation	Returns a transform that translates by '(tx, ty, tz)'. $t' = [1\ 0\ 0\ 0; 0\ 1\ 0\ 0; 0\ 0\ 1\ 0; tx\ ty\ tz\ 1]$ .
CATransform3DTranslate	Translate 't' by '(tx, ty, tz)' and return the result: $* t' = \text{translate}(tx, ty, tz) * t$ .
CATransform3DMakeScale	Returns a transform that scales by '(sx, sy, sz)': $* t' = [sx\ 0\ 0\ 0; 0\ sy\ 0\ 0; 0\ 0\ sz\ 0; 0\ 0\ 0\ 1]$ .
CATransform3DScale	Scale 't' by '(sx, sy, sz)' and return the result: $* t' = \text{scale}(sx, sy, sz) * t$ .
CATransform3DMakeRotation	Returns a transform that rotates by 'angle' radians about the vector '(x, y, z)'. If the vector has length zero the identity transform is returned.
CATransform3DRotate	Rotate 't' by 'angle' radians about the vector '(x, y, z)' and return the result. $t' = \text{rotation}(\text{angle}, x, y, z) * t$ .

The angle of rotation is specified in radians rather than degrees. The following functions allow you to convert between radians and degrees.

```
CGFloat DegreesToRadians(CGFloat degrees) {return degrees * M_PI / 180;};  
CGFloat RadiansToDegrees(CGFloat radians) {return radians * 180 / M_PI;};
```

Core Animation provides a transform function that inverts a matrix, `CATransform3DInvert`. Inversion is generally used to provide reverse transformation of points within transformed objects. Inversion can be useful when you need to recover a value that has been transformed by a matrix: invert the matrix, and multiply the value by the inverted matrix, and the result is the original value.

Functions are also provided that allow you to convert a `CATransform3D` matrix to a `CGAffineTransform` matrix, if the `CATransform3D` matrix can be expressed as such.

**Table 2** CATransform3D transform functions for CGAffineTransform conversion

Function	Use
CATransform3DMakeAffineTransform	Returns a CATransform3D with the same effect as the passed affine transform.

Function	Use
CATransform3DIsAffine	Returns YES if the passed CATransform3D can be exactly represented as an affine transform.
CATransform3DGetAffineTransform	Returns the affine transform represented by the passed CATransform3D.

Functions are provided for comparing transform matrices for equality with the identity matrix, or another transform matrix.

**Table 3** CATransform3D transform functions for testing equality

Function	Use
CATransform3DIsIdentity	Returns YES if the transform is the identity transform.
CATransform3DEqualToTransform	Returns YES if the two transforms are exactly equal..

## Modifying the Transform Data Structure

You can modify the value of any of the CATransform3D data structure members as you would any other data structure. Listing 1 contains the definition of the CATransform3D data structure, the structure members are shown in their corresponding matrix positions.

**Listing 1** CATransform3D structure

```
struct CATransform3D
{
    CGFloat m11, m12, m13, m14;
    CGFloat m21, m22, m23, m24;
    CGFloat m31, m32, m33, m34;
    CGFloat m41, m42, m43, m44;
};

typedef struct CATransform3D CATransform3D;
```

The example in Listing 2 illustrates how to configure a CATransform3D as a perspective transform.

**Listing 2**      Modifying the CATransform3D data structure directly

```
CATransform3D aTransform = CATransform3DIdentity;
// the value of zDistance affects the sharpness of the transform.
zDistance = 850;
aTransform.m34 = 1.0 / -zDistance;
```

## Modifying a Transform Using Key Paths

Core Animation extends the key-value coding protocol to allow getting and setting of the common values of a layer's `CATransform3D` matrix through key paths. Table 4 describes the key paths for which a layer's `transform` and `sublayerTransform` properties are key-value coding and observing compliant.

**Table 4**      CATransform3D key paths

Field Key Path	Description
<code>rotation.x</code>	The rotation, in radians, in the x axis.
<code>rotation.y</code>	The rotation, in radians, in the y axis.
<code>rotation.z</code>	The rotation, in radians, in the z axis.
<code>rotation</code>	The rotation, in radians, in the z axis. This is identical to setting the <code>rotation.z</code> field.
<code>scale.x</code>	Scale factor for the x axis.
<code>scale.y</code>	Scale factor for the y axis.
<code>scale.z</code>	Scale factor for the z axis.
<code>scale</code>	Average of all three scale factors.
<code>translation.x</code>	Translate in the x axis.
<code>translation.y</code>	Translate in the y axis.
<code>translation.z</code>	Translate in the z axis.
<code>translation</code>	Translate in the x and y axis. Value is an <code>NSSize</code> or <code>CGSize</code> .

You can not specify a structure field key path using Objective-C 2.0 properties. This will not work:



```
myLayer.transform.rotation.x=0;
```

Instead you must use `setValue:forKeyPath:` or `valueForKeyPath:` as shown below:

```
[myLayer setValue:[NSNumber numberWithInt:0] forKeyPath:@"transform.rotation.x"];
```

# Layer-Tree Hierarchy

Along with their own direct responsibilities for providing visual content and managing animations, layers also act as containers for other layers, creating a layer hierarchy.

This chapter describes the layer hierarchy and how you manipulate layers within that hierarchy.

## What Is a Layer-Tree Hierarchy?

The layer-tree is the Core Animation equivalent of the Cocoa view hierarchy. Just as an instance of `NSView` or `UIView` has superview and subviews, a Core Animation layer has a superlayer and sublayers. The layer-tree provides many of the same benefits as the view hierarchy:

- Complex interfaces can be assembled using simpler layers, avoiding monolithic and complex subclassing. Layers are well suited to this type of ‘stacking’ due to their complex compositing capabilities.
- Each layer declares its own coordinate system relative to its superlayer's coordinate system. When a layer is transformed, its sublayers are transformed within it.
- A layer-tree is dynamic. It can be reconfigured as an application runs. Layers can be created, added as a sublayer first of one layer, then of another, and removed from the layer-tree.

## Displaying Layers in Views

Core Animation doesn't provide a means for actually displaying layers in a window, they must be hosted by a view. When paired with a view, the view must provide event-handling for the underlying layers, while the layers provide display of the content.

The view system in iOS is built directly on top of Core Animation layers. Every instance of `UIView` automatically creates an instance of a `CALayer` class and sets it as the value of the view's `layer` property. You can add sublayers to the view's layer as needed.

On OS X you must configure an `NSView` instance in such a way that it can host a layer. To display the root layer of a layer tree, you set a view's layer and then configure the view to use layers as shown in Table 2.

**Listing 1**     Inserting a layer into a view

```
// theView is an existing view in a window
// theRootLayer is the root layer of a layer tree

[theView setLayer: theRootLayer];
[theView setWantsLayer:YES];
```

## Adding and Removing Layers from a Hierarchy

Simply instantiating a layer instance doesn't insert it into a layer-tree. Instead you add, insert, replace, and remove layers from the layer-tree using the methods described in .Table 1.

**Table 1**     Layer-tree management methods.

Method	Result
<code>addSublayer:</code>	Appends the layer to the receiver's sublayers array.
<code>insertSublayer: atIndex:</code>	Inserts the layer as a sublayer of the receiver at the specified index.
<code>insertSublayer: below:</code>	Inserts the layer into the receiver's sublayers array, below the specified sublayer.
<code>insertSublayer: above:</code>	Inserts the layer into the receiver's sublayers array, above the specified sublayer.
<code>removeFromSuperlayer</code>	Removes the receiver from the sublayers array or mask property of the receiver's superlayer.
<code>replaceSublayer: with:</code>	Replaces the layer in the receiver's sublayers array with the specified new layer.

You can also set the sublayers of a layer using an array of layers, and setting the intended superlayer's sublayers property. When setting the sublayers property to an array populated with layer objects you must ensure that the layers have had their superlayer set to `nil`.

By default, inserting and removing layers from a visible layer-tree triggers an animation. When a layer is added as a sublayer the animation returned by the parent layer for the action identifier `kCAOnOrderIn` is triggered. When a layer is removed from a layer's sublayers the animation returned by the parent layer for the action

identifier `kCAOrderOut` is triggered. Replacing a layer in a sublayer causes the animation returned by the parent layer for the action identifier `kCATransition` to be triggered. You can disable animation while manipulating the layer-tree, or alter the animation used for any of the action identifiers.

## Repositioning and Resizing Layers

After a layer has been created, you can move and resize it programmatically simply by changing the value of the layer's geometry properties: `frame`, `bounds`, `position`, `anchorPoint`, or `zPosition`.

If a layer's `needsDisplayOnBoundsChange` property is YES, the layer's content is recached when the layer's bounds changes. By default the `needsDisplayOnBoundsChange` property is no.

By default, setting the `frame`, `bounds`, `position`, `anchorPoint`, and `zPosition` properties causes the layer to animate the new values.

## Autoresizing Layers

`CALayer` provides a mechanism for automatically moving and resizing sublayers in response to their superlayer being moved or resized. In many cases simply configuring the autoresizing mask for a layer provides the appropriate behavior for an application.

A layer's autoresizing mask is specified by combining the `CAAutoresizingMask` constants using the bitwise OR operator and the layer's `autoresizingMask` property to the resulting value. Table 2 shows each mask constant and how it effects the layer's resizing behavior.


**Table 2** Autoresizing mask values and descriptions

Autoresizing Mask	Description
<code>kCALayerHeightSizable</code>	If set, the layer's height changes proportionally to the change in the superlayer's height. Otherwise, the layer's height does not change relative to the superlayer's height.
<code>kCALayerWidthSizable</code>	If set, the layer's width changes proportionally to the change in the superlayer's width. Otherwise, the layer's width does not change relative to the superlayer's width.
<code>kCALayerMinXMargin</code>	If set, the layer's left edge is repositioned proportionally to the change in the superlayer's width. Otherwise, the layer's left edge remains in the same position relative to the superlayer's left edge.

Autoresizing Mask	Description
<code>kCALayerMaxXMargin</code>	If set, the layer's right edge is repositioned proportionally to the change in the superlayer's width. Otherwise, the layer's right edge remains in the same position relative to the superlayer.
<code>kCALayerMaxYMargin</code>	If set, the layer's top edge is repositioned proportionally to the change in the superlayer's height. Otherwise, the layer's top edge remains in the same position relative to the superlayer.
<code>kCALayerMinYMargin</code>	If set, the layer's bottom edge is repositioned proportional to the change in the superlayer's height. Otherwise, the layer's bottom edge remains in the same position relative to the superlayer.

For example, to keep a layer in the lower-left corner of its superlayer, you use the mask `kCALayerMaxXMargin | kCALayerMaxYMargin`. When more than one aspect along an axis is made flexible, the resize amount is distributed evenly among them. Figure 1 provides a graphical representation of the position of the constant values.

**Figure 1** Layer autoresizing mask constants

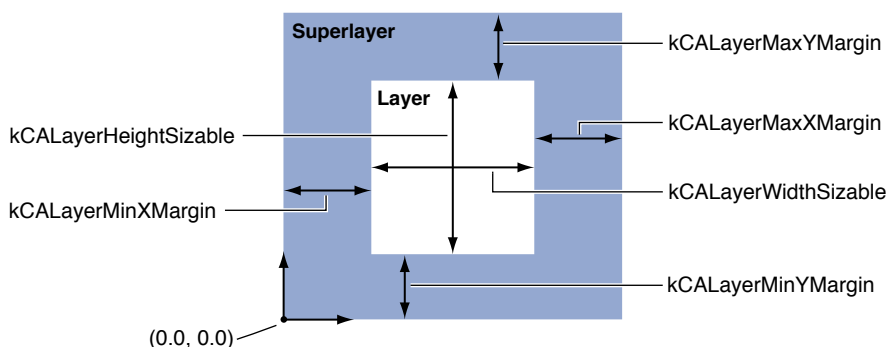

When one of these constants is omitted, the layer's layout is fixed in that aspect; when a constant is included in the mask the layer's layout is flexible in that aspect.


A subclass can override the `CALayer` methods `resizeSublayersWithOldSize:` and `resizeWithOldSuperlayerSize:` to customize the autoresizing behavior for a layer. A layer's `resizeSublayersWithOldSize:` method is invoked automatically by a layer whenever bounds property changes, and sends a `resizeWithOldSuperlayerSize:` message to each sublayer. Each sublayer compares the old bounds size to the new size and adjusts its position and size according to its autoresize mask.

## Clipping Sublayers

When subviews of a Cocoa view lie outside of the parent view's bounds, the views are clipped to the parent view. Layers remove this limitation, allowing sublayers to be displayed in their entirety, regardless of their position relative to the parent layer.

The value of a layer's `masksToBounds` property determines if sublayers are clipped to the parent. The default value of the `masksToBounds` property is `NO`, which prevents sublayers from being clipped to the parent. Figure 2 shows the results of setting the `masksToBounds` for `layerA` and how it will affect the display of `layerB` and `layerC`.

**Figure 2** Example Values of the `masksToBounds` property

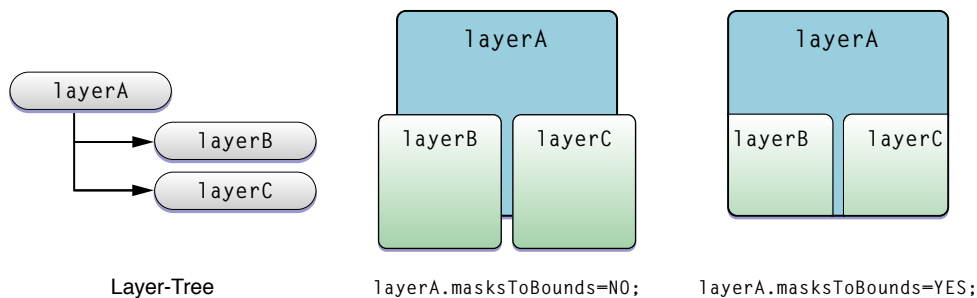

# Providing Layer Content

When using Cocoa views you must subclass `NSView` or `UIView` and implement `drawRect:` in order to display anything. However `CALayer` instances can often be used directly, without requiring subclassing. Because `CALayer` is a key-value coding compliant container class, that is you can store arbitrary values in any instance, subclassing can often be avoided entirely.

## Providing CALayer Content

You specify the content of a `CALayer` instance in one of the following ways:

- Explicitly set the `contents` property of a layer instance using a `CGImageRef` that contains the content image.
- Specify a delegate that provides, or draws, the content.
- Subclass `CALayer` and override one of the display methods.

## Setting the Contents Property

A layer's content image is specified by the `contents` property to a `CGImageRef`. This can be done from another object when the layer is created (as shown in Table 3) or at any other time.

**Listing 1**     Setting a layer's contents property

```
CALayer *theLayer;

// create the layer and set the bounds and position
theLayer=[CALayer layer];
theLayer.position=CGPointMake(50.0f,50.0f);
theLayer.bounds=CGRectMake(0.0f,0.0f,100.0f,100.0f);

// set the contents property to a CGImageRef
// specified by theImage (loaded elsewhere)
theLayer.contents=theImage;
```

## Using a Delegate to Provide Content

You can draw content for your layer, or better encapsulate setting the layer's content image by creating a delegate class that implements one of the following methods: `displayLayer:` or `drawLayer:inContext:`.

Implementing a delegate method to draw the content does not automatically cause the layer to draw using that implementation. Instead, you must explicitly tell a layer instance to re-cache the content, either by sending it a `setNeedsDisplay` or `setNeedsDisplayInRect:` message, or by setting its `needsDisplayOnBoundsChange` property to YES.

Delegates that implement the `displayLayer:` method can determine which image should be displayed for the specified layer, and then set that layer's `contents` property accordingly. The example in implementation of `displayLayer:` in “Layer Coordinate System” sets the `contents` property of `theLayer` depending on the value of the state key. Subclassing is not required to store the state value, because the `CALayer` instance acts as a key-value coding container.

**Listing 2** Example implementation of the delegate method `displayLayer:`

```
- (void)displayLayer:(CALayer *)theLayer
{
    // check the value of the layer's state key
    if ([[theLayer valueForKey:@"state"] boolValue])
    {
        // display the yes image
        theLayer.contents=[someHelperObject loadStateYesImage];
    }
    else {
        // display the no image
        theLayer.contents=[someHelperObject loadStateNoImage];
    }
}
```

If you must draw the layer's content rather than loading it from an image, you implement the `drawLayer:inContext:` delegate method. The delegate is passed the layer for which content is required and a `CGContextRef` to draw the content in.

The example in implementation of `drawLayer:inContext:` in “Specifying a Layer's Geometry” draws a path using the `lineWidth` key value returned by `theLayer`.



**Listing 3** Example implementation of the delegate method `drawLayer:inContext:`:

```
- (void)drawLayer:(CALayer *)theLayer
    inContext:(CGContextRef)theContext
{
    CGMutablePathRef thePath = CGPathCreateMutable();

    CGPathMoveToPoint(thePath, NULL, 15.0f, 15.0f);
    CGPathAddCurveToPoint(thePath,
                          NULL,
                          15.0f, 250.0f,
                          295.0f, 250.0f,
                          295.0f, 15.0f);

    CGContextBeginPath(theContext);
    CGContextAddPath(theContext, thePath );

    CGContextSetLineWidth(theContext,
                          [[theLayer valueForKey:@"lineWidth"] floatValue]);
    CGContextStrokePath(theContext);

    // release the path
    CFRelease(thePath);
}
```

## Providing CALayer Content by Subclassing

Although often unnecessary, you can subclass `CALayer` and override the drawing and display methods directly. This is typically done when your layer requires custom behavior that can't be provided through delegation.

A subclass can override the `CALayer` display method and set the layer's contents to the appropriate image. The example in "Transforming a Layer's Geometry" provides the same functionality as the delegate implementation of `displayLayer:` in "Layer Coordinate System." The difference is that the subclass defines state as instance property, rather than depending on the key-value coding container ability of `CALayer`.

**Listing 4** Example override of the CALayer display method

```
- (void)display
{
    // check the value of the layer's state key
    if (self.state)
    {
        // display the yes image
        self.contents=[someHelperObject loadStateYesImage];
    }
    else {
        // display the no image
        self.contents=[someHelperObject loadStateNoImage];
    }
}
```

CALayer subclasses can draw the layer's content into a graphics context by overriding `drawInContext:`. The example in "Modifying the Transform Data Structure" produces the same content image as the delegate implementation in "Specifying a Layer's Geometry." Again, the only difference in the implementation is that `lineWidth` and `lineColor` are now declared as instance properties of the subclass.

**Listing 5** Example override of the CALayer drawInContext: method

```
- (void)drawInContext:(CGContextRef)theContext
{
    CGMutablePathRef thePath = CGPathCreateMutable();

    CGContextMoveToPoint(thePath,NULL,15.0f,15.f);
    CGContextAddCurveToPoint(thePath,
                             NULL,
                             15.f,250.0f,
                             295.0f,250.0f,
                             295.0f,15.0f);
}
```

```
CGContextBeginPath(theContext);
CGContextAddPath(theContext, thePath );

CGContextSetLineWidth(theContext,
                      self.lineWidth);
CGContextSetStrokeColorWithColor(theContext,
                                 self.lineColor);

CGContextStrokePath(theContext);
CFRelease(thePath);
}
```

Subclassing `CALayer` and implementing one of the drawing methods does not automatically cause drawing to occur. You must explicitly cause the instance to re-cache the content, either by sending it a `setNeedsDisplay` or `setNeedsDisplayInRect:` message, or by setting its `needsDisplayOnBoundsChange` property to `YES`.

## Positioning Content Within a Layer

The `CALayer` property `contentsGravity` allows you to position and scale the layer's contents image within the layer bounds. By default, the content image fills the layer's bounds entirely, ignoring the natural aspect ratio of the image.

Using the `contentsGravity` positioning constants you can specify that the image is placed along any of the layer's edges, in the layer's corners, or centered within the layer's bounds. However, when using the positioning constants the `contentsCenter` property is not used. [Table 1](#) (page 35) lists the positioning constants and their corresponding positions.


**Table 1** Positioning constants for a layer's `contentsGravity` property

Position constant	Description
<code>kCAGravityTopLeft</code>	Positions the content image in the top left corner of the layer.
<code>kCAGravityTop</code>	Positions the content image horizontally centered along the top edge of the layer.
<code>kCAGravityTopRight</code>	Positions the content image in the top right corner of the layer.
<code>kCAGravityLeft</code>	Positions the content image vertically centered on the left edge of the layer.

Position constant	Description
<code>kCAGravityCenter</code>	Positions the content image at the center of the layer.
<code>kCAGravityRight</code>	Positions the content image vertically centered on the right edge of the layer.
<code>kCAGravityBottomLeft</code>	Positions the content image in the bottom left corner of the layer.
<code>kCAGravityBottom</code>	Positions the content image centered along the bottom edge of the layer.
<code>kCAGravityBottomRight</code>	Positions the content image in the top right corner of the layer.

“Layer Coordinate System” shows the supported content positions and their corresponding constants.

**Figure 1** Position constants for a layer’s `contentsGravity` property

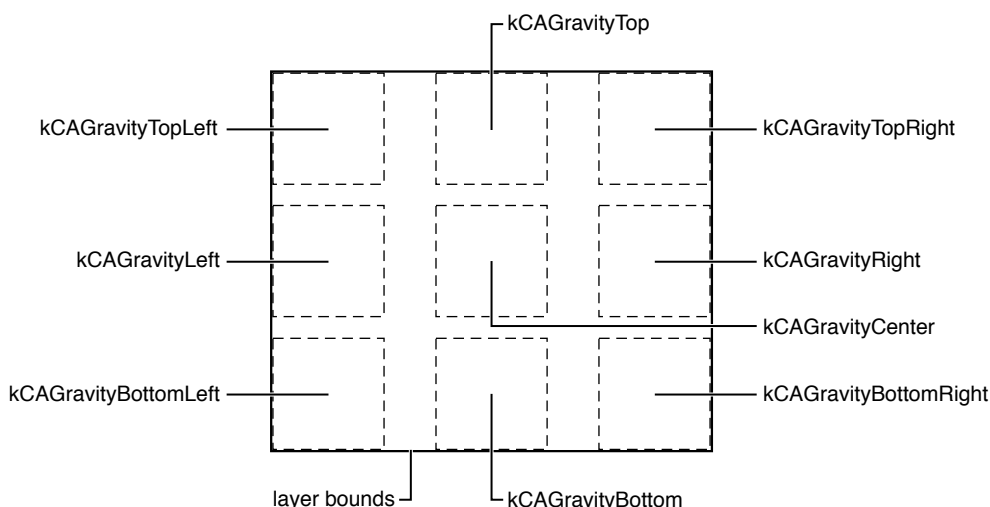

The content image can be scaled up, or down, by setting the `contentsGravity` property to one of the constants listed in [Table 2](#) (page 36). It is only when using one of these resize constants that the `contentsCenter` property affects the content image.


**Table 2** Scaling Constants For A Layer’s `contentsGravity` Property

Scaling constant	Description
<code>kCAGravityResize</code>	Resize the content image to completely fill the layer bounds, potentially ignoring the natural aspect of the content. This is the default.

Scaling constant	Description
<code>kCAGravityResizeAspect</code>	Resize the content image to scale such that it is displayed as large as possible within the layer bounds, yet still retains its natural aspect.
<code>kCAGravityResizeAspectFill</code>	Resize the content image to scale such that it is displayed filling the layer bounds, yet retaining its natural aspect. This may cause the content to extend outside the layer bounds.

“Transforming a Layer’s Geometry” illustrates how a square image is resized to fit within a rectangular layer bounds using the resizing modes.

**Figure 2**      Scaling constants for a layer’s `contentsGravity` property

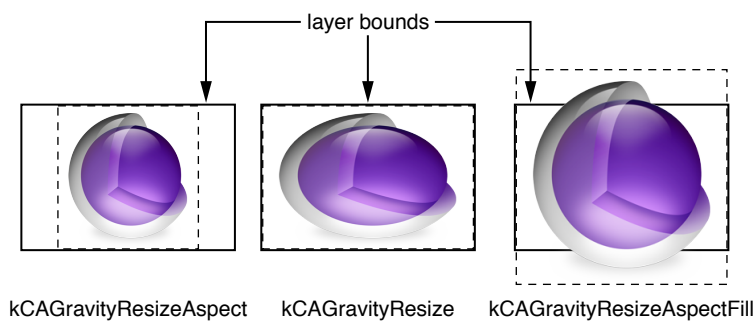

**Note** Using any of the constants `kCAGravityResize`, `kCAGravityResizeAspect`, and `kCAGravityResizeAspectFill` make the gravity position constants in [Table 1](#) (page 35) irrelevant. The content will fill the layer bounds, so it is impossible to position the content using those constants.

# Animation

Animation is a key element of today's user interfaces. When using Core Animation animation is completely automatic. There are no animation loops or timers. Your application is not responsible for frame by frame drawing, or tracking the current state of your animation. The animation occurs automatically in a separate thread, without further interaction with your application.

This chapter provides an overview of the animation classes, and describes how to create both implicit and explicit animations.

## Animation Classes and Timing

Core Animation provides an expressive set of animation classes you can use in your application:

- `CABasicAnimation` provides simple interpolation between values for a layer property.
- `CAKeyframeAnimation` provides support for key frame animation. You specify the key path of the layer property to be animated, an array of values that represent the value at each stage of the animation, as well as arrays of key frame times and timing functions. As the animation runs, each value is set in turn using the specified interpolation.
- `CATransition` provides a transition effect that affects the entire layer's content. It fades, pushes, or reveals layer content when animating. The stock transition effects can be extended by providing your own custom Core Image filters.
- `CAAnimationGroup` allows an array of animation objects to be grouped together and run concurrently.

In addition to specifying the type of animation to perform, you must also specify the duration of the animation, the pacing (how the interpolated values are distributed across the duration), if the animation is to repeat and how many times, whether it should automatically reverse when each cycle is completed, and its visual state when the animation is completed. The animation classes and the `CAMediaTiming` protocol provides all this functionality and more.

`CAAnimation` and its subclasses and the timing protocols are shared by both Core Animation and the Cocoa Animation Proxy functionality. The classes are described in detail in *Animation Types and Timing Programming Guide*.

## Implicit Animation

Core Animation's implicit animation model assumes that all changes to animatable layer properties should be gradual and asynchronous. Dynamically animated scenes can be achieved without ever explicitly animating layers. Changing the value of an animatable layer property causes the layer to implicitly animate the change from the old value to the new value. While an animation is in-flight, setting a new target value causes the animation transition to the new target value from its current state.

Listing 1 shows how simple it is to trigger an implicit animation that animates a layer from its current position to a new position.

**Listing 1**      Implicitly animating a layer's position property

```
// assume that the layer is current positioned at (100.0,100.0)
theLayer.position=CGPointMake(500.0,500.0);
```

You can implicitly animate a single layer property at a time, or many. You can also implicitly animate several layers simultaneously. The code in Listing 2 causes four implicit animations to occur simultaneously.

**Listing 2**      Implicitly animating multiple properties of multiple layers

```
// animate theLayer's opacity to 0 while moving it
// further away in the layer
theLayer.opacity=0.0;
theLayer.zPosition=-100;

// animate anotherLayer's opacity to 1
// while moving it closer in the layer
anotherLayer.opacity=1.0;
anotherLayer.zPosition=100.0;
```

Implicit animations use the duration specified in the default animation for the property, unless the duration has been overridden in an implicit or explicit transaction. See [“Overriding the Duration of Implied Animations”](#) (page 48) for more information.

## Explicit Animation

Core Animation also supports an explicit animation model. The explicit animation model requires that you create an animation object, and set start and end values. An explicit animation won't start until you apply the animation to a layer. The code fragment in Listing 3 creates an explicit animation that transitions a layer's opacity from fully opaque to fully transparent, and back over a 3 second duration. The animation doesn't begin until it is added to the layer.

**Listing 3** Explicit animation

```
CABasicAnimation *theAnimation;

theAnimation=[CABasicAnimation animationWithKeyPath:@"opacity"];
theAnimation.duration=3.0;
theAnimation.repeatCount=2;
theAnimation.autoreverses=YES;
theAnimation.fromValue=[NSNumber numberWithFloat:1.0];
theAnimation.toValue=[NSNumber numberWithFloat:0.0];
[layer addAnimation:theAnimation forKey:@"animateOpacity"];
```

Explicit animations are especially useful when creating animations that run continuously. Listing 4 shows how to create an explicit animation that applies a CoreImage bloom filter to a layer, animating its intensity. This causes the “selection layer” to pulse, drawing the user's attention.

**Listing 4** Continuous explicit animation example

```
// The selection layer will pulse continuously.
// This is accomplished by setting a bloom filter on the layer

// create the filter and set its default values
CIFilter *filter = [CIFilter filterWithName:@"CIBloom"];
[filter setDefaults];
[filter setValue:[NSNumber numberWithFloat:5.0] forKey:@"inputRadius"];

// name the filter so we can use the keypath to animate the inputIntensity
// attribute of the filter
```



```
[filter setName:@"pulseFilter"];

// set the filter to the selection layer's filters
[selectionLayer setFilters:[NSArray arrayWithObject:filter]];

// create the animation that will handle the pulsing.
CABasicAnimation* pulseAnimation = [CABasicAnimation animation];

// the attribute we want to animate is the inputIntensity
// of the pulseFilter
pulseAnimation.keyPath = @"filters.pulseFilter.inputIntensity";

// we want it to animate from the value 0 to 1
pulseAnimation.fromValue = [NSNumber numberWithFloat: 0.0];
pulseAnimation.toValue = [NSNumber numberWithFloat: 1.5];

// over a one second duration, and run an infinite
// number of times
pulseAnimation.duration = 1.0;
pulseAnimation.repeatCount = HUGE_VALF;

// we want it to fade on, and fade off, so it needs to
// automatically autoreverse.. this causes the intensity
// input to go from 0 to 1 to 0
pulseAnimation.autoreverses = YES;

// use a timing curve of easy in, easy out..
pulseAnimation.timingFunction = [CAMediaTimingFunction functionWithName:
kCAMediaTimingFunctionEaseInEaseOut];

// add the animation to the selection layer. This causes
// it to begin animating. We'll use pulseAnimation as the
// animation key name
[selectionLayer addAnimation:pulseAnimation forKey:@"pulseAnimation"];
```

## Starting and Stopping Explicit Animations

You start an explicit animation by sending a `addAnimation:forKey:` message to the target layer, passing the animation and an identifier as parameters. Once added to the target layer the explicit animation will run until the animation completes, or it is removed from the layer. The identifier used to add an animation to a layer is also used to stop it by invoking `removeAnimationForKey:`. You can stop all animations for a layer by sending the layer a `removeAllAnimations` message.

# Layer Actions

Layer actions are triggered in response to: layers being inserted and removed from the layer-tree, the value of layer properties being modified, or explicit application requests. Typically, action triggers result in an animation being displayed.

## The Role of Action Objects

An action object is an object that responds to an action identifier via the `CAAction` protocol. Action identifiers are named using standard dot-separated key paths. A layer is responsible for mapping action identifiers to the appropriate action object. When the action object for the identifier is located that object is sent the message defined by the `CAAction` protocol.

The `CALayer` class provides default action objects—instances of `CAAnimation`, a `CAAction` protocol compliant class—for all animatable layer properties. `CALayer` also defines the following action triggers that are not linked directly to properties, as well as the action identifiers in Table 1.

**Table 1** Action triggers and their corresponding identifiers

Trigger	Action identifier
A layer is inserted into a visible layer-tree, or the <code>hidden</code> property is set to <code>NO</code> .	The action identifier constant <code>kCAOnOrderIn</code> .
A layer is removed from a visible layer-tree, or the <code>hidden</code> property is set to <code>YES</code> .	The action identifier constant <code>kCAOnOrderOut</code> .
A layer replaces an existing layer in a visible layer tree using <code>replaceSublayer: with:</code> .	The action identifier constant <code>kCATransition</code> .

## Defined Search Pattern for Action Keys

When an action trigger occurs, the layer's `actionForKey:` method is invoked. This method returns an action object that corresponds to the action identifier passed as the parameter, or `nil` if no action object exists.

When the `CALayer` implementation of `actionForKey:` is invoked for an identifier the following search pattern is used:

1. If the layer has a delegate, and it implements the method `actionForLayer:forKey:` it is invoked, passing the layer, and the action identifier as parameters. The delegate's `actionForLayer:forKey:` implementation should respond as follows:
  - Return an action object that corresponds to the action identifier.
  - Return `nil` if it doesn't handle the action identifier.
  - Return `NSNull` if it doesn't handle the action identifier and the search should be terminated.
2. The layer's `actions` dictionary is searched for an object that corresponds to the action identifier.
3. The layer's `style` property is searched for an `actions` dictionary that contains the identifier.
4. The layer's class is sent a `defaultActionForKey:` message. It will return an action object corresponding to the identifier, or `nil` if not found.

## Adopting the CAAction Protocol

The `CAAction` protocol defines how action objects are invoked. Classes that implement the `CAAction` protocol have a method with the signature `runActionForKey:object:arguments:`.

When the action object receives the `runActionForKey:object:arguments:` message it is passed the action identifier, the layer on which the action should occur, and an optional dictionary of parameters.

Typically, action objects are an instance of a `CAAnimation` subclass, which implements the `CAAction` protocol. You can, however, return an instance of any class that implements the protocol. When that instance receives the `runActionForKey:object:arguments:` message it should respond by performing its action.

When an instance of `CAAnimation` receives the `runActionForKey:object:arguments:` message it responds by adding itself to the layer's animations, causing the animation to run (see [Listing 1](#) (page 44)).

**Listing 1** `runActionForKey:object:arguments:` implementation that initiates an animation

```
- (void)runActionForKey:(NSString *)key
    object:(id)anObject
    arguments:(NSDictionary *)dict
{
    [(CALayer *)anObject addAnimation:self forKey:key];
}
```

```
}
```

## Overriding an Implied Animation

You can provide a different implied animation for an action identifier by inserting an instance of `CAAnimation` into the `actions` dictionary, into an `actions` dictionary in the `style` dictionary, by implementing the delegate method `actionForLayer:forKey:`, or subclassing a layer class, overriding `defaultActionForKey:` and returning the appropriate action object.

The example in Listing 2 replaces the default implied animation for the `contents` property using delegation.

**Listing 2** Implied animation for the `contents` property

```
- (id<CAAction>)actionForLayer:(CALayer *)theLayer
    forKey:(NSString *)theKey
{
    CATransition *theAnimation=nil;

    if ([theKey isEqualToString:@"contents"])
    {

        theAnimation = [[CATransition alloc] init];
        theAnimation.duration = 1.0;
        theAnimation.timingFunction = [CAMediaTimingFunction
functionWithName:kCAMediaTimingFunctionEaseIn];
        theAnimation.type = kCATransitionPush;
        theAnimation.subtype = kCATransitionFromRight;
    }

    return theAnimation;
}
```

The example in [Listing 3](#) (page 46) disables the default animation for the `sublayers` property using the `actions` dictionary pattern.

**Listing 3**      Implied animation for the sublayers property

```
// get a mutable version of the current actions dictionary
NSMutableDictionary *customActions=[NSMutableDictionary
dictionaryWithDictionary:[theLayer actions]];

// add the new action for sublayers
[customActions setObject:[NSNull null] forKey:@"sublayers"];

// set theLayer actions to the updated dictionary
theLayer.actions=customActions;
```

## Temporarily Disabling Actions

By default, any time you change an animatable property, the appropriate animation will occur.

You can temporarily disable actions when modifying layer properties by using transactions. See [“Temporarily Disabling Layer Actions”](#) (page 48) for more information.

# Transactions

Every modification to a layer is part of a transaction. `CATransaction` is the Core Animation class responsible for batching multiple layer-tree modifications into atomic updates to the render tree.

This chapter describes the two types of transactions Core Animation supports: implicit transactions and explicit transactions.

## Implicit transactions

Implicit transactions are created automatically when the layer tree is modified by a thread without an active transaction, and are committed automatically when the thread's run-loop next iterates.

The example in Listing 1 modifies a layer's `opacity`, `zPosition`, and `position` properties, relying on the implicit transaction to ensure that the resulting animations occur at the same time.

**Listing 1** Animation using an implicit transaction

```
theLayer.opacity=0.0;  
theLayer.zPosition=-200;  
theLayer.position=CGPointMake(0.0,0.0);
```

**Important** When modifying layer properties from threads that don't have a runloop, you must use explicit transactions.

## Explicit Transactions

You create an explicit transaction by sending the `CATransaction` class a `begin` message before modifying the layer tree, and a `commit` message afterwards. Explicit transactions are particularly useful when setting the properties of many layers at the same time (for example, while laying out multiple layers), temporarily disabling layer actions, or temporarily changing the duration of resulting implied animations.

## Temporarily Disabling Layer Actions

You can temporarily disable layer actions when changing layer property values by setting the value of the transaction's `kCATTransactionDisableActions` to `true`. Any changes made during the scope of that transaction will not result in an animation occurring. Listing 2 shows an example that disables the fade animation that occurs when removing a `Layer` from a visible layer-tree.

**Listing 2** Temporarily disabling a layer's actions

```
[CATTransaction begin];
[CATTransaction setValue:(id)kCFBooleanTrue
                      forKey:kCATTransactionDisableActions];
[aLayer removeFromSuperlayer];
[CATTransaction commit];
```

## Overriding the Duration of Implied Animations

You can temporarily alter the duration of animations that run in response to changing layer property values by setting the value of the transaction's `kCATTransactionAnimationDuration` key to a new duration. Any resulting animations in that transaction scope will use that duration rather than their own. Listing 3 shows an example that causes an animation to occur over 10 seconds rather than the duration specified by the `zPosition` and `opacity` animations..

**Listing 3** Overriding the animation duration

```
[CATTransaction begin];
[CATTransaction setValue:[NSNumber numberWithFloat:10.0f]
                      forKey:kCATTransactionAnimationDuration];
theLayer.zPosition=200.0;
theLayer.opacity=0.0;
[CATTransaction commit];
```

Although the above example shows the duration bracketed by an explicit transaction `begin` and `commit`, you could omit those and use the implicit transaction instead.



## Nesting Transactions

Explicit transactions can be nested, allowing you to disable actions for one part of an animation, or using different durations for the implicit animations of properties that are modified. Only when the outer-most transaction is committed will the animations occur.

Listing 4 shows an example of nesting two transactions. The outer transaction sets the implied animation duration to 2 seconds and sets the layer's `position` property. The inner transaction sets the implied animation duration to 5 seconds and changes the layer's `opacity` and `zPosition`.

**Listing 4**     Nesting explicit transactions

```
[CATransaction begin]; // outer transaction

// change the animation duration to 2 seconds
[CATransaction setValue:[NSNumber numberWithFloat:2.0f]
                    forKey:kCATransactionAnimationDuration];
// move the layer to a new position
theLayer.position = CGPointMake(0.0,0.0);

[CATransaction begin]; // inner transaction
// change the animation duration to 5 seconds
[CATransaction setValue:[NSNumber numberWithFloat:5.0f]
                    forKey:kCATransactionAnimationDuration];

// change the zPosition and opacity
theLayer.zPosition=200.0;
theLayer.opacity=0.0;

[CATransaction commit]; // inner transaction

[CATransaction commit]; // outer transaction
```

# Laying Out Core Animation Layers

`NSView` provides the classic "struts and springs" model of repositioning views relative to their superlayer when it resizes. While layers support this model, Core Animation on OS X provides a more general layout manager mechanism that allows developers to write their own layout managers. A custom layout manager (which implements the `CALayoutManager` protocol) can be specified for a layer, which then assumes responsibility for providing layout of the layer's sublayers.

This chapter describes the constraints layout manager and how to configure a set of constraints.

---

**iOS Note** The `CALayer` class in iOS only supports the "struts and springs" positioning model, it does not provide custom layout managers. However, if you want to manually position layers associated with a particular view, you can override the `layoutSubviews` method of that view and implement your custom layout code there. For more information on handling view-based layout in an iOS application, see *View Programming Guide for iOS*.


---

## Constraints Layout Manager

Constraint-based layout allows you to specify the position and size of a layer using relationships between itself its sibling layers or its superlayer. The relationships are represented by instances of the `CAConstraint` class that are stored in an array in the sublayers' `constraints` property.

Figure 1 shows the layout attributes you can use when specifying relationships.

**Figure 1** Constraint layout manager attributes

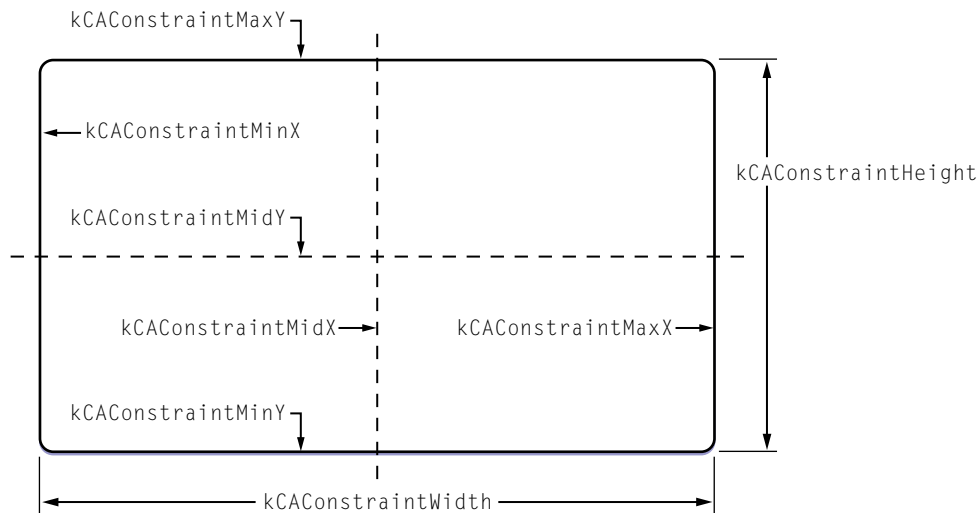


When using constraints layout you first create an instance of `CACoordinateLayoutManager` and set it as the parent layer's layout manager. You then create constraints for the sublayers by instantiating `CACoordinate` objects and adding them to the sublayer's constraints using `addConstraint:`. Each `CACoordinate` instance encapsulates one geometry relationship between two layers on the same axis.

Sibling layers are referenced by name, using the `name` property of a layer. The special name `superlayer` is used to refer to the layer's superlayer.

A maximum of two relationships must be specified per axis. If you specify constraints for the left and right edges of a layer, the width will vary. If you specify constraints for the left edge and the width, the right edge of the layer will move relative to the superlayer's frame. Often you'll specify only a single edge constraint, the layer's size in the same axis will be used as the second relationship.

The example code in Listing 1 creates a layer, and then adds sublayers that are positioned using constraints. Figure 2 shows the resulting layout.

**Figure 2** Example constraints based layout

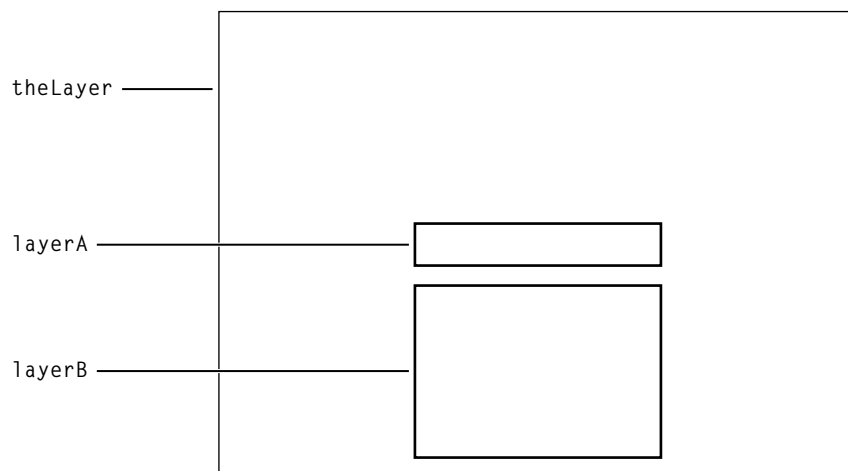

**Listing 1** Configuring a layer's constraints

```
// create and set a constraint layout manager for theLayer
theLayer.layoutManager=[CAConstraintLayoutManager layoutManager];

CALayer *layerA = [CALayer layer];
layerA.name = @"layerA";

layerA.bounds = CGRectMake(0.0,0.0,100.0,25.0);
layerA.borderWidth = 2.0;

[layerA addConstraint:[CAConstraint constraintWithAttribute:kCAConstraintMidY
                                                         relativeTo:@"superlayer"
                                                         attribute:kCAConstraintMidY]];

[layerA addConstraint:[CAConstraint constraintWithAttribute:kCAConstraintMidX
                                                         relativeTo:@"superlayer"
                                                         attribute:kCAConstraintMidX]];

[theLayer addSublayer:layerA];
```

```
CALayer *layerB = [CALayer layer];
layerB.name = @"layerB";
layerB.borderWidth = 2.0;

[layerB addConstraint:[CAConstraint constraintWithAttribute:kCAConstraintWidth
                                                    relativeTo:@"layerA"
                                                    attribute:kCAConstraintWidth]];

[layerB addConstraint:[CAConstraint constraintWithAttribute:kCAConstraintMidX
                                                    relativeTo:@"layerA"
                                                    attribute:kCAConstraintMidX]];

[layerB addConstraint:[CAConstraint constraintWithAttribute:kCAConstraintMaxY
                                                    relativeTo:@"layerA"
                                                    attribute:kCAConstraintMinY
                                                    offset:-10.0]];

[layerB addConstraint:[CAConstraint constraintWithAttribute:kCAConstraintMinY
                                                    relativeTo:@"superlayer"
                                                    attribute:kCAConstraintMinY
                                                    offset:+10.0]];

[theLayer addSublayer:layerB];
```

Here's what the code does:

1. Creates an instance of `CAConstraintLayoutManager` and sets it as the `layoutManager` property of `theLayer`.
2. Creates an instance of `CALayer` (`layerA`) and sets the layer's name property to "layerA".
3. The bounds of `layerA` is set to a (0.0,0.0,100.0,25.0).
4. Creates a `CAConstraint` object, and adds it as a constraint of `layerA`.  
This constraint aligns the horizontal center of `layerA` with the horizontal center of the superlayer.
5. Creates a second `CAConstraint` object, and adds it as a constraint of `layerA`.

This constraint aligns the vertical center of `layerA` with the vertical center of the superlayer.

6. Adds `layerA` as a sublayer of `theLayer`.
7. Creates an instance of `CALayer` (`layerB`) and sets the layer's name property to "layerB".
8. Creates a `CAConstraint` object, and adds it as a constraint of `layerA`.

This constraint sets the width of `layerB` to the width of `layerA`.

9. Creates a second `CAConstraint` object, and adds it as a constraint of `layerB`.

This constraint sets the horizontal center of `layerB` to be the same as the horizontal center of `layerA`.

10. Creates a third `CAConstraint` object, and adds it as a constraint of `layerB`.

This constraint sets the top edge of `layerB` 10 points below the bottom edge of `layerA`.

11. Creates a fourth `CAConstraint` object, and adds it as a constraint of `layerB`.

This constraint sets the bottom edge of `layerB` 10 points above the bottom edge of the superlayer.



**Warning** It is possible to create constraints that result in circular references to the same attributes. In cases where the layout is unable to be computed, the behavior is undefined.

# Core Animation Extensions To Key-Value Coding

The `CAAnimation` and `CALayer` classes extend the `NSKeyValueCoding` protocol adding default values for keys, expanded wrapping conventions, and key path support for `CGPoint`, `CGRect`, `CGSize`, and `CATransform3D`.

## Key-Value Coding Compliant Container Classes

Both `CALayer` and `CAAnimation` are key-value coding compliant container classes, allowing you to set values for arbitrary keys. That is, while the key “someKey” is not a declared property of the `CALayer` class, however you can still set a value for the key “someKey” as follows:

```
[theLayer setValue:[NSNumber numberWithInt:50] forKey:@"someKey"];
```

You retrieve the value for the key “someKey” using the following code:

```
someKeyValue=[theLayer valueForKey:@"someKey"];
```

---

**OS X Note** On OS X, the `CALayer` and `CAAnimation` classes support the `NSCoding` protocol and will automatically archive any additional keys that you set for an instance of those classes.

---

## Default Value Support

Core Animation adds a new convention to key value coding that allows a class to provide a default value that is used when a class has no value set for that key. Both `CALayer` or `CAAnimation` support this convention using the class method `defaultValueForKey:`.

To provide a default value for a key you create a subclass of the class and override `defaultValueForKey:`. The subclass implementation examines the key parameter and then returns the appropriate default value. Listing 1 shows an example implementation of `defaultValueForKey:` that provides a new default value for the layer property `masksToBounds`.

**Listing 1** Example implementation of `defaultValueForKey:`:

```
+ (id)defaultValueForKey:(NSString *)key
{
    if ([key isEqualToString:@"masksToBounds"])
        return [NSNumber numberWithBool:YES];

    return [super defaultValueForKey:key];
}
```

## Wrapping Conventions

When using the key-value coding methods to access properties whose values are not objects the standard key-value coding wrapping conventions support, the following wrapping conventions are used:

C Type	Class
CGPoint	NSValue
CGSize	NSValue
CGRect	NSValue
CGAffineTransform	NSAffineTransform (OS X only)
CATransform3D	NSValue

## Key Path Support for Structure Fields

`CAAnimation` provides support for accessing the fields of selected structures using key paths. This is useful for specifying these structure fields as the key paths for animations, as well as setting and getting values using `setValue:forKeyPath:` and `valueForKeyPath:`.

`CATransform3D` exposes the following fields:

Structure Field	Description
<code>rotation.x</code>	The rotation, in radians, in the x axis.



Structure Field	Description
<code>rotation.y</code>	The rotation, in radians, in the y axis.
<code>rotation.z</code>	The rotation, in radians, in the z axis.
<code>rotation</code>	The rotation, in radians, in the z axis. This is identical to setting the <code>rotation.z</code> field.
<code>scale.x</code>	Scale factor for the x axis.
<code>scale.y</code>	Scale factor for the y axis.
<code>scale.z</code>	Scale factor for the z axis.
<code>scale</code>	Average of all three scale factors.
<code>translation.x</code>	Translate in the x axis.
<code>translation.y</code>	Translate in the y axis.
<code>translation.z</code>	Translate in the z axis.
<code>translation</code>	Translate in the x and y axis. Value is an <code>NSSize</code> or <code>CGSize</code> .

`CGPoint` exposes the following fields:

Structure Field	Description
<code>x</code>	The x component of the point.
<code>y</code>	The y component of the point.

`CGSize` exposes the following fields:

Structure Field	Description
<code>width</code>	The width component of the size.
<code>height</code>	The height component of the size.

`CGRect` exposes the following fields:

Structure Field	Description
<code>origin</code>	The origin of the rectangle as a <code>CGPoint</code> .

Structure Field	Description
<code>origin.x</code>	The x component of the rectangle origin.
<code>origin.y</code>	The y component of the rectangle origin.
<code>size</code>	The size of the rectangle as a <code>CGSize</code> .
<code>size.width</code>	The width component of the rectangle size.
<code>size.height</code>	The height component of the rectangle size.

You can not specify a structure field key path using Objective-C 2.0 properties. This will not work:

```
myLayer.transform.rotation.x=0;
```

Instead you must use `setValue:forKeyPath:` or `valueForKeyPath:` as shown below:

```
[myLayer setValue:[NSNumber numberWithInt:0] forKeyPath:@"transform.rotation.x"];
```

# Layer Style Properties

Regardless of the type of media a layer displays, a layer's style properties are applied by the render-tree as it composites layers.

This chapter describes the layer style properties and provides examples of their effect on an example layer.

---

**Note** The layer style properties available on OS X and iOS differ and are noted below.


---

## Geometry Properties

A layer's geometry properties specify how it is displayed relative to its parent layer. The geometry also specifies the radius used to round the layer corners and a transform that is applied to the layer and its sublayers.

Figure 1 shows the geometry of the example layer.

**Figure 1** Layer geometry

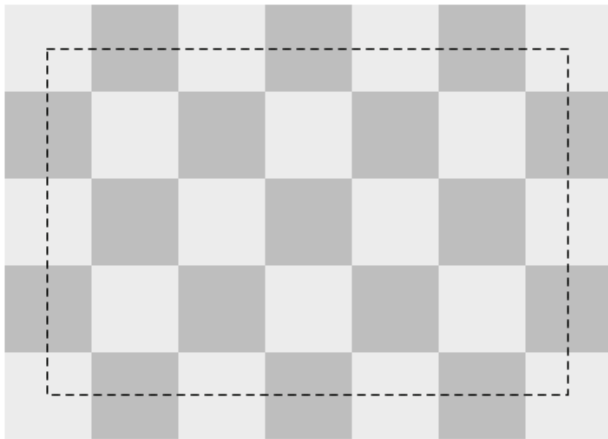

The following `CALayer` properties specify a layer's geometry:

- `frame`
- `bounds`
- `position`

- `anchorPoint`
- `cornerRadius`
- `transform`
- `zPosition`

---

**iOS Note** The `cornerRadius` property is supported only in iOS 3.0 and later.

---

## Background Properties

Next, the layer renders its background. You can define a color for the background as well as a Core Image filter.

Figure 2 illustrates the sample layer with its `backgroundColor` set.

**Figure 2** Layer with background color



The background filter is applied to the content behind the layer. For example, you may wish to apply a blur filter as a background filter to make the layer content stand out better.

The following `CALayer` properties affect the display of a layer's background:

- `backgroundColor`
- `backgroundFilters`

---

**iOS Note** While the `CALayer` class in iOS exposes the `backgroundColor` property, Core Image is not available. The filters available for this property are currently undefined.


---

## Layer Content

Next, if set, the content of the layer is rendered. The layer content can be created using the Quartz graphics environment, OpenGL, QuickTime, or Quartz Composer.

Figure 4 shows the example layer with its content composited.

**Figure 3** Layer displaying a content image

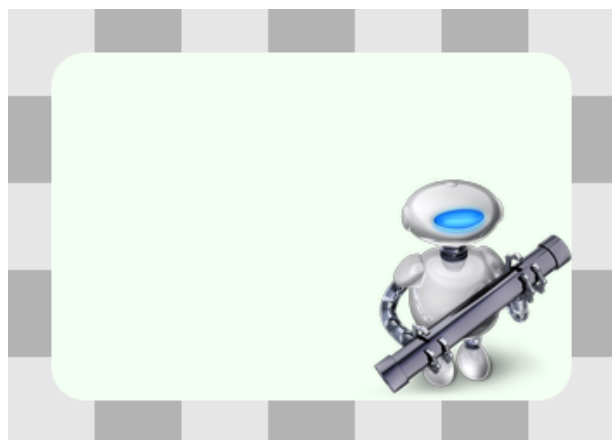

By default, the content of a layer is not clipped to its bounds and corner radius. The `masksToBounds` property can be set to `true` to clip the layer content to those values.

The following `CALayer` properties affect the display of a layer's content:

- `contents`
- `contentsGravity`

## Sublayers Content

It is typical that a layer will have a hierarchy of child layers, its sublayers. These sublayers are rendered recursively, relative to the parent layer's geometry. The parent layer's `sublayerTransform` is applied to each sublayer, relative to the parent layer's anchor point.

**Figure 4** Layer displaying the sublayers content



By default, a layer's sublayers are not clipped to the layer's bounds and corner radius. The `masksToBounds` property can be set to `true` to clip the layer content to those values. The example layer's `masksToBounds` property is `false`; notice that the sublayer displaying the monitor and test pattern is partially outside of its parent layer's bounds.

The following `CALayer` properties affect the display of a layer's sublayers:

- `sublayers`
- `masksToBounds`
- `sublayerTransform`

## Border Attributes

A layer can display an optional border using a specified color and width. Figure 5 shows the example layer after applying a border.

**Figure 5** Layer displaying the border attributes content



The following `CALayer` properties affect the display of a layer's borders:

- `borderColor`
- `borderWidth`

---


**iOS Note** The `borderColor` and `borderWidth` properties are supported only in iOS 3.0 and later.

---

## Filters Property

An array of Core Image filters can be applied to the layer. These filters affect the layer's border, content, and background. Figure 6 shows the example layer with the Core Image posterize filter applied.

**Figure 6** Layer displaying the filters properties

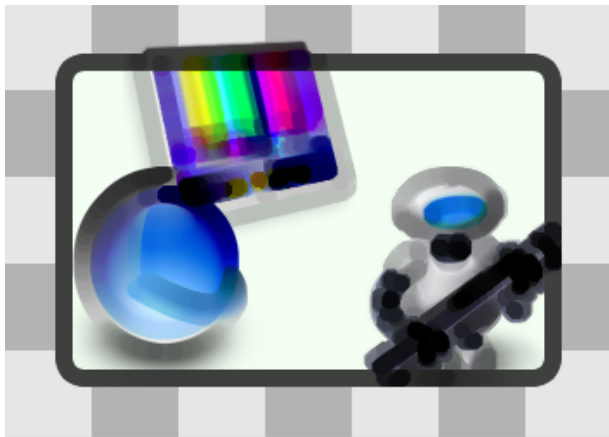

The following `CALayer` property specifies a layers content filters:

- `filters`



---


**iOS Note** While the `CALayer` class in iOS exposes the `filters` property, Core Image is not available. Currently the filters available for this property are undefined.

---

## Shadow Properties

Optionally, a layer can display a shadow, specifying its opacity, color, offset, and blur radius. Figure 7 shows the example layer with a red shadow applied.

**Figure 7** Layer displaying the shadow properties

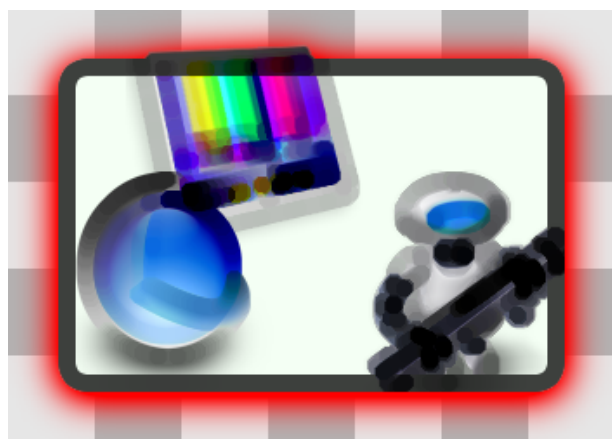

The following `CALayer` properties affect the display of a layer's shadow:

- `shadowColor`
- `shadowOffset`
- `shadowOpacity`
- `shadowRadius`

---


**iOS Note** The `shadowColor`, `shadowOffset`, `shadowOpacity`, and `shadowRadius` properties are supported only in iOS 3.2 and later.

---

## Opacity Property

By setting the opacity of a layer, you can control the layer's transparency. Figure 8 shows the example layer with an opacity of 0.5.

**Figure 8** Layer including the opacity property

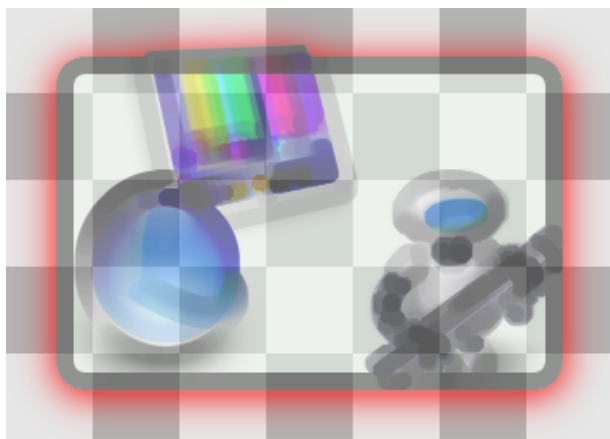

The following `CALayer` property specifies the opacity of a layer:

- `opacity`

## Composite Property

A layer's compositing filter is used to combine the layer content with the layers behind it. By default, a layer is composited using source-over. Figure 9 shows the example layer with a compositing filter applied.

**Figure 9** Layer composited using the `compositingFilter` property



The following `CALayer` property specifies the compositing filter for a layer:

- `compositingFilter`

---

**iOS Note** While the `CALayer` class in iOS exposes the `compositingFilter` property, Core Image is not available. Currently the filters available for this property are undefined.

---

## Mask Properties

Finally, you can specify a layer that will serve as a mask, further modifying how the rendered layer appears. The opacity of the mask layer determines masking when the layer is composited. Figure 10 shows the example layer composited with a mask layer.

**Figure 10** Layer composited with the mask property



The following `CALayer` property specifies the mask for a layer:

- `mask`

---

**iOS Note** The `mask` property is supported only in iOS 3.0 and later.

---

# Example: Core Animation Kiosk Menu Style Application

The Core Animation Kiosk Style Menu example displays a simple selection example using Core Animation layers to generate and animate the user interface. In less than 100 lines of code, it demonstrates the following capabilities and design patterns:

- Hosting the root-layer of a layer hierarchy in a view.
- Creating and inserting layers into a layer hierarchy.
- Using a `QCCompositionLayer` to display Quartz Composer compositions as layer content. It also demonstrates the performance increase when using a solid color.
- Using an explicit animation that runs continuously.
- Animating Core Image Filter inputs.
- Implicitly animating the position of the selection item.
- Handling key events through the `MenuView` instance that hosts the view.

This application makes heavy use of Core Image filters and Quartz Composer compositions and, as a result, runs only on OS X. The techniques illustrated for managing the layer hierarchy, implicit and explicit animation, and event handling are common to both platforms.

The application is available as sample code in two versions: One that uses the `QCCompositionLayer` as the background and a second that uses a solid black background. See the *CoreAnimationKioskStyleMenu* sample for a working copy of the application. The initial code walkthrough describes the version of the application that uses the Quartz Composer background. The performance increase when using a solid color is discussed later in the article.

## The User Interface

The `QCCoreAnimationKioskMenuStyle` sample provides a very basic kiosk-style user interface; it takes over the entire screen and the user can select a single item in a menu. The user navigates the menu using the up and down arrows on the keyboard. As the selection changes the selection indicator (the rounded white

rectangle) animates to its new location. A continuously animating bloom filter is set for the selection indicator causing it to subtly catch your attention. The background is a Quartz Composer animation runs continuously, providing an attention grabbing background. Figure 1 shows the application's interface.

**Figure 1** Core Animation Kiosk Menu Interface




## Examining the Nib File

### The Layer Hierarchy

The layer hierarchy, also referred to as the layer tree, of the CoreAnimationKioskMenuStyle application is shown below.

**Figure 2** Layer Hierarchy For QCCoreAnimationKioskStyleMenu Application

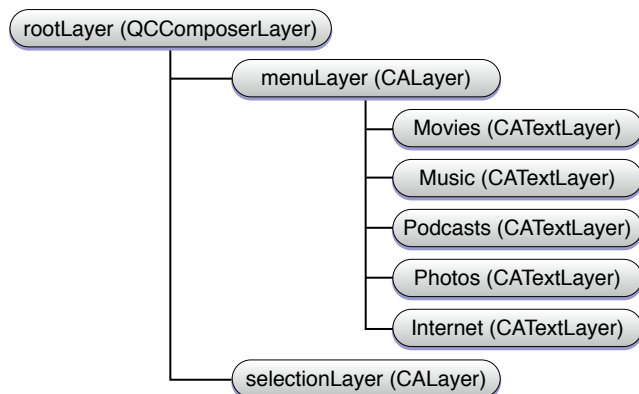


The `rootLayer` is an instance of `QCComposerLayer`. As the root-layer this layer is the same size as the `MenuView` instance, and remains that way as the window is resized.

The `menuLayer` is a sublayer of the `rootLayer`. It is an empty layer; it does not have anything set as its `contents` property and none of its style properties are set. The `menuLayer` is simply used as a container for the menu item layers. This approach allows the application to easily access a menu item sublayer by its position in the `menuLayers.sublayers` array. The `menuLayer` is the same size as, and overlaps, the `rootLayer`. This was done intentionally so that there was no need to convert between coordinate systems when positioning the `selectionLayer` relative to the current menu item.

## Examining the Application's Nib

`MainMenu.nib` is very straightforward. An instance of `CustomView` is dragged from the Interface Builder palette and positioned in the window. It is resized such that it fills the entire window. The `SelectionView.h` file is imported into Interface Builder by dragging it to the `Menu.nib` window. The `CustomView` is then selected in the Selection View Identity palette, and the Class is changed to `SelectionView`.

Figure 3      `MainMenu.nib` File

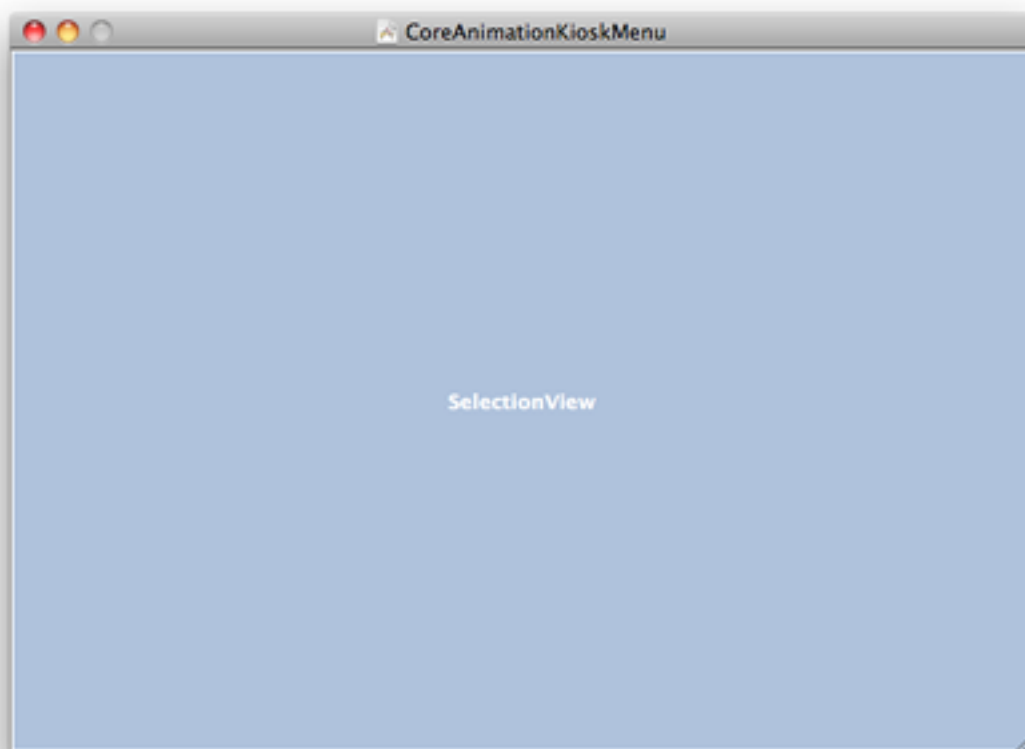

No other connections need to be made. When the nib file is loaded the window is unarchived along with the `SelectionView` instance. The `SelectionView` class layers are configured in the class's implementation of `awakeFromNib`.



## Examining the Application's Code

Having looked at the application's nib file and the overall design, you can now begin examining the implementation of the `SelectionView` class. The `SelectionView.h` file declares the properties and methods for the `SelectionView`, `SelectionView.m` contains the implementation. In order to find the code snippets easier in the implementation file, `#pragma mark` statements have been added that correspond to each listing.

### QCCoreAnimationKioskStyleMenu.h and QCCoreAnimationKioskStyleMenu.m Files

The `CodeAnimationKioskMenuAppDelegate.h` and `.m` files were created automatically when the application was created. They contain no code of relevance to this example.

### Examining SelectionView.h

The `SelectionView` class is a subclass of `NSView`. It declares four properties as well as the methods the `SelectionView.h` implements. It is the only view in the application's window and serves as the container for the `rootLayer` and the other layers in the applications layer tree.

#### Listing 1      SelectionView.h File Listing

```
#import <Cocoa/Cocoa.h>
#import <QuartzCore/Quartz.h>

// The SelectionView class is the view subclass that is inserted into
// the window. It hosts the rootLayer, and responds to events.
@interface SelectionView : NSView {

    // Contains the selected menu item index
    NSInteger selectedIndex;

    // The layer that contains the menu item layers
    CALayer *menuLayer;

    // The layer that is displays the selection
    CALayer *selectionLayer;
```

```
// The array of layers that contain the menu item names.
NSArray *names;

}

@property NSInteger selectedIndex;
@property (retain) CALayer *menuLayer;
@property (retain) CALayer *selectionLayer;
@property (retain) NSArray *names;

-(void)awakeFromNib;
-(void)setupLayers;
-(void)changeSelectedIndex:(NSInteger)theSelectedIndex;
-(void)moveUp:(id)sender;
-(void)moveDown:(id)sender;
-(void)dealloc;

@end
```

---

**Note** Notice that `Quartz/CoreAnimation.h` is imported. The `QuartzCore.framework` must be added to any project that uses Core Animation. Because this example uses Quartz Composer the `SelectionView.h` header also imports `Quartz/Quartz.h`, and the `Quartz.framework` is added to the project.

---

## Examining SelectionView.m

The `SelectionView` class is the workhorse of this application. It responds when the view is loaded by the nib, expands to fill the current screen, sets up the layers to be displayed, creates the animations, and handles the keys that move the selection.

The listing of the `SelectionView.m` file is divided as follows:

- The implementation of `awakeFromNib`.
- Setting Up the Layers
- Animating the Selection Layer Movement
- Responding to Key Events

- Cleaning Up

## Implementing `awakeFromNib`

The `awakeFromNib` method is called when `MainMenu.nib` is loaded and unarchived. The view is expected to complete its setup in `awakeFromNib`.

The `MainMenuView` implementation of `awakeFromNib` does the following:

- Creates an array of strings, the names, which are used to display the menu items.
- Hides the cursor. Full screen applications typically don't show the cursor and this application relies entirely on keyboard input.
- The view is resized to automatically fill the screen in which the window resizes. This gives the kiosk look.
- Makes the window the view resides within the first responder so that it receives the up and down arrow events.
- Calls the `setupLayers` method to setup the layers (discussed in [“The `setupLayers` Method”](#) (page 76))
- Finally, the window is brought to the front and made visible.

The code excerpt in Listing 2 shows the code that is used to accomplish the above functionality. It is located at the `#pragma mark "Implementation of awakeFromNib"` in `SelectionView.m` within the example project.

**Listing 2** Implementation of `awakeFromNib`

```
#pragma mark - Listing 1: Implementation of awakeFromNib
- (void)awakeFromNib
{

    // create an array that contains the various
    // strings
    self.names=[NSArray arrayWithObjects:@"Movies",@"Music",
                                         @"Podcasts",@"Photos",@"Internet",
                                         nil] ;

    // The cursor isn't used for selection, so we hide it
    [NSCursor hide];

    // go full screen, as a kiosk application
```

```
[self enterFullScreenMode:[self.window screen] withOptions:NULL];

// Make the window the first responder to get keystrokes
[self.window makeFirstResponder:self];

// setup the individual layers
[self setupLayers];

// bring the window to the front
[self.window makeKeyAndOrderFront:self];

}
```

## The setupLayers Method

The majority of the code in the `QCCoreAnimationKioskStyleMenu` application is in the `setupLayers` method. This method is responsible for creating the layers and animations and configuring the currently selected item.

The `#pragma mark "Configuration of the Background rootLayer"` is shown in [Listing 3](#) (page 76). This snippet of code sets up the `rootLayer` for all the child layers.

There are two significant element to take notice of in this section of code:

- The `rootLayer` is created and set for the view and only then layers are enabled for the view. Doing this in this order causes the view to use the specified layer, rather than creating it's own layer, this is referred to as **layer-view hosting**. Layer-view hosting requires that all drawing be the responsibility of Core Animation. You must not use the `NSView` drawing capabilities and methods, however the view event-handling routines are used as normal.
- The other is related to performance. Depending upon the hardware, running a Quartz Composer animation in the background can cause performance issues. Using a solid color performance can be increased. This is further discussed in ["Performance Considerations"](#) (page 82).

### Listing 3 Configuration of the Background rootLayer

```
#pragma mark Listing: "Configuration of the Background rootLayer"

-(void)setupLayers;
{
```

```
// make a Quartz Composition Layer.  
// Note: Running a QCComposition can significantly impact performance  
QCCompositionLayer* rootLayer=[QCCompositionLayer compositionLayerWithFile:  
    [[NSBundle mainBundle] pathForResource:@"Background" ofType:@"qtz"]];  
  
// Set the QCCompositionLayer as the root layer  
// and then turn on wantsLayer. This order cases  
// layer-hosting behavior on the part of the view..  
[self setLayer:rootLayer];  
[self setWantsLayer:YES];
```

The `#pragma mark Setup menuLayers Array. The Selectable Menu Items.` is shown in [Listing 4](#) (page 77). This code initialized the `menuLayer` of the application inserting it as a sublayer of the `rootLayer` (see [Figure 2](#) (page 70) for a reminder of the layer hierarchy of the application. It then inserts separate layers for each text entry into the `menuLayer`. This code is located at `#pragma mark – Setup menuLayers Array. The Selectable Menu Items.` in the sample.

**Listing 4** Setup menuLayers Array. The Selectable Menu Items.

```
// Create a layer to contain the menus  
self.menuLayer=[CALayer layer] ;  
self.menuLayer.frame=rootLayer.frame;  
self.menuLayer.layoutManager=[CAConstraintLayoutManager layoutManager];  
[rootLayer addSublayer:self.menuLayer];  
  
// setup and calculate the size and location of the individually selectable  
items.  
CGFloat width=400.0;  
CGFloat height=50.0;  
CGFloat spacing=20.0;  
CGFloat fontSize=32.0;  
CGFloat initialOffset=self.bounds.size.height/2-(height*5+spacing*4)/2.0;  
  
//Create whiteColor it's used to draw the text and also in the selectionLayer  
CGColorRef whiteColor=CGColorCreateGenericRGB(1.0f,1.0f,1.0f,1.0f);
```

```
// Iterate over the list of selection names and create layers for each.
// The menuItemLayer's are also positioned during this loop.
NSInteger i;
for (i=0;i<[names count];i++) {

    CATextLayer *menuItemLayer=[CATextLayer layer];
    menuItemLayer.string=[self.names objectAtIndex:i];
    menuItemLayer.font=@"Lucida-Grande";
    menuItemLayer.fontSize=fontSize;
    menuItemLayer.foregroundColor=whiteColor;
    [menuItemLayer addConstraint:[CAConstraint
                                constraintWithAttribute:kCAConstraintMaxY
                                relativeTo:@"superlayer"
                                attribute:kCAConstraintMaxY
                                offset:-(i*height+spacing+initialOffset)]];

    [menuItemLayer addConstraint:[CAConstraint
                                constraintWithAttribute:kCAConstraintMidX
                                relativeTo:@"superlayer"
                                attribute:kCAConstraintMidX]];

    [self.menuLayer addSublayer:menuItemLayer];
} // end of for loop
[self.menuLayer layoutIfNeeded];
```

The #pragma mark Setup selectionLayer. Used to Display the Currently Selected Item. is shown in [Listing 5](#) (page 79). The code is commented, but to summarize:

- The selectionLayer CALayer is created.
- A CIBloom filter is added to the layer and configured to continuously provide a pulsing animation to the selection indicator.
- The selectionIndex is set to 0, the initial value.
- The selectionLayer is added to the rootLayer as a sublayer.

The implementation can be found at the `#pragma mark – Setup selectionLayer`. Displays the Currently Selected Item. in the sample code

**Listing 5** Setup selectionLayer. Used to Display the Currently Selected Item.

```
#pragma mark – Setup selectionLayer. Displays the Currently Selected Item.

// we use an additional layer, selectionLayer
// to indicate that the current item is selected
self.selectionLayer=[CALayer layer];
self.selectionLayer.bounds=CGRectMake(0.0,0.0,width,height);
self.selectionLayer.borderWidth=2.0;
self.selectionLayer.cornerRadius=25;
self.selectionLayer.borderColor=whiteColor;
CIFilter *filter = [CIFilter filterWithName:@"CIBloom"];
[filter setDefaults];
[filter setValue:[NSNumber numberWithFloat:5.0] forKey:@"inputRadius"];
[filter setName:@"pulseFilter"];
[selectionLayer setFilters:[NSArray arrayWithObject:filter]];

// The selectionLayer shows a subtle pulse as it
// is displayed. This section of the code create the pulse animation
// setting the filters.pulsefilter.inputintensity to range from 0 to 2.
// This will happen every second, autoreverse, and repeat forever
CABasicAnimation* pulseAnimation = [CABasicAnimation animation];
pulseAnimation.keyPath = @"filters.pulseFilter.inputIntensity";
pulseAnimation.fromValue = [NSNumber numberWithFloat: 0.0];
pulseAnimation.toValue = [NSNumber numberWithFloat: 2.0];
pulseAnimation.duration = 1.0;
pulseAnimation.repeatCount = 1e100f;
pulseAnimation.autoreverses = YES;
pulseAnimation.timingFunction = [CAMediaTimingFunction functionWithName:
                                kCAMediaTimingFunctionEaseInEaseOut];
[selectionLayer addAnimation:pulseAnimation forKey:@"pulseAnimation"];

// set the first item as selected
```

```
[self changeSelectedIndex:0];

// finally, the selection layer is added to the root layer
[rootLayer addSublayer:self.selectionLayer];

// cleanup
CGColorRelease(whiteColor);
// end of setupLayers
}
```

## Responding to Key Events

Because layers do not take part in the responder chain, or accept events, the `SelectionView` view instance that acts as the **layer-host** for the layer tree must assume that role. This is why it was registered as the first responder in the `awakeFromNib` method.

The `moveUp:` and `moveDown:` messages are provided by `NSResponder`, of which the `SelectionView` class is a descendent, as are all view classes. The `moveUp:` and `moveDown:` messages are invoked when the up arrow and down arrows are pressed respectively. These methods allows the application to respect any remapped arrow key functionally specified by the user. And it's easier than implementing `keyDown:`, although more complex key handling in your own application may require you do to so.

The method implementation shown in [Listing 6](#) (page 80) implements the setting of the current selection layer. You can find it in the sample code at `#pragma mark "Handle Changes in the Selection"`.

### Listing 6     Handle Changes in Selection

```
#pragma mark Handle Changes in the Selection

-(void)changeSelectedIndex:(NSInteger)theSelectedIndex
{
    self.selectedIndex=theSelectedIndex;

    if (self.selectedIndex == [names count])
        self.selectedIndex=[names count]-1;
    if (self.selectedIndex < 0)
        self.selectedIndex=0;
}
```



```
    CALayer *theSelectedLayer=[[self.menuLayer sublayers]
objectAtIndex:self.selectedIndex];

    // Moves the selectionLayer to illustrate the
    // currently selected item. It does this
    // using an animation so that the transition
    // is visible.
    self.selectionLayer.position=theSelectedLayer.position;
};
```

When the up arrow is pressed the `selectedIndex` value is decremented and updated by calling `changeSelectedIndex:`. As shown in [Listing 6](#) (page 80) this moves the selection to highlight the correct item. The sample code section is shown at `#pragma mark Handle Keystrokes`.

**Listing 7** Handling Up and Down Key Presses

```
#pragma mark Handle Keystrokes

-(void)moveUp:(id)sender
{
    [self changeSelectedIndex:self.selectedIndex-1];
}

-(void)moveDown:(id)sender
{
    [self changeSelectedIndex:self.selectedIndex+1];
}
```

When the `SelectionView` is closed, we are responsible for cleaning up our instance variables. The `menuLayer`, `selectionLayer`, and `names` are set to `nil` (which results in their release) in the `dealloc` implementation. The `#pragma mark Dealloc and Cleanup` shows this portion of the sample code.

**Listing 8** Dealloc and Cleanup

```
#pragma mark Dealloc and Cleanup
```

```
-(void)dealloc
{
    [self setLayer:nil];
    self.menuLayer=nil;
    self.selectionLayer=nil;
    self.names=nil;
    [super dealloc];
}
```

## Performance Considerations

Setting a Quartz Composer animation as the background for this type of interface makes for a much more interesting and eye catching display. However, you should be sure to do the required performance testing on the target hardware configurations. Not all hardware configurations can maintain smooth animation of the selection indicator when it runs on top of a Quartz Composer animation. You may want to consider using a solid color or a static image for the background.

To help you evaluate any performance impact the sample code project includes an additional project **CoreAnimationKioskStyleMenu** that draws the content over a solid background rather than a Quartz Composer animation. It may be useful to compare the performance of the two applications as an example of the potential impact.

**Figure 4** Alternate Interface With Black Background.



# Animatable Properties

Many of the properties in `CALayer` and `CIFilter` can be animated. This article lists those properties, along with the animation used by default.

## CALayer Animatable Properties

The following `CALayer` class properties can be animated by Core Animation. See `CALayer` for more information.

- `anchorPoint`  
Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).
- `backgroundColor`  
Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86). (subproperties are animated using a basic animation)
- `backgroundFilters`  
Uses the default implied `CATransitionAnimation` described in [Table 2](#) (page 86). Sub-properties of the filters are animated using the default implied `CABasicAnimation` described in [Table 1](#) (page 86).
- `borderColor`  
Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).
- `borderWidth`  
Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).
- `bounds`  
Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).
- `compositingFilter`  
Uses the default implied `CATransitionAnimation` described in [Table 2](#) (page 86). Sub-properties of the filters are animated using the default implied `CABasicAnimation` described in [Table 1](#) (page 86).
- `contents`
- `contentsRect`  
Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).
- `cornerRadius`

Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).

- `doubleSided`

No default implied animation is set.

- `filters`

Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86). Sub-properties of the filters are animated using the default implied `CABasicAnimation` described in [Table 1](#) (page 86).

- `frame`

The frame property itself is not animatable. You can achieve the same results by modifying the `bounds` and `position` properties instead.

- `hidden`

Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).

- `mask`

Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).

- `masksToBounds`

Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).

- `opacity`

Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).

- `position`

Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).

- `shadowColor`

Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).

- `shadowOffset`

Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).

- `shadowOpacity`

Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).

- `shadowRadius`

Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).

- `sublayers`

Uses the default implied `CATransitionAnimation` described in [Table 2](#) (page 86).

- `sublayerTransform`

Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).

- `transform`  
Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).
- `zPosition`  
Uses the default implied `CABasicAnimation` described in [Table 1](#) (page 86).

**Table 1** Default Implied Basic Animation

Description	Value
Class	<code>CABasicAnimation</code>
duration	.25 seconds, or the duration of the current transaction
keyPath	Dependent on layer property type

**Table 2** Default Implied Transition

Description	Value
Class	<code>CATransition</code>
duration	.25 seconds, or the duration of the current transaction
type	Fade ( <code>kCATransitionFade</code> )
startProgress	0.0
endProgress	1.0

## CIFilter Animatable Properties

Core Animation adds the following animatable properties to Core Image’s `CIFilter` class. See `CIFilter` [Core Animation Additions](#) for more information. These properties are available only on OS X.

- `name`
- `enabled`

# Document Revision History

This table describes the changes to *Core Animation Programming Guide*.

Date	Notes
2010-09-24	Updated the document to reflect Core Animation support in iOS 4.2.
2010-08-12	Corrected iOS origin information. Clarified that the coordinate system origin used in the examples are based on the OS X model.
2010-05-25	Corrected autoresizing masks table.
2010-03-24	Added missing constant to the contentGravity property resizing table in Providing Layer Content.
2010-02-24	Updated Core Animation Kiosk Style Menu tutorial project.
2010-01-20	Updated infinite value for repeatCount.
2009-10-19	Modified section headings.
2009-08-13	Corrected availability of cornerRadius on iOS v 3.0 and later.
2008-11-13	Introduces iOS SDK content to OS X content. Corrects frame animation capabilities.
2008-09-09	Corrected typos.
2008-06-18	Updated for iOS.
2008-05-06	Corrected typos.
2008-03-11	Corrected typos.
2008-02-08	Corrected typos. Corrected RadiansToDegrees() calculation.

Date	Notes
2007-12-11	Corrected typos.
2007-10-31	<p>Added information on the presentation tree. Added example application walkthrough.</p> <p>New document that introduces the main components and services of Core Animation.</p> <p>Added “Key-Value Coding Additions” chapter.</p> <p>Updated class names to reflect new Core Animation API prefix.</p>

---





Apple Inc.

© 2010 Apple Inc.

All rights reserved.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, mechanical, electronic, photocopying, recording, or otherwise, without prior written permission of Apple Inc., with the following exceptions: Any person is hereby authorized to store documentation on a single computer for personal use only and to print copies of documentation for personal use provided that the documentation contains Apple's copyright notice.

The Apple logo is a trademark of Apple Inc.

No licenses, express or implied, are granted with respect to any of the technology described in this document. Apple retains all intellectual property rights associated with the technology described in this document. This document is intended to assist application developers to develop applications only for Apple-labeled computers.

Apple Inc.

1 Infinite Loop

Cupertino, CA 95014

408-996-1010

Apple, the Apple logo, Cocoa, Cocoa Touch, iPhone, iPod, iPod touch, Mac, Objective-C, OS X, Quartz, and QuickTime are trademarks of Apple Inc., registered in the United States and other countries.

IOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

OpenGL is a registered trademark of Silicon Graphics, Inc.

**Even though Apple has reviewed this document, APPLE MAKES NO WARRANTY OR REPRESENTATION, EITHER EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT, ITS QUALITY, ACCURACY, MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE. AS A RESULT, THIS DOCUMENT IS PROVIDED "AS IS," AND YOU, THE READER, ARE ASSUMING THE ENTIRE RISK AS TO ITS QUALITY AND ACCURACY.**

**IN NO EVENT WILL APPLE BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY DEFECT OR INACCURACY IN THIS DOCUMENT, even if advised of the possibility of such damages.**

**THE WARRANTY AND REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHERS, ORAL OR WRITTEN, EXPRESS OR IMPLIED. No Apple dealer, agent, or employee is authorized to make any modification, extension, or addition to this warranty.**

**Some states do not allow the exclusion or limitation of implied warranties or liability for incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.**