

Lecture 12: Preparing journal artical with *papaja*

Hu Chuan-Peng<sup>1</sup> & All Students<sup>1,2</sup>

<sup>1</sup> Nanjing Normal Unviersity

<sup>2</sup> Collaborators' Affiliations

Author Note

Add complete departmental affiliations for each author here. Each new line herein must be indented, like this line.

Author Note: This is for demonstration only.

The authors made the following contributions. Hu Chuan-Peng: Conceptualization, Writing - Original Draft Preparation, Supervision; All Students: Writing - Original Draft Preparation, Writing - Review & Editing.

Correspondence concerning this article should be addressed to Hu Chuan-Peng, #122 Ninghai Rd, Gulou District, Nanjing. E-mail: hcp4715@hotmail.com

## Abstract

Psychological science has encountered a serious replication crisis.

To make self-correction of the field, researchers actively reform the current practices and increase the openness, transparency, and reproducibility of studies in the field. Using R language for data analyses is recommended by many. With increasingly emphases on computational reproducibility, *papaja* was developed to combine data analysis and manuscript preparation.

The current chapter aims to demonstrate how to use *papaja*.

We will introduce the package and key elements of the it.

After the lecture, we expected students able to create an example APA manuscript using open data or exemplary data we had provided at the beginning of the class.

This demo and practice will further enhance the student's experience in computational reproducibility.

By spreading the ideas of reproducibility and teaching *papaja*, this class will increase the computational reproducibility.

*Keywords:* Reproducibility, R, Teaching, Demonstration

Word count: X

## Lecture 12: Preparing journal artical with *papaja*

R language has been widely used in psychological science and social science in general. However, for most students with a background of psychology, learning R is not easy.

In the past decade, an increasingly number of psychological researchers had switched from SPSS to R. The most common suggestions from those who successfully adopted R is: learning by doing.

To fully integrate R in the life-cycle of psychological research, using R for preparing journal article is necessary.

Fortunately, we now have *papaja* (Aust & Barth, n.d.), which enable us to prepare journal article that formatted as required by APA.

Below we will demonstrate how to use *papaja* to generate an APA formatted PDF. Note that we will use the data from perceptual matching task, which was from (Hu, Lan, Macrae, & Sui, 2020). The data analysis for this dataset has been showed in previous classes.

Here we will try to reproduce what has been reported in Hu et al. (2020). Thus, we adopted the code from: [https://github.com/hcp4715/moralSelf\\_ddm](https://github.com/hcp4715/moralSelf_ddm).

```
## [1] TRUE
```

## Methods

We report how we determined our sample size, all data exclusions (if any), all manipulations, and all measures in the study.

## Participants

The sample size of the study was determined in a dynamic way (Schoenbrodt, Wagenmakers, Zehetleitner, & Perugini, 2017). Specifically, we kept collecting data and

analyzing the strength of evidence for the critical hypothesis, including the interaction between Self-Relevance  $\times$  Valence on RT data and two Bayes factor paired  $t$ -tests (good-self vs. bad-self, good-self vs. good-other). We stopped recruiting new participants when both paired  $t$ -tests reached  $BF_{10} \leq 0.1$  or  $BF_{10} \geq 10$ . Participants who were already recruited at that moment continued to complete the experiment. See <https://osf.io/w6hrj/> for the change of Bayes factor during the data collection. In total, 44 college students (25 females, age:  $20.91 \pm 2.58$ ) were recruited. Two participants were excluded from data analysis because of procedural failures, leaving 42 participants (24 females, age:  $20.71 \pm 2.38$ ).

## Material and Procedure

The data was collected using the same settings as described in the pilot study, with several differences:

- In the shape-categorization task, the shapes were presented for 100 ms, instead of 200 ms in the pilot experiment, and feedback was Chinese character ‘Correct’ or ‘Incorrect’, instead of happy or sad symbolic faces.
- There were only two different types of blocks in the categorization task in the confirmatory study because the importance judgments resulted in unbalanced trials between participants.
- There were more trials per condition: 72 experimental trials for the matching task.
- The questionnaires were different from the pilot study.

## Data analysis

We used R (Version 4.2.3; R Core Team, 2023) and the R-packages *afex* (Version 1.3.0; Singmann, Bolker, Westfall, Aust, & Ben-Shachar, 2023), *dplyr* (Version 1.1.2; Wickham, François, Henry, Müller, & Vaughan, 2023), *emmeans* (Version 1.8.5; Lenth,

2023), *ggplot2* (Version 3.4.2; Wickham, 2016), *patchwork* (Version 1.1.2; Pedersen, 2022),  
and *tidyr* (Version 1.3.0; Wickham, Vaughan, & Girlich, 2023) for all our analyses. The  
results from Frequentist hypothesis testing (i.e., ANOVA and *t*-tests) will be reported  
below.

## Results

### Sensitivity ( $d'$ )

A two-way repeated-measure ANOVA revealed a significant interaction between  
Identity and Valence.  $F(1, 41) = 12.06$ ,  $p = 0.0012$ . We conducted follow-up simple main  
effect analyses. When the shapes were self-referential,  $d'$  was significantly larger for moral  
condition ( $2.5 \pm 0.11$ ) than for immoral condition ( $1.99 \pm 0.1$ ),  $t(41) = 4.29$ ,  $p < 0.001$ .  
However, this was no clear evidence that moral condition ( $2.11 \pm 0.116$ ) and immoral  
condition ( $2.27 \pm 0.107$ ) were not significantly different when the shapes are  
other-referential (see figure 1).

### Reaction times

[Please finish this part]

## Discussion

In this demonstration, we exemplified how to use *papaja* to prepare an APA style  
manuscript. We highlighted the following details:

- Installation and start a manuscript from the template.
- YAML front
- Mathematical notations
- Citation

- 100      • Insert results from code block
- 101      • Plot

## References

- Aust, F., & Barth, M. (n.d.). *papaja: Create APA manuscripts with R Markdown*.
- Hu, C.-P., Lan, Y., Macrae, C. N., & Sui, J. (2020). Good Me Bad Me: Does Valence Influence Self-Prioritization During Perceptual Decision-Making? *Collabra-Psychology*, 6(1), 20. <https://doi.org/10.1525/collabra.301>
- Lenth, R. V. (2023). *Emmeans: Estimated marginal means, aka least-squares means*. Retrieved from <https://CRAN.R-project.org/package=emmeans>
- Pedersen, T. L. (2022). *Patchwork: The composer of plots*. Retrieved from <https://CRAN.R-project.org/package=patchwork>
- R Core Team. (2023). *R: A language and environment for statistical computing*. Vienna, Austria: R Foundation for Statistical Computing. Retrieved from <https://www.R-project.org/>
- Schoenbrodt, F. D., Wagenmakers, E.-J., Zehetleitner, M., & Perugini, M. (2017). Sequential hypothesis testing with Bayes factors: Efficiently testing mean differences. *Psychological Methods*, 22(2), 322–339. <https://doi.org/10.1037/met0000061>
- Singmann, H., Bolker, B., Westfall, J., Aust, F., & Ben-Shachar, M. S. (2023). *Afex: Analysis of factorial experiments*. Retrieved from <https://CRAN.R-project.org/package=afex>
- Wickham, H. (2016). *ggplot2: Elegant graphics for data analysis*. Springer-Verlag New York. Retrieved from <https://ggplot2.tidyverse.org>
- Wickham, H., François, R., Henry, L., Müller, K., & Vaughan, D. (2023). *Dplyr: A grammar of data manipulation*. Retrieved from <https://CRAN.R-project.org/package=dplyr>
- Wickham, H., Vaughan, D., & Girlich, M. (2023). *Tidyr: Tidy messy data*. Retrieved from <https://CRAN.R-project.org/package=tidyr>

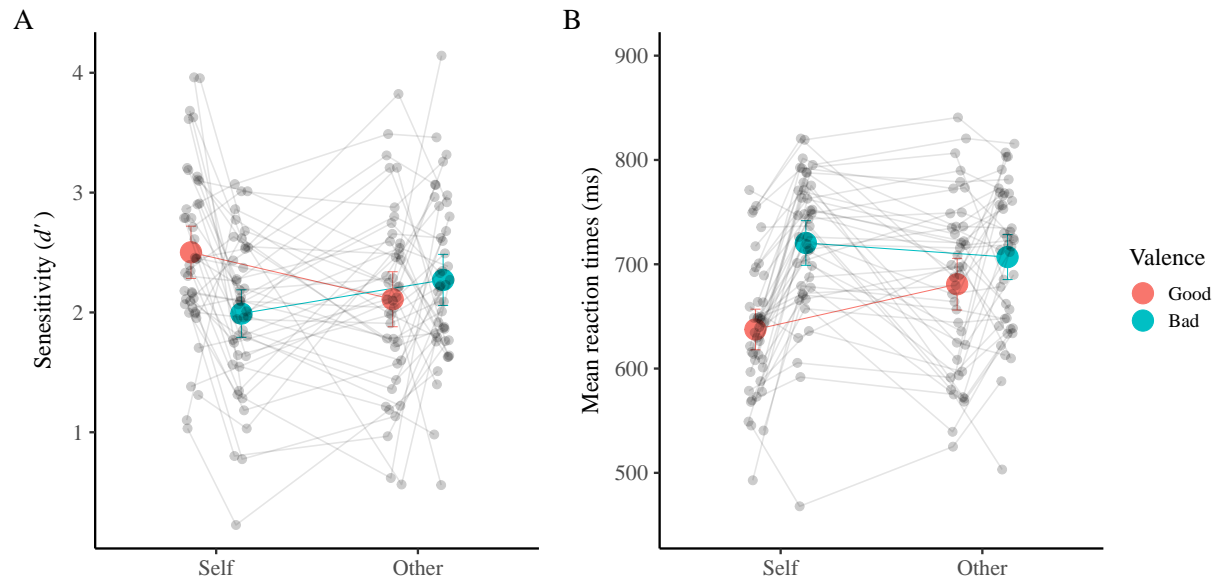


Figure 1. Interaction between identity and valence for (A) sensitivity and (B) reaction times.