


OFFLINE CONSTRUCTION

RUNTIME

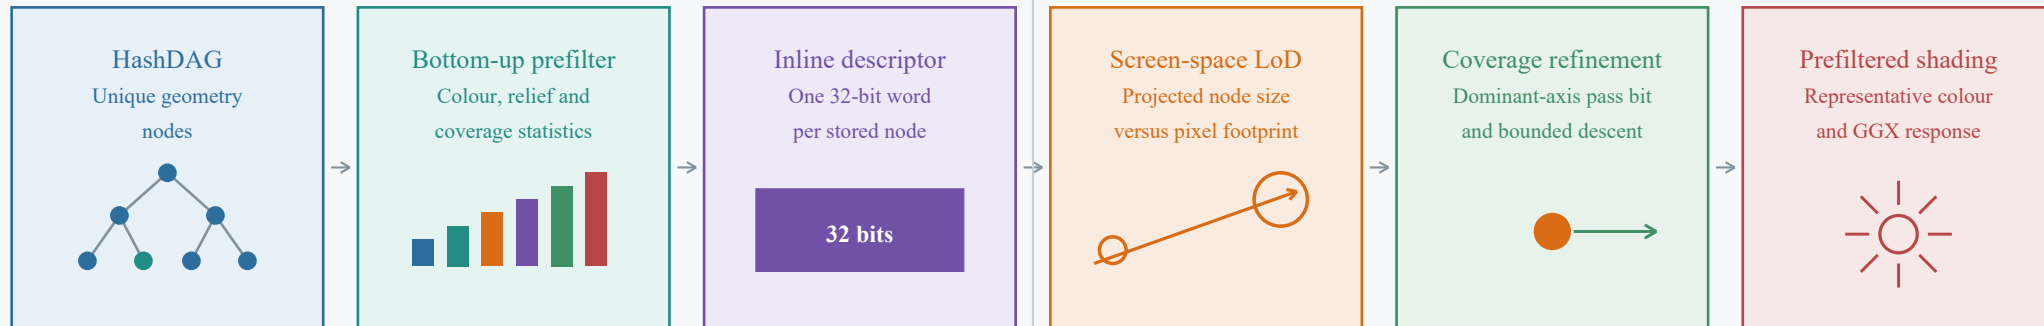

The node descriptor is constructed once for each unique DAG node. At runtime it is consumed only after the projected-size test becomes eligible for termination.