

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

WABA PORTAL

OMNICHANNEL PUBLIC API

Specification Document

Version 1.4.4
1-07-2024

INDOSAT OOREDOO HUTCHISON
WISMA MANDIRI 2
Jl. Medan Merdeka Barat No.21, Gambir,
Jakarta Pusat 10110
Indonesia
Telp: (021) 30003000

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

PROJECT: WABA PORTAL OMNICHANNEL PUBLIC API



Document No.

IOH/OMNI/11/V/23

	Company	Title	Name	Signature	Date
Prepared by	Tel-Access	Lead Development Project	David Enrico B		26-03-2023
Approved by	Tel-Access	Project Manager	Fitya Nur Fadhillah		07-09-2023

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

Document History

The following is the document change history:

No Revisi	Effective date	Description	Author	Reviewer
1.2.0	6 Juli 2023	- API Create Template - Update Template - Delete Template	A. Raca Prasetyo	- Satria Pratama - Fitya Nur F
1.2.1	17 Juli 2023	Webhook	Satria Pratama	- Fitya Nur F A. Raca Prasetyo
1.2.2	9 Agustus 2023	- Adding missing description of not sent message in send_message and broadcast operation in the description - Response body now returned op and timestamp - Disclaimer for error object, and adding trace_id for inspection. - Error response for facebook rejection and	Satria Pratama	Fitya Nur F

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

		returning fb_error object 5. Example of facebook rejection 6. Check status now returning error/errors object when status is failed 7. Example of failed message status 8. Webhook callback now sending error/errors object 9. Example of webhook with error object		
1.4.0	4 Oktober 2023	1. Add a table of content. 2. Adding a detailed explanation for payload specification. 3. Add get request for retrieve/download media based on id. 4. Add new error codes related to get request	Satria Pratama	
1.4.1	31 Oktober 2023	1. Separate status and message notification for	Satria Pratama	

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

		webhook 2. Add new error messages		
1.4.2	26 Maret 2024	1. add Message type pada Webhook	Fitya Nur Fadhilah	
1.4.3	5 April 2024	1. Penambahan jumlah karakter pada param HTTP Request Body	Fitya Nur Fadhilah	
1.4.4	26 Juni 2024	1. Add error handling for Gateway Timeout 2. Add Check Response	Satria Pratama	

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

Daftar Isi

Document History	3
Daftar Isi	6
Digital Engagement Platform	10
1. Protocol Specification	10
2. Payload Specification	10
GET Request	10
URL	10
HTTP Header	10
POST Request	11
HTTP Request Body	11
Example	13
HTTP Response Body	13
Example	15
3. Operation and Endpoint	16
3.1. Send Message	16
Description	16
Flow	16
Flow if message failed to send	17
Request Parameters	17
Response Parameters	18
Example of Request and Response Parameters :	19
Replied Message Example	20
■ Message type	22
1) Text	22
2) Reaction	23
3) Images	24
4) Location	27
5) Contact	29
6) Interactive	33
3.2. Check Status	45
a. Description	45
b. Request Parameters	45
c. Response Parameters	45

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

d. Example of Request and Response Param :	46
3.3. Get Analytics	48
a. Description	48
b. Request Parameters	48
c. Response Parameters	49
d. Example of Request and Response Param :	50
3.4. Get Messages	52
a. Description	52
incoming messages flow	52
b. Request Parameters	53
c. Response Param	54
d. Example of Request and Response Param	55
3.5. WhatsApp Template Inquiry	56
a. Description	56
b. Request Parameters	56
c. Response Parameters	56
d. Example of Response and Request Param :	57
3.6. Broadcast	60
a. Description	60
b. Request Parameters	60
Request broadcast template object formats:	60
Template object format	61
Component object format	62
c. Response Parameters	62
d. Example of Response and Request Parameters :	63
o Request parameters :	63
e. Another template example.	64
3.7. Create Template	66
a. Description	66
b. Request Parameters	66
c. Response Param	67
d. Example of Response and Request Param :	68
3.8. Update Template	71
a. Description	71
b. Request Parameters	71
c. Response Parameters	71

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

d. Example of Response and Request Param :	72
3.9. Delete Template	73
a. Description	73
b. Request Param	74
c. Response Param	74
d. Example of Response and Request Param :	74
3.10. Retrieve Media File	75
a. Description	75
b. Specification	75
c. Response Content	75
d. Example :	75
3.11 Check Response	76
a. Description	76
b. Flow	76
c. Request Parameters	77
d. Response Parameters	77
e. Example of Request and Response Parameters	77
4. Webhook	78
■ Subscription	78
Request parameters	78
Response parameters	78
Example :	79
■ Payloads	79
Webhook Body	79
● Webhook Operation	81
1. Status Notification	81
Webhook Parameter	82
Example	83
2. Message Notification	84
Webhook Parameter	84
Customer Object	85
Example	85
■ Message type	86
1) Text	86
2) Reaction	87
3) Images	89

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

4) Location	91
5) Contact	93
6) Interactive	98
7) System	108
5. Detail explanation	110
■ Prerequisite	110
■ Auth Header	110
DEP-Signature	110
■ Encryption	111
a. system_id	111
b. unique_id	111
c. op	112
d. timestamp	112
e. iv	112
f. param	112
g. auth_token	113
■ Decryption:	114
6. Error	115
a. Deskripsi	115
b. Format Response Object	115
c. List of Error Code	116
1) 400 - BAD REQUEST	116
2) 401 - UNAUTHORIZED	117
3) 403 - FORBIDDEN	117
4) 404 - Not Found	118
5) 409 - CONFLICT	118
6) 500 - INTERNAL SERVER ERROR	118
7) 504 - GATEWAY TIMEOUT	119
d. Example	119
Request Body layer error	119
Request parameters layer error	120
e. Handling Error	121

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

Digital Engagement Platform

This documentation is used for integration with our platform, especially for sending WhatsApp messages and broadcasts.

1. Protocol Specification

Protocol : HTTPS (RFC 2818)

Host : ioh.co.id

Port : 443

2. Payload Specification

GET Request

URL

Root URL : <https://dep.ioh.co.id/public-api/v1/>

Full URL : Root URL + Endpoint

HTTP Header

Key	Value	Usage Code	Description
Content-Type	"application/json"	M	
DEP-Timestamp	YYYY-MM-DDT HH:mm:ss.sssZ	M	Format Date : ISO datetime in UTC, example : "2020-01-13T05:12:19.573Z"
DEP-System-ID	alphanumeric	M	An identifier for the client's system or application, obtained via email.
DEP-Signature	alphanumeric	M	DEP-Signature = HEX(SHA256(Endpoint + DEP-Timestamp + salted_secret_key)) Where salted_secret_key =

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

			<code>HEX(HMACSHA256(message=secret_key. secret=salt))</code> with secret_key, and salt obtained via email - Endpoint is the portion of the URL that follows the Root URL. For example: - Full URL: <code>"https://dep.ioh.co.id/public-api/v1/greeting"</code> - Endpoint: <code>"/greeting"</code> *with the hexadecimal form in lowercase.
--	--	--	---

See [detail explanation](#) for definition detail, explanation, and examples.

POST Request

Our system uses encryption-based messaging, where messaging is not sent directly, but rather, encapsulated using encryption calculation instead. The security layer will wrap the original request and response payloads.

Request Type : HTTP POST

Content-Type : application/json

Root URL : <https://dep.ioh.co.id/public-api/v1/>

HTTP Request Body

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	system_id	String	Alphanumeric	1-32	M	An identifier for the client's system or application, obtained via email.
2	unique_id	String	Alphanumeric	1-16	M	Uniquely generated token by the client. No two tokens are the same on the same day.
3	op	String	Alphanumeric	1-30	M	Operation available for the API, example: <code>"broadcast"</code>

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

4	timestamp	String	Alphanumeric	30	M	Format Date : ISO datetime in UTC, example : "2020-01-13T05:12:19.573Z"
5	iv	String	Alphanumeric	16	M	Randomly the client generated 128 bits (16 length characters).
6	param	String	Alphanumeric	1 - 1.000.000	M	Field parameters based on operation. param = Base64(AES256_CBC(message=JSON(request_param), secret = key, iv = iv)) where: • Iv from request's iv field, • key = SHA256(salted_secret_key + unique_id + timestamp + op), with the hexadecimal form in lowercase, and salted_secret_key = HEX(HMACSHA256(message=secret_key. secret=salt))
7	auth_token	String	Alphanumeric	64	M	Used for checksum token. auth_token = HEX(SHA256(salted_secret_key + unique_id + timestamp + op + param)) where: • salted_secret_key = HEX(HMACSHA256(message=secret_key. secret=salt)) • secret_key (string) secret obtained via email.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						• salt (string) obtained via email. *with the hexadecimal form in lowercase.
--	--	--	--	--	--	---

Usage Codes:

M : Mandatory -> The field must be included.

O : Optional -> The field can be excluded depending on its usage.

C : Conditional -> The field is mandatory if certain conditions are met; vice versa.

Example

```
{
  "system_id": "0123456789abcdef",
  "unique_id": "FPlyfsuIOHXuxTnL",
  "param": "iGdkQu+HKSAVbEyLzbfItZL/zxn3Du6hvd8q6w49opI=",
  "auth_token":
"d73a1f2ae71e533c303a8120012bd8bfab720bb42c6c59ed30af31f653ffb041",
  "iv": "vf2V6BZfceV4rQMk",
  "op": "greeting",
  "timestamp": "2020-01-13T05:12:19.573Z"
}
```

HTTP Response Body

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	system_id	String	Alphanumeric	1-32	M	An identifier for the client's system or application, obtained via email.
2	unique_id	String	Alphanumeric	1-16	M	Uniquely generated token by the client. No two tokens are the same on the same day.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

3	iv	String	Alphanumeric	16	M	Randomly the server generated 128 bits (16 length characters).
4	op	String	Alphanumeric	1-30	M	Operation available for the API, example: "broadcast"
5	timestamp	String	Alphanumeric	30	M	Format Date : ISO datetime in UTC, example : "2020-01-13T05:12:19.573Z"
6	param	String	Alphanumeric	1500	M	Field parameters based on operation. <pre>param = Base64(AES256_CBC(message= JSON(response_param), secret=key, iv=iv))</pre> where: • Iv from response's iv field, • key = SHA256(salted_secret_key + unique_id + timestamp + op), with the hexadecimal form in lowercase, and salted_secret_key = HEX(HMACSHA256(message=secret_key. secret=salt))
7	auth_token	String	Alphanumeric	64	M	auth_token = HEX(SHA256(salted_secret_key + unique_id + timestamp + op + param)) where: • salted_secret_key = HEX(HMACSHA256(message=secret_key. secret=salt)) • secret_key (string) secret

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						obtained via email. ● salt (string) obtained via email. *with the hexadecimal form in lowercase.
--	--	--	--	--	--	--

Usage Codes:

- M : Mandatory -> The field must be included.
- O : Optional -> The field can be excluded depending on its usage.
- C : Conditional -> The field is mandatory if certain conditions are met; vice versa.

Example

```
{
  "system_id": "0123456789abcdef",
  "unique_id": "FPlyfsuIOHXuxTnL",
  "param": "iGdkQu+HKSAVbEyLzbfItZL/zxn3Du6hvd8q6w49opI=",
  "auth_token":
"d73a1f2ae71e533c303a8120012bd8bfab720bb42c6c59ed30af31f653ffb041",
  "iv": "vf2V6BZfceV4rQMk",
  "op": "greeting",
  "timestamp": "2020-01-13T05:12:19.573Z"
}
```

See [detail explanation](#) for definition detail, explanation, and examples.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

3.Operation and Endpoint


3.1. Send Message

Description

Sending messages in various formats to customers is possible. All message types, except for reaction messages, can be designated as replies, causing the replied-to message to appear alongside a contextual bubble displaying the content of the message you're responding to.


```
op = "send_message"
```

Flow

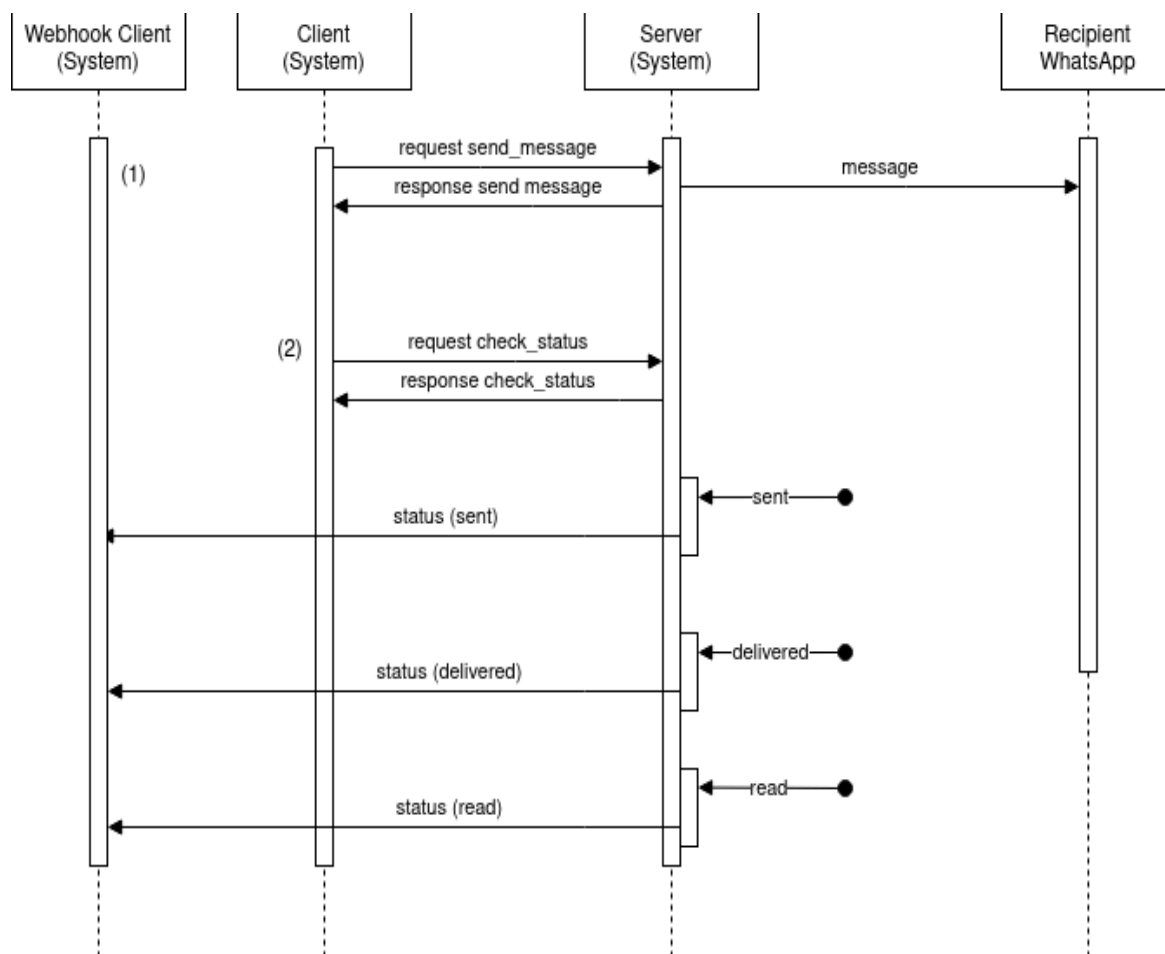

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

Flow if message failed to send

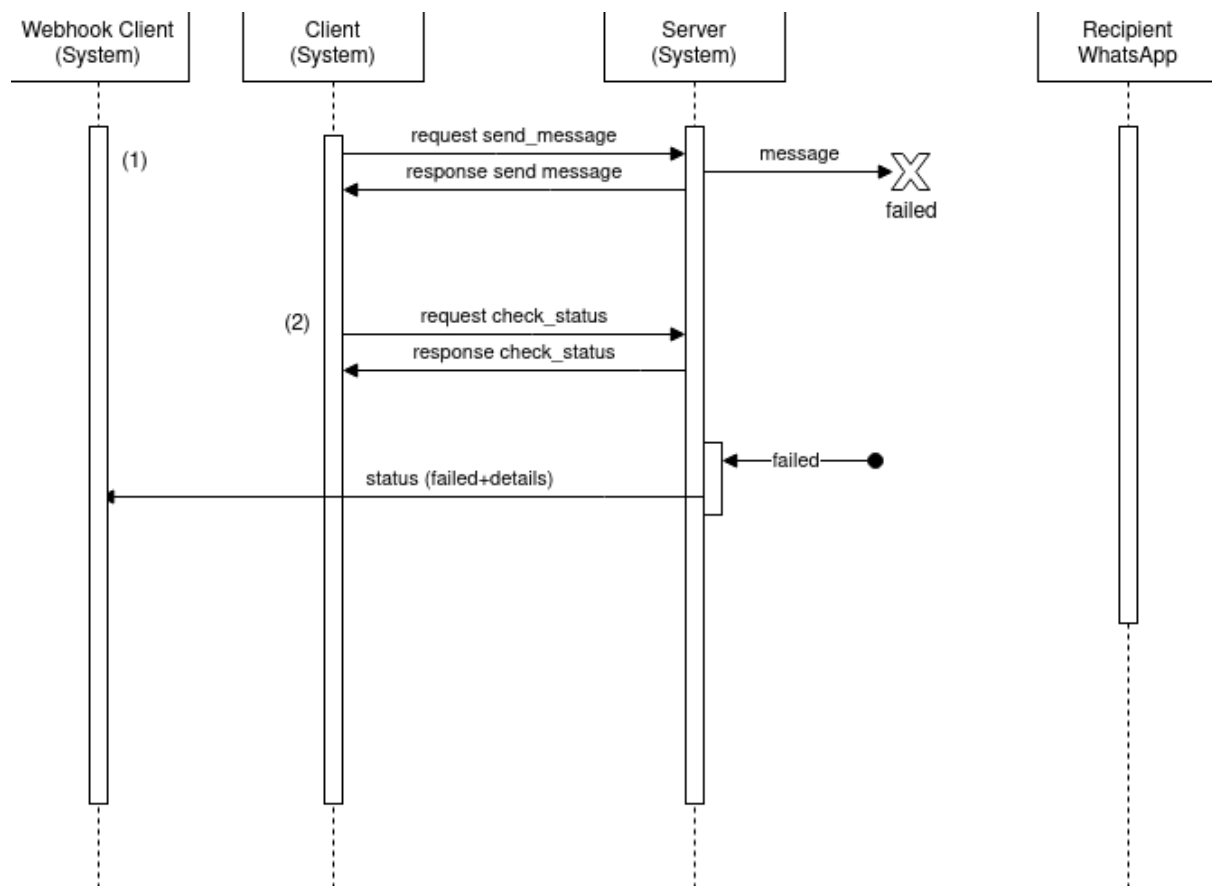

Status message, including message failed to send, in WhatsApp application will be known through the (1) check status (See: Operation). operation or the callback (2) webhook (See: Webhook).

Request Parameters

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	messaging_product	String	alphanumeric	8	M	Supported value: "whatsapp"
2	recipient_type	String	alphanumeric	10	M	Supported value: "individual"

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

3	replied_message_id	String	alphanumeric	64	O	ID Pesan yang direply. Ex: 1686884400011-74d 07648-e901-4207-89 21-17c3af6345b1
4	to	String	alphanumeric	7-16	M	ID WhatsApp atau nomor telepon pelanggan yang akan dikirim pesan. Contoh nomor telepon yang valid "+16315551234"
5	type	String	alphanumeric	4-11	M	Tipe pesan yang dikirim, supported value "text", "reaction", "image", "location", "contacts", dan "interactive",
6	data	Object			M	Konten data berdasarkan type pesan.

Response Parameters

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	messaging_product	String	alphanumeric	8	M	Supported value: "whatsapp"
2	phone_number	String	alphanumeric	7-16	M	Nomor telepon pelanggan yang dikirim pesan. Ini mungkin tidak

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						cocok dengan wa_id.
3	message_id	String	alphanumeric	64	M	ID pesan untuk melacak status pesan Anda. Ex: 1686884400011-74d07648-e901-4207-8921-17c3af6345b1

Attention!

It's important to note that the status of messages (sent, delivered, read, failed, etc.) on the WhatsApp application will be known through the check status operation or the callback webhook

Example of Request and Response Parameters :

Here are the request parameters used for sending a free text message:


```
{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",
  "to": "<phone-number> or <wa_id>",
  "type": "text",
  "data": {
    "preview_url": false,
    "body": "hai sayang"
  }
}
```

The output (response parameters) will be:

```
{
  "messaging_product": "whatsapp",
  "phone_number": "<phone-number>",
  "message_id": "1687355298-e71cv5b7-fc5e-4f67-9n8c-bf14a2469473"
}
```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

Here is a preview of the message in the recipient's app:

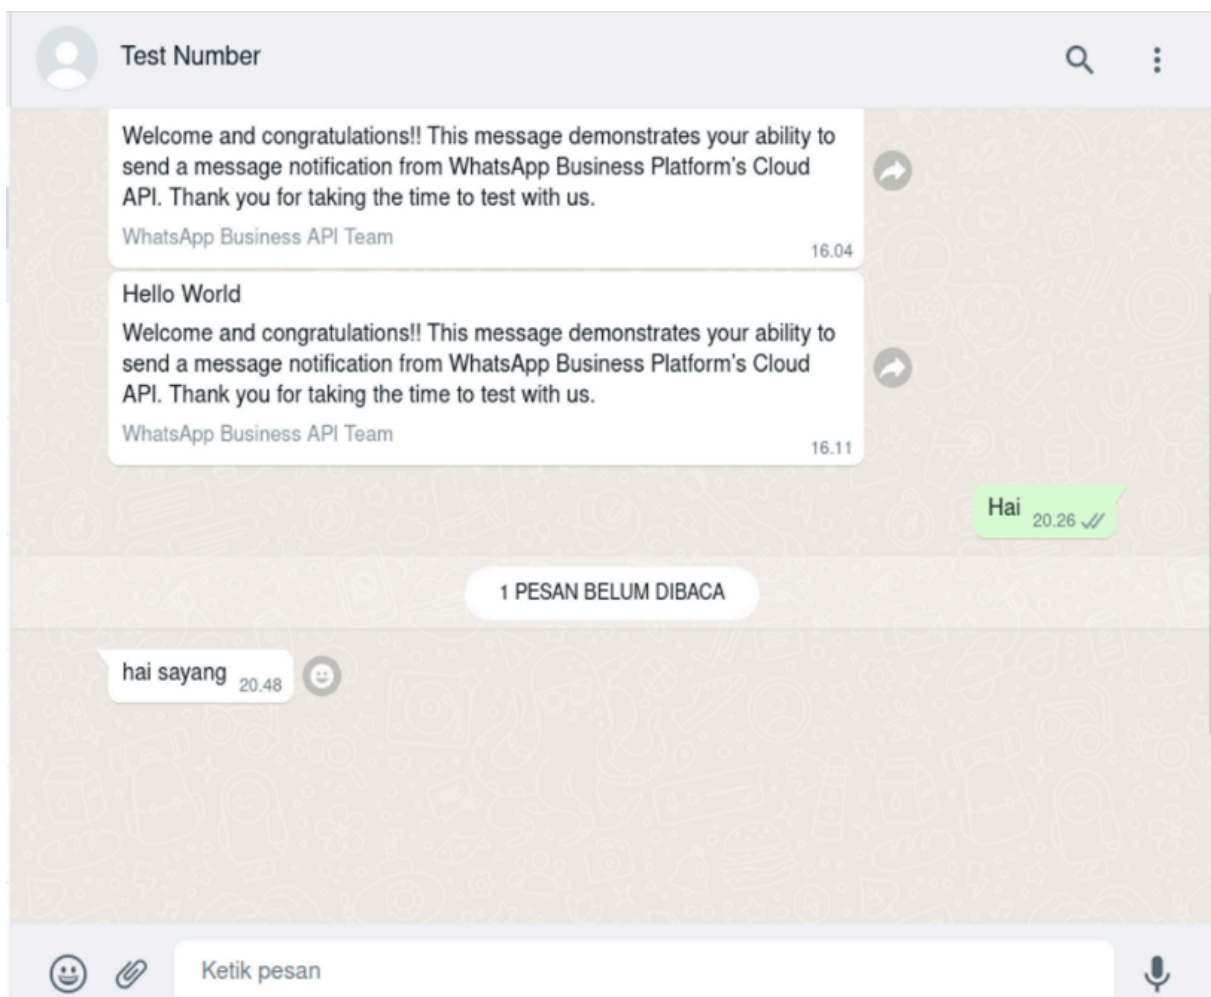

Replied Message Example

If you want to reply to a message, you can use the following example:

```
{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",
  "replied_message_id": "1687355298-e71cv5b7-fc5e-4f67-9n8c-bf14a2469473",
  "to": "<phone-number>",
}
```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

{
  "type": "text",
  "data": {
    "preview_url": false,
    "body": "Sorry salah kirim"
  }
}

```


The output (response parameters) will be:

```

{
  "messaging_product": "whatsapp",
  "phone_number": "<phone-number>",
  "message_id": "1687353970-498c0475-ea8c-4a46-9057-b713893358ef"
}

```

Here is a preview of the message in the recipient's app

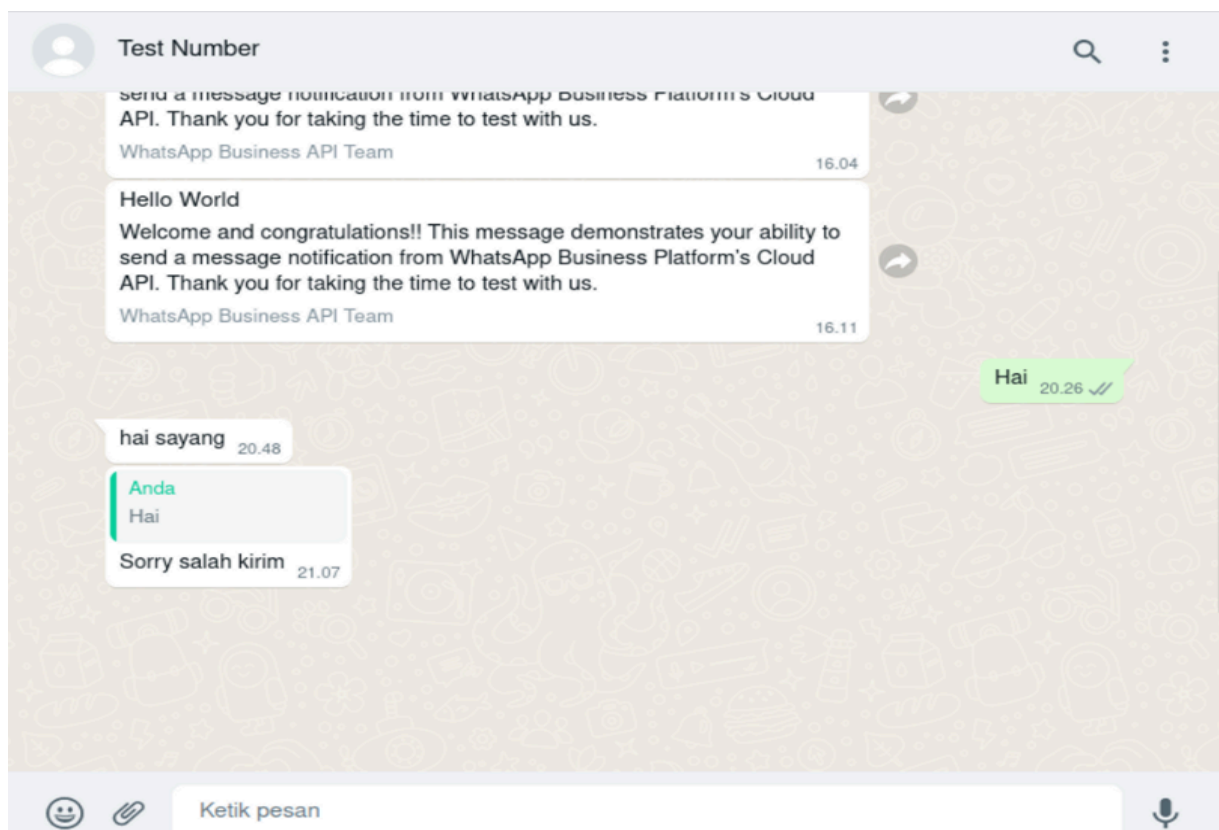

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

■ Message type

Each message type's content is described in detail below.

1) Text

The following contains the contents of the text object

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	preview_url	boolean	true/false		M	True, jika ingin menambahkan URL pratinjau. pratinjau akan muncul jika pesan mengandung URL yang berawalan dengan https:// atau http://
2	body	string	alphanumeric	1-700	M	Isi pesan yang dikirimkan

Here are the request parameters used for sending a free text message:

```
{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",
  "to": "<phone-number> or <wa_id>",
  "type": "text",
  "data": {
    "preview_url": false,
    "body": "your-text-message-content"
  }
}
```

The output (response parameters) will be:

```
{
```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

"messaging_product": "whatsapp",
"phone_number": "<phone-number>",
"message_id": "1687355298-e71cv5b7-fc5e-4f67-9n8c-bf14a2469473"
}

```

2) Reaction

The following contains the contents of the Reaction object

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	message_id	String	alphanumeric	64	M	ID pesan yang diberikan ketika mengirim pesan.
2	emoji	string	alphanumeric		M	Emoji yang digunakan, ditulis dalam format UTF-8 Emoji. Contoh "\uD83D\uDE00" untuk Grinning Face

Here are the request parameters used for sending a free text message:

```

{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",
  "to": "<phone-number>",
  "type": "reaction",
  "data": {
    "message_id": "1687353970-498c0475-ea8c-4a46-9057-b713893358ef",
    "emoji": "\ud83d\ude01"
  }
}

```

The output (response parameters) will be:

```

{

```


	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

"messaging_product": "whatsapp",
"phone_number": "<phone-number>",
"message_id": "1687355298-e71cv5b7-fc5e-4f67-9n8c-bf14a2469473"
}

```

Here is a preview of the message in the recipient's app

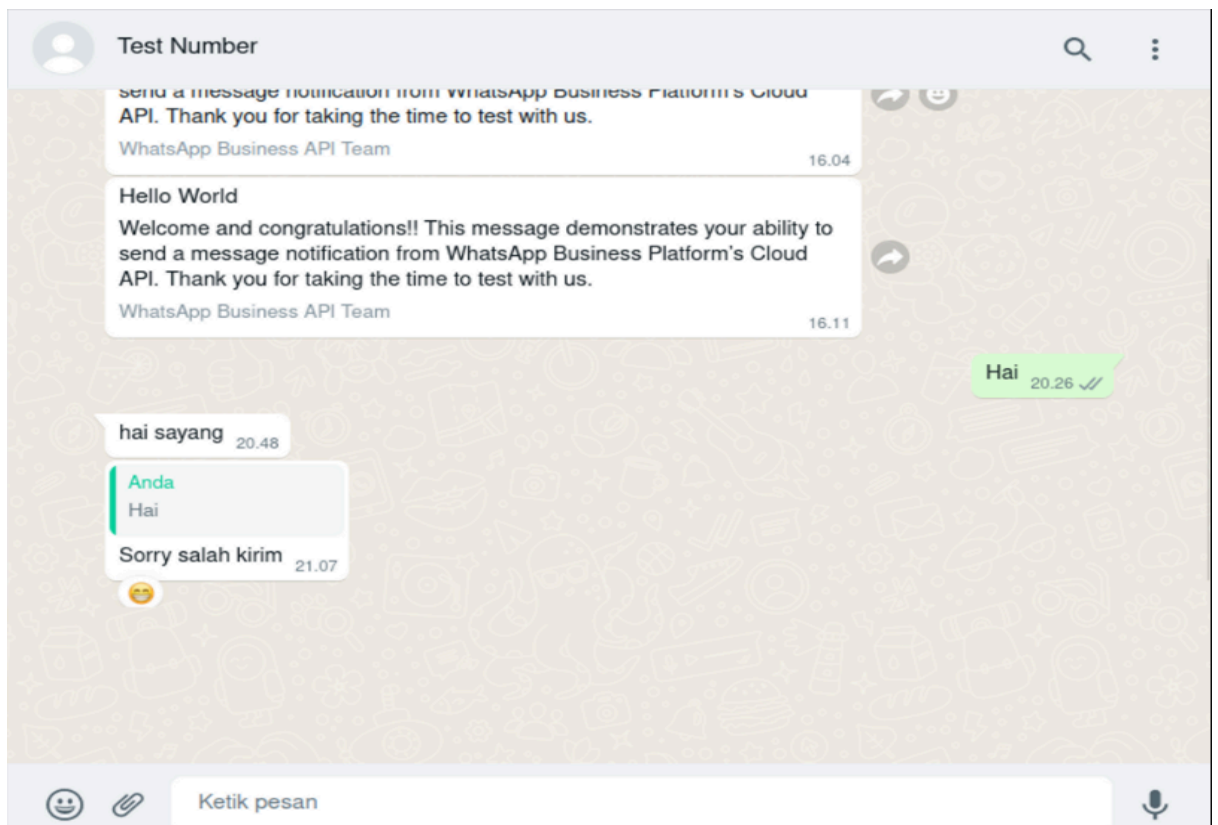

3) Images

The following contains the contents of the image object

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	id	string	alphanumeric		C	The media object ID required when type is

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						audio, document, image, sticker, or video and you are not using a link. Do not use this field when the message type is set to text. You can retrieve the media by using this as the <code>media_id</code> in the 'Retrieve Media' endpoint.
2	link	String	URL		C	Protokol URL dari media yang digunakan berformat HTTP/HTTPS. Pastikan URL dapat diakses publik.
3	filename	string	alphanumeric		O	Describes the filename for the specific document. Use only with document media. The extension of the filename will specify what format the document is displayed as in WhatsApp.
4	Provider	String	alphanumeric		O	Optional. Only used for On-Premises API. This path is optionally used with a link when the HTTP/HTTPS link is not directly accessible and requires additional configurations like a bearer token. For information on configuring providers, see the Media Providers documentation.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

Here are the request parameters used for sending a free text message:


```
{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",
  "to": "<phone-number>",
  "type": "image",
  "data": {
    "link":
    "https://raw.githubusercontent.com/PokeAPI/sprites/master/sprites/pokemon/other/official-artwork/91.png"
  }
}
```

The output (response parameters) will be:

```
{
  "messaging_product": "whatsapp",
  "phone_number": "<phone-number>",
  "message_id": "1687355298-e71cv5b7-fc5e-4f67-9n8c-bf14a2469473"
}
```

Here is a preview of the message in the recipient's app

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

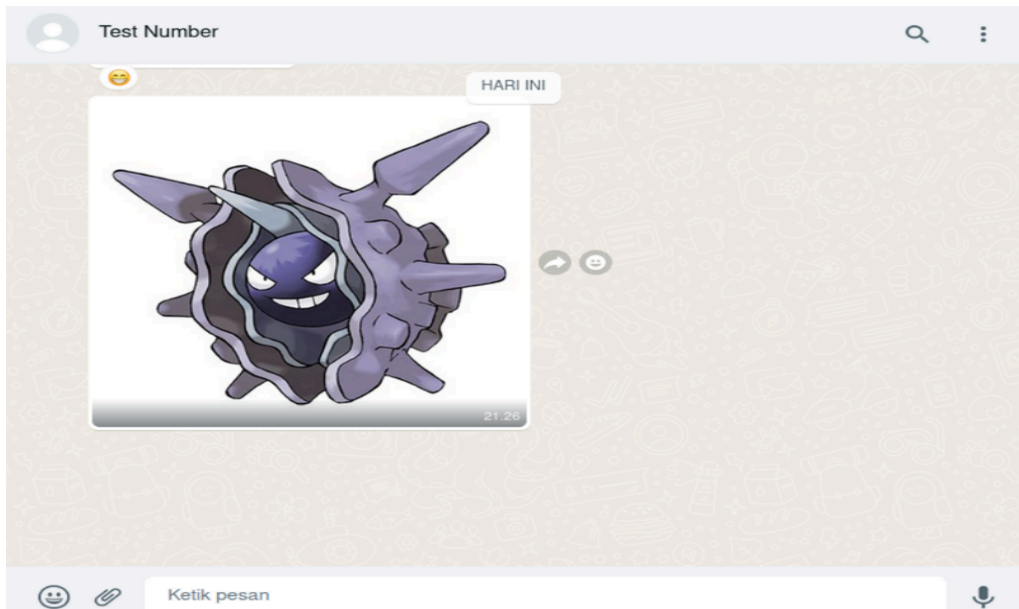

4) Location

The following contains the contents of the location object

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	longitude	float	-180 to 180		M	Longitude dari lokasi
2	latitude	float	-90 to 90		M	Latitude dari lokasi
3	name	string	alphanumeric		O	Nama lokasi
4	address	string	alphanumeric		O	Alamat lokasi. Akan ditampilkan ketika ada nama

Here are the request parameters used for sending a free text message:

```
{
```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

"messaging_product": "whatsapp",
"recipient_type": "individual",
"to": "<phone-number>",
"type": "location",
"data": {
  "longitude": 106.8066222,
  "latitude": -6.2102648,
  "name": "PT Teleaksres Solusindo"
}
}

```


The output (response parameters) will be:

```

{
  "messaging_product": "whatsapp",
  "phone_number": "<phone-number>",
  "message_id": "1687355298-e71cv5b7-fc5e-4f67-9n8c-bf14a2469473"
}

```

Here is a preview of the message in the recipient's app

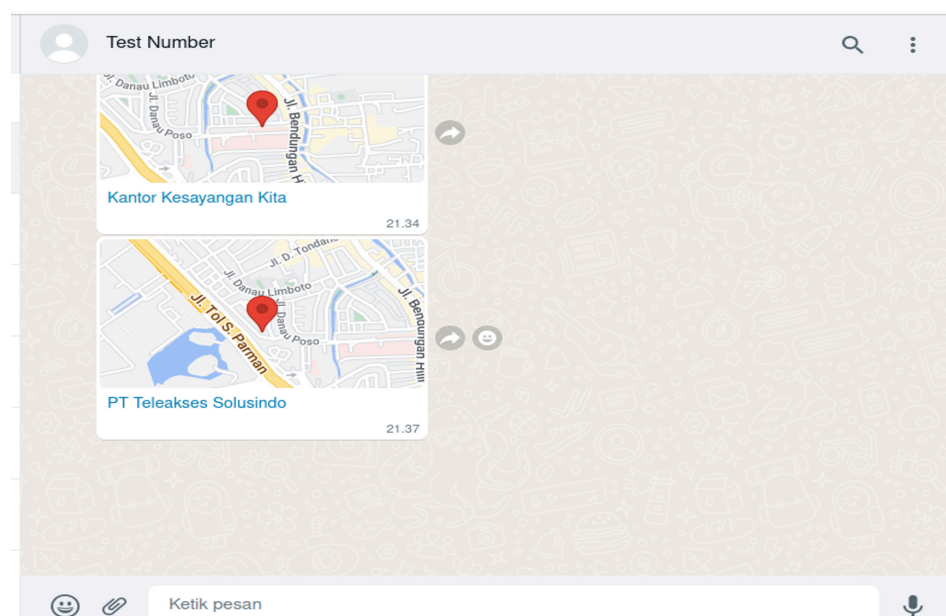

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

5) Contact

The following is the contact's content, which includes a list/array of contact objects with the following fields.

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	name	Object			M	Full contact name formatted as a name object. The object can contain the following fields: - formatted_name (string) – Required. Full name, as it normally appears. - first_name (string) – Conditional*. First name. - last_name (string) – *Conditional. Last name. - middle_name (string) – Conditional*. Middle name. - suffix (string) – Conditional. Name suffix. - prefix (string) – Conditional*. Name prefix. *At least one of the optional parameters needs to be included along with the formatted_name parameter.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

2	addresses	Object			O	Full contact address(es) formatted as an addresses object. The object can contain the following fields: - street (string) – Optional. Street number and name. - city (string) – Optional. City name. - state (string) – Optional. State abbreviation. - zip (string) – Optional. ZIP code. - country (string) – Optional. Full country name. - country_code (string) – Optional. Two-letter country abbreviation. - type (string) – Optional. Supported values are “HOME” and “WORK”.
3	birthday	string	YYYY-M M-DD	10	O	
4	emails	Object			O	Contact email address(es) formatted as an emails object. The object can contain the following fields: email (string) – Optional. Email address.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						type (string) – Optional. Supported values are HOME and WORK.
5	org	Object			O	Contact organization information formatted as an org object. The object can contain the following fields: - company (string) – Optional. Name of the contact's company. - department (string) – Optional. Name of the contact's department. - title (string) – Optional. Contact's business title.
6	phones	Object			O	Contact phone number(s) formatted as a phone object. The object can contain the following fields: - phone (string) – Optional. Automatically populated with the `wa_id` value as a formatted phone number. - type (string) – Optional. Supported Values are CELL, MAIN, IPHONE, HOME, and WORK. - wa_id (string) – Optional. WhatsApp ID.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

7	url	Object			O	Contact URL(s) formatted as a urls object. The object can contain the following fields: - url (string) – Optional. URL. - type (string) – Optional. Supported values are HOME and WORK.
---	-----	--------	--	--	---	--

Here are the request parameters used for sending a free text message:


```
{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",
  "to": "<nomor>",
  "type": "contacts",
  "data": [
    {
      "name": {
        "formatted_name": "Joko Tingkir",
        "first_name": "Joko",
        "last_name": "Tingkir"
      },
      "phones": [
        {
          "phone": "081234567890",
          "type": "HOME"
        }
      ]
    }
  ]
}
```


	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

The output (response parameters) will be:

```
{
  "messaging_product": "whatsapp",
  "phone_number": "<phone-number>",
  "message_id": "1687355298-e71cv5b7-fc5e-4f67-9n8c-bf14a2469473"
}
```

Here is a preview of the message in the recipient's app

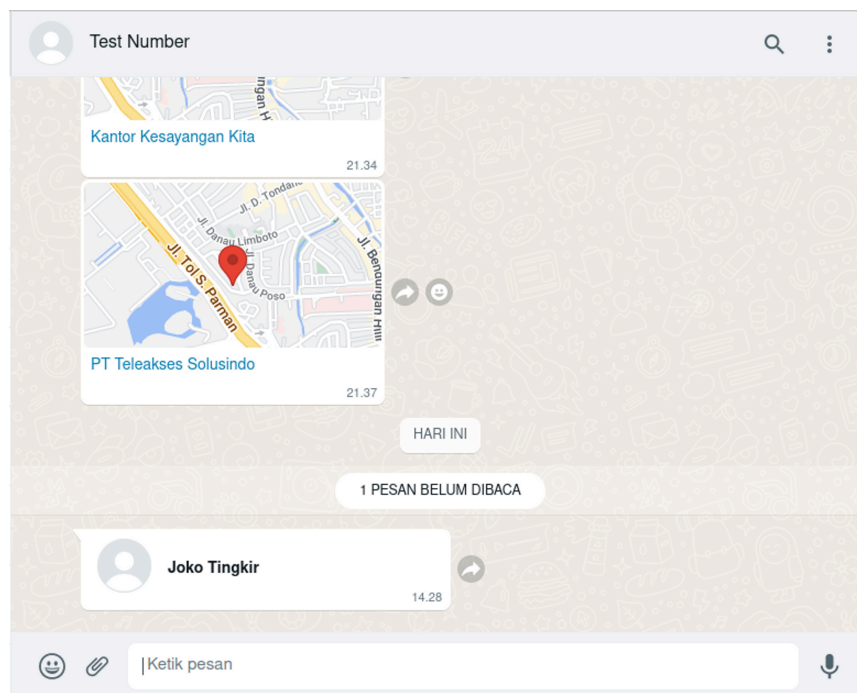

6) Interactive

In the interactive section, there are two types, Message List and Reply Button. Here is the data content format in interactive messages.

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
----	------------	-----------	--------	--------	------------	-------------

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

1	type	string	alphanumeric	4-10	M	The type of interactive message you want to send. Supported values: • “button”: Use for Reply Buttons. • “catalog_message”: Use for Catalog Messages. • “list”: Use for List Messages. • “product”: Use Single-Product Messages. • “product_list”: Use for Multi-Product Messages.
2	action	Object			M	Action you want the user to perform after reading the message.
3	body				O	An object with the body of the message. The body object contains the following field: • text (string) – Required if body is present. The content of the message. Emojis and markdown are supported. Maximum length: 1024 characters.
4	footer				O	An object with the footer of the message. The footer object contains the

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						following field: text (string) – Required if footer is present. The footer content. Emojis, markdown, and links are supported. Maximum length: 60 characters.
5	header				C	Required for type product_list. Optional for other types. Header content displayed on top of a message. You cannot set a header if your interactive object is of product type. See header object for more information.

The format for details of an object in the interactive field

a) Action

Here is the content of the action, containing a list/array of action objects with the following fields.

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	button	String		20	C	Required for List Messages. Button content. It cannot be an empty string and must be unique within the message. Emojis are supported, markdown is not.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

2	buttons	Object			C	Required for Reply Buttons. A button object can contain the following parameters: • type: only supported type is reply (for Reply Button) • title: Button title. It cannot be an empty string and must be unique within the message. Emojis are supported, markdown is not. Maximum length: 20 characters. • id: Unique identifier for your button. This ID is returned in the webhook when the button is clicked by the user. Maximum length: 256 characters. You can have up to 3 buttons. You cannot have leading or trailing spaces when setting the ID.
3	catalog_id	String			C	Required for Single Product Messages and Multi-Product Messages. Unique identifier of the

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						Facebook catalog linked to your WhatsApp Business Account. This ID can be retrieved via the Meta Commerce Manager.
4	product_retailer_id	String			C	Required for Single Product Messages and Multi-Product Messages. Unique identifier of the product in a catalog. To get this ID go to Meta Commerce Manager and select your Meta Business account. You will see a list of shops connected to your account. Click the shop you want to use. On the left-side panel, click Catalog > Items, and find the item you want to mention. The ID for that item is displayed under the item's name.
5	sections	Object				Required for List Messages and Multi-Product Messages. Array of section objects. Minimum of 1, maximum of 10. See section object.

Here is the format for the section object

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	product_items	Object		20	C	Required for Multi-Product Messages. Array of product objects. There is a minimum of 1 product per section and a maximum of 30 products across all sections. Each product object contains the following field: product_retailer_id string – Required for Multi-Product Messages. Unique identifier of the product in a catalog. To get this ID, go to the Meta Commerce Manager, select your account and the shop you want to use. Then, click Catalog > Items, and find the item you want to mention. The ID for that item is displayed under the item's name.
2	rows	Object			C	Required for List Messages. Contains a list of rows. You

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						can have a total of 10 rows across your sections. Each row must have a title (Maximum length: 24 characters) and an ID (Maximum length: 200 characters). You can add a description (Maximum length: 72 characters), but it is optional.
3	title	String			C	Required if the message has more than one section. Title of the section.

b) Header

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	type	string	alphanumeric	4-8	M	The header type you would like to use. Supported values: • text: Used for List Messages, Reply Buttons, and Multi-Product Messages. • video: Used for Reply Buttons. • image: Used for Reply Buttons. • document: Used for Reply Buttons.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

2	document	Object			C	Required if type is set to document. Contains the media object for this document.
3	image	Object			C	Required if type is set to image. Contains the media object for this image.
4	text	string	alphanumeric	60	C	Required if type is set to text. Text for the header. Formatting allows emojis, but not markdown.
5	video	Object			C	Required if type is set to video. Contains the media object for this video.

Here is the media object format for the header, if the type of message being sent is video, images, or document.

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	id	string	alphanumeric		C	Required when type is audio, document, image, sticker, or video and you are not using a link. The media object ID. Do not use this field when

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						message type is set to text.
2	link	String	URL		C	Protokol URL dari media yang digunakan berformat HTTP/HTTPS. Pastikan URL dapat diakses publik.
3	filename	string	alphanumeric		O	Describes the filename for the specific document. Use only with document media. The extension of the filename will specify what format the document is displayed as in WhatsApp.
4	provider	String	alphanumeric		O	Optional. Only used for On-Premises API. This path is optionally used with a link when the HTTP/HTTPS link is not directly accessible and requires additional configurations like a bearer token. For information on configuring providers, see the Media Providers documentation.

Here are the request parameters used for sending a free text message:

```
{
  "type": "list",
```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

"header": {
  "type": "text",
  "text": "HEADER_TEXT"
},
"body": {
  "text": "BODY_TEXT"
},
"footer": {
  "text": "FOOTER_TEXT"
},
"action": {
  "button": "BUTTON_TEXT",
  "sections": [
    {
      "title": "SECTION_1_TITLE",
      "rows": [
        {
          "id": "SECTION_1_ROW_1_ID",
          "title": "SECTION_1_ROW_1_TITLE",
          "description": "SECTION_1_ROW_1_DESCRIPTION"
        },
        {
          "id": "SECTION_1_ROW_2_ID",
          "title": "SECTION_1_ROW_2_TITLE",
          "description": "SECTION_1_ROW_2_DESCRIPTION"
        }
      ]
    },
    {
      "title": "SECTION_2_TITLE",
      "rows": [
        {
          "id": "SECTION_2_ROW_1_ID",
          "title": "SECTION_2_ROW_1_TITLE",
          "description": "SECTION_2_ROW_1_DESCRIPTION"
        }
      ]
    }
  ]
}

```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

    },
    {
      "id": "SECTION_2_ROW_2_ID",
      "title": "SECTION_2_ROW_2_TITLE",
      "description": "SECTION_2_ROW_2_DESCRIPTION"
    }
  ]
}
]
}
}

```

The output (response parameters) will be:


```

{
  "messaging_product": "whatsapp",
  "phone_number": "<phone-number>",
  "message_id": "1687355298-e71cv5b7-fc5e-4f67-9n8c-bf14a2469473"
}


```

Here is a preview of the message in the recipient's app:

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

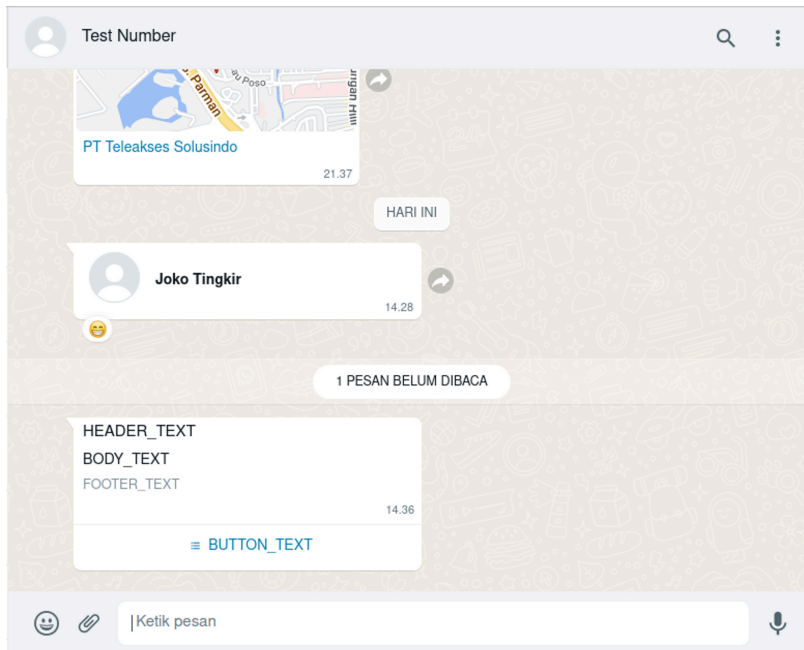

If the button is pressed, then

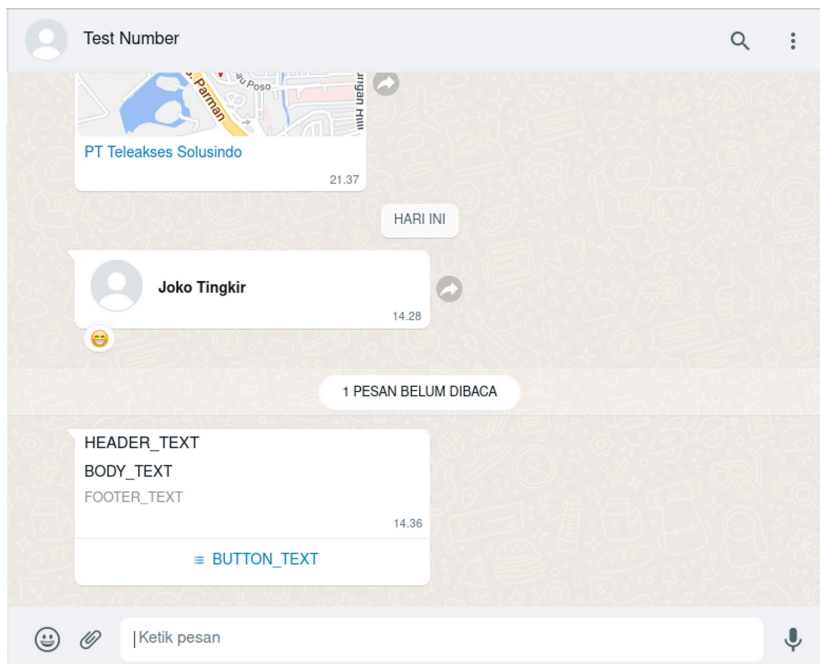

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

3.2. Check Status

a. Description

Checking the status of the message sent to the customer.

```
op = "check_status"
```

b. Request Parameters

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	data	Object	alphanumeric		M	List of Request Check Status Data Object

which Request Check Status Data Object contains

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	message_id	String	alphanumeric		M	ID pesan yang akan dicek statusnya

c. Response Parameters

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	data	Object	alphanumeric		M	List of Response Check Status Data Object

which Response Check Status Data Object contains

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
----	------------	-----------	--------	--------	------------	-------------

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

1	message_id	String	alphanumeric		M	ID pesan yang akan dicek statusnya
2	status	String	alphanumeric		M	Status pesan, supported value: - initiated - pending - sent - delivered - read - failed
3	error	Object			*C	Error object from facebook, *included only when status is 'failed' reference https://developers.facebook.com/docs/whatsapp/cloud-api/support/error-codes/
4	errors	Array			*C	List of error object *included only when status is 'failed'

d. Example of Request and Response Param :

Example request parameters to check status:

```
{
  "data": [
    {
      "message_id": "1687419748-2ae79ac5-0799-417b-8e60-219af5931cc0"
    }
  ]
}
```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```
}
```

The output (response parameters) will be:

```
{
  "data": [
    {
      "message_id": "1687419748-2ae79ac5-0799-417b-8e60-219af5931cc0",
      "status": "sent"
    }
  ]
}
```

Another example of request parameters for checking status:

```
{
  "data": [
    {
      "message_id": "1691590411-d719b8d7-56cc-4b2d-aeb7-6bd3f5a35c9a"
    }
  ]
}
```

The output (response parameters) will be:

```
{
  "data": [
    {
      "message_id": "1691210411-d719b8d7-56cc-4b2d-aeb7-6b2d55a35c9a",
      "status": "failed",
      "error": {
        "code": 132001,
        "type": "OAuthException",
        "message": "(#132001) Template name does not exist in the translation",
      }
    }
  ]
}
```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

      "error_data": {
        "details": "template name (call_action_button) does not exist in
en_coucg",
        "messaging_product": "whatsapp"
      }
    },
    "fbtrace_id": "AJSQrLlrQDdn0WkQR0KlzYf"
  }
]
}

```

3.3. Get Analytics

a. Description

The analytics field provides the number and type of messages sent and delivered by the phone numbers associated with a specific WABA

```
op = "get_analytics"
```

b. Request Parameters

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	start	Integer	numeric		M	UNIX Timestamp in seconds, The start date for the date range you are retrieving analytics for.
2	end	Integer	numeric		M	UNIX Timestamp in seconds, The end date for the date range you are retrieving analytics for.
3	granularity	String	alphanumeric	3-9	M	The granularity by which you would like to retrieve

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						the analytics. Supported value: • HALF_HOUR • DAY • MONTH
4	phone_numbers	Array			O	An array of phone numbers for which you would like to retrieve analytics. If not provided, all phone numbers added to your WABA are included.

c. Response Parameters

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	phone_numbers	Array			M	An array of phone numbers for which you would like to retrieve analytics. If not provided, all phone numbers added to your WABA are included.
2	granularity	String	alphanumeric	3-9	M	The granularity by which you would like to retrieve the analytics. Supported

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						value: ● HALF_HOUR ● DAY ● MONTH
3	data_points	Array			M	Array of object which contains ● start (int) - UNIX timestamp ● end (int) - UNIX timestamp ● initiated (int) - message count ● pending (int) - message count ● failed (int) - message count ● sent (int) - message count ● delivered (int) - message count ● read (int) - message count
4	id	String				WHATSAPP-BUSINESS-AC COUNT-ID

d. Example of Request and Response Param :

Request Parameters

```
{
  "start": 0,
```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

"end": 1687455852,
"granularity": "DAY",
"phone_numbers": ["<number>"]
}

```

The output (response parameters) will be:

```

{
  "phone_numbers": ["<phone-number>"],
  "granularity": "DAY",
  "data_points": [
    {
      "start": 1687305600.0,
      "end": 1687392000.0,
      "initiated": 0,
      "pending": 0,
      "failed": 0,
      "sent": 0,
      "delivered": 2,
      "read": 9
    },
    {
      "start": 1687392000.0,
      "end": 1687478400.0,
      "initiated": 0,
      "pending": 0,
      "failed": 0,
      "sent": 0,
      "delivered": 2,
      "read": 4
    }
  ],
  "id": "<whatsapp-business-account-id>"
}

```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

3.4. Get Messages

a. Description


You can receive messages sent by recipients/customers through two methods: either via the callback webhook (See: [Webhook](#)), or by using the following operation:

This operation allows you to retrieve messages from customers since the specified time

```
op = "get_messages"
```

incoming messages flow

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

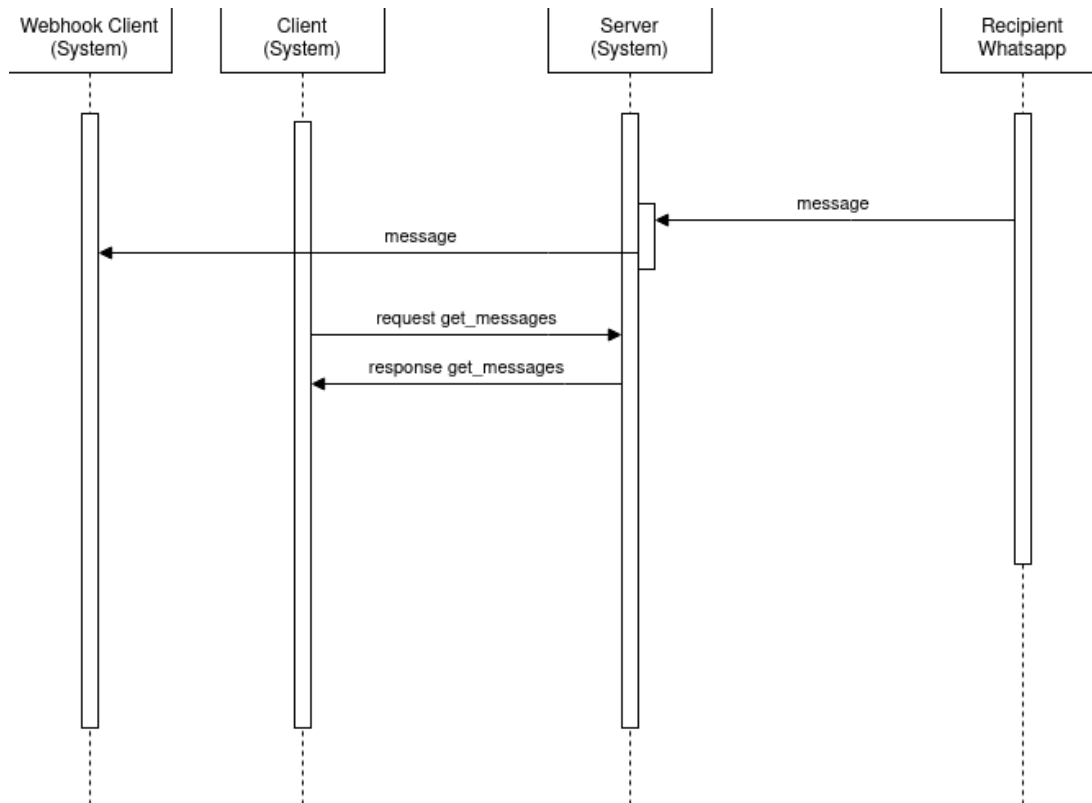

b. Request Parameters

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	messaging_product	String	alphanumeric	8	M	Supported value: "whatsapp"
2	from	String	numeric	8	O	Opsional jika ingin mengambil pesan pada nomor telepon tertentu. ID WhatsApp atau nomor telepon pelanggan sebagai pengirim pesan. Contoh nomor

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						telepon yang valid "+16315551234"
3	since	String	YYYY-MM-DD HH:mm:SS	16	M	Waktu terakhir pengambilan pesan
4	side	String	alphanumeric	8	O	Supported value: "business", "customer". If not specified, it will return all.

c. Response Param

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	data	Array			M	Array dari message object.

It is a list/array of message objects, where each message object is as follows

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	messaging_product	String	alphanumeric	8	M	Supported value: "whatsapp"
3	message_id	String	alphanumeric	64	O	Ada ketika menggunakan fitur reply, ID pesan untuk melacak status pesan Anda. Ex: 1686884400011-74d 07648-e901-4207-8 921-17c3af6345b1

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

4	from	String	alphanumeric	7-16	M	ID WhatsApp atau nomor telepon pelanggan sebagai pengirim pesan. Contoh nomor telepon yang valid "+16315551234"
5	type	String	alphanumeric	4-11	M	Tipe pesan yang dikirim, supported value "text", "reaction", "image", "location", "contacts", dan "interactive",
6	data	Object			M	Konten data berdasarkan type pesan.
7	tstamp	Integer	numeric		M	UNIX Timestamp dari messages
8	side	String	alphanumeric		O	Supported value: "business", "customer"

d. Example of Request and Response Param

Request Parameter

```
{
  "messaging_product": "whatsapp",
  "from": "<phone-number>",
  "since": 1687323661
}
```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

The output (response parameters) will be:

```
{
  "data": [
    {
      "messaging_product": "whatsapp",
      "message_id": "1687353970-498c0475-ea8c-4a46-9057-b713893358ef",
      "from": "<nomor>",
      "type": "text",
      "data": {
        "body": "Hai"
      },
      "tstamp": 1687353969
    }
  ]
}
```

3.5. WhatsApp Template Inquiry

a. Description

Obtaining a list of broadcast templates.

```
op = "wa_template_inquiry"
```

b. Request Parameters

In this operation, the request parameters are an empty object.

c. Response Parameters

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	data	List/Array	List/Array		M	List available broadcast template which is registered to system

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

d. Example of Response and Request Param :

Request parameters

```
{}
```

The output (response parameters) will be:

```
{
  "data": {
    "templates": {
      "data": [
        {
          "name": "auth_otp_test",
          "components": [
            {
              "type": "BODY",
              "text": "*{{1}}* is your verification code. For your security, do not share this code.",
              "example": {
                "body_text": ["123456"]
              }
            },
            {
              "type": "BUTTONS",
              "buttons": [
                {
                  "type": "URL",
                  "text": "Th1s1sT3st0tp",
                  "url": "https://www.whatsapp.com/otp/code/?otp_type=COPY_CODE&code=otp{{1}}",
                  "example": [
                    "https://www.whatsapp.com/otp/code/?otp_type=COPY_CODE&code=otp123456"
                  ]
                }
              ]
            }
          ]
        }
      ]
    }
  }
}
```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

    }
  ],
  "language": "en_US",
  "status": "APPROVED",
  "category": "AUTHENTICATION",
  "id": "<template-id>"
},
{
  "name": "call_action_button",
  "components": [
    {
      "type": "BODY",
      "text": "Thank you for subscribing to us! If you want to ask anything,
please chat with this number or simply call using the button below."
    },
    {
      "type": "FOOTER",
      "text": "This is an automated message"
    },
    {
      "type": "BUTTONS",
      "buttons": [
        {
          "type": "PHONE_NUMBER",
          "text": "Call CS",
          "phone_number": "<phone-number>"
        }
      ]
    }
  ],
  "language": "en_US",
  "status": "APPROVED",
  "category": "MARKETING",
  "id": "<template-id>"
},

```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

{
  "name": "reply_action_test",
  "components": [
    {
      "type": "BODY",
      "text": "This is a quick reply sample test"
    },
    {
      "type": "FOOTER",
      "text": "Not interested? Tap Stop promotions"
    },
    {
      "type": "BUTTONS",
      "buttons": [
        {
          "type": "QUICK_REPLY",
          "text": "Message success"
        },
        {
          "type": "QUICK_REPLY",
          "text": "Stop promotions"
        }
      ]
    }
  ],
  "language": "en_US",
  "status": "APPROVED",
  "category": "MARKETING",
  "id": "<template-id>"
}
],
"paging": {
  "cursors": {
    "before": "MAZDZD",
    "after": "MjQZD"
  }
}

```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

    }
  }
}
}
}

```

3.6. Broadcast

a. Description

Sending a template message to a WhatsApp number.

Attention! Please remember that the status of the message (sent, delivered, read, failed, etc.) on the WhatsApp application will be known through the status check operation (Section 2.2) or callback webhook (Section 3)

```
op = "broadcast"
```

b. Request Parameters

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	template_id	String	String		M	ID gotten from operation wa_template_inquiry
2	data	Array			M	Array of request broadcast template object

Request broadcast template object formats:

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	to	String	Alphanumeric	7-16	M	Destination phone number that is registered to WhatsApp start with country code ex: "628XXXXXXXXXX"
2	template	Object	Object		M	Template object

Template object format

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	name	String	Alphanumeric		M	Nama template.
2	language	Object	Object		M	Menentukan bahasa template yang dapat di-render. Hanya kebijakan bahasa deterministic yang berfungsi dengan pesan template media. Lihat bagian Bahasa untuk informasi selengkapnya. Paramaeter code (string): Required (see: https://developers.facebook.com/docs/whatsapp/api/messages/message-templates#supported-languages)

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON				
		Version no: 1.4.4				

3	components	Array			O	Array of Component object
---	------------	-------	--	--	---	---------------------------

Component object format

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	type	String	Alphanumeric		M	Mendeskripsikan jenis component. Supported value: "header", "body", "footer"
2	parameters	Array			M	Array yang berisi konten pesan.

c. Response Parameters

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	messaging_product	String	Alphanumeric	1-8	M	Supported format: "Success"
2	data	Array				List of object which contains: - phone_number (String) - Nomor telepon pelanggan yang dikirim pesan. Ini mungkin tidak cocok dengan wa_id. - message_id (String) - ID pesan

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						untuk melacak status pesan Anda
--	--	--	--	--	--	------------------------------------

d. Example of Response and Request Parameters :

○ *Request parameters :*


```
{
  "template_id": "<template-id>",
  "data": [
    {
      "to": "<nomor>",
      "template": {
        "name": "call_action_button",
        "language": {
          "code": "en_US"
        },
        "components": []
      }
    }
  ]
}
```

The output (response parameters) will be:

```
{
  "data": [
    {
      "phone_number": "<phone-number>",
      "message_id": "1687421509-a0acfdcf-b4fc-45d2-bc41-4acff500ea84"
    }
  ]
}
```

Here is a preview of the message in the recipient's app

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

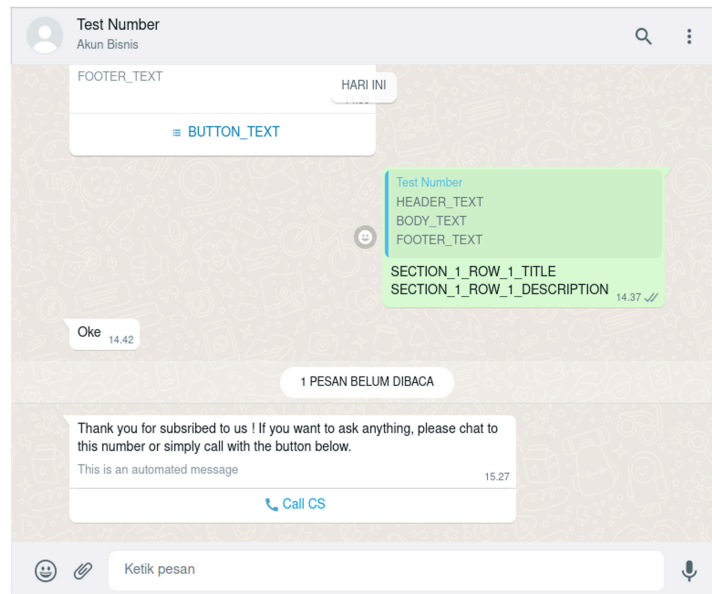

e. Another template example.

For template reference, see:

<https://developers.facebook.com/docs/whatsapp/cloud-api/guides/send-message-templates>

Request paramaters :

```
{
  "template_id": "<template-id>",
  "data": [
    {
      "to": "<phone-number>",
      "template": {
        "name": "auth_otp_test",
        "language": {
          "code": "en_us"
        }
      },
      "components": [
        {
```


	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4


```

    "type": "body",
    "parameters": [
      {
        "type": "text",
        "text": "123121"
      }
    ]
  },
  {
    "type": "button",
    "sub_type": "url",
    "index": "0",
    "parameters": [
      {
        "type": "text",
        "text": "123121"
      }
    ]
  }
]
}
]
}
]
}

```

And if OTP successfully sent, it will delivered to user as show as below:

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

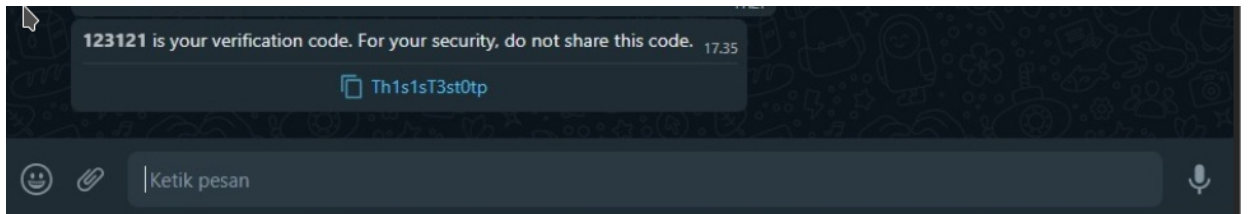

3.7. Create Template

a. Description

Creating a WhatsApp template on a WhatsApp Business account

```
op = "wa_template_create"
```

b. Request Parameters

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	name	String	String	512	M	Template name
2	language	String	String		M	Template language and locale code. Reference : https://developers.facebook.com/docs/whatsapp/business-management-api/message-templates/supported-languages
3	category	String	String		M	Template category. Supported value : "AUTHENTICATION", "MARKETING", "UTILITY"
4	components	Object			M	Components that make

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						up the template. Reference : https://developers.facebook.com/docs/whatsapp/business-management-api/message-templates/components
5	allow_category_change	Boolean			0	Set to true to allow us to assign a category based on our template guidelines and the template's contents. This can prevent your template from being rejected for miscategorization. Supported value : true, false

c. Response Param

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	data	Object			M	List of object which contains : • id (string) - Template ID • status (string) - Approval status of template • category (string) - Category of template

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

d. Example of Response and Request Param :

Request Param
<pre> { "name": "seasonal_promotion", "language": "en_US", "category": "MARKETING", "components": [{ "type": "HEADER", "format": "TEXT", "text": "Our {{1}} is on!", "example": { "header_text": ["Summer Sale"] } }, { "type": "BODY", "text": "Shop now through {{1}} and use code {{2}} to get {{3}} off of all merchandise.", "example": { "body_text": ["the end of August", "250FF", "25%"] } }, { "type": "FOOTER", "text": "Use the buttons below to manage your marketing subscriptions" }, { "type": "BUTTONS", "buttons": [{ </pre>

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

        "type": "QUICK_REPLY",
        "text": "Unsubscribe from Promos"
    },
    {
        "type": "QUICK_REPLY",
        "text": "Unsubscribe from All"
    }
]
}
]
}
{
    "name": "seasonal_promotion",
    "language": "en_US",
    "category": "MARKETING",
    "components": [
        {
            "type": "HEADER",
            "format": "TEXT",
            "text": "Our {{1}} is on!",
            "example": {
                "header_text": ["Summer Sale"]
            }
        },
        {
            "type": "BODY",
            "text": "Shop now through {{1}} and use code {{2}} to get {{3}} off of all merchandise.",
            "example": {
                "body_text": ["the end of August", "250FF", "25%"]
            }
        }
    ],

```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```
{
  "type": "FOOTER",
  "text": "Use the buttons below to manage your marketing subscriptions"
},
{
  "type": "BUTTONS",
  "buttons": [
    {
      "type": "QUICK_REPLY",
      "text": "Unsubscribe from Promos"
    },
    {
      "type": "QUICK_REPLY",
      "text": "Unsubscribe from All"
    }
  ]
}
]
```

The output (response parameters) will be:

```
{
  "data": {
    "id": "594425479261596",
    "status": "PENDING",
    "category": "MARKETING"
  }
}
```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

3.8. Update Template

a. Description

Memperbarui template WhatsApp pada akun WhatsApp business

```
op = "wa_template_update"
```

b. Request Parameters

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	wa_template_id	String	Numeric		M	Template ID
2	category	String	String		O	Template category. Supported value : "AUTHENTICATION", "MARKETING", "UTILITY". Mandatory if components is omitted
3	components	Object			O	Components that make up the template. Reference: Components . Mandatory if category is omitted.

c. Response Parameters

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
----	------------	-----------	--------	--------	------------	-------------

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

1	data	Object			M	List of object which contains the status of the update.
---	------	--------	--	--	---	---

d. Example of Response and Request Param :

Request Param
<pre>{ "wa_template_id": "989721088731271", "category": "UTILITY", "components": [{ "type": "HEADER", "format": "TEXT", "text": "Our promotional sale which is {{1}} is on!", "example": { "header_text": ["Summer Sale"] } }, { "type": "BODY", "text": "Shop now through {{1}} and use code {{2}} to get {{3}} off of all merchandise.", "example": { "body_text": ["the end of August", "250FF", "25%"] } }, { "type": "FOOTER", "text": "Use the buttons below to manage your marketing subscriptions" },] }</pre>

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

    "type": "BUTTONS",
    "buttons": [
      {
        "type": "QUICK_REPLY",
        "text": "Unsubscribe from Promos"
      },
      {
        "type": "QUICK_REPLY",
        "text": "Unsubscribe from All"
      }
    ]
  }
]
}

```

The output (response parameters) will be:

```

{
  "data": {
    "success": true
  }
}

```

3.9. Delete Template

a. Description

Deleting a WhatsApp template on a WhatsApp Business account.

```
op = "wa_template_delete"
```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

b. Request Param

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	wa_template_id	String	Numeric		O	Template ID
2	name	String	alphanumeric		M	Template name

c. Response Param

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	data	Object			M	List of objects which contains the status of the update.

d. Example of Response and Request Param :

Request Param
<pre>{ "wa_template_id": "989721088731271", "name": "seasonal_promotion3" }</pre>

The output (response parameters) will be:

<pre>{ "data": { "success": true } }</pre>
--

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

3.10. Retrieve Media File

a. Description

This endpoint allows you to download a media file based on its media ID.

Endpoint
GET /media/{media_id}/view

b. Specification

No	Key	Value	Usage Code	Description
1	media_id	alphanumeric	M	ID of the file to retrieve

c. Response Content

The response contains the file content in binary format.

d. Example :

Curl Example
<pre>curl -x GET \ 'https://dep.ioh.co.id/public-api/v1/media/{media_id}/view' \ - H 'DEP-Timestamp: {timestamp}' \ - H 'DEP-System-ID: {system_id}' \ - H 'DEP-Signature: {signature}'</pre>

See: [Payload specification](#) for the header data.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4


3.11. Check Response

a. Description

Check response is used to check if the message response parameters are in the correct format as required from send_message operation.

```
op = "check_response"
```

b. Flow

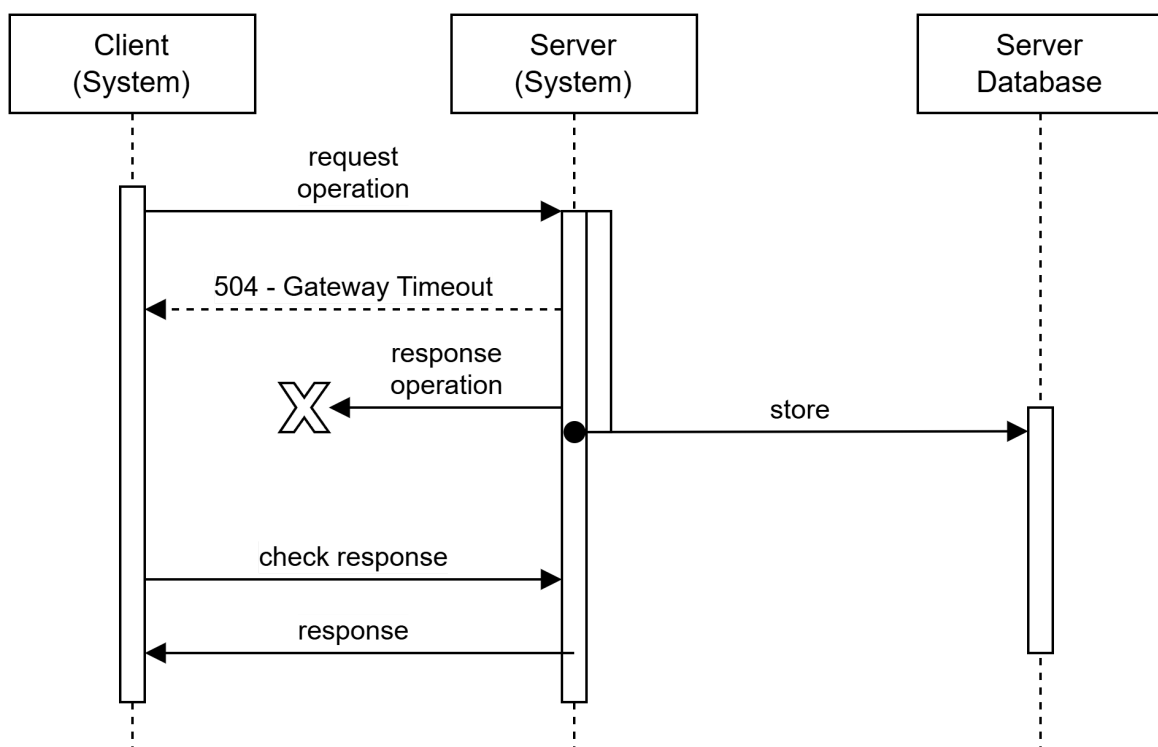

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

c. Request Parameters

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	unique_id	String	alphanumeric	16	M	Unique_id dari pesan yang akan dicek responsenya. Ex: 4YSGSZT36T2HOR62

d. Response Parameters

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	response	object			M	Berisikan response parameter dari pesan yang telah dikirim sebelumnya, yaitu messaging_product , phone_number dan message_id

e. Example of Request and Response Parameters :

Here are the request parameters used to check for response:

```
{
  "unique_id": "4YSGSZT36T2HOR62"
}
```

The output (response parameters) will be:

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```
{
  'response': {
    'message_id': '1718781621-9af4d0713f6e4904bb7859612a889d38',
    'messaging_product': 'whatsapp',
    'phone_number': '<phone-number>'
  }
}
```

4.Webhook

The client can install a webhook on their owned server and subscribe to a webhook URL. The purpose of installing this webhook is to assist the consumer in receiving incoming message notifications from customers and notification status of messages that have been sent by the consumer.

■ Subscription

```
op = "subscribe_webhook"
```

Request parameters

No	Field Name	Data type	Format	Length	Usage code	Description
1	callback_url	string	alphanumeric	8		Supported value URL

Response parameters

No	Field Name	Data type	Format	Length	Usage code	Description
1	status	boolean			M	Supported values: true and false
2	message	string			M	Message of

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						subscription
--	--	--	--	--	--	--------------

Example :

Request Parameters
<pre>{ "callback_url": "your-webhooks-url.com/" }</pre>

The output (response parameters) will be:

<pre>{ "success": true, "message": "Subscribed!" }</pre>
--

■ Payloads

Here is the format payloads our system send to your webhook as HTTP Request

Webhook Body

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	unique_id	String	Alphanumeric	1-16	M	Uniquely generated token by the client. No two tokens are the same on the same day.
2	op	String	Alphanumeric	1-30	M	Operation available for the API, example: "status_notification"

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

3	timestamp	String	Alphanumeric	30	M	Format Date : ISO datetime in UTC, example : "2020-01-13T05:12:19.573Z"
4	iv	String	Alphanumeric	32	M	Randomly the client generated 128 bits (16 length characters).
5	param	String	Alphanumeric	1-1500	M	Field parameters based on operation. param = Base64(AES256_CBC(message = JSON(webhook_param), secret = key, iv = iv)) where: • Iv from webhook iv field, • key = SHA256(HEX(HMACSHA256(message=secret_key, secret=salt)) + unique_id + timestamp + op), with the hexadecimal form in lowercase, and salted_secret_key = HEX(HMACSHA256(message=secret_key, secret=salt))
6	auth_token	String	Alphanumeric	64	M	Used for checksum token. auth_token = HEX(SHA256(HEX(HMACSHA256(secret=salt, message=secret_key)) + unique_id + timestamp + op + param)) where: • salted_secret_key = HEX(HMACSHA256(message=secret_key, secret=salt)) • secret_key (string) secret obtained via email.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						• salt (string) obtained via email. *with the hexadecimal form in lowercase.
--	--	--	--	--	--	--

Webhook Body
<pre>{ "unique_id": "1689332587020-HXE", "op": "send_notification", "param": "IM87sTILZ/KbY4yh9bgBzDLwEpRob4Y43fTy74URtBr1ZJJRFPddsz22qrRcH2k1HguPibD2H1MQvdzijYm 2uU08VeOUExWLTdWCBFrA00TXQvRnpsCkSYHc2bI5+OZS/V4nfuxmzB0lpMLJgipGKGJRVmNJJoHoLiEAkgXS CUM/IyQQxr5jSnAMghArx7JhpEQdYYsKAWLXgng37URAdxzmooPK2Yer7w21lw9ReyZ/a7xvH904eYViqk+P 0hhpp7tJF0bdJSmIaxDsEy1qE7g=", "auth_token": "50e326916e001dcad7e259b3b5b39766c016eff3c3bd9bd92ec73bcc25229a06", "timestamp": "2023-07-14T18:03:07.020251Z", "iv": "BGrqRo3E3QQcynJk" }</pre>

• Webhook Operation

1. Status Notification

```
op = "status_notification"
```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

Webhook Parameter

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	message_id	String	alphanumeric		M	ID pesan
2	from	String	alphanumeric		M	Nomor pengirim pesan
3	to	String	alphanumeric		M	Nomor penerima
4	st	String	alphanumeric		M	Status dari pesan, supported value: - initiated - pending - sent - delivered - read - failed
6	tstamp	int	numeric		M	waktu terakhir perubahan status
7	error	Object			*C	Error object from facebook, *included only when status is 'failed' reference https://developers.facebook.com/docs/what-sapp/cloud-api/support/error-codes/
8	errors	Array			*C	List of error object *included only when status is 'failed'

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

Example

Webhook Parameters
<pre>{ "message_id": "1689332524-dc4b7za3-1c47-4d08-886f-7463f3b2dx04", "from": "<business-phone-number>", "to": "<customer-phone-number>", "st": "delivered", "content": { "body": "punten" }, "tstamp": 1689332524, "chat_type": "text" }</pre>

webhook parameters when a message has a “failed” status
<pre>{ "message_id": "1691604275-8fda8c78-bd3e-467e-89d4-800958b18904", "from": "<business-phone-number>", "to": "<customer-phone-number>", "st": "failed", "tstamp": 1691604275, "error": { "code": 131030, "type": "OAuthException", "message": "(#131030) Recipient phone number not in allowed list", "error_data": { "details": "Recipient phone number not in allowed list: Add recipient phone number to recipient list and try again.", } } }</pre>

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

        "messaging_product": "whatsapp"
    },
    "fbtrace_id": "AFOfTYSVuYRqbl9U3LV0mq3"
}
}

```

2. Message Notification

```
op = "message_notification"
```

Webhook Parameter

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	message_id	String	alphanumeric		M	ID pesan
2	from	String	alphanumeric		M	Nomor pengirim pesan
3	to	String	alphanumeric		M	Nomor penerima
5	content	Object			M	Konten berdasarkan data tipe pesan.
6	tstamp	int	numeric		M	Message sent
7	chat_type	String	alphanumeric		M	Tipe pesan
8	customer	Object			M	The customer object who sends the incoming message.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

Customer Object

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	profile_name	String	alphanumeric		M	Customer name in WhatsApp application
2	phone_number	String	alphanumeric		M	Customer phone number

Example

Webhook Parameters
<pre>{ "message_id": "1689332524-dc4b7za3-1c47-4d08-886f-7463f3b2dx04", "from": "<customer-phone-number>", "to": "<business-phone-number>", "content": { "body": "punten" }, "tstamp": 1689332524, "chat_type": "text" "customer": { "profile_name": "<customer-name>" "phone_number": "<customer-phone-number>" }, }</pre>

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

■ Message type

Each message type's content is described in detail below.

1) Text

The following contains the contents of the text object

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	preview_url	boolean	true/false		M	True, jika ingin menambahkan URL pratinjau. pratinjau akan muncul jika pesan mengandung URL yang berawalan dengan https:// atau http://
2	body	string	alphanumeric	1-700	M	Isi pesan yang dikirimkan

Webhook Parameters
<pre>{ "message_id": "1689332524-dc4b7za3-1c47-4d08-886f-7463f3b2dx04", "from": "<customer-phone-number>", "to": "<business-phone-number>", "content": { "preview_url": false, "body": "your-text-message-content" }, "tstamp": 1689332524, "chat_type": "text" }</pre>

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

"customer": {
  "profile_name": "<customer-name>"
  "phone_number": "<customer-phone-number>"
},
}

```

2) Reaction

The following contains the contents of the Reaction object

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	message_id	String	alphanumeric	64	M	ID pesan yang diberikan ketika mengirim pesan.
2	emoji	string	alphanumeric		M	Emoji yang digunakan, ditulis dalam format UTF-8 Emoji. Contoh "\uD83D\uDE00" untuk Grinning Face

Webhook Parameters
<pre> { "message_id": "1689332524-dc4b7za3-1c47-4d08-886f-7463f3b2dx04", "from": "<customer-phone-number>", "to": "<business-phone-number>", "content": { "message_id": "1687353970-498c0475-ea8c-4a46-9057-b713893358ef", "emoji": "\ud83d\ude01" }, "tstamp": 1689332524, </pre>


	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

"chat_type": "text"
"customer": {
  "profile_name": "<customer-name>"
  "phone_number": "<customer-phone-number>"
},
}

```

Here is a preview of the message in the recipient's app

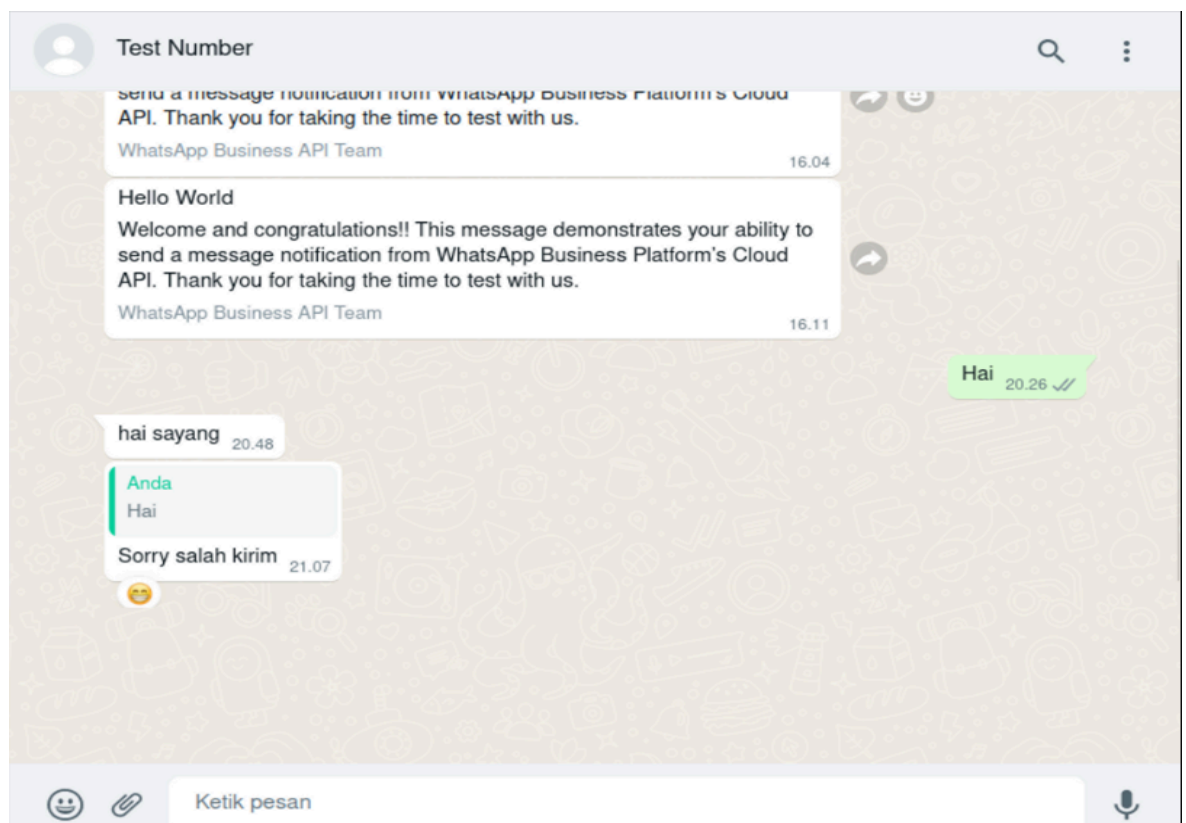

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

3) Images

The following contains the contents of the image object

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	id	string	alphanumeric		C	The media object ID required when type is audio, document, image, sticker, or video and you are not using a link. Do not use this field when the message type is set to text. You can retrieve the media by using this as the media_id in the 'Retrieve Media' endpoint.
2	link	String	URL		C	Protokol URL dari media yang digunakan berformat HTTP/HTTPS. Pastikan URL dapat diakses publik.
3	filename	string	alphanumeric		O	Describes the filename for the specific document. Use only with document media. The extension of the filename will specify what format the document is displayed as in WhatsApp.
4	Provider	String	alphanumeric		O	Optional. Only used for On-Premises API. This path is optionally used with a link when the


	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						HTTP/HTTPS link is not directly accessible and requires additional configurations like a bearer token. For information on configuring providers, see the Media Providers documentation.
--	--	--	--	--	--	---

Webhook Parameters
<pre> { "message_id": "1689332524-dc4b7za3-1c47-4d08-886f-7463f3b2dx04", "from": "<customer-phone-number>", "to": "<business-phone-number>", "content": { "link": "https://raw.githubusercontent.com/PokeAPI/sprites/master/sprites/pokemon/other/official-artwork/91.png", }, "tstamp": 1689332524, "chat_type": "text" "customer": { "profile_name": "<customer-name>" "phone_number": "<customer-phone-number>" }, } </pre>

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

Here is a preview of the message in the recipient's app

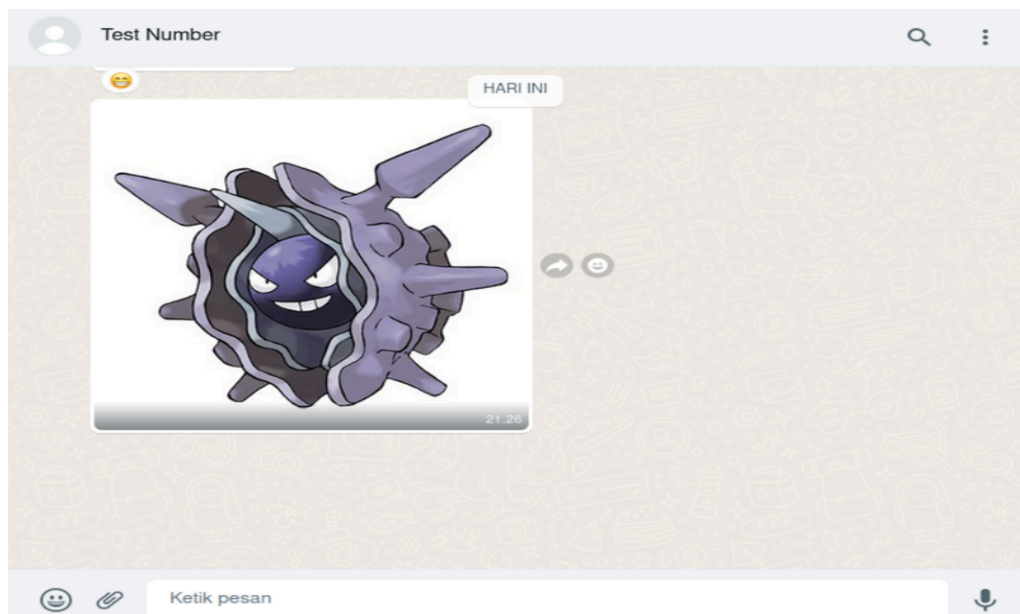

4) Location


The following contains the contents of the location object

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	longitude	float	-180 to 180		M	Longitude dari lokasi
2	latitude	float	-90 to 90		M	Latitude dari lokasi
3	name	string	alphanumeric		O	Nama lokasi
4	address	string	alphanumeric		O	Alamat lokasi. Akan ditampilkan ketika ada nama

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

Webhook Parameters
<pre>{ "message_id": "1689332524-dc4b7za3-1c47-4d08-886f-7463f3b2dx04", "from": "<customer-phone-number>", "to": "<business-phone-number>", "content": { "longitude": 106.8066222, "latitude": -6.2102648, "name": "PT Teleakses Solusindo" }, "tstamp": 1689332524, "chat_type": "text" "customer": { "profile_name": "<customer-name>" "phone_number": "<customer-phone-number>" }, }</pre>

Here is a preview of the message in the recipient's app

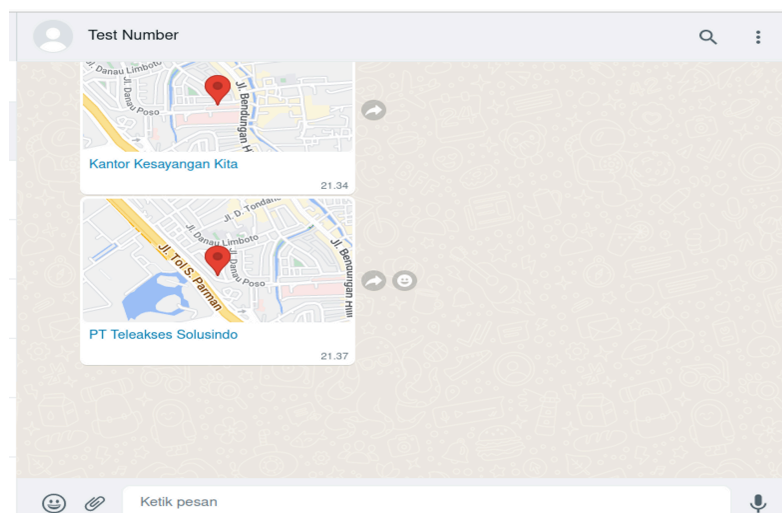

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

5) Contact

The following is the contact's content, which includes a list/array of contact objects with the following fields.

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	name	Object			M	Full contact name formatted as a name object. The object can contain the following fields: - formatted_name (string) – Required. Full name, as it normally appears. - first_name (string) – Conditional*. First name. - last_name (string) – *Conditional. Last name. - middle_name (string) – Conditional*. Middle name. - suffix (string) – Conditional. Name suffix. - prefix (string) – Conditional*. Name prefix. *At least one of the optional parameters needs to be included along with the formatted_name parameter.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

2	addresses	Object			O	Full contact address(es) formatted as an addresses object. The object can contain the following fields: - street (string) – Optional. Street number and name. - city (string) – Optional. City name. - state (string) – Optional. State abbreviation. - zip (string) – Optional. ZIP code. - country (string) – Optional. Full country name. - country_code (string) – Optional. Two-letter country abbreviation. - type (string) – Optional. Supported values are “HOME” and “WORK”.
3	birthday	string	YYYY-M M-DD	10	O	
4	emails	Object			O	Contact email address(es) formatted as an emails object. The object can contain the following fields: email (string) – Optional. Email address.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						type (string) – Optional. Supported values are HOME and WORK.
5	org	Object			O	Contact organization information formatted as an org object. The object can contain the following fields: - company (string) – Optional. Name of the contact's company. - department (string) – Optional. Name of the contact's department. - title (string) – Optional. Contact's business title.
6	phones	Object			O	Contact phone number(s) formatted as a phone object. The object can contain the following fields: - phone (string) – Optional. Automatically populated with the `wa_id` value as a formatted phone number. - type (string) – Optional. Supported Values are CELL, MAIN, IPHONE, HOME, and WORK. - wa_id (string) – Optional. WhatsApp ID.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

7	url	Object			O	Contact URL(s) formatted as a urls object. The object can contain the following fields: - url (string) – Optional. URL. - type (string) – Optional. Supported values are HOME and WORK.
---	-----	--------	--	--	---	--

Webhook Parameters
<pre> { "message_id": "1689332524-dc4b7za3-1c47-4d08-886f-7463f3b2dx04", "from": "<customer-phone-number>", "to": "<business-phone-number>", "content": [{ "name": { "formatted_name": "Joko Tingkir", "first_name": "Joko", "last_name": "Tingkir" }, "phones": [{ "phone": "081234567890", "type": "HOME" }] }] } </pre>


	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

"chat_type": "text"
"customer": {
  "profile_name": "<customer-name>"
  "phone_number": "<customer-phone-number>"
},
}

```

Here is a preview of the message in the recipient's app

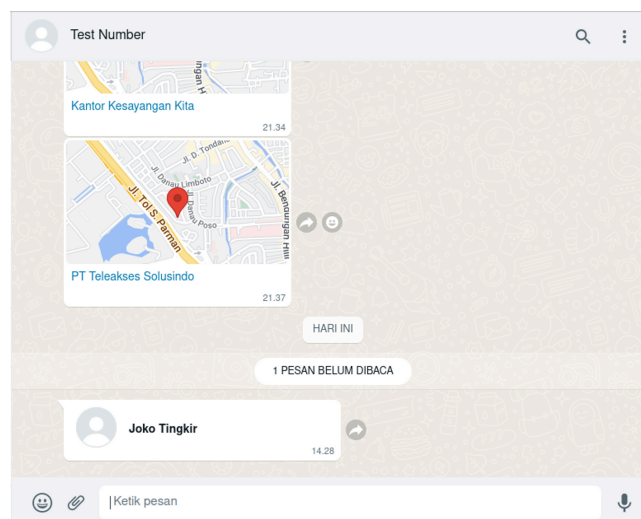

6) Interactive

In the interactive section, there are two types, Message List and Reply Button. Here is the data content format in interactive messages.

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	type	string	alphanumeric	4-10	M	The type of interactive message you want to send. Supported values: “button”: Use for Reply Buttons.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						• “catalog_message”: Use for Catalog Messages. • “list”: Use for List Messages. • “product”: Use Single-Product Messages. • “product_list”: Use for Multi-Product Messages.
2	action	Object			M	Action you want the user to perform after reading the message.
3	body				O	An object with the body of the message. The body object contains the following field: • text (string) – Required if body is present. The content of the message. Emojis and markdown are supported. Maximum length: 1024 characters.
4	footer				O	An object with the footer of the message. The footer object contains the following field: • text (string) – Required if footer is present. The footer content. Emojis, markdown, and links are supported. Maximum

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						length: 60 characters.
5	header				C	Required for type product_list. Optional for other types. Header content displayed on top of a message. You cannot set a header if your interactive object is of product type. See header object for more information.

The format for details of an object in the interactive field

a) Action

Here is the content of the action, containing a list/array of action objects with the following fields.

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	button	String		20	C	Required for List Messages. Button content. It cannot be an empty string and must be unique within the message. Emojis are supported, markdown is not.
2	buttons	Object			C	Required for Reply Buttons. A button object can contain the following parameters: type: only supported type is reply (for Reply

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						Button) • title: Button title. It cannot be an empty string and must be unique within the message. Emojis are supported, markdown is not. Maximum length: 20 characters. • id: Unique identifier for your button. This ID is returned in the webhook when the button is clicked by the user. Maximum length: 256 characters. You can have up to 3 buttons. You cannot have leading or trailing spaces when setting the ID.
3	catalog_id	String			C	Required for Single Product Messages and Multi-Product Messages. Unique identifier of the Facebook catalog linked to your WhatsApp Business Account. This ID can be retrieved via the Meta Commerce Manager.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

4	product_retailer_id	String			C	Required for Single Product Messages and Multi-Product Messages. Unique identifier of the product in a catalog. To get this ID go to Meta Commerce Manager and select your Meta Business account. You will see a list of shops connected to your account. Click the shop you want to use. On the left-side panel, click Catalog > Items, and find the item you want to mention. The ID for that item is displayed under the item's name.
5	sections	Object				Required for List Messages and Multi-Product Messages. Array of section objects. Minimum of 1, maximum of 10. See section object.

Here is the format for the section object

No	Field Name	Data Type	Format	Lenght	Usage Code	Description
1	product_items	Object		20	C	Required for Multi-Product Messages. Array of product objects. There is a minimum of 1

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						product per section and a maximum of 30 products across all sections. Each product object contains the following field: product_retailer_id string – Required for Multi-Product Messages. Unique identifier of the product in a catalog. To get this ID, go to the Meta Commerce Manager, select your account and the shop you want to use. Then, click Catalog > Items, and find the item you want to mention. The ID for that item is displayed under the item's name.
2	rows	Object			C	Required for List Messages. Contains a list of rows. You can have a total of 10 rows across your sections. Each row must have a title (Maximum length: 24 characters) and an ID (Maximum length: 200 characters). You can add a

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						description (Maximum length: 72 characters), but it is optional.
3	title	String			C	Required if the message has more than one section. Title of the section.

b) Header

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	type	string	alphanumeric	4-8	M	The header type you would like to use. Supported values: • text: Used for List Messages, Reply Buttons, and Multi-Product Messages. • video: Used for Reply Buttons. • image: Used for Reply Buttons. • document: Used for Reply Buttons.
2	document	Object			C	Required if type is set to document. Contains the media object for this document.
3	image	Object			C	Required if type is set to image.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

						Contains the media object for this image.
4	text	string	alphanumeric	60	C	Required if type is set to text. Text for the header. Formatting allows emojis, but not markdown.
5	video	Object			C	Required if type is set to video. Contains the media object for this video.

Here is the media object format for the header, if the type of message being sent is video, images, or document.

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	id	string	alphanumeric		C	Required when type is audio, document, image, sticker, or video and you are not using a link. The media object ID. Do not use this field when message type is set to text.
2	link	String	URL		C	Protokol URL dari media yang digunakan berformat HTTP/HTTPS. Pastikan URL dapat diakses publik.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

3	filename	string	alphanumeric		O	Describes the filename for the specific document. Use only with document media. The extension of the filename will specify what format the document is displayed as in WhatsApp.
4	provider	String	alphanumeric		O	Optional. Only used for On-Premises API. This path is optionally used with a link when the HTTP/HTTPS link is not directly accessible and requires additional configurations like a bearer token. For information on configuring providers, see the Media Providers documentation.

Webhook Parameters
<pre>{ "message_id": "1689332524-dc4b7za3-1c47-4d08-886f-7463f3b2dx04", "from": "<customer-phone-number>", "to": "<business-phone-number>", "content": { "type": "list", "header": { "type": "text", "text": "HEADER_TEXT" } } }</pre>

```

},
"body": {
  "text": "BODY_TEXT"
},
"footer": {
  "text": "FOOTER_TEXT"
},
"action": {
  "button": "BUTTON_TEXT",
  "sections": [
    {
      "title": "SECTION_1_TITLE",
      "rows": [
        {
          "id": "SECTION_1_ROW_1_ID",
          "title": "SECTION_1_ROW_1_TITLE",
          "description": "SECTION_1_ROW_1_DESCRIPTION"
        },
        {
          "id": "SECTION_1_ROW_2_ID",
          "title": "SECTION_1_ROW_2_TITLE",
          "description": "SECTION_1_ROW_2_DESCRIPTION"
        }
      ]
    },
    {
      "title": "SECTION_2_TITLE",
      "rows": [
        {
          "id": "SECTION_2_ROW_1_ID",
          "title": "SECTION_2_ROW_1_TITLE",
          "description": "SECTION_2_ROW_1_DESCRIPTION"
        },
        {
          "id": "SECTION_2_ROW_2_ID",

```


	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

        "title": "SECTION_2_ROW_2_TITLE",
        "description": "SECTION_2_ROW_2_DESCRIPTION"
    }
  ]
}
]
}
}
},
"tstamp": 1689332524,
"chat_type": "text"
"customer": {
  "profile_name": "<customer-name>"
  "phone_number": "<customer-phone-number>"
},
}


```

Here is a preview of the message in the recipient's app:

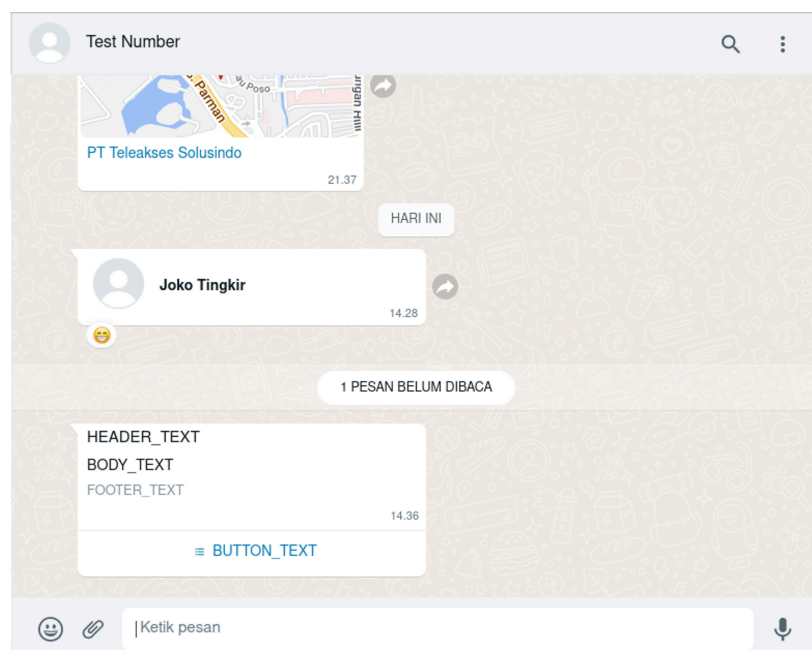

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

If the button is pressed, then

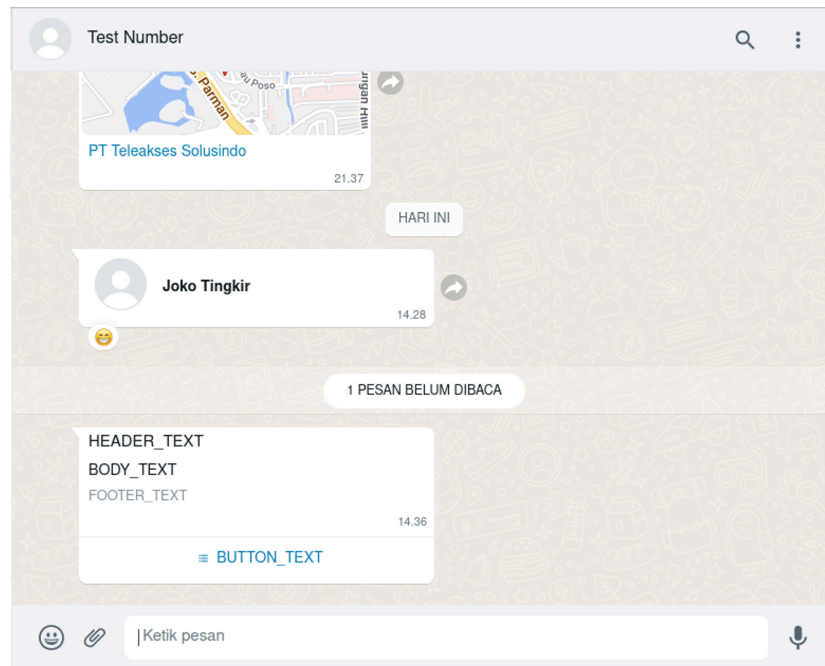

7) System

The following contains the contents of system message notification

No	Field Name	Data Type	Format	Usage Code	Description
1	body	string	numeric	M	Name change from PHONE_NUMBER to PHONE_NUMBER
2	new_wa_id	string	numeric	M	Phone Number
3	type	string	numeric	M	user_change_number

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

Here are the request parameters used when a user changes their phone number on WhatsApp, you receive a system message notification

Webhook Parameters
<pre>{ "message_id": "1689332524-dc4b7za3-1c47-4d08-886f-7463f3b2dx04", "from": "<customer-phone-number>", "to": "<business-phone-number>", "content": { "body": "Name change stuff", "new_wa_id": "6281234567890" "type": "user_changed_number" }, "tstamp": 1689332524, "chat_type": "text" "customer": { "profile_name": "<customer-name>" "phone_number": "<customer-phone-number>" }, }</pre>

5.Detail explanation

■ Prerequisite

You need to provide the following keys, which are obtained from registration/activation **email**, in order to use our API.

- system_id
- secret_key

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

- salt

■ Auth Header

DEP-Signature

```
DEP-Signature = HEX(SHA256(Endpoint + DEP-Timestamp + salted_secret_key))
```

On the key part, Let's examine the `salted\_secret\_key = HEX(HMACSHA256(secret = salt, message = secret\_key))` part, which we refer to as salted_secret_key. When both the salt and secret_key are provided via email alongside the system_id, and the hexadecimal result value is in **lowercase**,

For example, if we have a secret_key and salt as follows, we can expect the value of salted_secret_key as shown in the table below.

salted_secret_key = HEX(HMACSHA256(secret = salt, message = secret_key))		
Input	secret_key	'12345678'
	salt	'87654321'
Expected Output	salted_secret_key	'18cef3462f052e9fad5f4198f4ef397783189c6e25ab9dafbc7071401065ac76'

So,

DEP-Signature = HEX(SHA256(Endpoint + DEP-Timestamp + salted_secret_key))		
Input	Endpoint	'/greeting'
	DEP-Timestamp	'2020-01-13T05:12:19.573Z'
	salted_secret_key	'18cef3462f052e9fad5f4198f4ef397783189c6e25ab9dafbc7071401065ac76'
Expected	DEP-Signature	'bf7a312bd87e37f6ff1a4353ca301416b829ec1d3ea40a'

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

Output	f0d4366b338458c916'
--------	---------------------

■ Encryption

For the detailed explanation, let's assume you want to send a request, for security testing and we use the "greeting" operation.

a. system_id

The `system_id` is an identifier for the client, which is provided when a portal account is registered via email. It is represented as a string. For example:

```
system_id = "0123456789abcdef"
```

b. unique_id

The `unique_id` is a string of 16 characters in length, generated uniquely by the client. No two tokens can have the same value on the same day; if such tokens exist, our server will return an error. For example

```
unique_id = "FPlyfsuIOHXuxTnL"
```

c. op

The `op` parameter represents the operation available for the API. For example, it can take values such as "broadcast," "send_message," or "get_messages.", etc. You can find more details in the Operations section. As an example, let's consider the "greeting" operation, which returns a "Hello World" message:

```
op = "greeting"
```

d. timestamp

The `timestamp` is a datetime value in ISO datetime format in UTC when making a request. It should be represented as a string, and the `timestamp` cannot deviate by more than plus or minus 300 seconds; otherwise, the server will return an error.

```
timestamp = "2020-01-13T05:12:19.573Z"
```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

e. iv

The **iv** is a randomly generated 128-bit value by the client, represented as a 16-character string.

```
iv = "ii06m0iLIsoE5Vvo"
```

f. param

The **param** is an encrypted request parameter calculated using the following formula, as described in the documentation:

```
param = Base64(AES256_CBC(message = JSON(request_param), secret = key, iv = iv))
```

Here's how the key is derived and computed using the following formula:

```
key = SHA256(salted_secret_key + unique_id + timestamp + op)
```

We define the input for SHA256, `salted\_secret\_key + unique\_id + timestamp + op`; we can expect the value of the key in hexadecimal as shown in the table below.

key = SHA256(salted_secret_key + unique_id + timestamp + op)		
Input	salted_secret_key	"18cef3462f052e9fad5f4198f4ef397783189c6e25ab9dafbc7071401065ac76"
	unique_id	"FPlyfsuIOHXuxTnL"
	timestamp	"2020-01-13T05:12:19.573Z"
	op	"greeting"
Expected Output	*HEX(key)	"41f486ae6ae24cceb666a7b5b0c276e123875d56acf257100b46794c5204287"

*Note that we cannot directly print the key as a string character, so we convert it to a hexadecimal string for reference in this calculation.

Finally, with all the information to calculate the param; we can expect the value of param as shown in the table below.

```
param = Base64(AES256_CBC(message = JSON(request_param), secret = key, iv = iv))
```


	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

Input	JSON(request_param)	'{"message": "Hello, Dephie!"}'
	HEX(key)	'41f486ae6ae24cceba666a7b5b0c276e123875d56acf257100b46794c5204287'
	iv	'ii06m0iLIsoE5Vvo'
Expected Output	param	'BwJiVaKrCjxqW/nvnF9eSYkf6mZeCZ045xo0eZottH8='

g. auth_token

The `auth_token` is calculated using the following formula, represented as a hexadecimal-supported string, as described in the documentation:

```
auth_token = HEX(SHA256(salted_secret_key + unique_id + timestamp + op + param))
```

We define the input for SHA256, `salted\_secret\_key + unique\_id + timestamp + op + param`; we can expect the value of `auth_token` as shown in the table below.

auth_token = HEX(SHA256(salted_secret_key + unique_id + timestamp + op + param))		
Input	salted_secret_key	"18cef3462f052e9fad5f4198f4ef397783189c6e25ab9dafbc7071401065ac76"
	unique_id	"FPlyfsuIOHXuxTnL"
	timestamp	"2020-01-13T05:12:19.573Z"
	op	"greeting"
	param	'BwJiVaKrCjxqW/nvnF9eSYkf6mZeCZ045xo0eZottH8='
Expected Output	auth_token	'2fe3de46c455081d8728479d9a34dd3fd18e3167b3942563069d934716c1f9a1'

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

■ Decryption:

As we can see the encryption formula param is:

```
param = Base64(AES256_CBC(message = JSON(response_param), secret = key, iv = iv))
```

Where key is derived and computed using the following formula:

```
key = SHA256(HEX(HMACSHA256(secret = salt, message = secret_key)) + unique_id + timestamp + op)
```

We have calculated the key part before, now just focus on decrypting param. The response param can be defined

```
JSON(response_param) = AES256_CBC_decrypt(cipher_text = Base64_decode(param), secret = key, iv = iv)
```

With the provided param and iv, also key calculated; we can expect the value of decrypted response_param as shown in the table below.

JSON(response_param) = AES256_CBC_decrypt(cipher_text = Base64_decode(param), secret = key, iv = iv)		
Input	param	'iGdkQu+HKSABvEyLzbfItZL/zxn3Du6hvd8q6w49opI='
	HEX(key)	'41f486ae6ae24cceba666a7b5b0c276e123875d56acf257100b46794c5204287'
	iv	'vf2V6BZfceV4rQMk'
Expected Output	JSON(response_param)	'{"message": "Hello world"}'

6.Error

a. Deskripsi

Error codes and messages provided within the response body in the event of an error (non-200

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

status).

b. Format Response Object

No	Field Name	Data Type	Format	Length	Usage Code	Description
1	error_code	String	Alphanumeric	6	M	HTTP error code + customized error code, example: "400001"
2	error_message	String	Alphanumeric	1-256	M	Description of error_code, example: "Invalid request body"
3	trace_id	String	Alphanumeric		M	ID to track errors. For further inspection, please attach trace_id when contacting us!
4	fb_error	Integer			C	Given when operation declined by facebook, or any other related with facebook.

The Error object will replace the response_body in case of an error at the request_body level (not authenticated), or replace the response_param in the event of an error at the request_param level (authenticated).

c. List of Error Code

1) 400 - BAD REQUEST

error_code	error_message	use case
400001	Missing mandatory field	When a client doesn't fill mandatory field in the request body

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

400002	Format error	When a client sends an invalid format such as invalid length, the invalid datatype for the request body
400003	Missing mandatory param field: <field>	When the client doesn't send a mandatory field in the request param. specify the param in message for clue
400004	Format error param field: <field>	When client send invalid format such as invalid length, invalid datatype for request param
400005	Missing mandatory query param	When client doesn't send mandatory query param
400006	Bad Request by facebook	Facebook bad request
400006	Invalid broadcast field	Invalid when user upload csv

2) 401 - UNAUTHORIZED

error_code	error_message	use case
401001	Invalid field value	When the client miscalculates the encryption
401002	Invalid auth token	When the client miscalculates the checksum
401003	Unauthorized client	Either the system id, or secret key are incorrect
401004	Invalid unique id	Invalid unique id or unique id has been used before
401005	Invalid timestamp	Invalid timestamp format
401006	Unauthorized HTTP Header	Invalid HTTP Header
401007	Invalid signature	Invalid signature

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

401008	Invalid iv	When the client send invalid format IV
--------	------------	--

3) 403 - FORBIDDEN

error_code	error_message	use case
403001	Unsupported op	Operation requested by client are invalid (either doesn't exists or cannot be accessed via current flow)
403002	Operation declined	Operation is declined or canceled by the user.
403003	Rejected by facebook	Occurred when user request parameters which related to Facebook Cloud API are invalid.
403004	Broadcast has been finalized	Operation do on finalized broadcast
403005	Invalid user	This when user do operation which is not in their company
403006	Invalid template	Invalid template

4) 404 - Not Found

error_code	error_message	use case
404001	Data Not Found: <variable_name>	When a client requests specific data based on reference id, but the reference doesn't exist in the database. (note that if data of list of object found zero row, it still return 200)

5) 409 - CONFLICT

error_code	error_message	use case
409001	Invalid timestamp	Timestamp difference of exceed 5 minutes
409002	Miscalculation encryption	Parameters decrypted from "param" field are miscalculated

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

6) 500 - INTERNAL SERVER ERROR

error_code	error_message	use case
500000	Internal server error	General error, or any uncaught syntax error
500001	Internal server error	Any error caused by database query and/or connection
500002	Internal server error	Any third party (such as Meta) error caused by programming miss, or third party error
500003	Internal server error	Any error when data “from” storage (NFS) are broken such as cannot be encoded
500004	Internal server error	Any error of caught syntax error

7) 504 - GATEWAY TIMEOUT

error_code	error_message	use case
	Client.Timeout exceeded while awaiting headers	Any error, use check_response operation (Refer to Check Response document)

d. Example

Request Body layer error

Assuming you have omitted the timestamp field in the request body:

Request Body layer
<pre>{ "system_id": "<system-id>",</pre>

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

"unique_id": "kVAmjrVKiI07ITpf",
"param": "M9PNsUNvCQjnvttLETTjcb0LOsWq5NLhy6o6FLLpQ4FtX5zMltdl6ESm/K+hWqoI",
"auth_token":
"7685a65b05c76f4e62612762d7c449db05b8481a807cd44c1b2ba93f4ca9bfcc",
"iv": "iqYNsuIXZUah2wAf",
"op": "greeting"
}

```

The response will directly return:

```

{
  "error_code": "400001",
  "error_message": "Missing mandatory field",
  "trace_id": "tidis-1691601291-a1089411-93fe-4163-9b57-4b0782781d02"
}

```

Request parameters layer error

However, if your request body is valid (indicating successful authentication), the response body you receive will be:

```

{
  "system_id": "<system-id>",
  "unique_id": "zwGoOkRpNCIbfqKW",
  "param":
"5oMgKc7wpmCta5Fbp//KtPJ+9ZCPmpvyhErdsr0d/fGndFqtjzT2wK0CLa0JTBxldH8S1GD3SSaVMazY
Q7zjZYIXht+UP0YjGu2JaJcGqxRgqz3XKU3Mkv2if7QDqKJ6ZXXi/Nsq0kFeaHVxJo0yaADvZnx/SA81Y
g28AHEHBhYmpwjdJwOpeIp7Ye6vso8CufmIQHFeW3xcAzOxMiMUXkTMDjIfsLBm1kVlNpVjlt+0gSRRGw
ldwU7anChEnLSxzRj72QEdEhVXAarOuiQNU128gTpZEUsVLLaVvF87YoiR50YoU9vC6BY9/JUK+xN5HQ4
eQE+xzbJnJdmCAvA0aXzGxrzhbGppmyDs/rqvwlULIsI8glNkU1XXWuWYjy4Iy03JP3s3vVG8CmkftX10
4rpbEMq9HclhcQ7hJyTxD+Fncgmihb0LFmyQ2xZjmNtZQl0ejWXFcaJaLXQSZfaXSnPhfKpLcPIUTd53I
WVxpCFixGXR/mgvWMMuEAJNGu6+4SeGmq/fvJI6buE4gY530Efr8Z50wiefPAAW0uFjL6qbd1Ygy4X4e
P3m/QU731HWU4XxW5hJDMKbb2zqU2jMEHqgOQWP2g2NHqaoc+ZxDLtrfsZeBsTSx12Sboc+aZ05wGZR0/
bsePZE//kVe8rNZ3jy0i/oYJ3YeICKQN+XWb/zc0TRQUnR68xBDeE4mMtT9o4AF4pjSIG/py/QG4BR0Kz
i3WMnh2L6TsCPQZao0RqLjMc/cRG8oyCKJgZkMTC6LnVdT6Mf7iJNvTyCHn8ag=",

```

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```

    "auth_token":
"04594c93788d0daad1581703a2693659a3c0204a3d39b8aad904892aa87fd2a1",
    "iv": "Fjb7byXjPb6VhQKX",
    "op": "wa_template_update",
    "timestamp": "2023-08-18T11:25:49.862498Z"
}

```

In case of an error, your decrypted response parameter will contain an error response like this:

```

{
  "error_code": "403003",
  "error_message": "Rejected by facebook",
  "trace_id": "tidis-1691601291-a10a9411-93fe-4163-9b57-4b0782781d02",
  "fb_error": {
    "message": "Unsupported post request. Object with ID '1402739813992045' does not exist, cannot be loaded due to missing permissions, or does not support this operation. Please read the Graph API documentation at https://developers.facebook.com/docs/graph-api",
    "type": "GraphMethodException",
    "code": 100,
    "error_subcode": 33,
    "fbtrace_id": "Al3v6dMBV00yG_z8pzkAx1-"
  }
}

```

e. Handling Error

When you encounter an error, we attempt to provide you with error codes, messages, and a trace_id (Refer to Error Codes and Messages for details). As illustrated in our code sample, we utilize the trace_id as an error catcher.

	OMNICHANNEL PUBLIC API Specification Document	INDOSAT OOREDOO HUTCHISON
		Version no: 1.4.4

```
{
  "error_code": "400001",
  "error_message": "Missing mandatory field",
  "trace_id": "tidis-1691601291-a1089411-93fe-4163-9b57-4b0782781d02"
}
```

If you do not receive a trace_id, please feel free to contact us so that we can resolve the issue.