
sample-maven-site
v. 1.0.0-SNAPSHOT
User Guide

Indice

| | |
|------------------------------|----------|
| Indice | i |
| 1. Introduzione | 1 |
| 2. Guide | 2 |
| 2.1. Quick reference | 3 |
| 2.2. Markdown sample | 4 |


1 Introduzione

Introduzione

Esempio di documentazione generata con il [maven site plugin](#)

Nota: Questo documento è scritto in markdown

1.1 Panoramica strumenti utilizzati

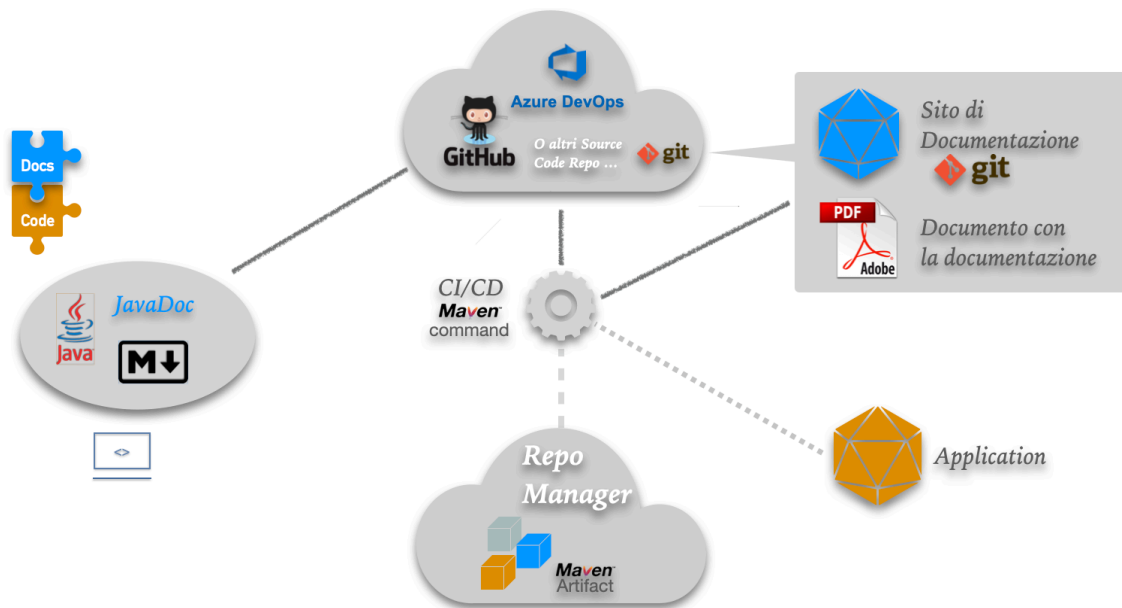

2 Guide

.....
Guide

3 Quick reference

Quick reference

3.1 Comandi MAVEN per creazione sito per il progetto di DEMO

| Task | Comando | Output root |
|---|--|--|
| Creazione documentazione in locale | <code>mvn clean site</code> | <code>\${project.basedir}/target/site</code> |
| Pubblicazione su repository GITHUB | <code>mvn clean site-deploy</code> | GITHUB gh-pages |
| Pubblicazione su repository AzureDevops | <code>mvn clean site-deploy -Psite-azuredevops -Pjavadoc-markdown</code> | AZUREDEVOPS Wiki |

3.2 Link utili

- [Maven site plugin](#)
- [Maven pdf plugin](#)
- [Doxia formati di riferimento](#)
- [Configurazione plugin checkstyle per JavaDoc](#)

4 Markdown sample

MARKDOWN

4.1 Header

A First Level Header with =
or

A First Level Header with #

4.2 A Second Level Header with --

or

4.3 A Second Level Header with

4.3.1 Header 3 with

4.4 HTML link

- with HTML [Markdown syntax reference](#)
- This is [an example](#) inline link.
- [This link](#) has no title attribute.
- Automatic link <http://example.com/>
- *Hello [link](#)*
- Hello *[link](#)* from Italy
- Hello from *[link](#)* to **everyone** reading this
- Here's an [important anchor link to style](#).

4.5 BLOCKQUOTE

This is a blockquote.

This is the second paragraph in the blockquote.

4.6 This is an H2 in a blockquote

Regular line

You can insert quotes by preceeding each line with >.

Blockquotes can also contain line breaks.

4.7 TABLE

Colons can be used to align columns.

| Tables | Are | Cool |
|----------|---------------|--------|
| col 3 is | right-aligned | \$1600 |
| col 2 is | centered | \$12 |

| | | |
|---------------|----------|-----|
| zebra stripes | are neat | \$1 |
|---------------|----------|-----|

There must be at least 3 dashes separating each header cell. The outer pipes (|) are optional, and you don't need to make the raw Markdown line up prettily. You can also use inline Markdown.

| Markdown | Less | Pretty |
|--------------|---------|---------------|
| <i>Still</i> | renders | nicely |
| 1 | 2 | 3 |

4.8 CODE BLOCK

This is a normal html paragraph:

```
This is a code block with html
```

One level of indentation — 4 spaces or 1 tab — is removed from each line of the code block. For example, this: Here is an example of AppleScript:

```
tell application "Foo"
    beep
end tell
```

4.8.1 Codeblock with space

```
You can also indent
blocks to display
code or poetry.

Indented code/poetry blocks
can be hard-wrapped.
```

Or, wrap your code in three backticks:

```
function codeBlocks() {
    return "Can be inserted"
}
```

```
function test() {  
  console.log("Print status");  
}
```

4.9 STYLE

This is a paragraph with ~style~ *italic italic* **bold bold**

4.10 Lists

4.10.1 Unordered lists

- Unordered
- Lists
- Hello

4.10.2 Ordered lists

1. Ordered
 2. Lists
 3. Numbers are ignored
 4. Ordered
-
1. Ordered lists can start
 2. with any number and
 3. use . as well as) as a separator.

4.10.3 Task lists

- [] Task 1
- [x] Task 2
- [] Task 3
- Regular list item

4.11 IMAGE



