THE UNIVERSITY of TENNESSEE KNOXVILLE

Lecture 3: Variational Autoencoders for imaging, spectra, and structure-property relationships

Sergei V. Kalinin

University of Tennessee, Knoxville and
Pacific Northwest National Laboratory

Pacific Northwest NATIONAL LABORATORY

The VAE Story

- What are (Variational) autoencoders?
  - Encoding and decoding
  - Latent distribution
  - Latent representations
  - Disentanglement of the representations

- Why invariances: rotational, translational, and shear

- Other colors of VAEs:
  - Semi-supervised
  - Conditional
  - Joint

- VAEs for real-world examples
- From VAEs to encoder-decoders (VED)

- Dual VAE

Autoencoders

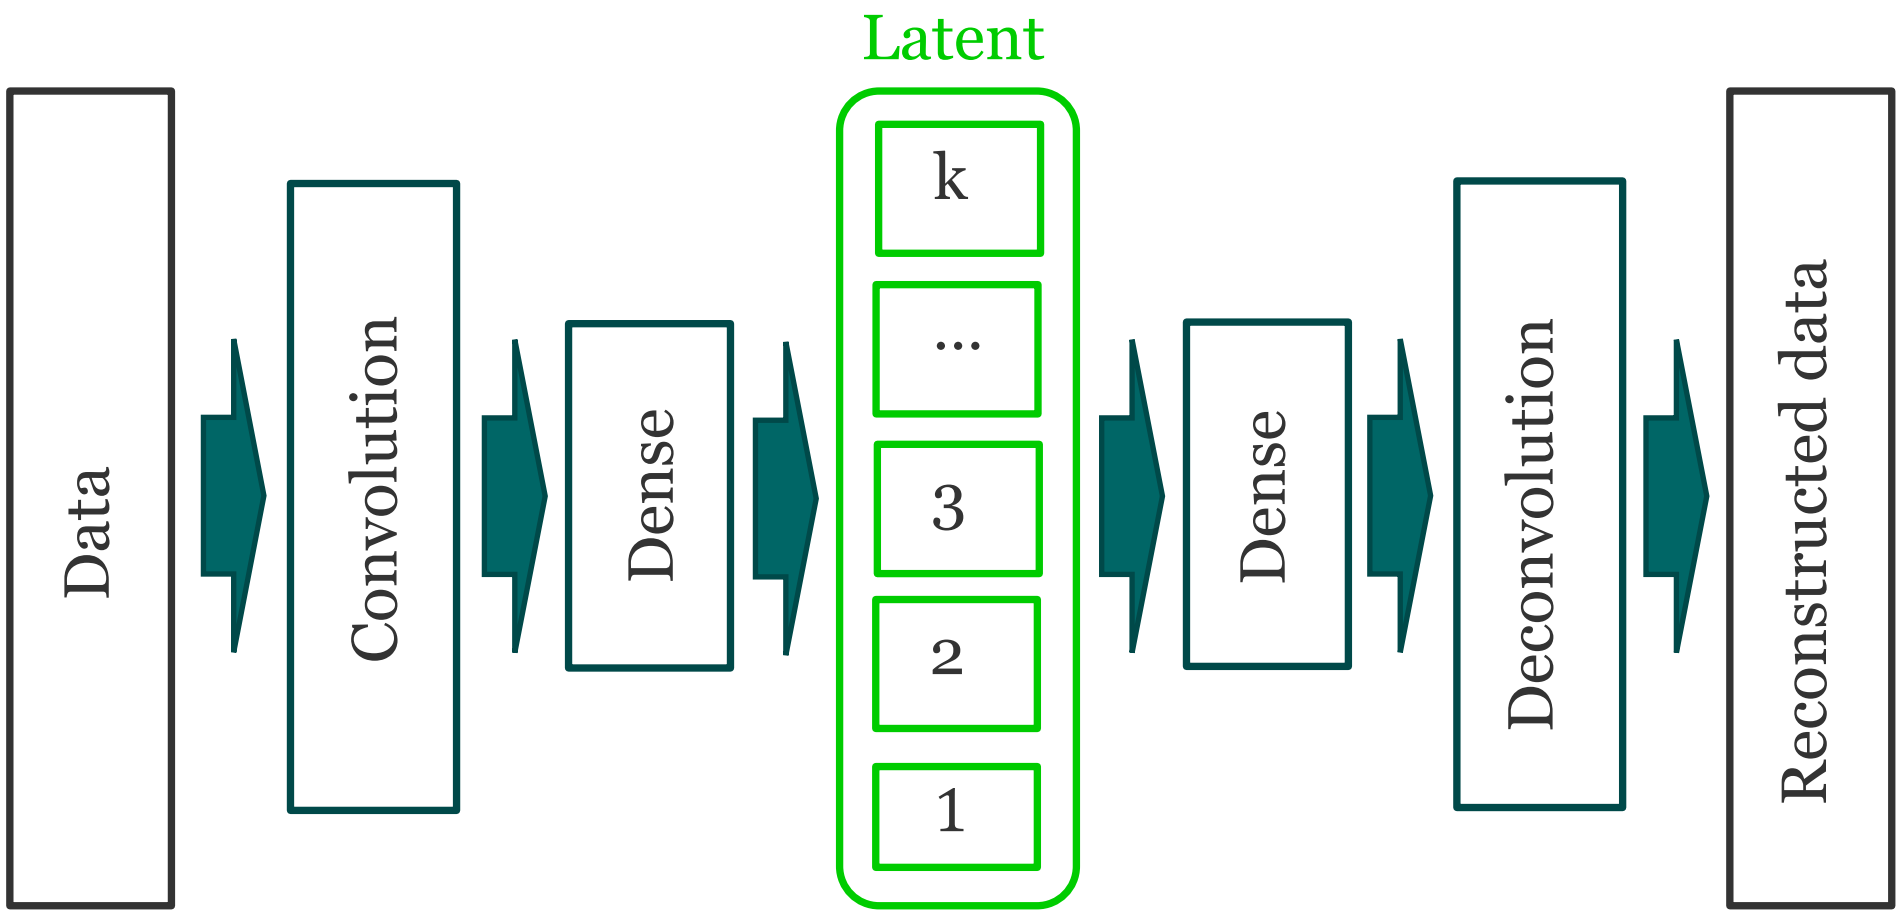

Loss: reconstruction loss

The AE reconstructs data

Input data

Decoded data

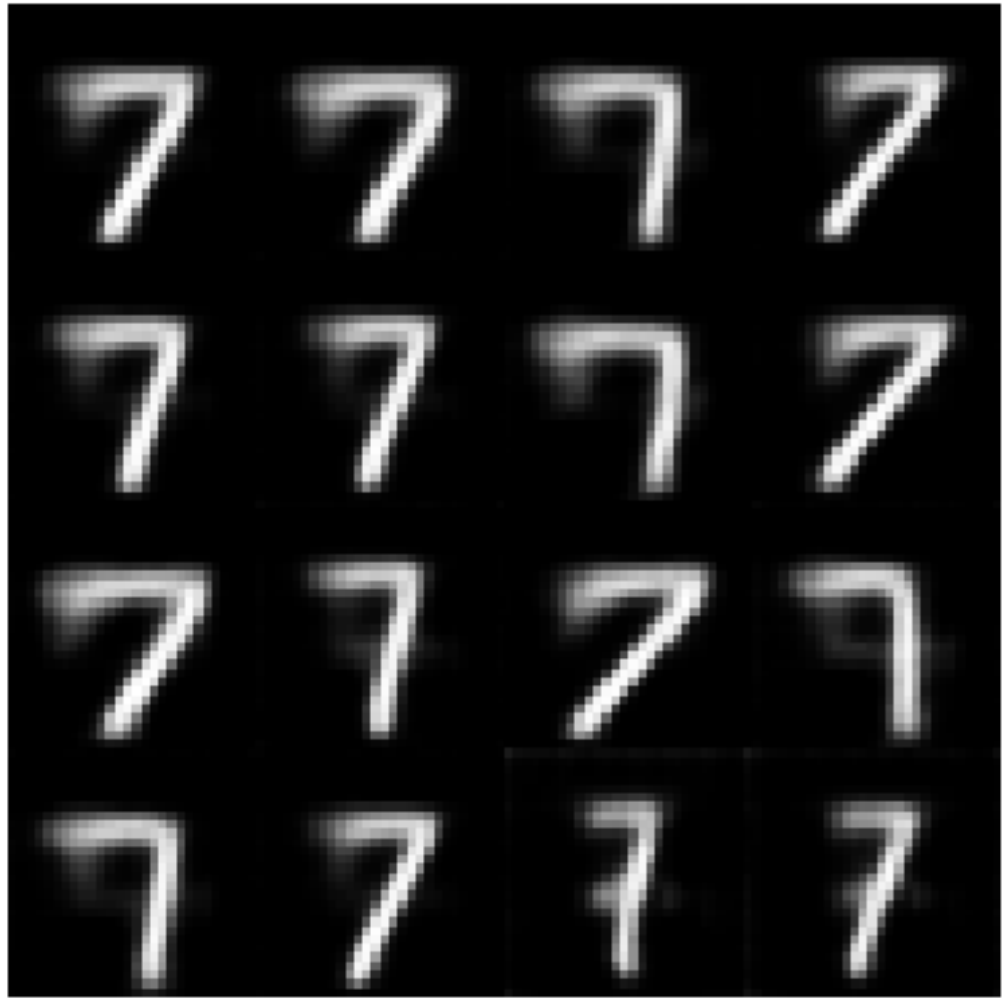

Why are AE important?

Geoffrey Hinton

FOLLOW

Emeritus Prof. Comp Sci, U.Toronto & Engineering Fellow, Google
Verified email at cs.toronto.edu - Homepage

machine learning psychology artificial intelligence cognitive science computer science

TITLE	CITED BY	YEAR
Imagenet classification with deep convolutional neural networks A Krizhevsky, I Sutskever, GE Hinton Communications of the ACM 60 (6), 84-90	130318	2017
Deep learning Y LeCun, Y Bengio, G Hinton Nature 521 (7553), 436-44	62790	2015
Dropout: a simple way to prevent neural networks from overfitting N Srivastava, G Hinton, A Krizhevsky, I Sutskever, R Salakhutdinov The journal of machine learning research 15 (1), 1929-1958	42078	2014
Visualizing data using t-SNE L van der Maaten, G Hinton Journal of Machine Learning Research 9 (Nov), 2579-2605	35035	2008
Learning representations by back-propagating errors DE Rumelhart, GE Hinton, RJ Williams Nature 323 (6088), 533-536	32239	1986
Learning internal representations by error-propagation DE Rumelhart, GE Hinton, RJ Williams Parallel Distributed Processing: Explorations in the Microstructure of ...	30711	1986
Schemata and sequential thought processes in PDP models. D Rumelhart, P Smolenksy, J McClelland, G Hinton Parallel distributed processing: Explorations in the microstructure of ...	28073 *	1986
Learning multiple layers of features from tiny images A Krizhevsky, G Hinton	21876	2009
Rectified linear units improve restricted boltzmann machines V Nair, GE Hinton Proceedings of the 27th international conference on machine learning (ICML ...	21050	2010
Reducing the dimensionality of data with neural networks GE Hinton, RR Salakhutdinov Science 313 (5786), 504-507	19930	2006

Reducing the dimensionality of data with neural networks

Authors	Geoffrey E Hinton, Ruslan R Salakhutdinov
Publication date	2006/7/28
Journal	Science
Volume	313
Issue	5786
Pages	504-507
Publisher	American Association for the Advancement of Science
Description	High-dimensional data can be converted to low-dimensional codes by training a multilayer neural network with a small central layer to reconstruct high-dimensional input vectors. Gradient descent can be used for fine-tuning the weights in such "autoencoder" networks, but this works well only if the initial weights are close to a good solution. We describe an effective way of initializing the weights that allows deep autoencoder networks to learn low-dimensional codes that work much better than principal components analysis as a tool to reduce the dimensionality of data.
Total citations	Cited by 19930



Encoding: Image → Latent Space

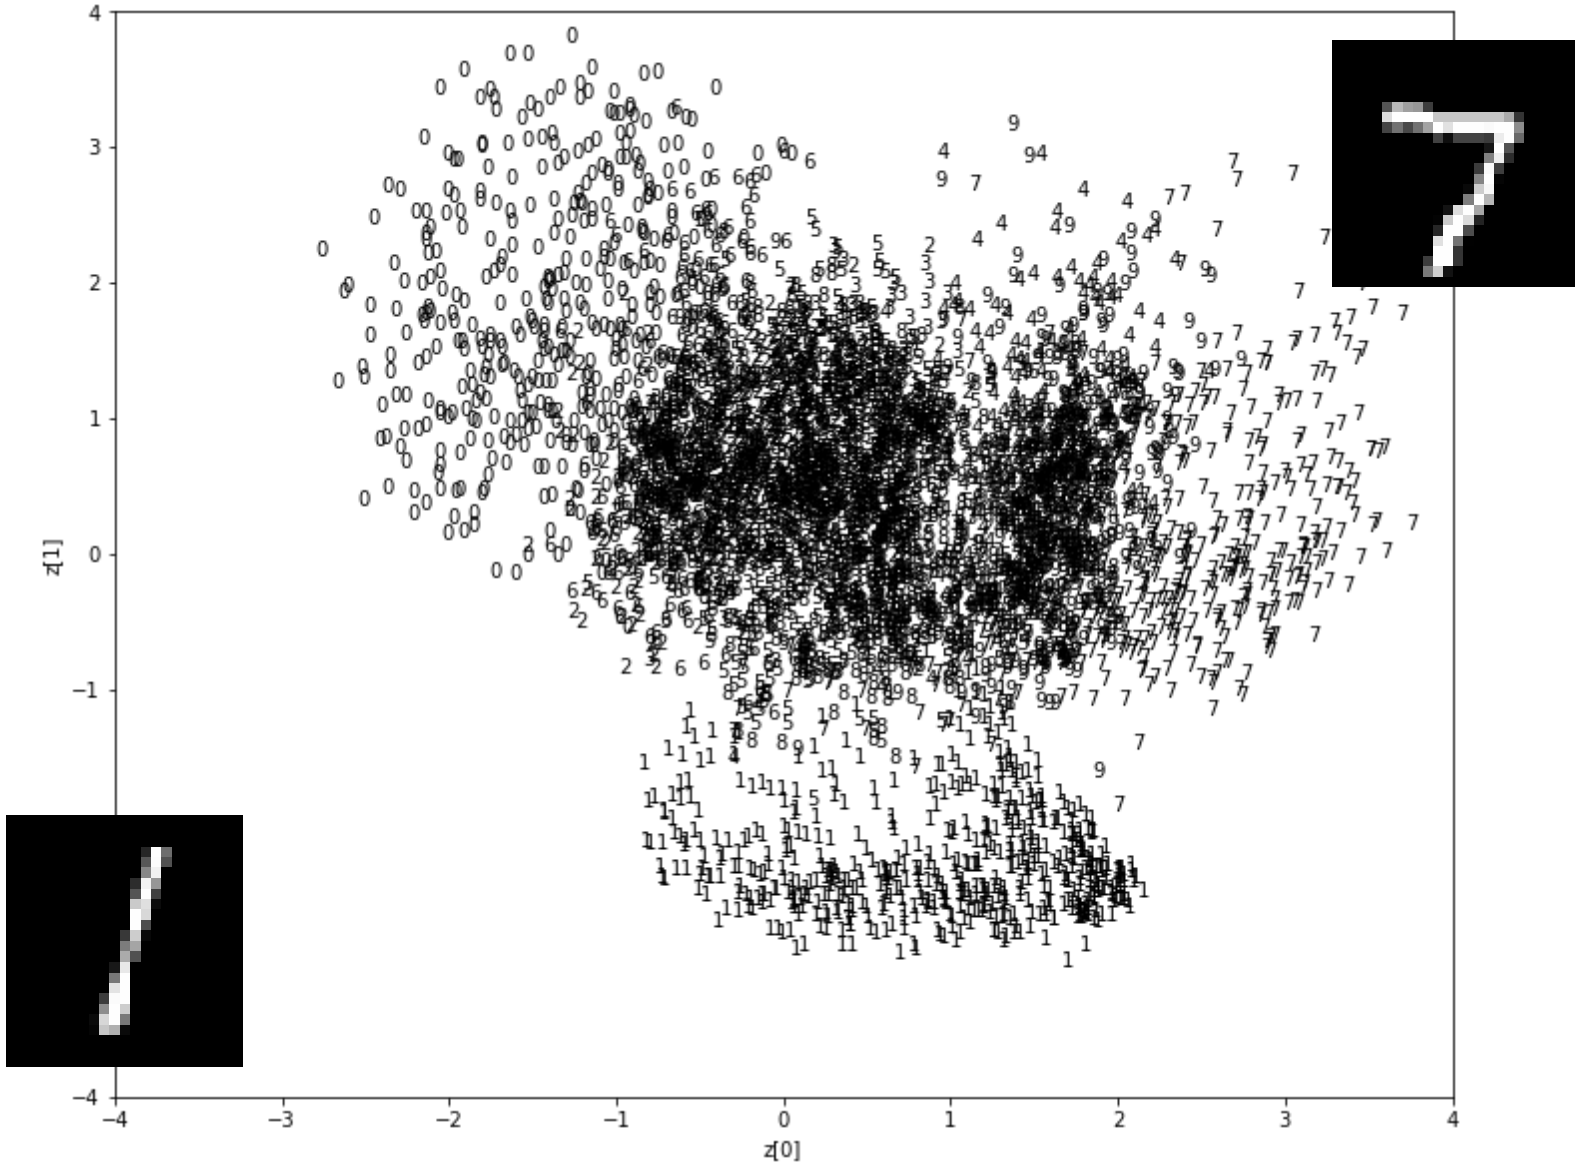

Latent distribution: Encoding the data via low dimensional vector

Decoding: Latent Space → Image

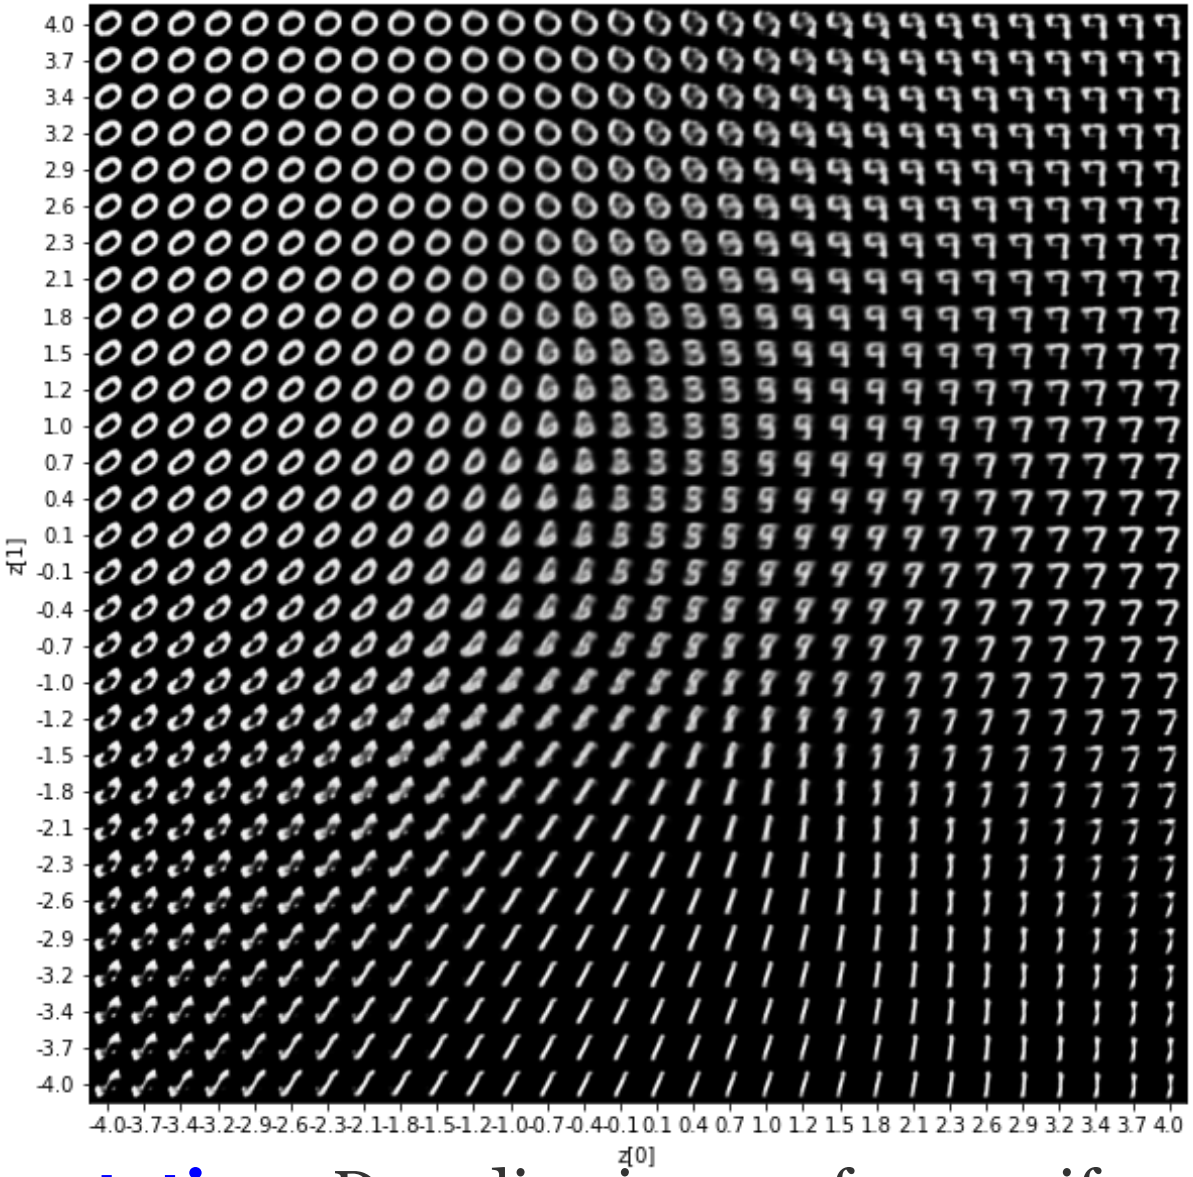

Latent representation: Decoding images from uniform grid in latent space

Image Reconstruction

Test color images (Ground Truth)

Test gray images (Input)

Image Reconstruction

Test color images (Ground Truth)

Colorized test images (Predicted)

Image Reconstruction

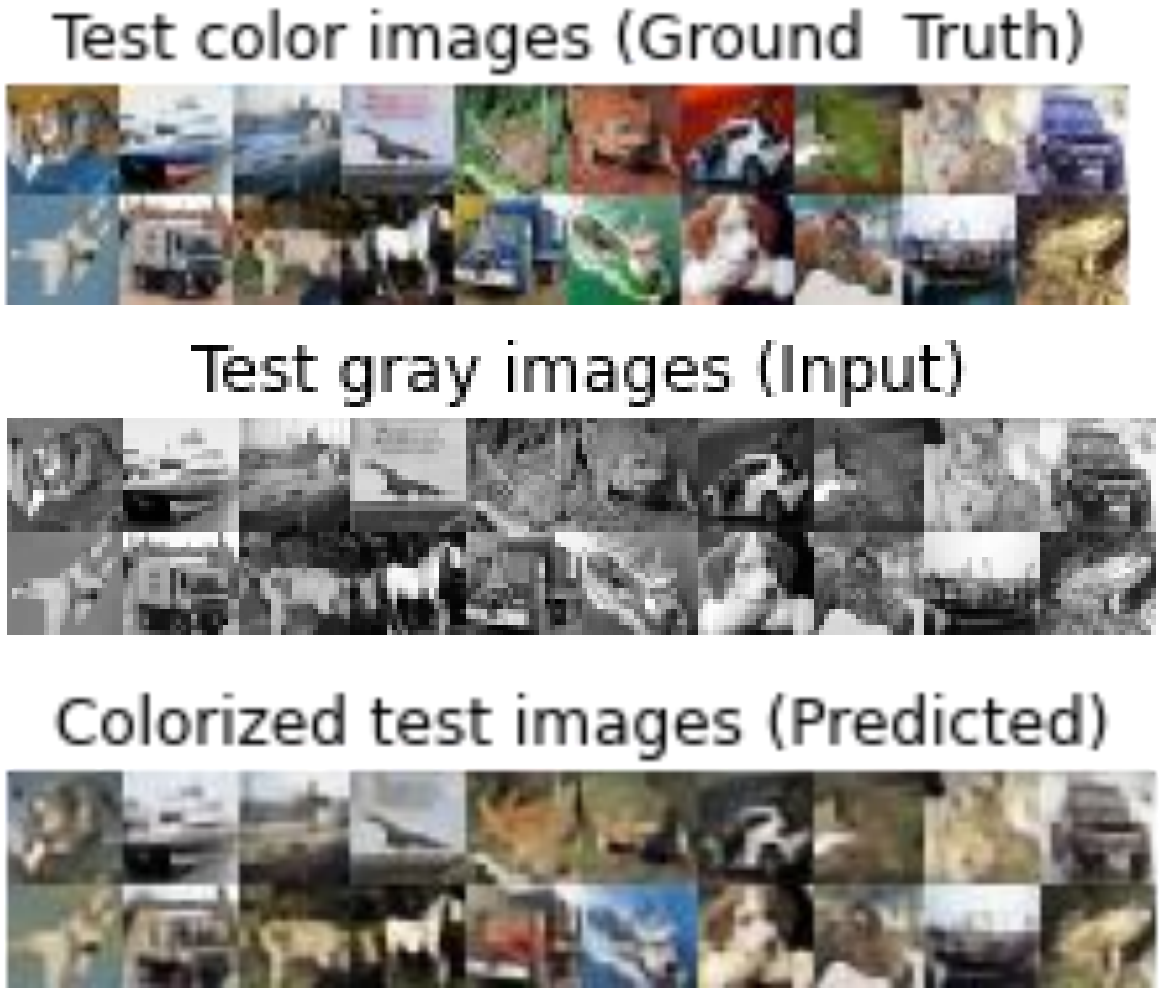

- **Training:** pairs of the grayscale and color images
- **Application:** new grayscale images (from the same distribution)
- **Concern:** has to be from the same distribution

Image Denoising

Ground truth

Noisy input

Reconstruction

- **Training:** pairs of the high-noise and low-noise images
- **Application:** new high noise images (from the same distribution)
- **Risk:** has to be from the same distribution

Variational Autoencoders

Diederik P. Kingma

FOLLOW

Other names

Research Scientist, Google Brain
Verified email at google.com - Homepage

Machine Learning Deep Learning Neural Networks Generative Models Variational Inference

TITLE	CITED BY	YEAR
Adam: A Method for Stochastic Optimization DP Kingma, J Ba Proceedings of the 3rd International Conference on Learning Representations ...	141306	2014
Auto-Encoding Variational Bayes DP Kingma, M Welling arXiv preprint arXiv:1312.6114	26540	2013
Semi-Supervised Learning with Deep Generative Models DP Kingma, S Mohamed, DJ Rezende, M Welling Advances in Neural Information Processing Systems, 3581-3589	2946	2014

- Variational Autoencoder (VAE): uses “reparameterization trick” to sample from the latent space
- Can be used for same tasks as AE
- Have a much better-behaved latent space: disentanglement of the representations

VAE Training

Latent manifold → Image space

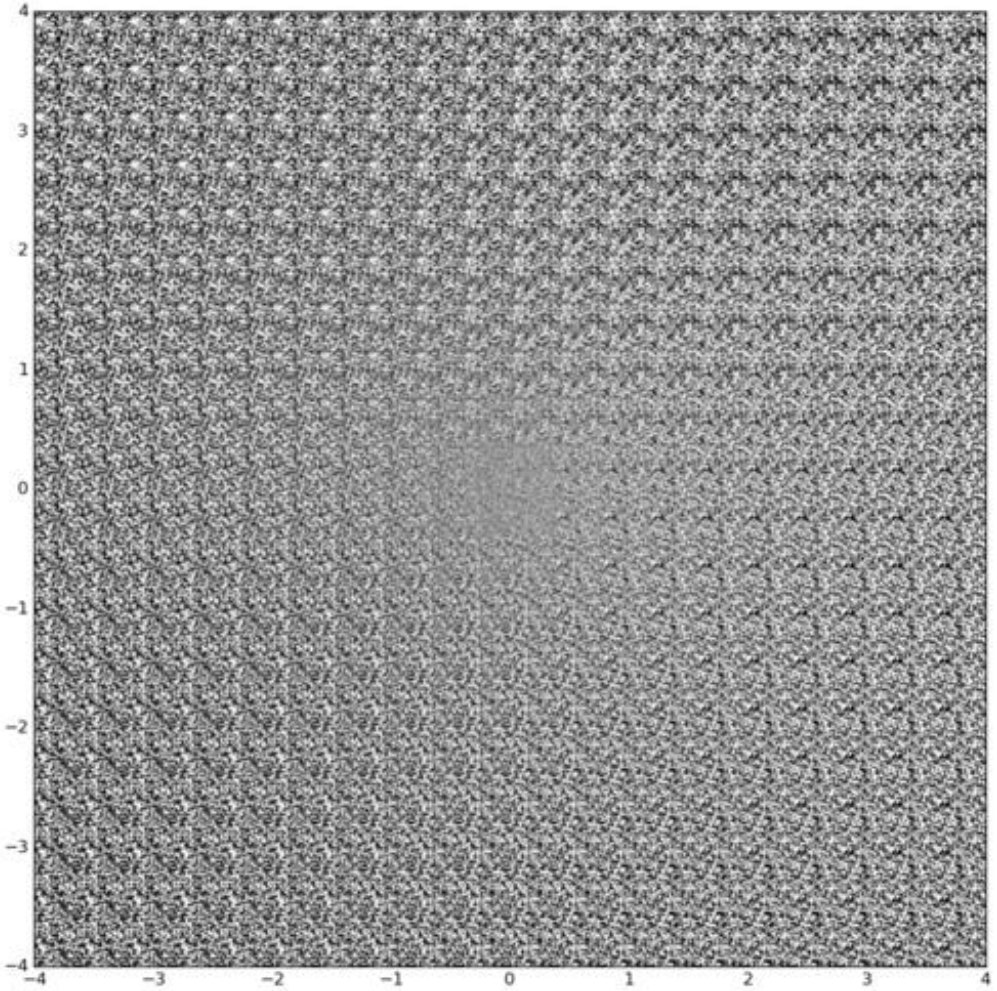

Image space → Latent space

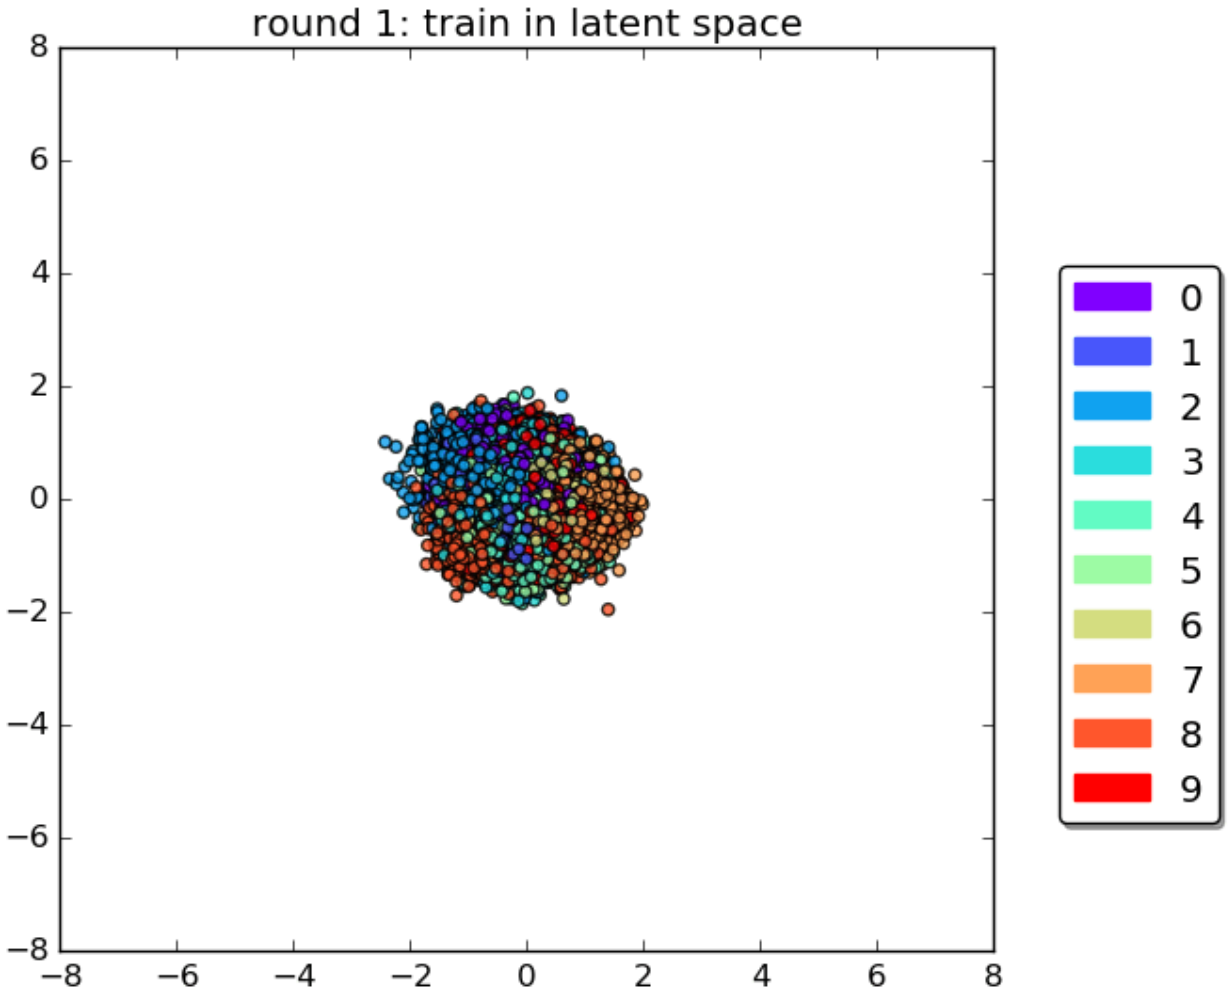

Autoencoder latent representation

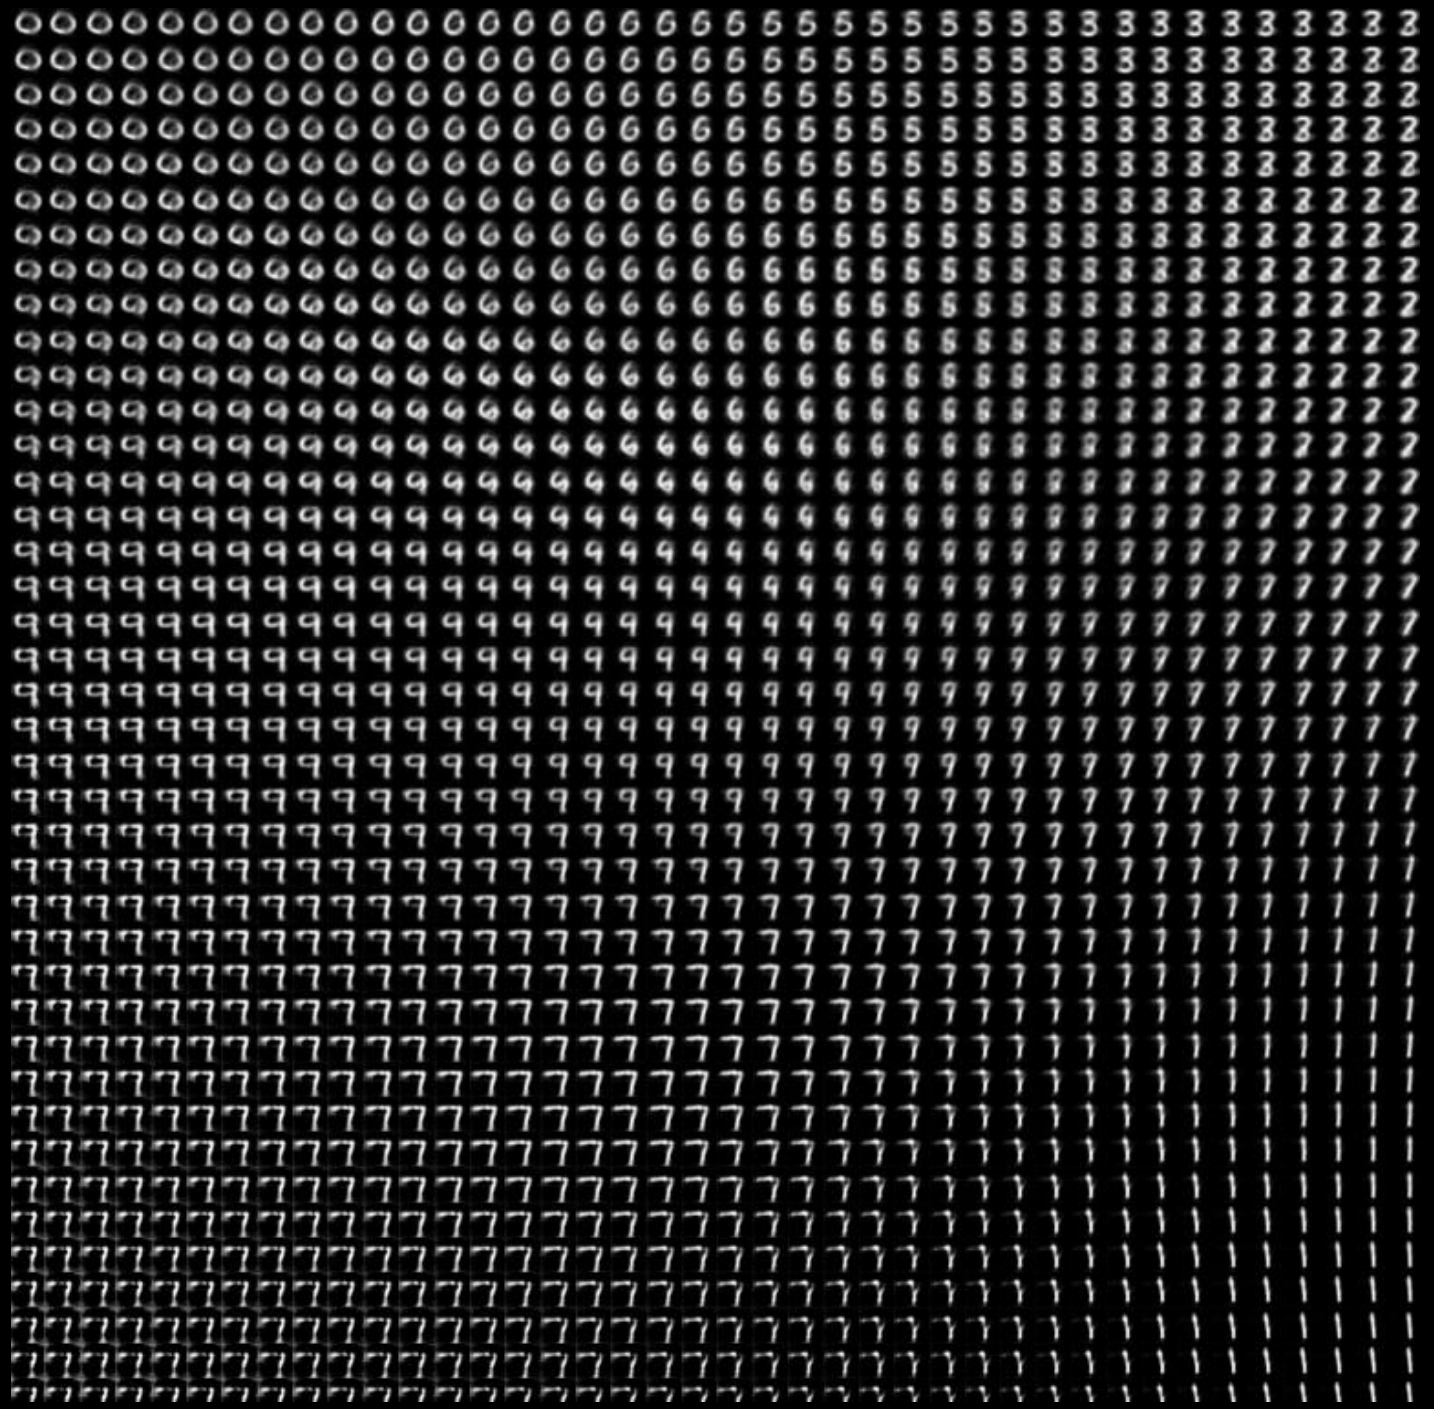

Autoencoder latent representation (digit 7)

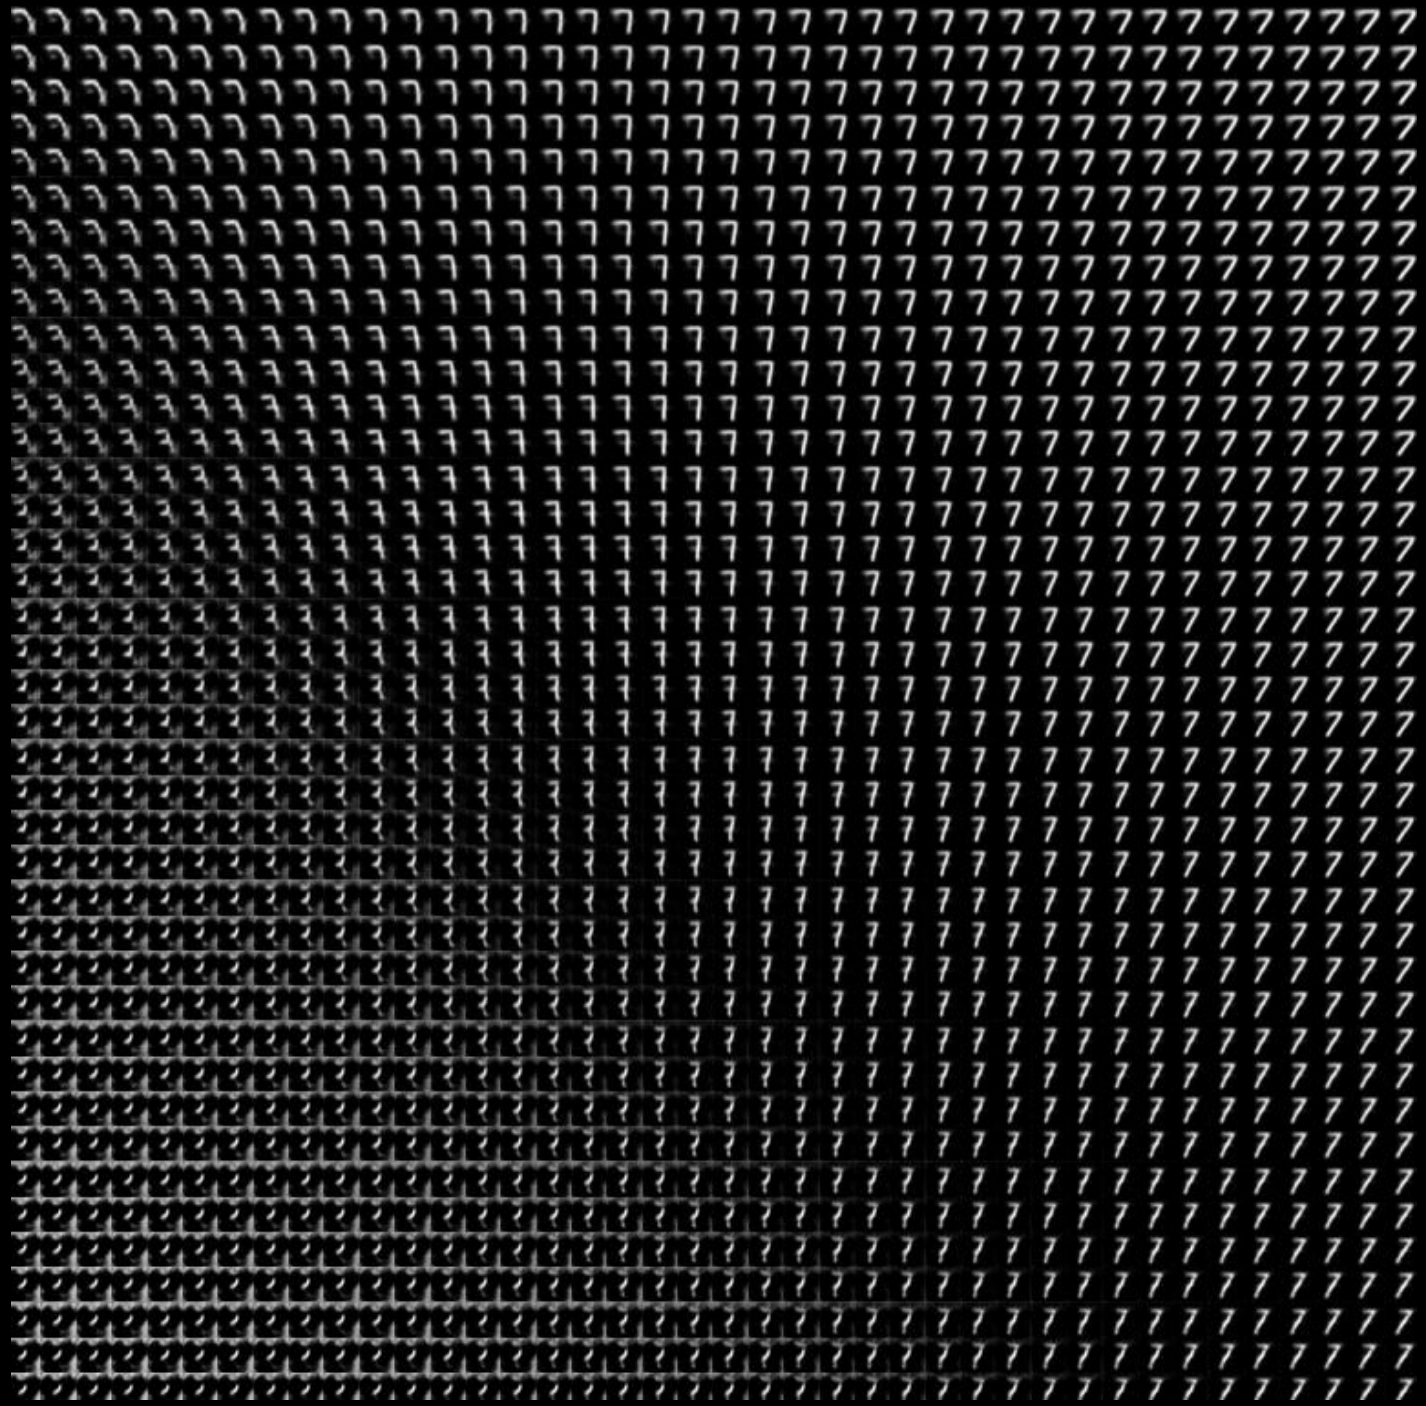

VAE latent representation

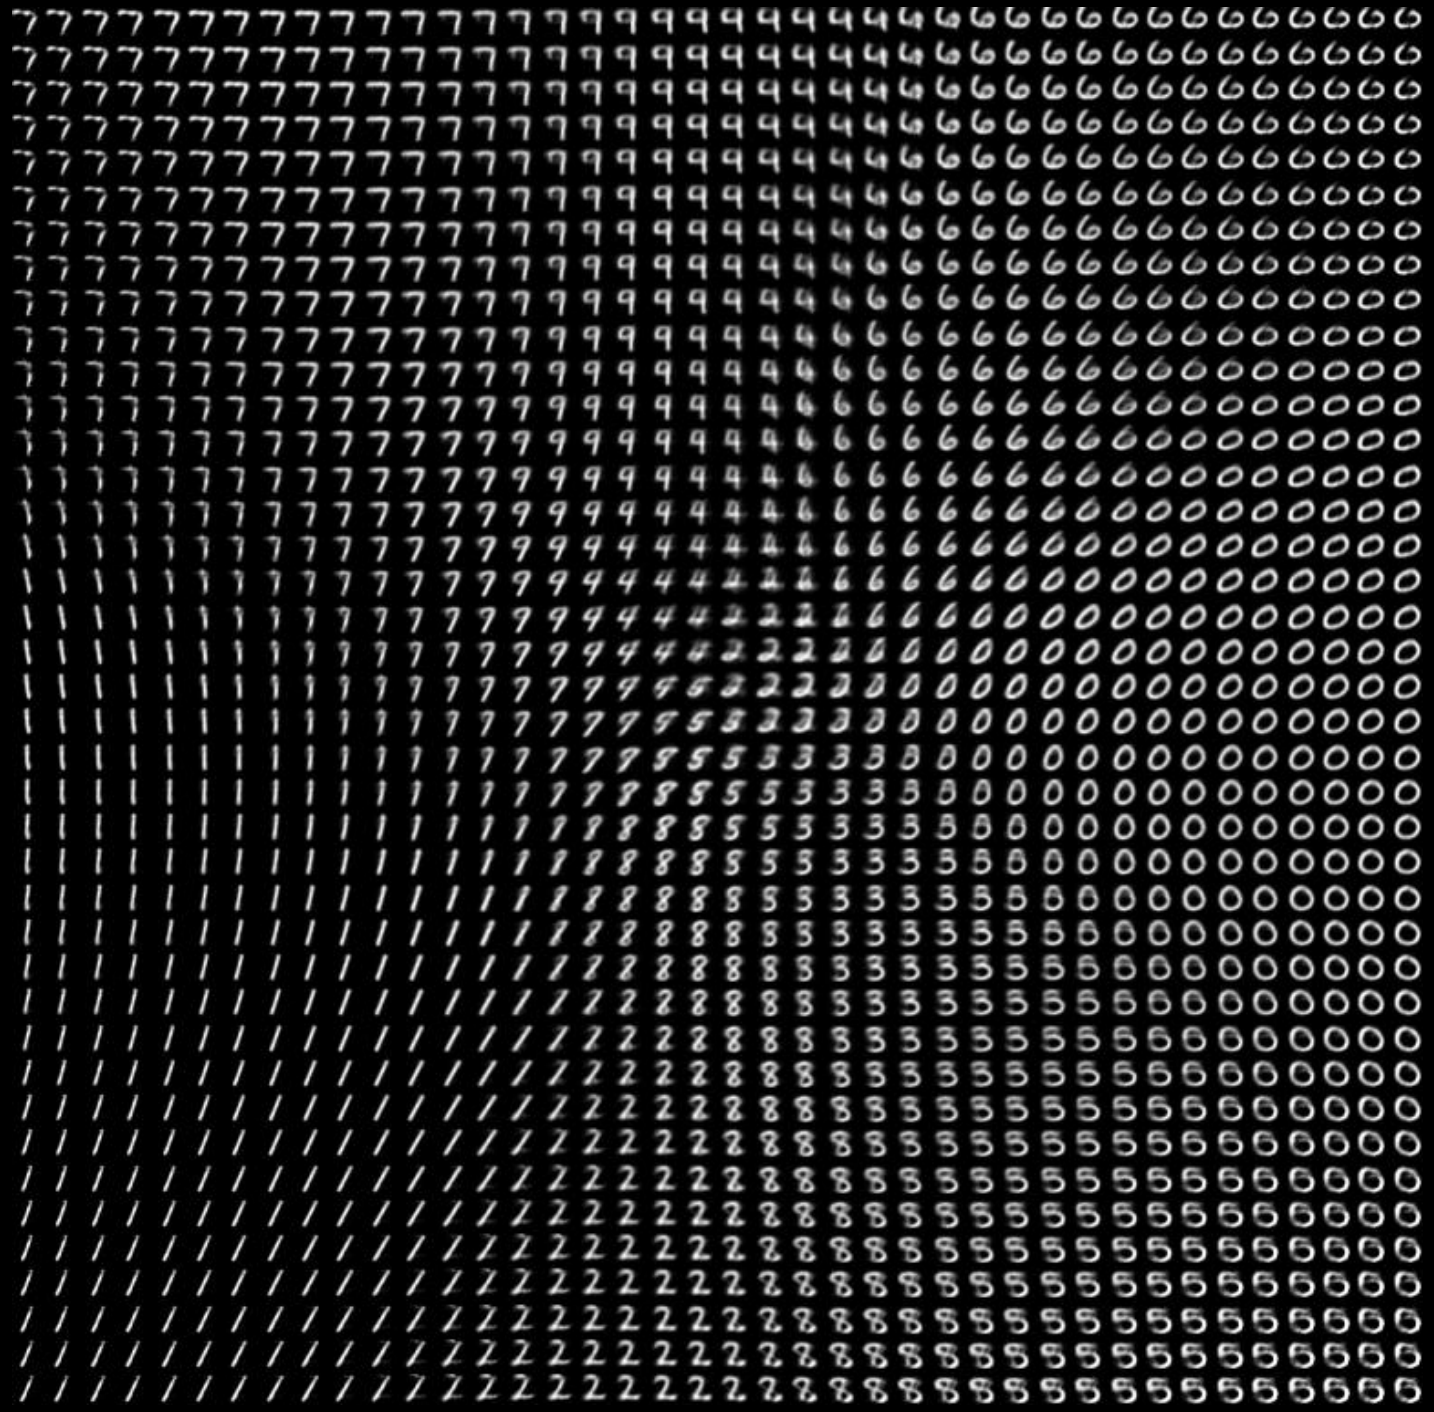

VAE latent representation (digit 7)

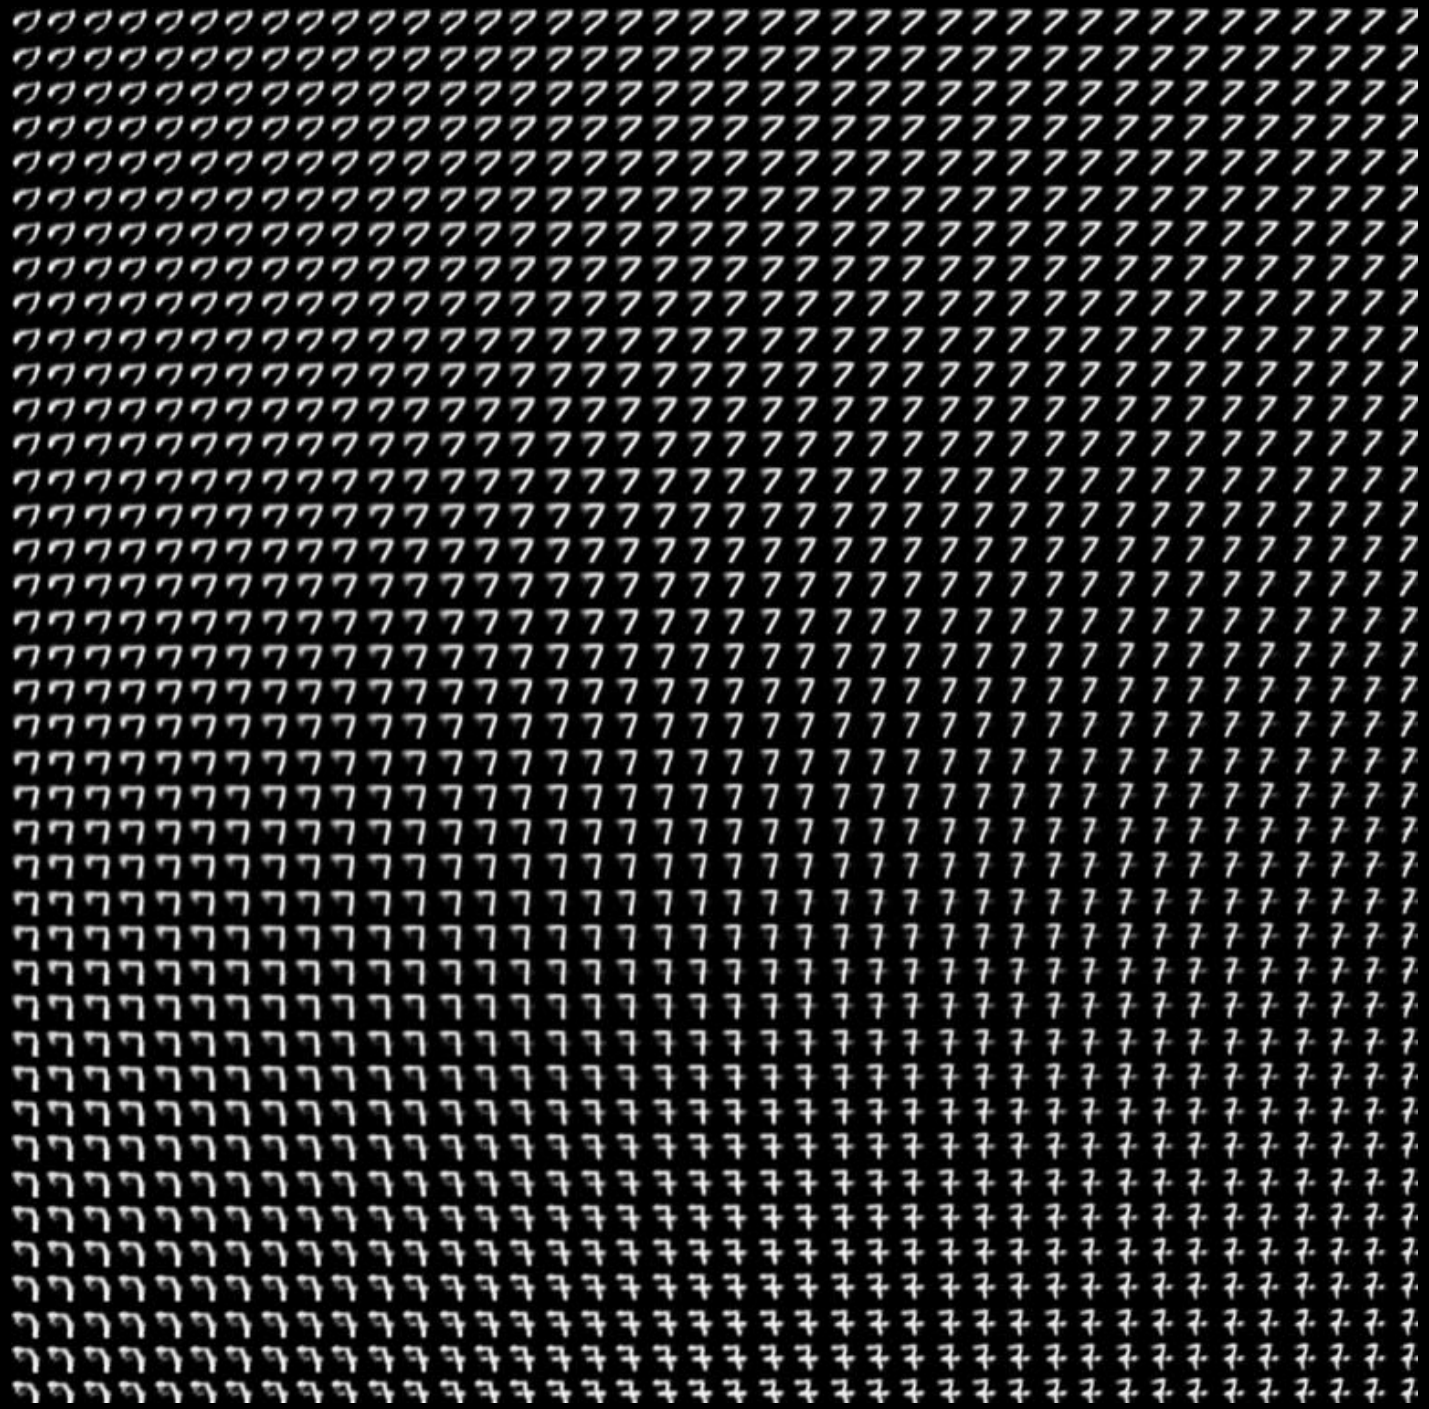

VAE latent representation (digit 8)

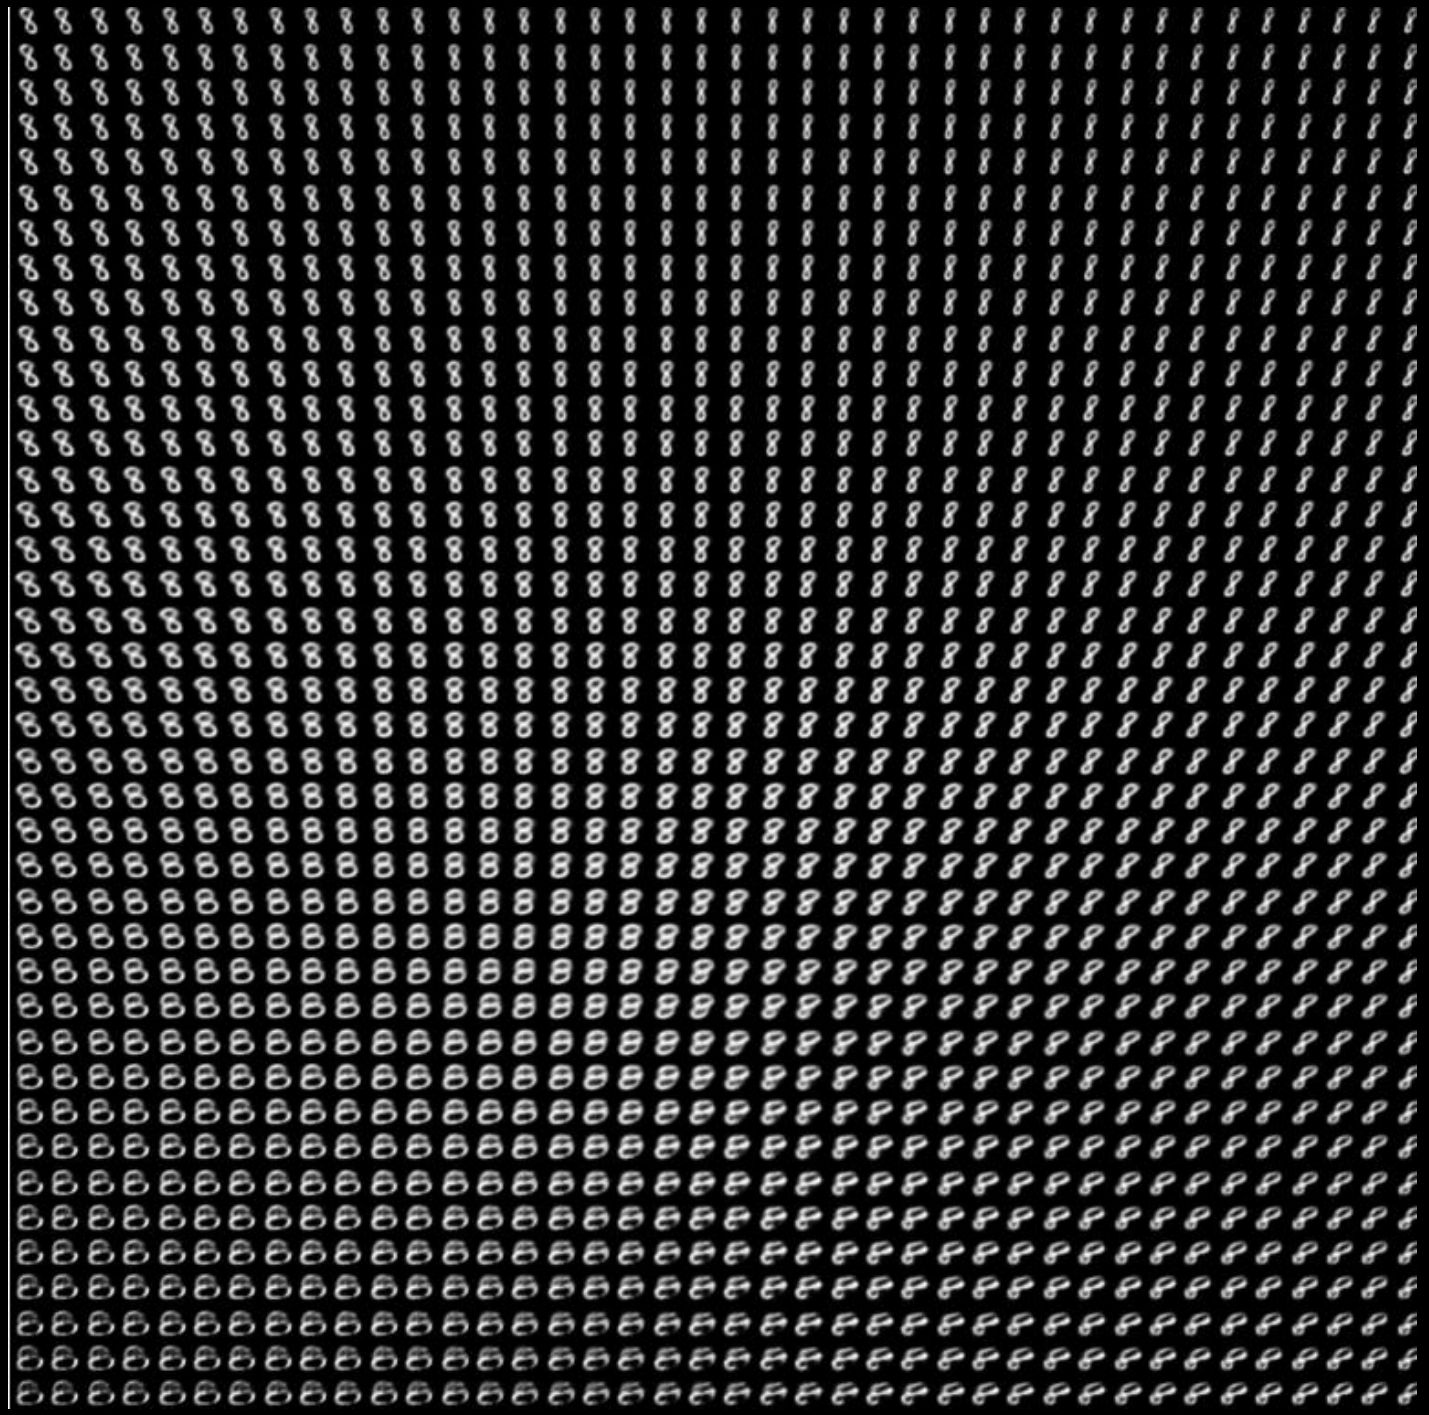

Word Embeddings

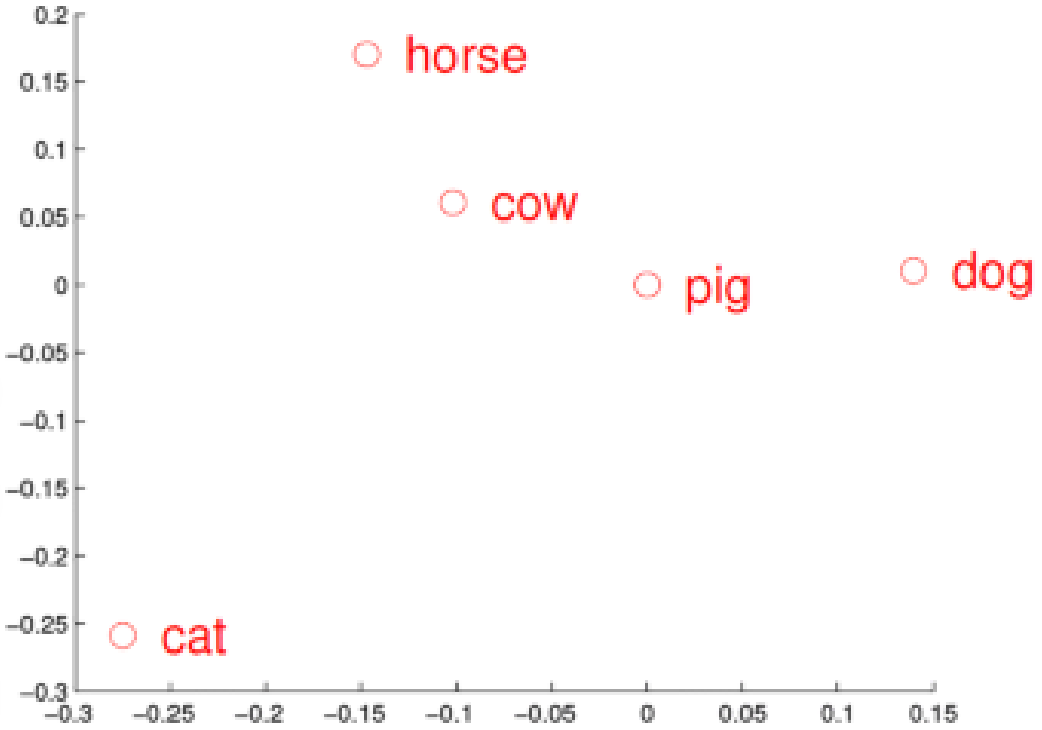

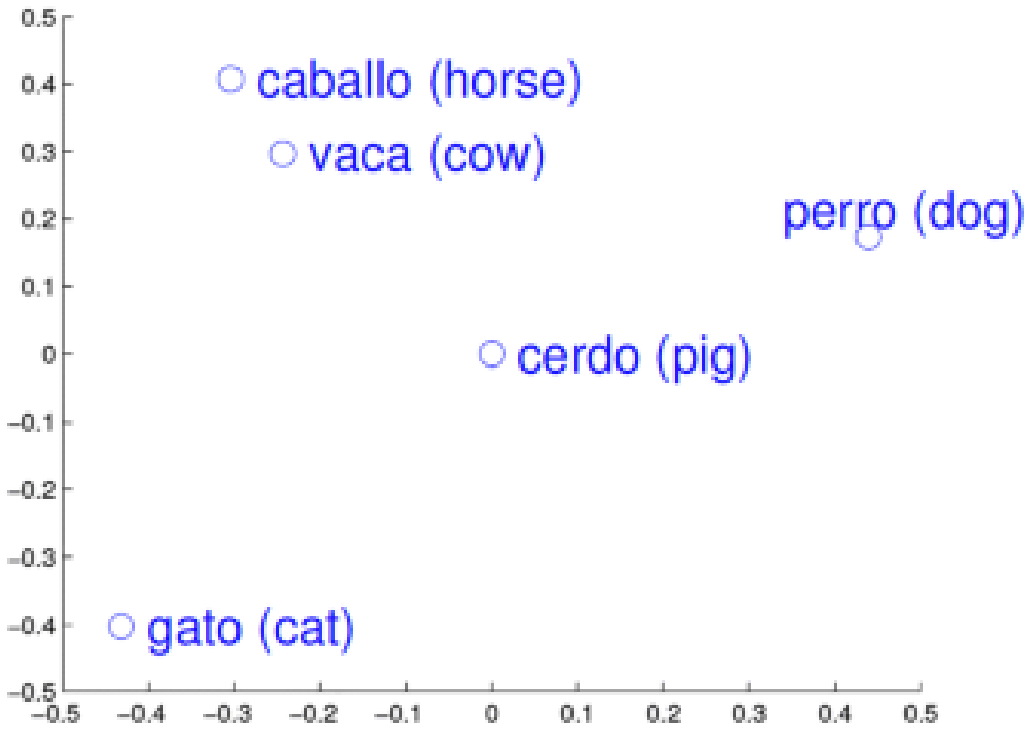

https://medium.com/geekculture/word-embeddings-in-ai-10a9e430cb59

Word Vectors

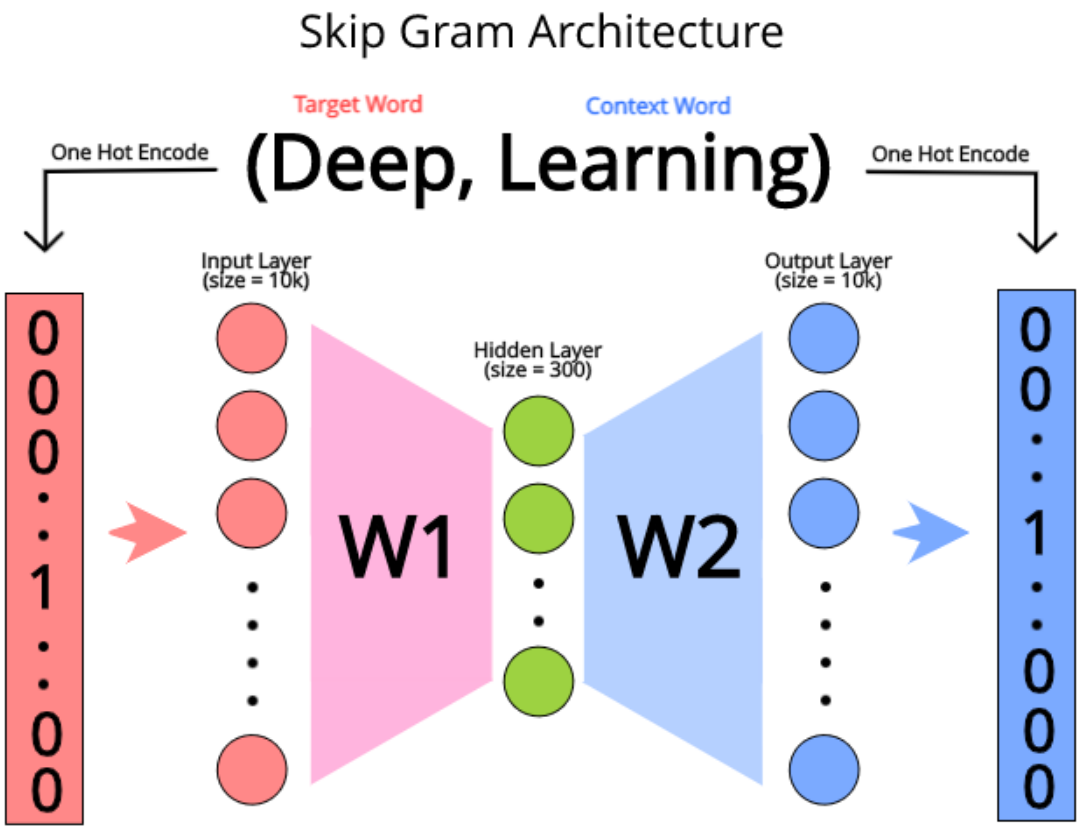

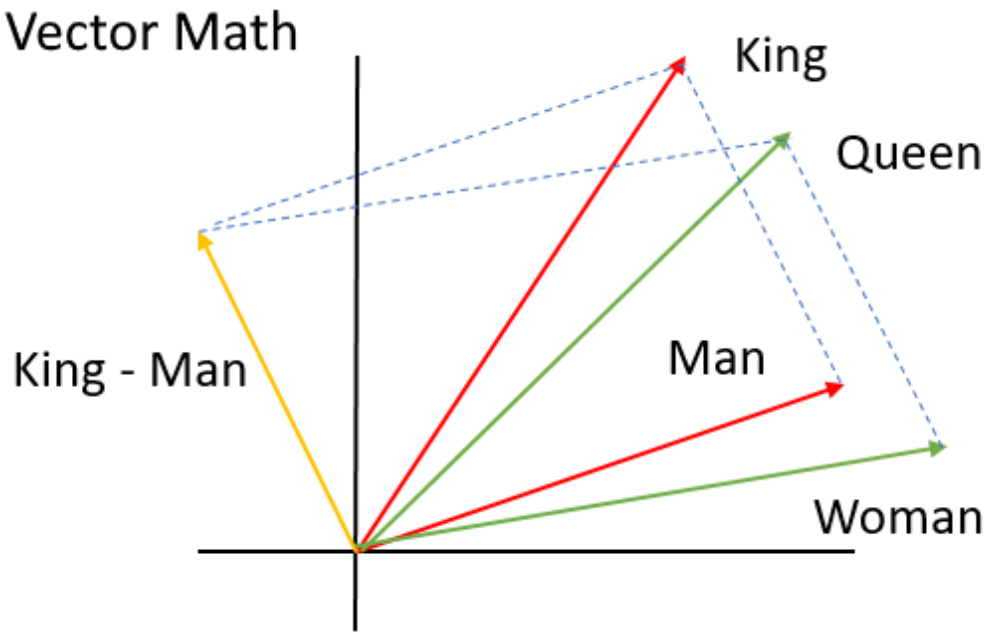

https://medium.com/analytics-vidhya/word-embeddings-in-nlp-word2vec-glove-fasttext-24d4d4286a73

Changing Attributes

https://rtoledo.me/post/2021-05-31-edit-face-attributes-using-vae/edit-face-attributes-using-vae/

Changing Attributes

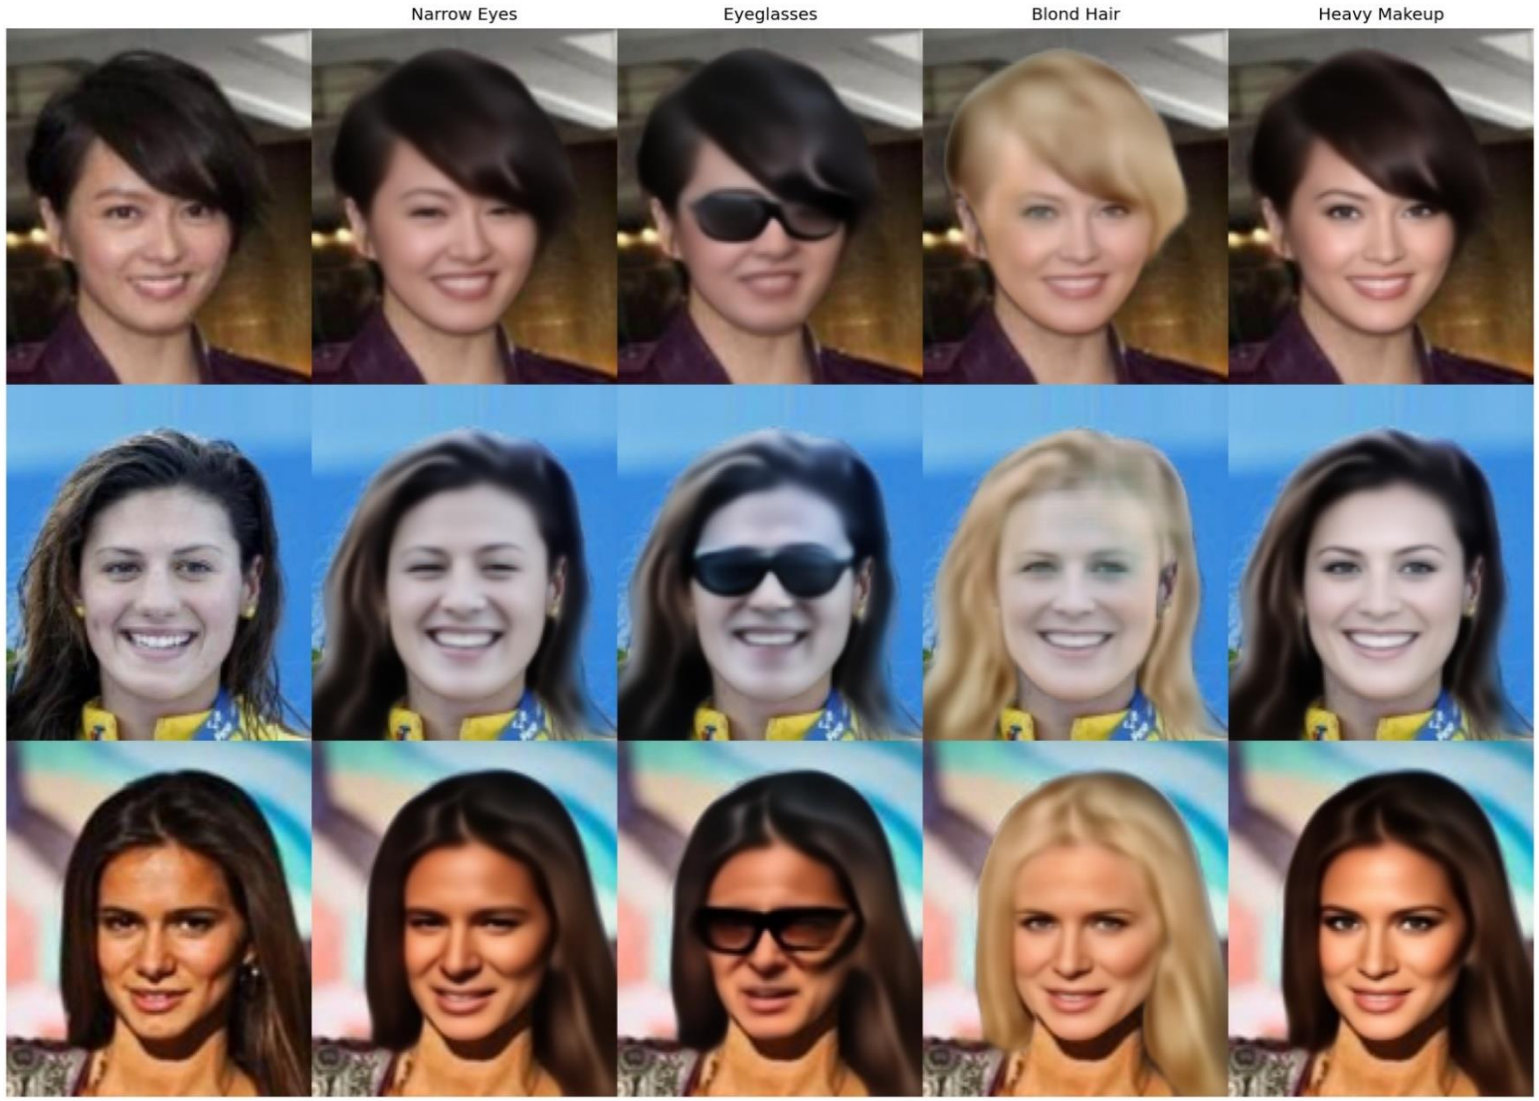

https://rtoledo.me/post/2021-05-31-edit-face-attributes-using-vae/edit-face-attributes-using-vae/

Conditional VAE

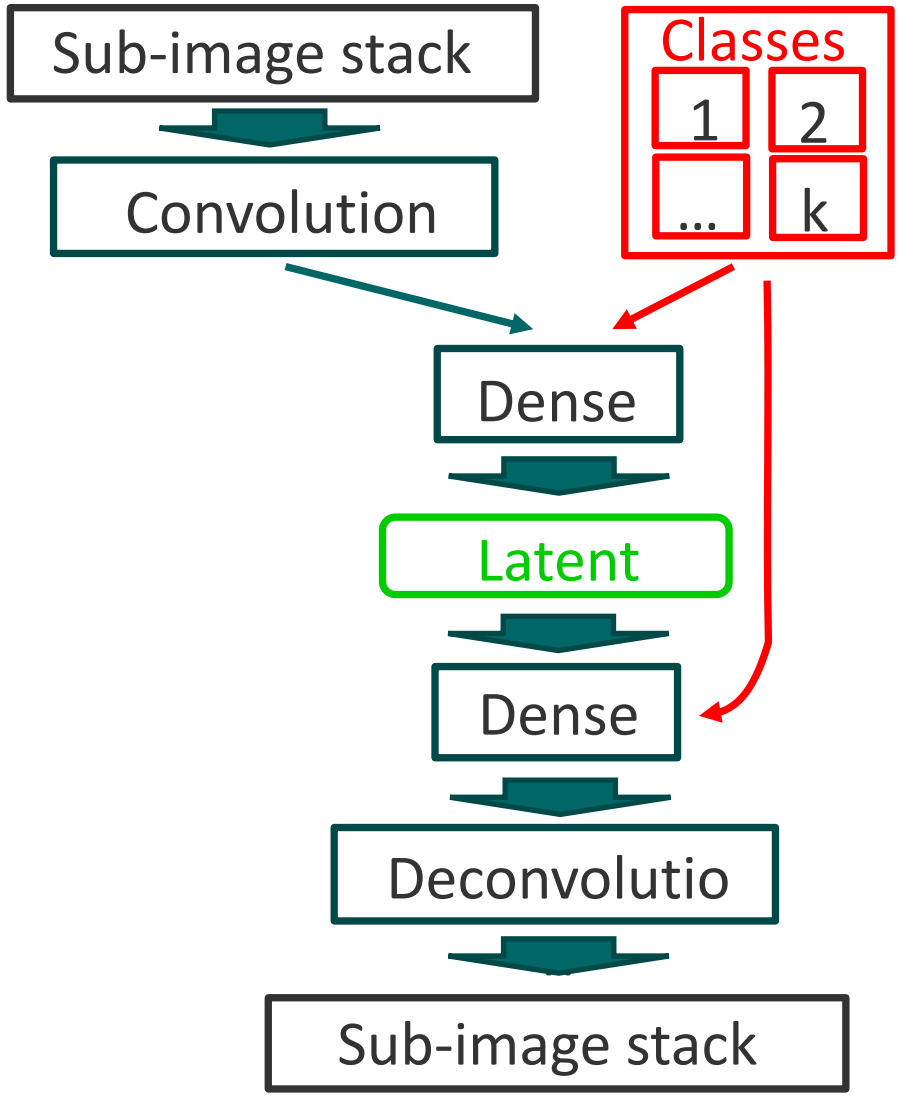

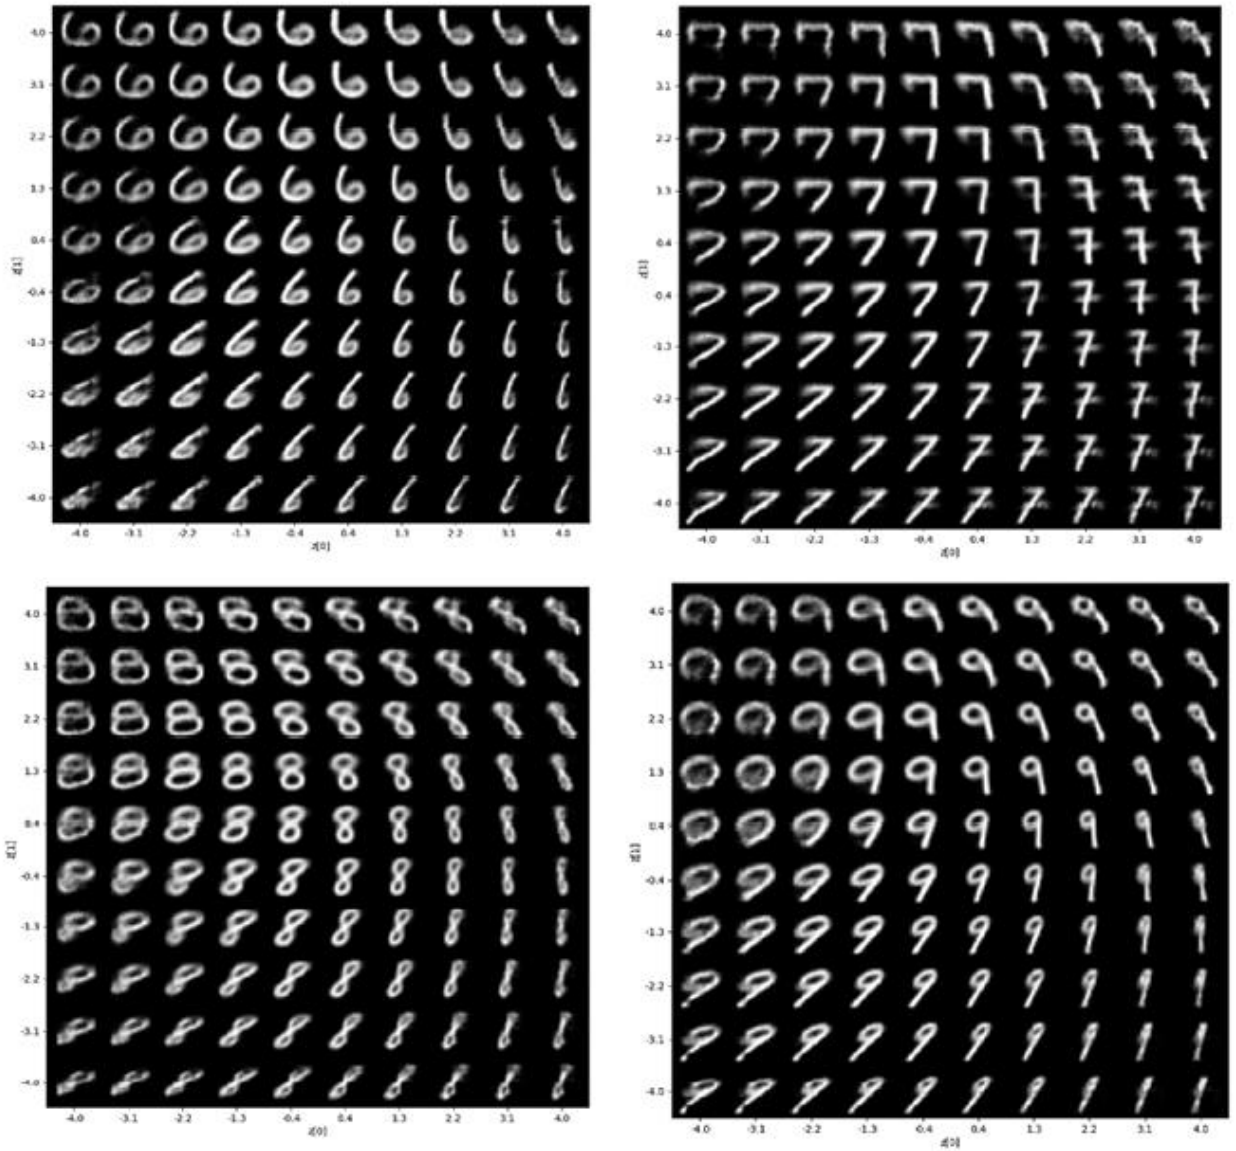

Note the trends in the latent representation for each digit: disentanglement of the representations

(R)VAE on Cards

Introduce the **cards** data set:

- Classical 4 hands (diamonds, clubs, pikes, hearts)
- Interesting similarities (pikes and hearts)
- And invariances on affine transforms (e.g. diamonds)

Cards 1: Low R (12 deg) and low S (1 deg)

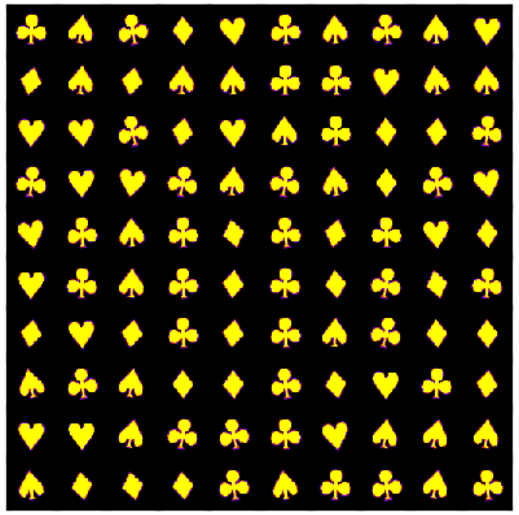

Cards 2: Low R (12 deg) and high S (20 deg)

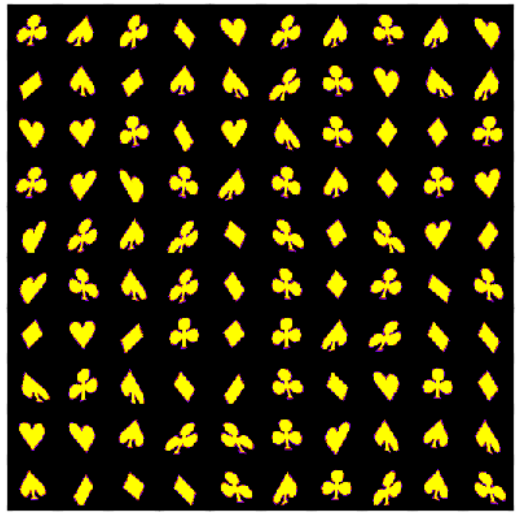

Cards 3: High R (120 deg) and Low S (1 deg)

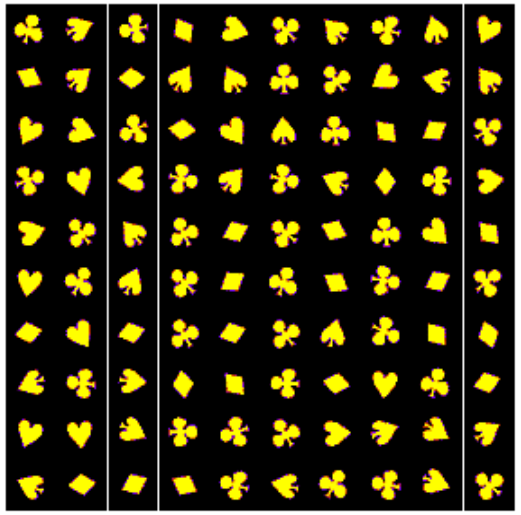

Cards 4: High R (120 deg) and high S (20 deg)

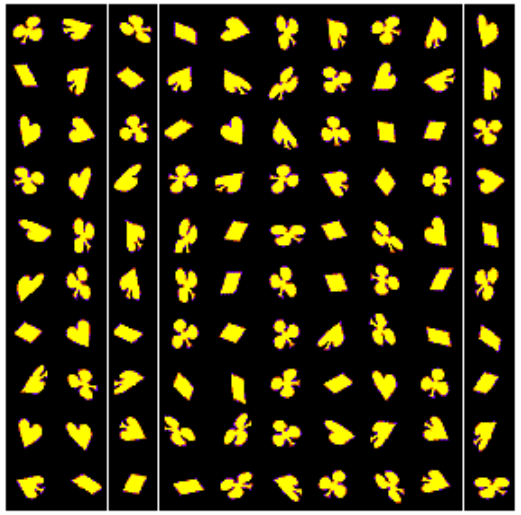

- Shear, rotations, and translations are **known** factors of variability (or traits) in data
- Can VAE disentangle representations and discover these factors of variability

VAE on Cards

Example of data

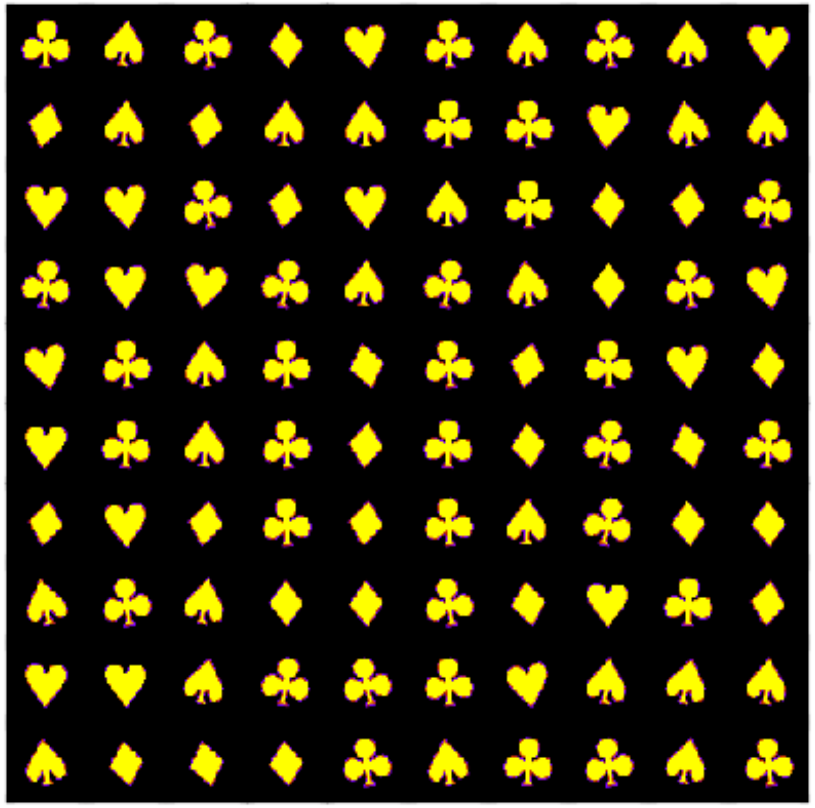

Latent representation

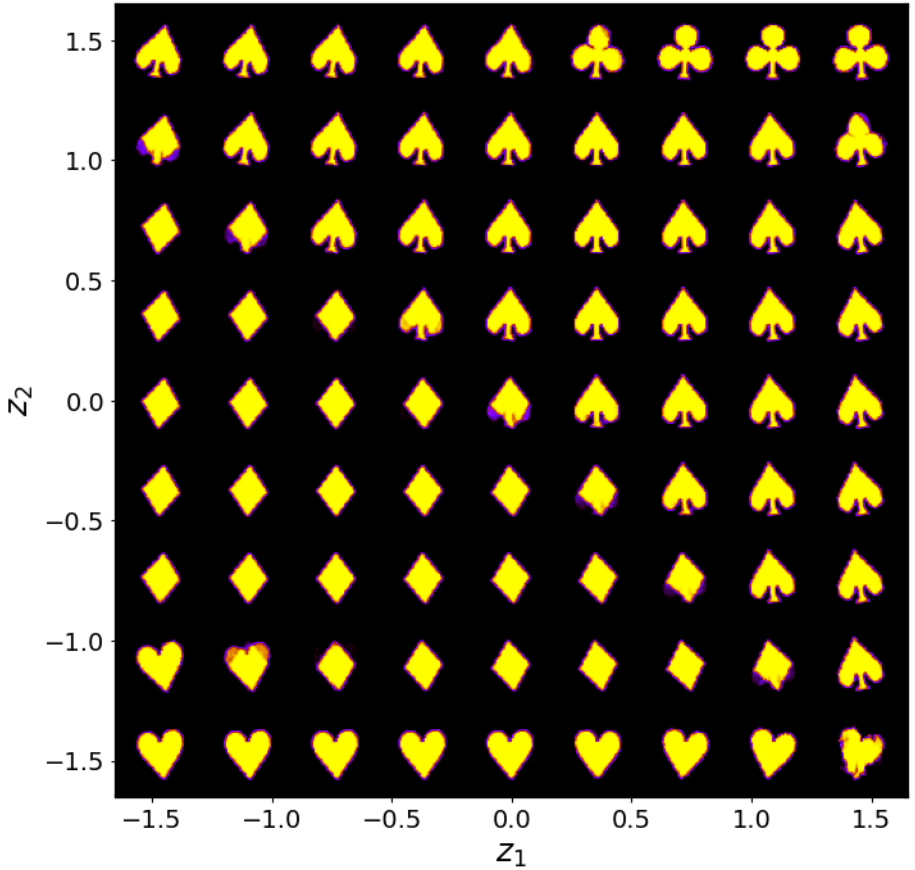

Cards 1: Low rotation (12 deg) and low shear (1 deg)

VAE on Cards

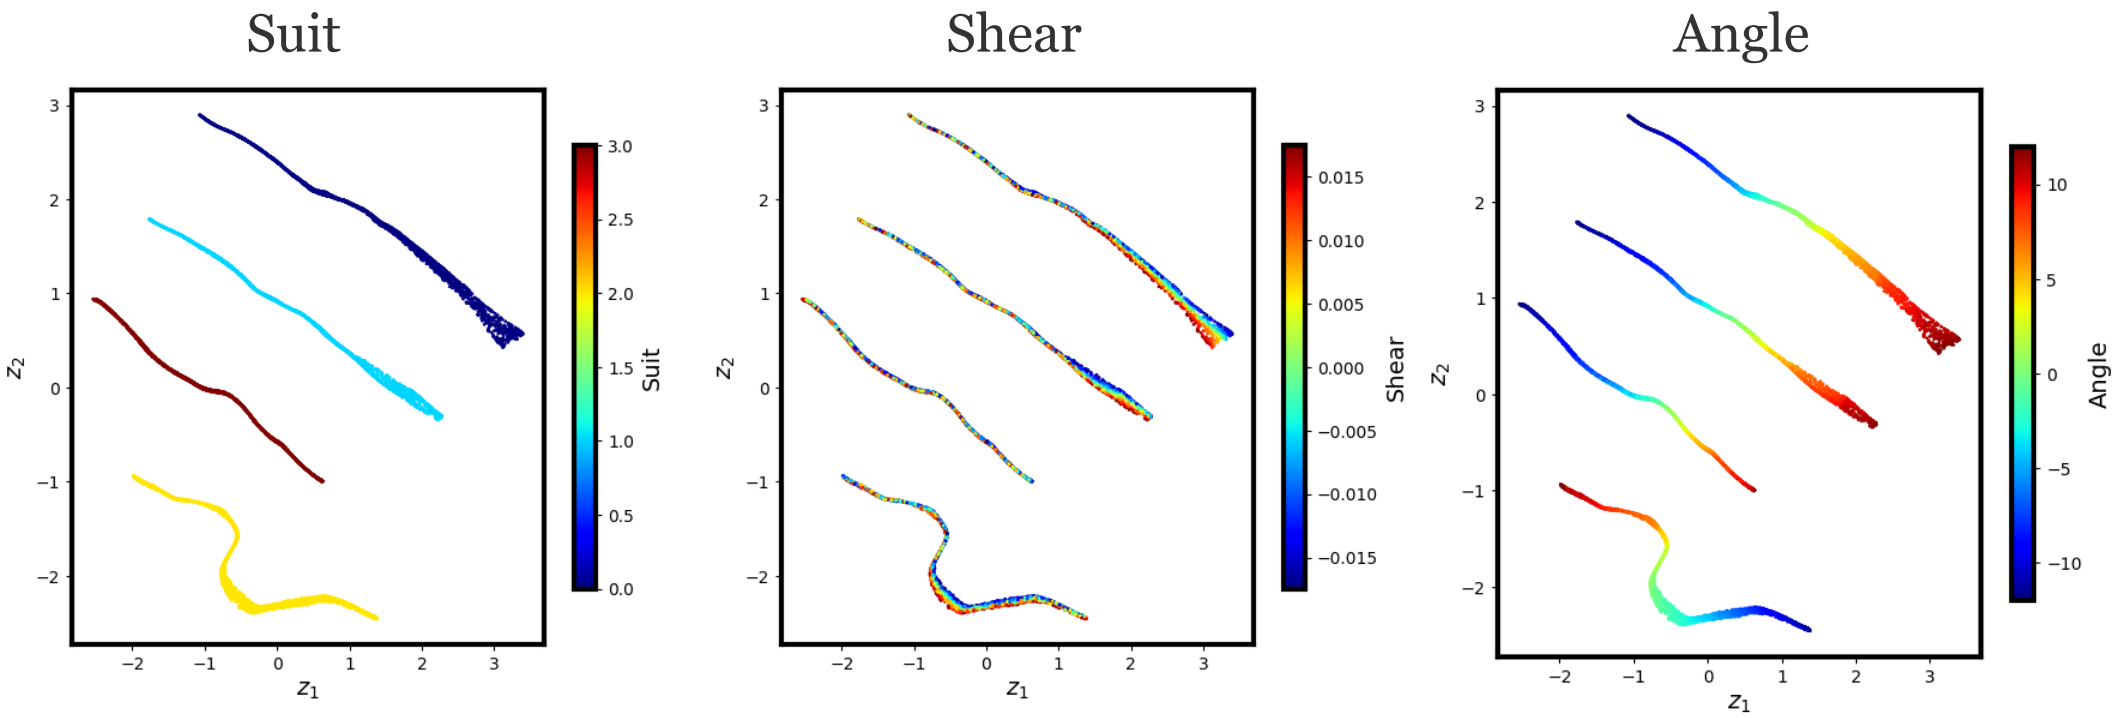

Cards 1: Low rotation (12 deg) and low shear (1 deg)

VAE on Cards

Example of data

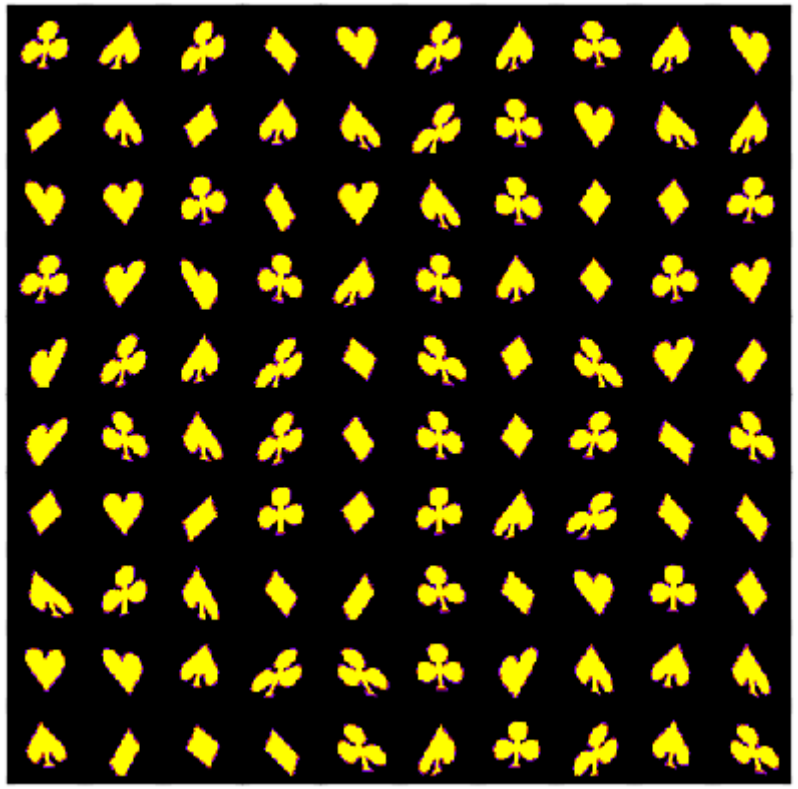

Latent representation

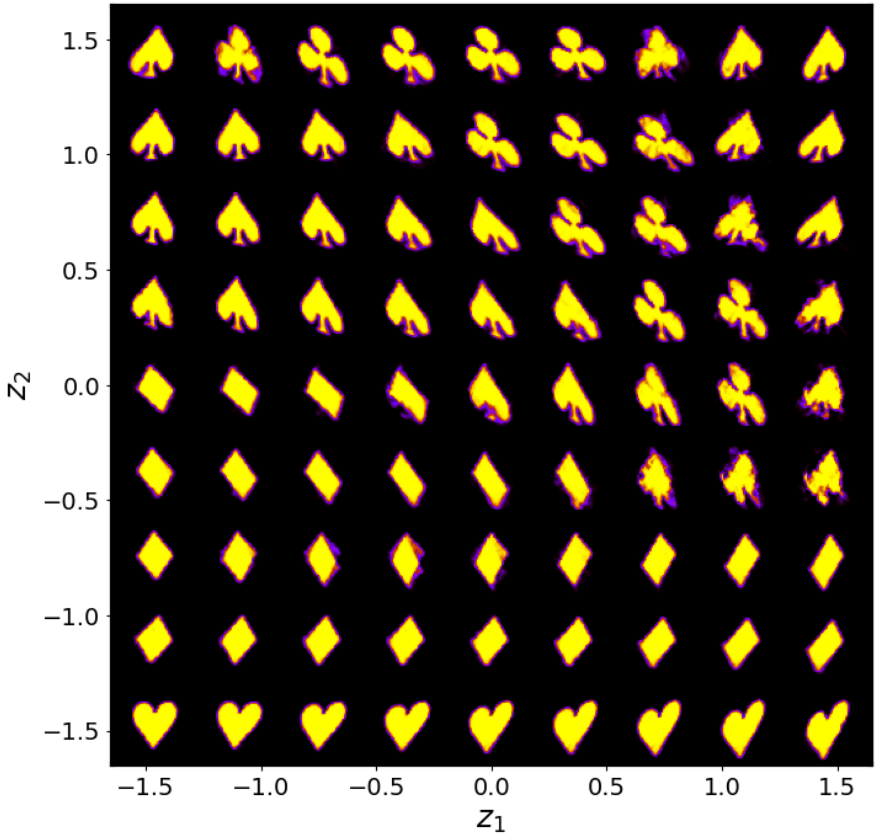

Cards 2: Low rotation (12 deg) and high shear (20 deg)

VAE on Cards

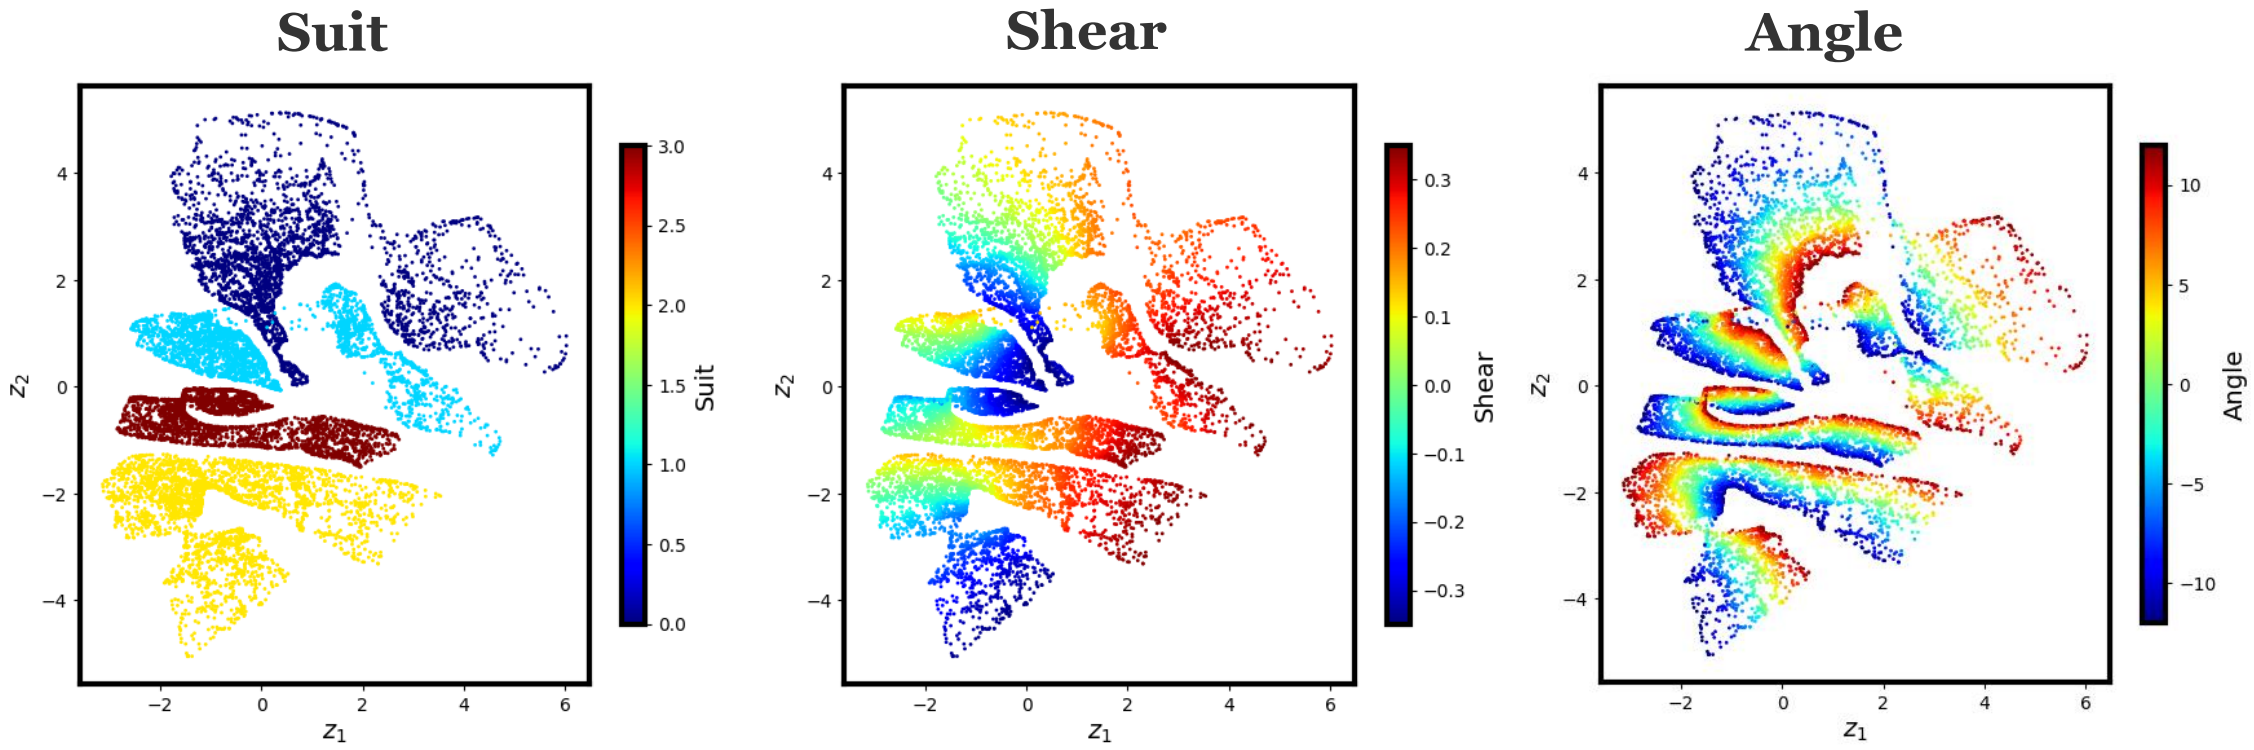

Cards 2: Low rotation (12 deg) and high shear (20 deg)

VAE on Cards

Example of data

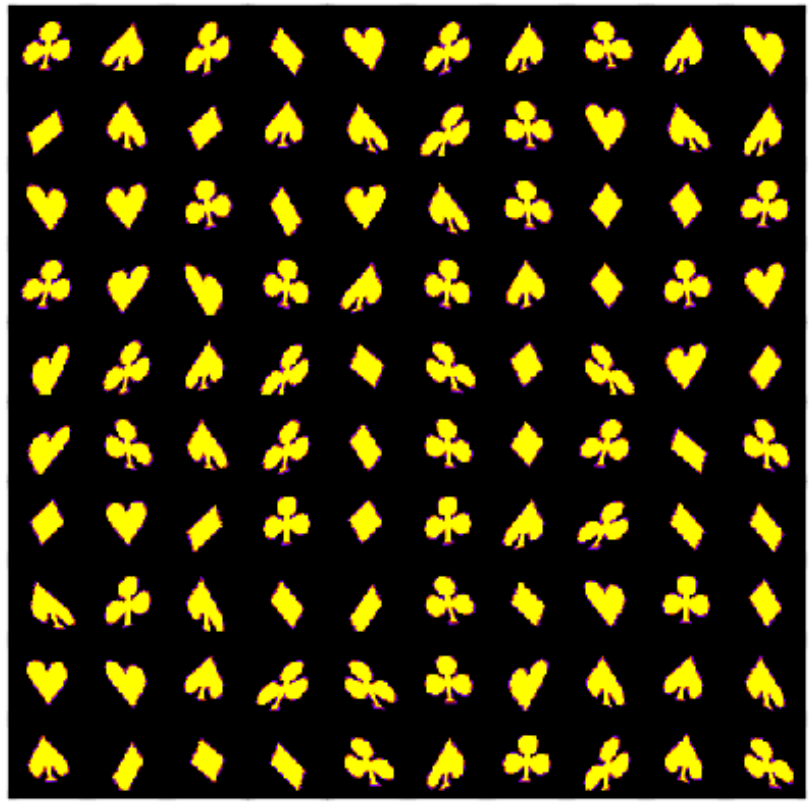

Latent representation

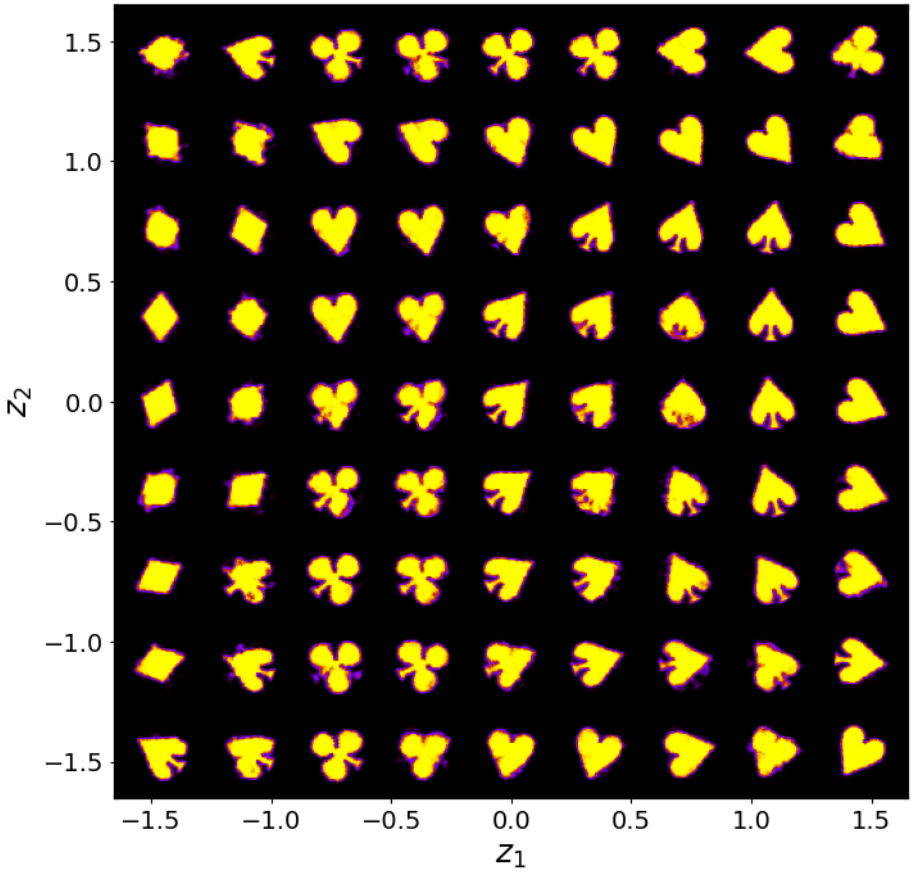

Cards 3: High rotation (120 deg) and low shear (1 deg)

VAE on Cards

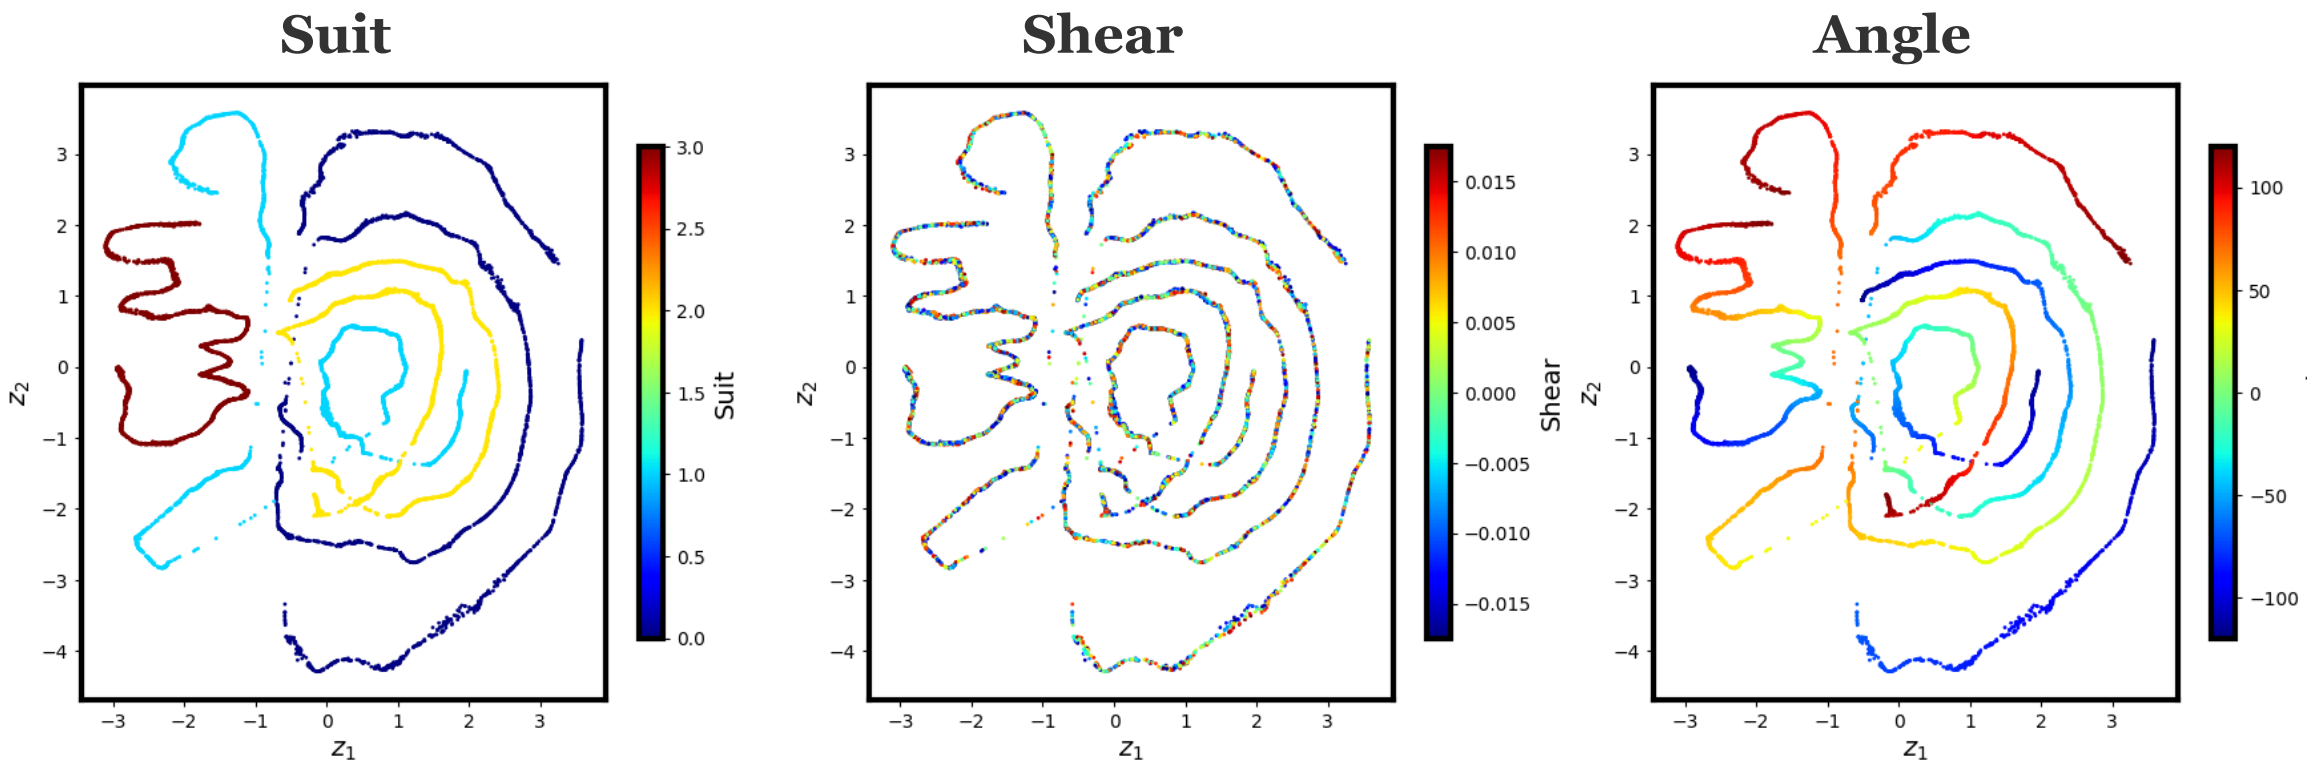

Cards 3: High rotation (120 deg) and low shear (1 deg)

VAE on Cards

Example of data

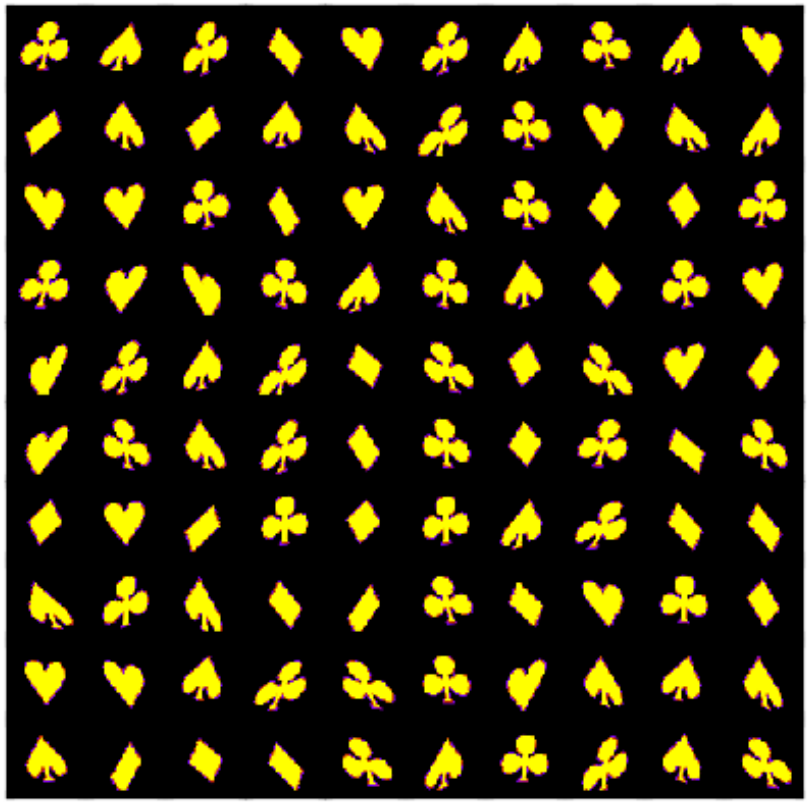

Latent representation

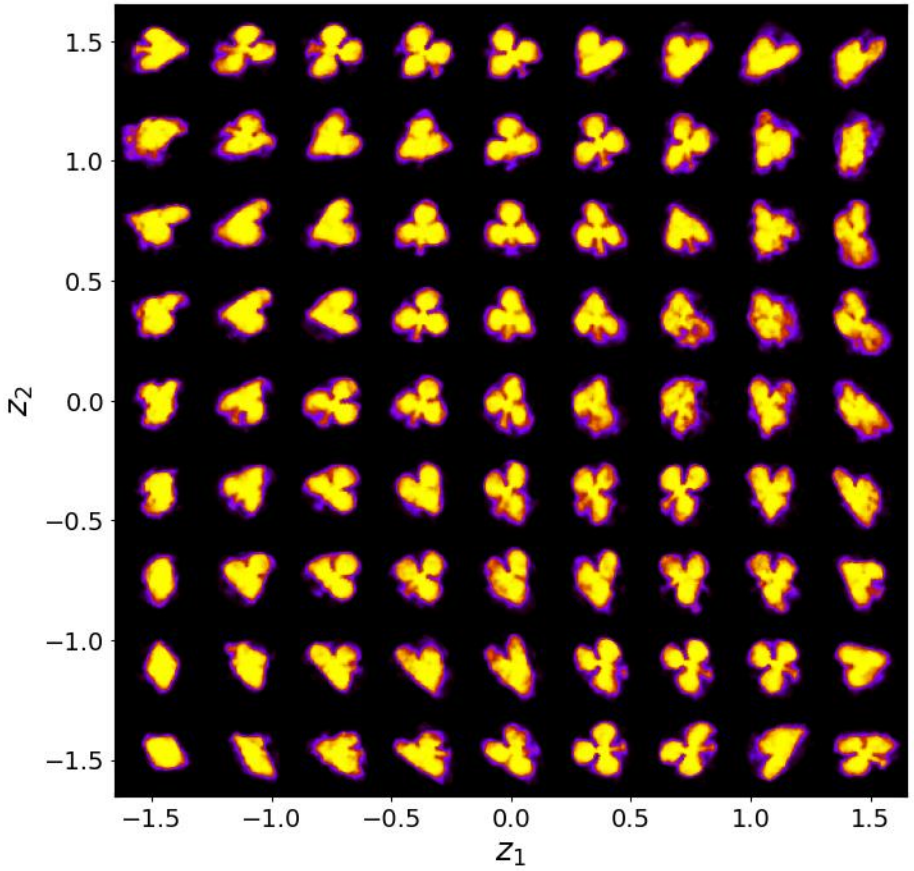

Cards 4: High rotation (120 deg) and high shear (20 deg)

VAE on Cards

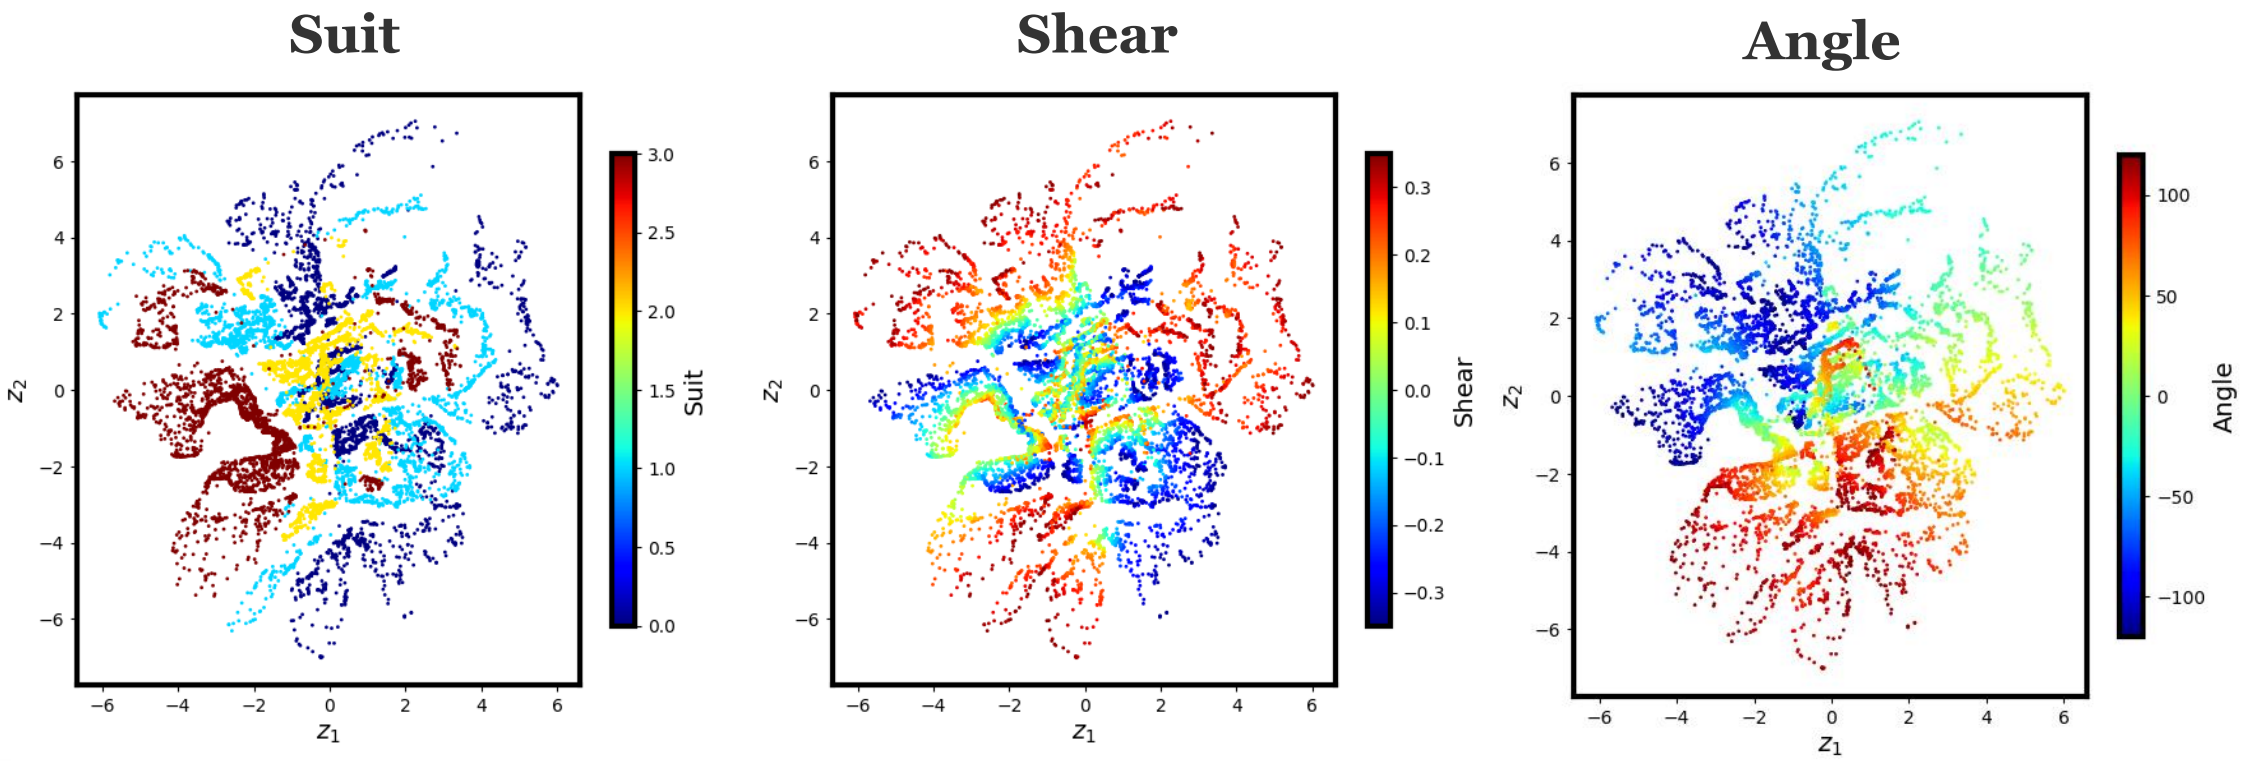

Cards 4: High rotation (120 deg) and high shear (20 deg)

Invariant VAE

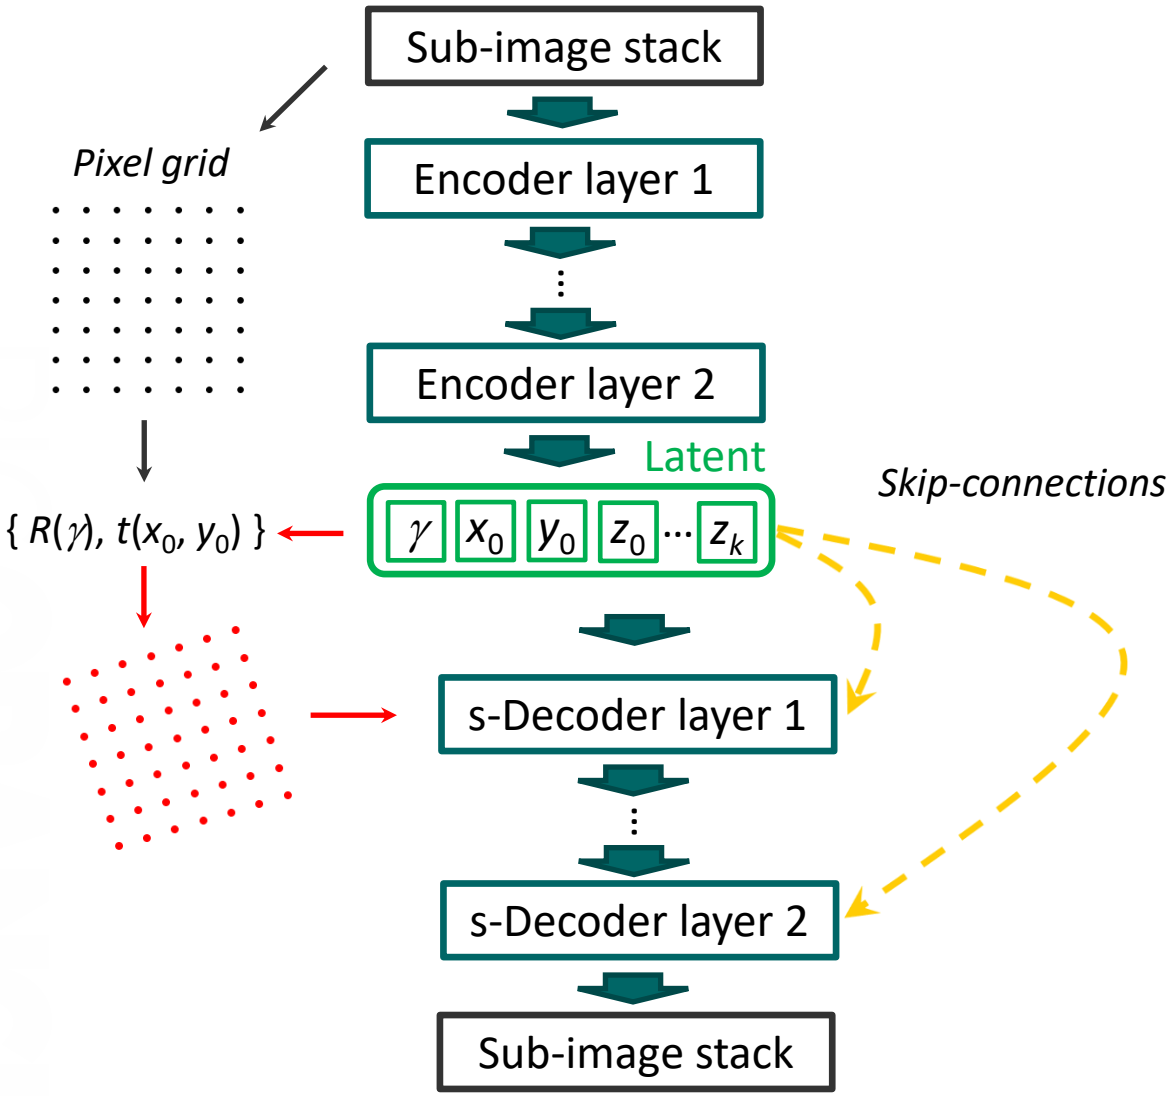

- Generative model is a function of spatial coordinate
- 3 additional latent variables to absorb rotations and shifts
- Disentangles rotations and translations from image content
- Ideal for analyzing microscopy sub-images on atomic level

$$
\begin{aligned}
&ELBO \\
&= Reconstruction\ Loss \\
&- D_{KL}\big(q(z|x)\|\mathcal{N}(0,I)\big) \\
&- D_{KL}\left(q(\gamma|x)\|\mathcal{N}\left(0,s_\gamma^2\right)\right) \\
&- D_{KL}\left(q(\Delta r|x)\|\mathcal{N}\left(0,s_{\Delta r}^2\right)\right)
\end{aligned}
$$

Regular VAE

Rotation

Translation

+ D_{KL}(physics-based “priors”) ?

+ D (physics) ?

Bepler *et al.*, NeurIPS 2019

rVAE on Cards

Example of data

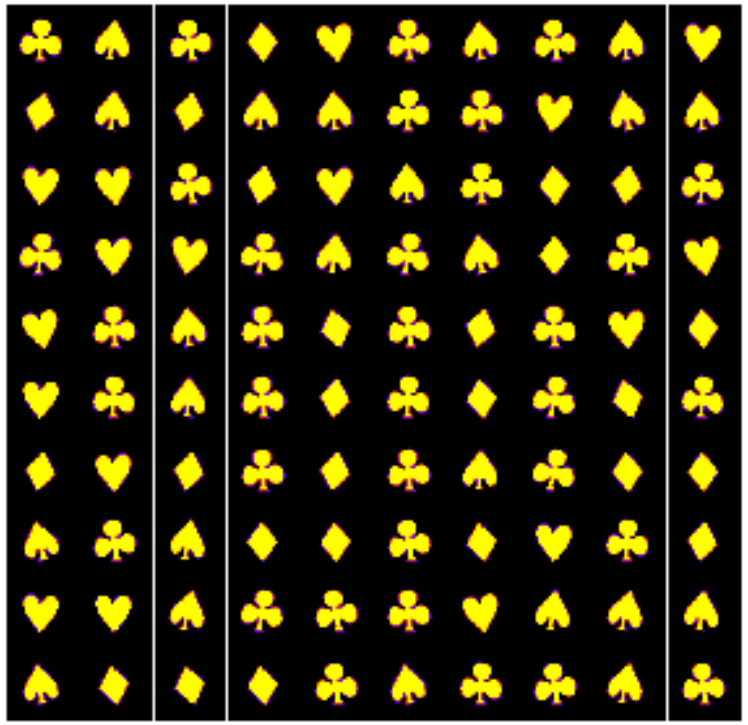

Latent representation

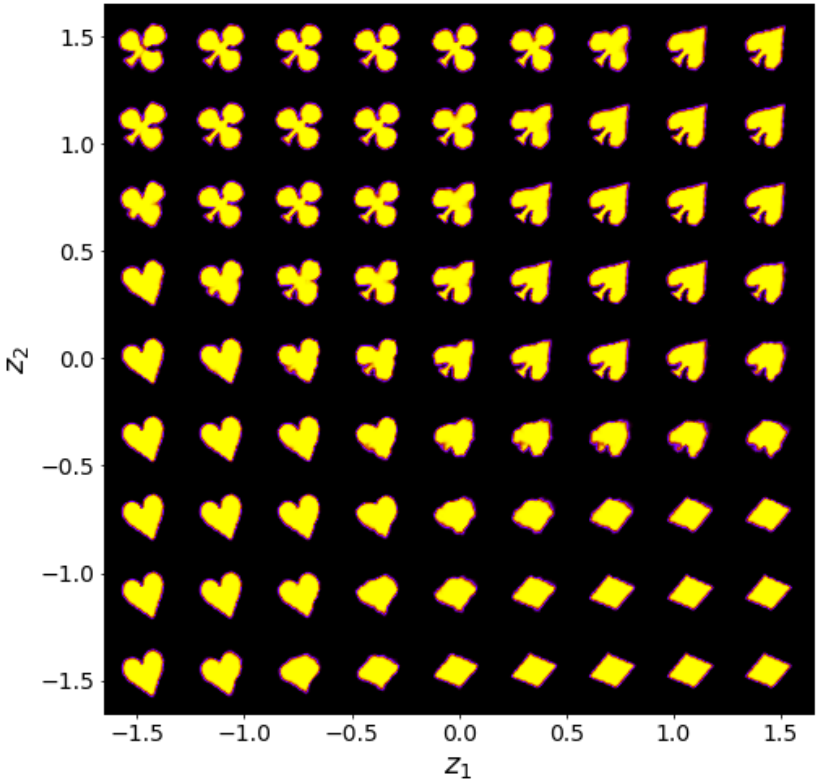

Cards 1: Low rotation (12 deg) and low shear (1 deg)

rVAE on Cards

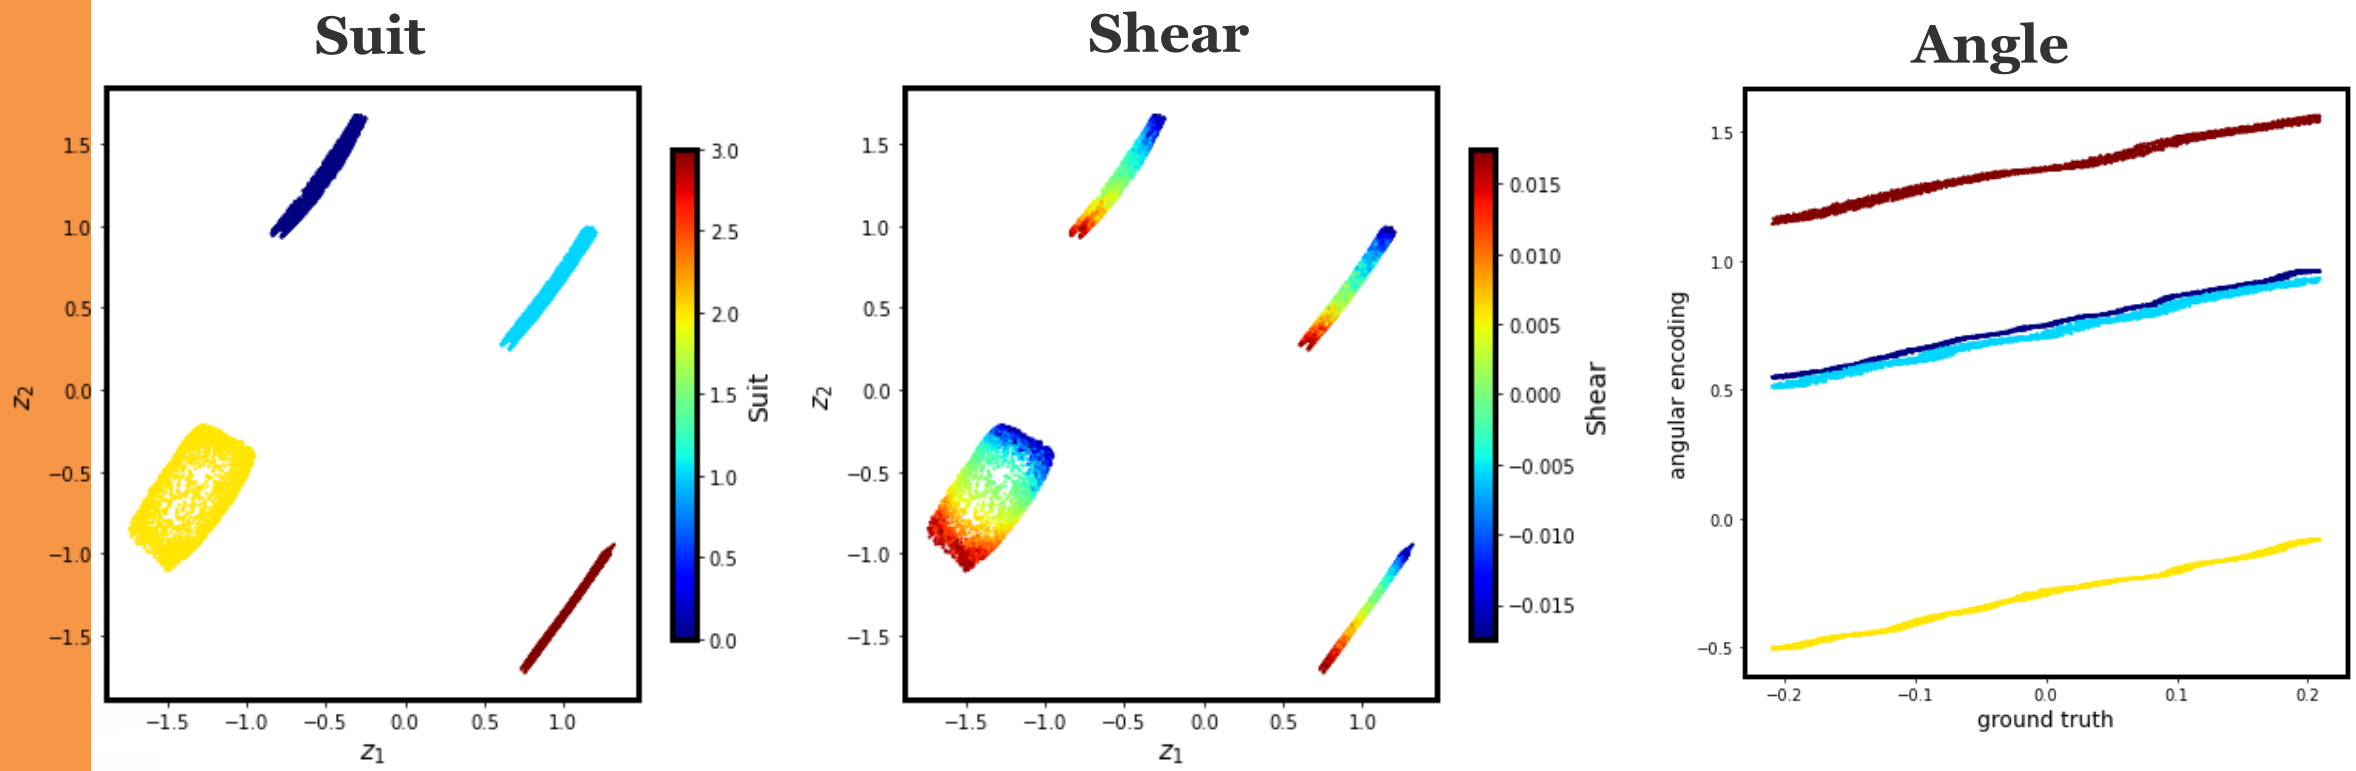

Cards 1: Low rotation (12 deg) and low shear (1 deg)

rVAE on Cards

Example of data

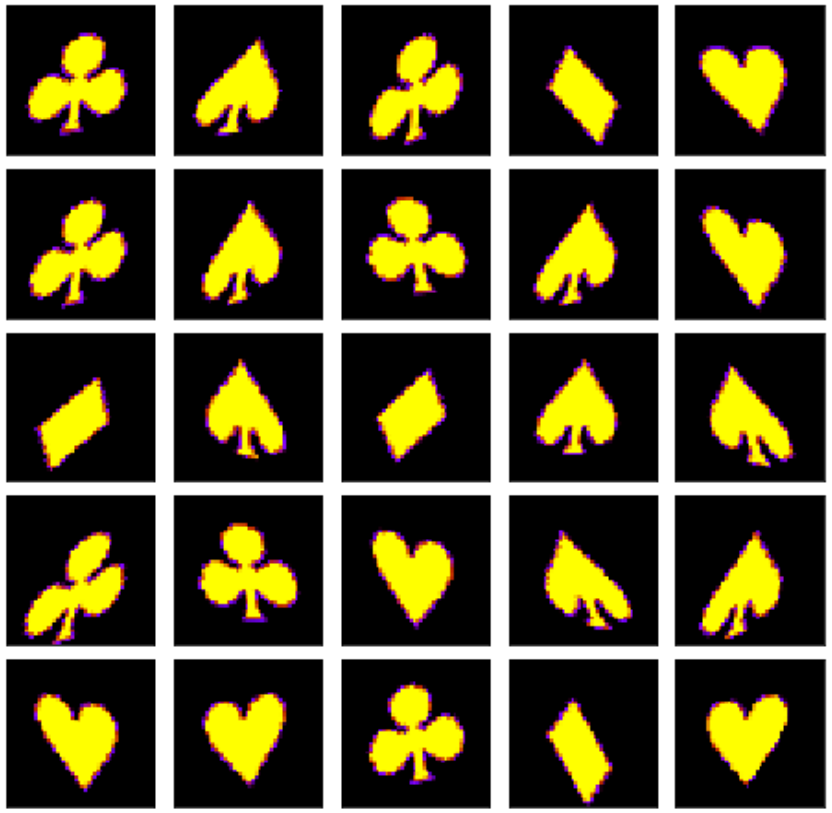

Latent representation

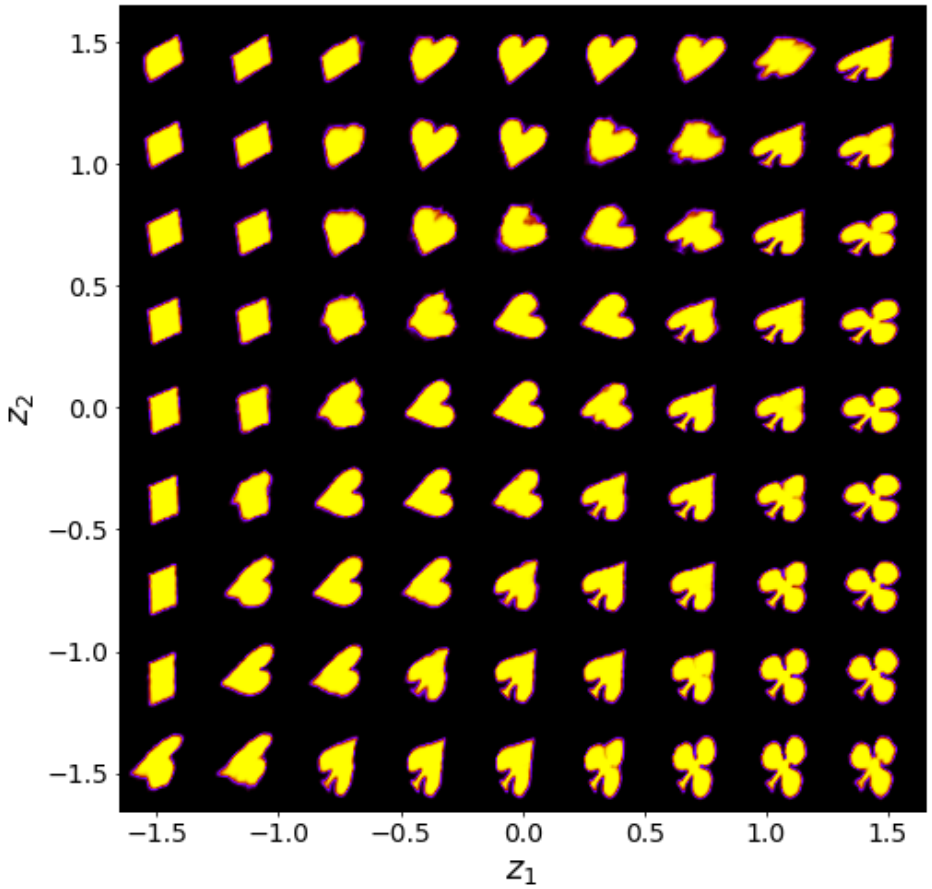

Cards 2: Low rotation (12 deg) and high shear (20 deg)

rVAE on Cards

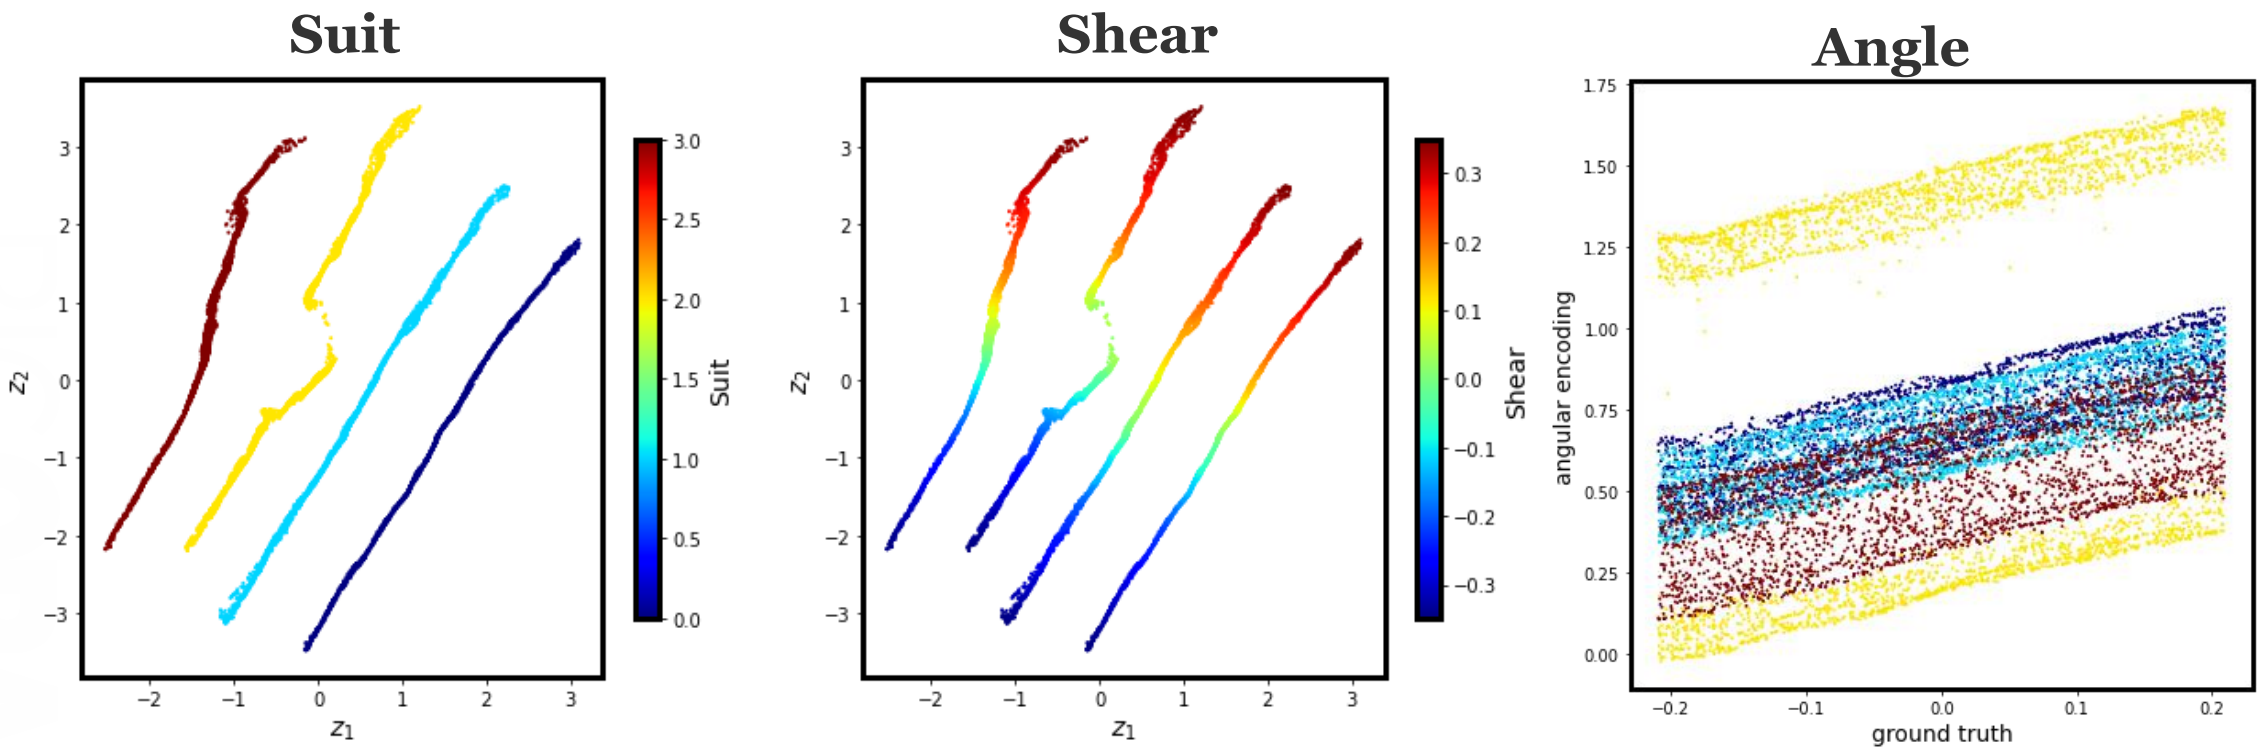

Cards 2: Low rotation (12 deg) and high shear (20 deg)

rVAE on Cards

Example of data

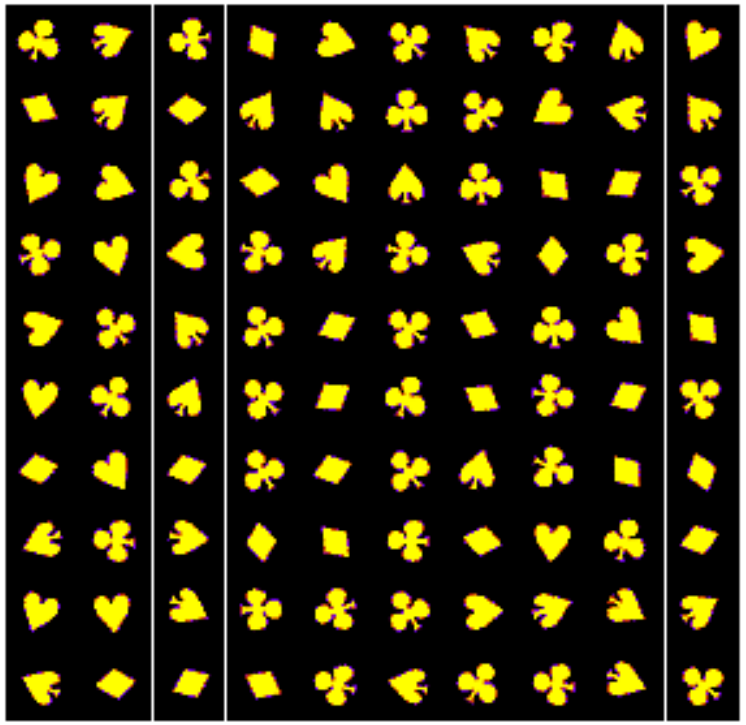

Latent representation

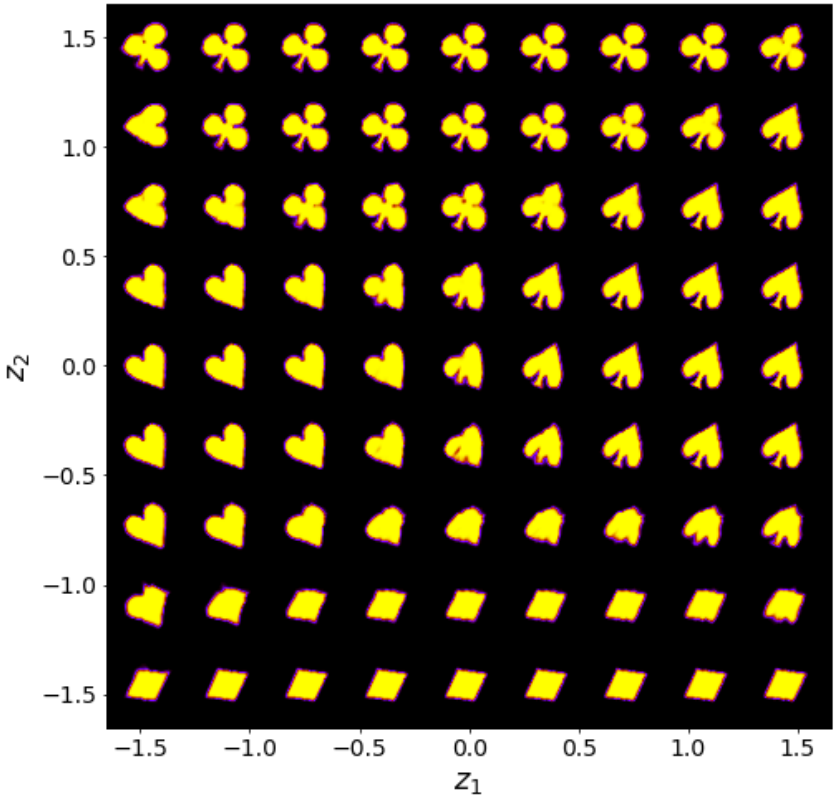

Cards 3: High rotation (120 deg) and low shear (1 deg)

rVAE on Cards

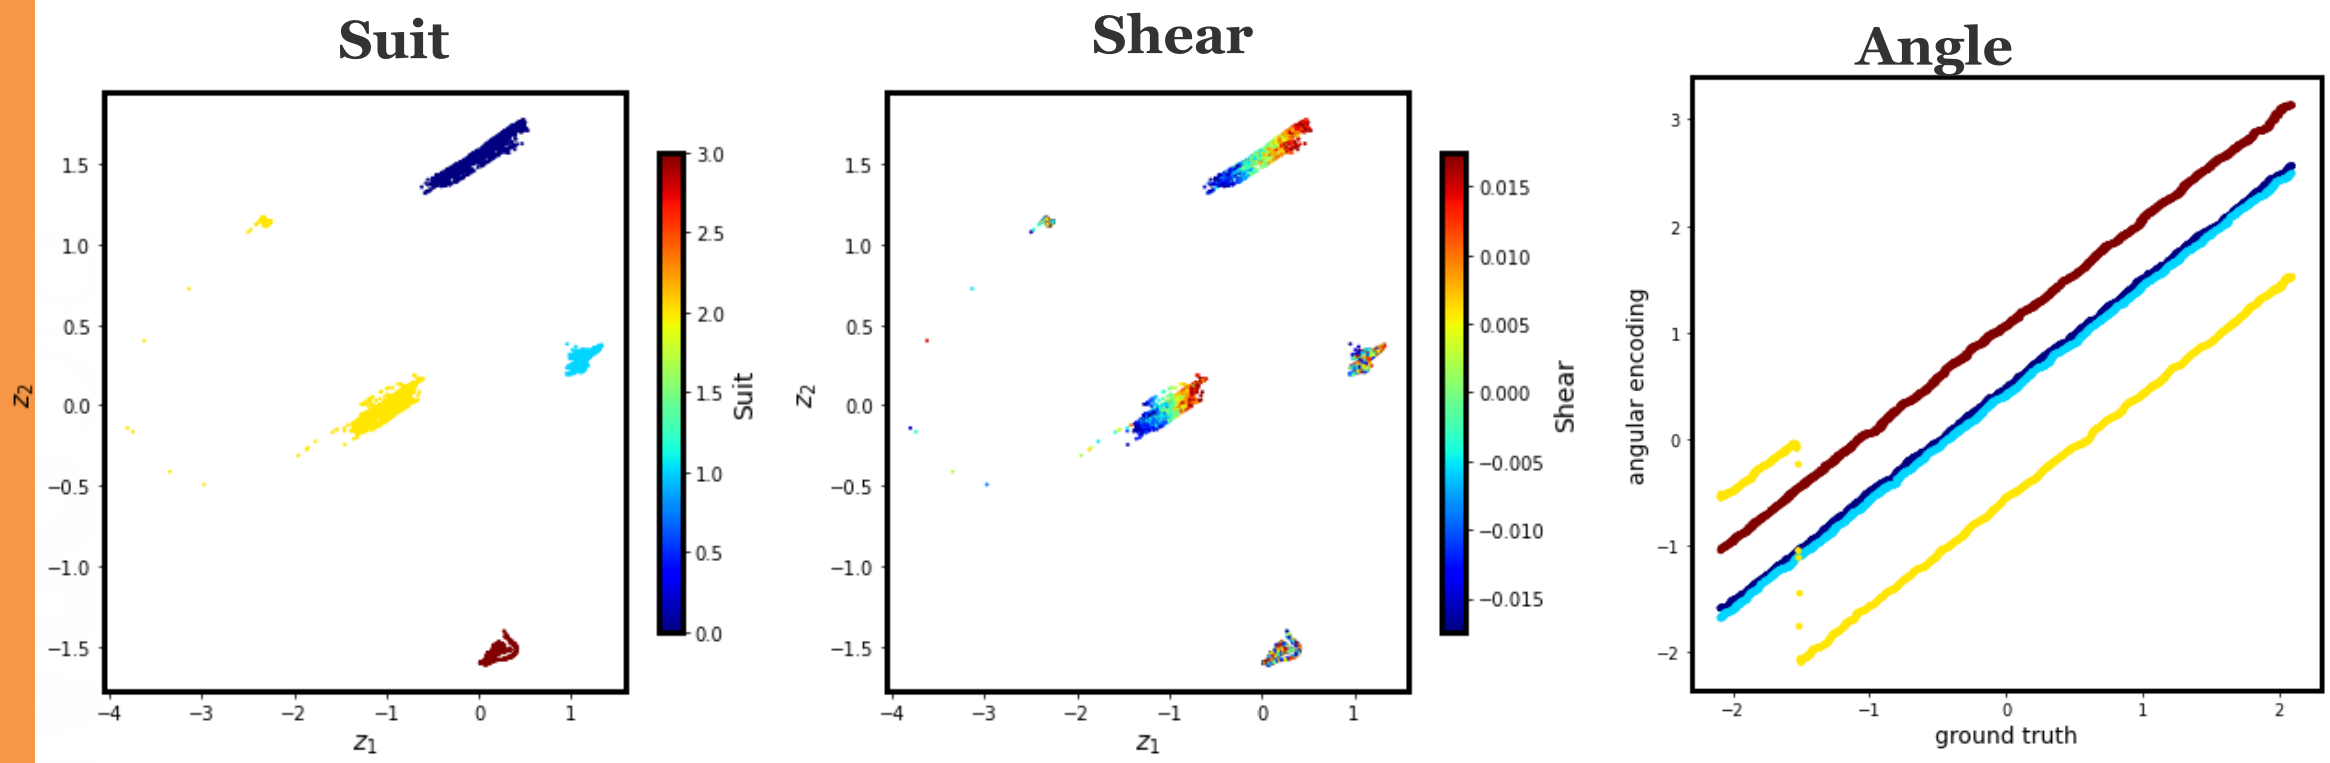

Cards 3: High rotation (120 deg) and low shear (1 deg)

rVAE on Cards

Example of data

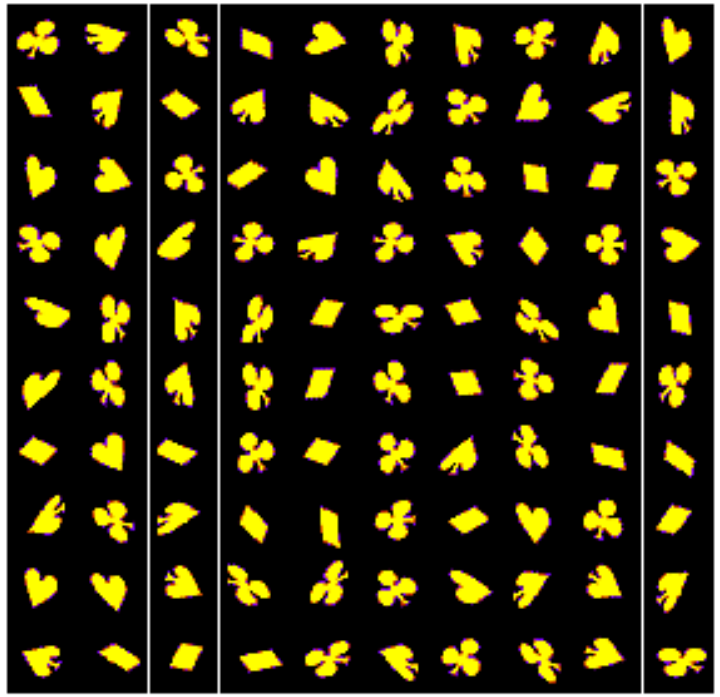

Latent representation

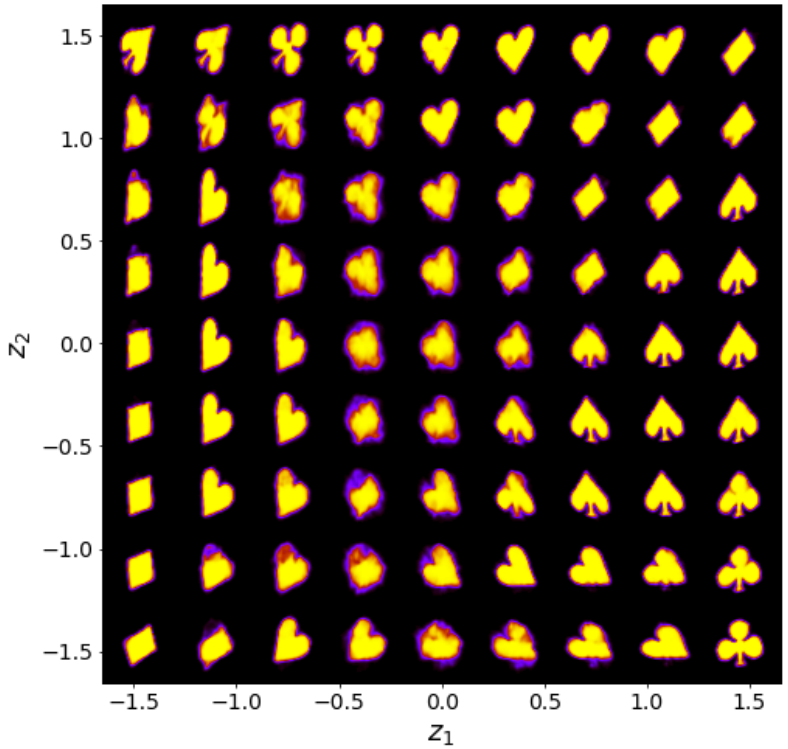

Cards 4: High rotation (120 deg) and high shear (20 deg)

rVAE on Cards

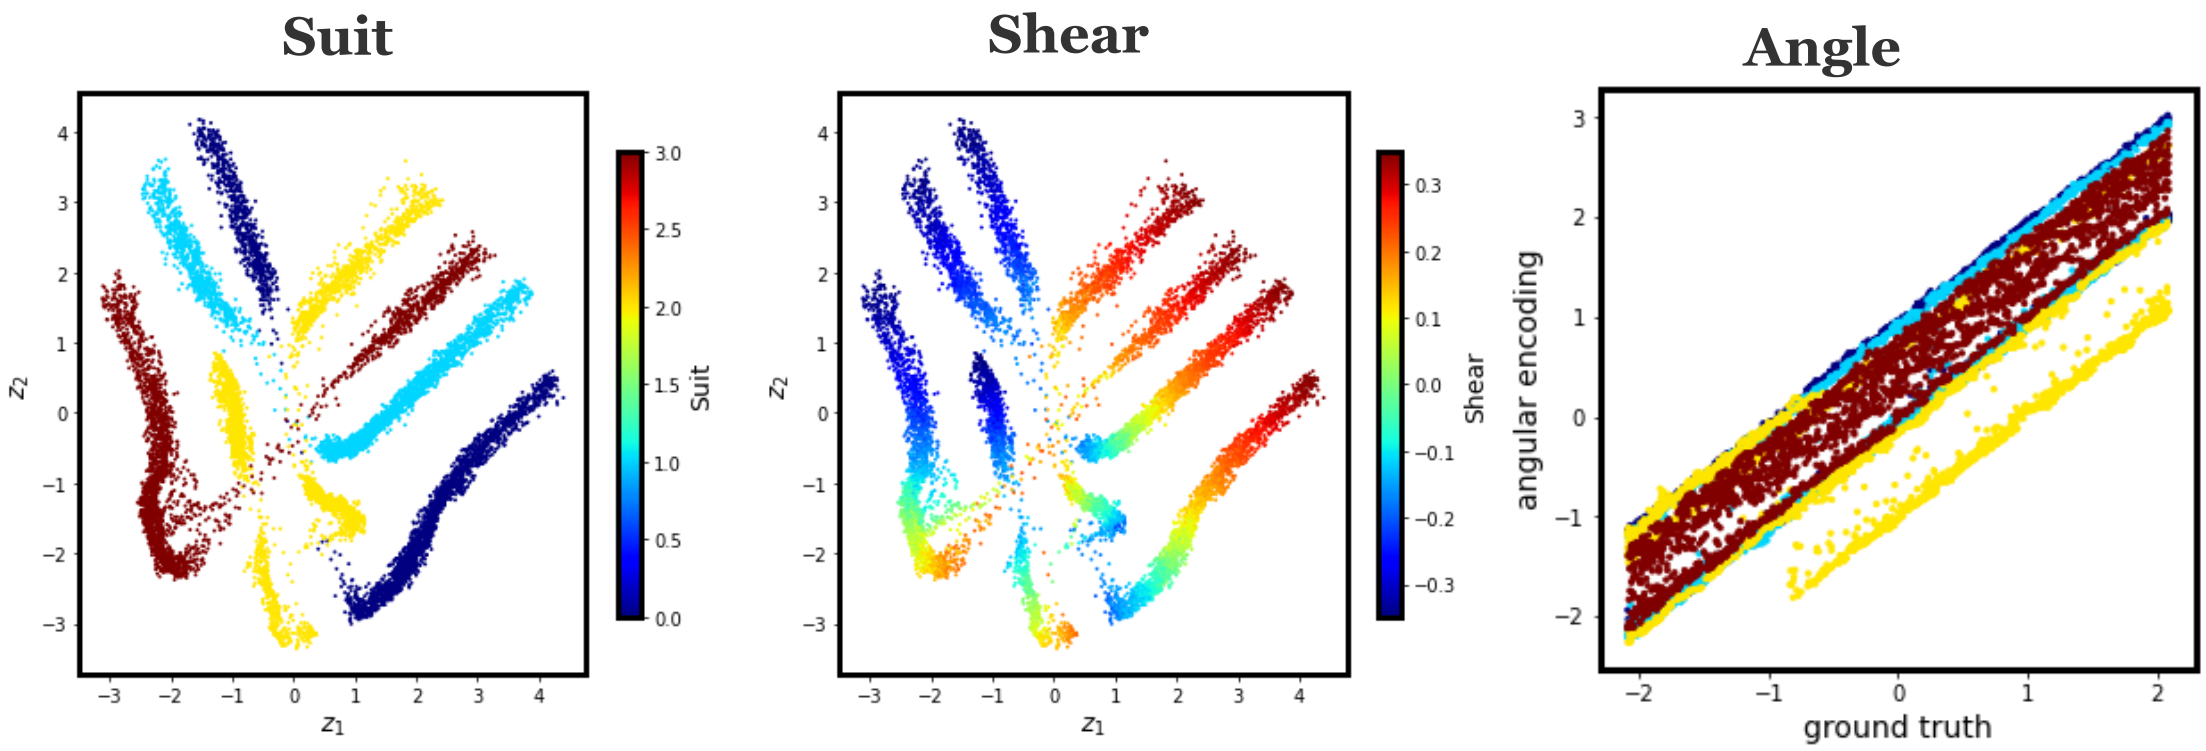

Cards 4: High rotation (120 deg) and high shear (20 deg)

What if we have multiple classes?

1. Classes are known: conditional (discrete) VAE
2. Factors of variability are known: conditional (continuous) VAE
3. Some classes are known: semi-supervised VAE
4. Number of classes are known: joint VAE

Conditional VAE

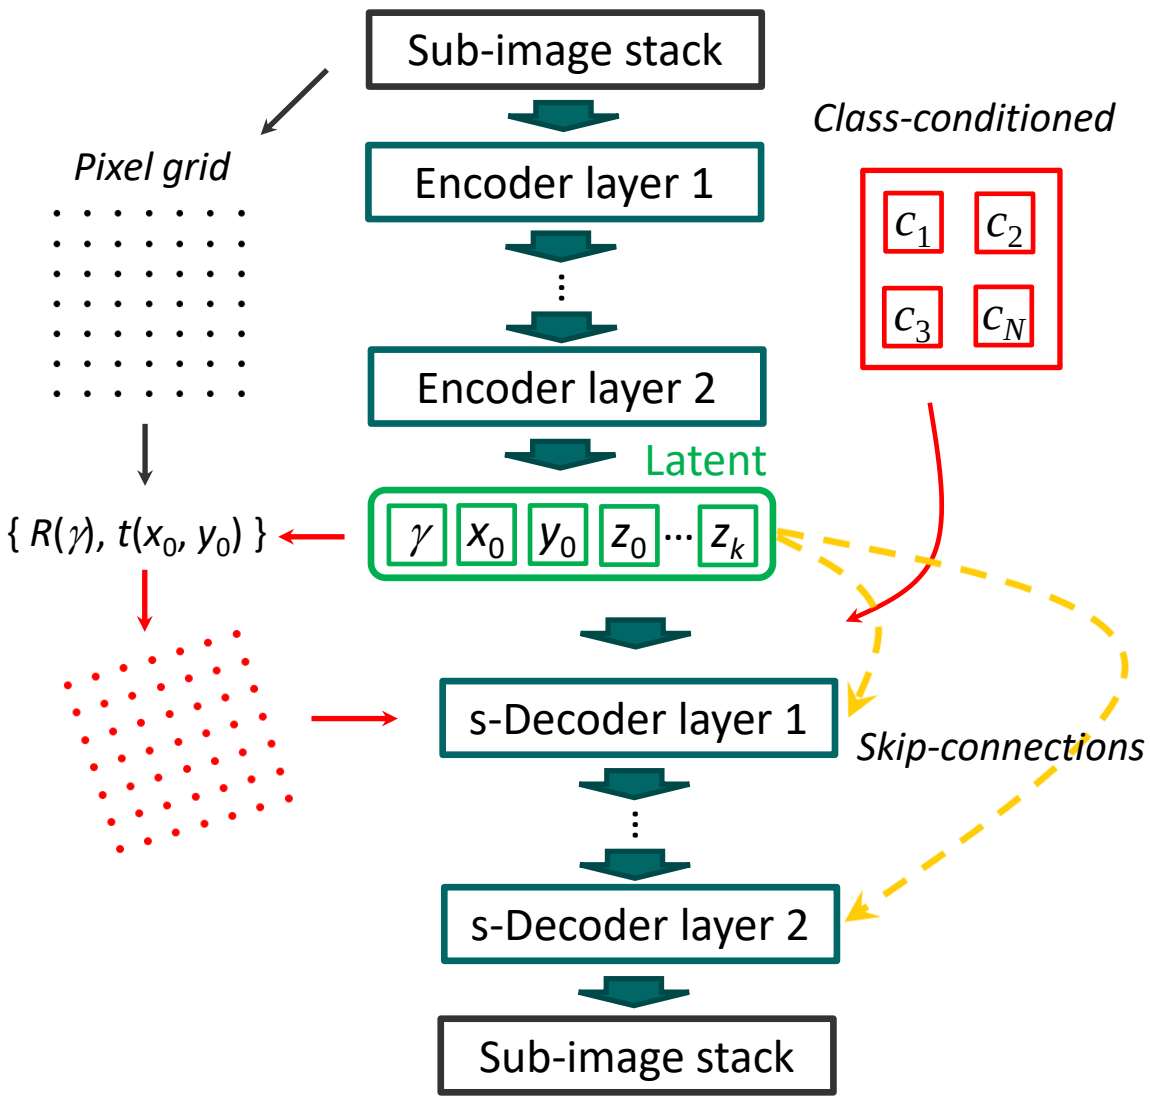

- Generative model is a function of spatial coordinate
- 3 additional latent variables to absorb rotations and shifts
- Disentangles rotations and translations from image content
- Ideal for analyzing microscopy sub-images on atomic level

$$
\begin{aligned}
&ELBO \\
&= Reconstruction\ Loss \\
&- D_{KL}\big(q(z|x)\|\mathcal{N}(0,I)\big) \\
&- D_{KL}\left(q(\gamma|x)\|\mathcal{N}\left(0,s_\gamma^2\right)\right) \\
&- D_{KL}\left(q(\Delta r|x)\|\mathcal{N}\left(0,s_{\Delta r}^2\right)\right)
\end{aligned}
$$

Regular VAE

Rotation

Translation

+ D_{KL}(physics-based “priors”) ?

+ D (physics) ?

Bepler *et al.*, NeurIPS 2019

MNIST: cVAE

No rotations

With rotations

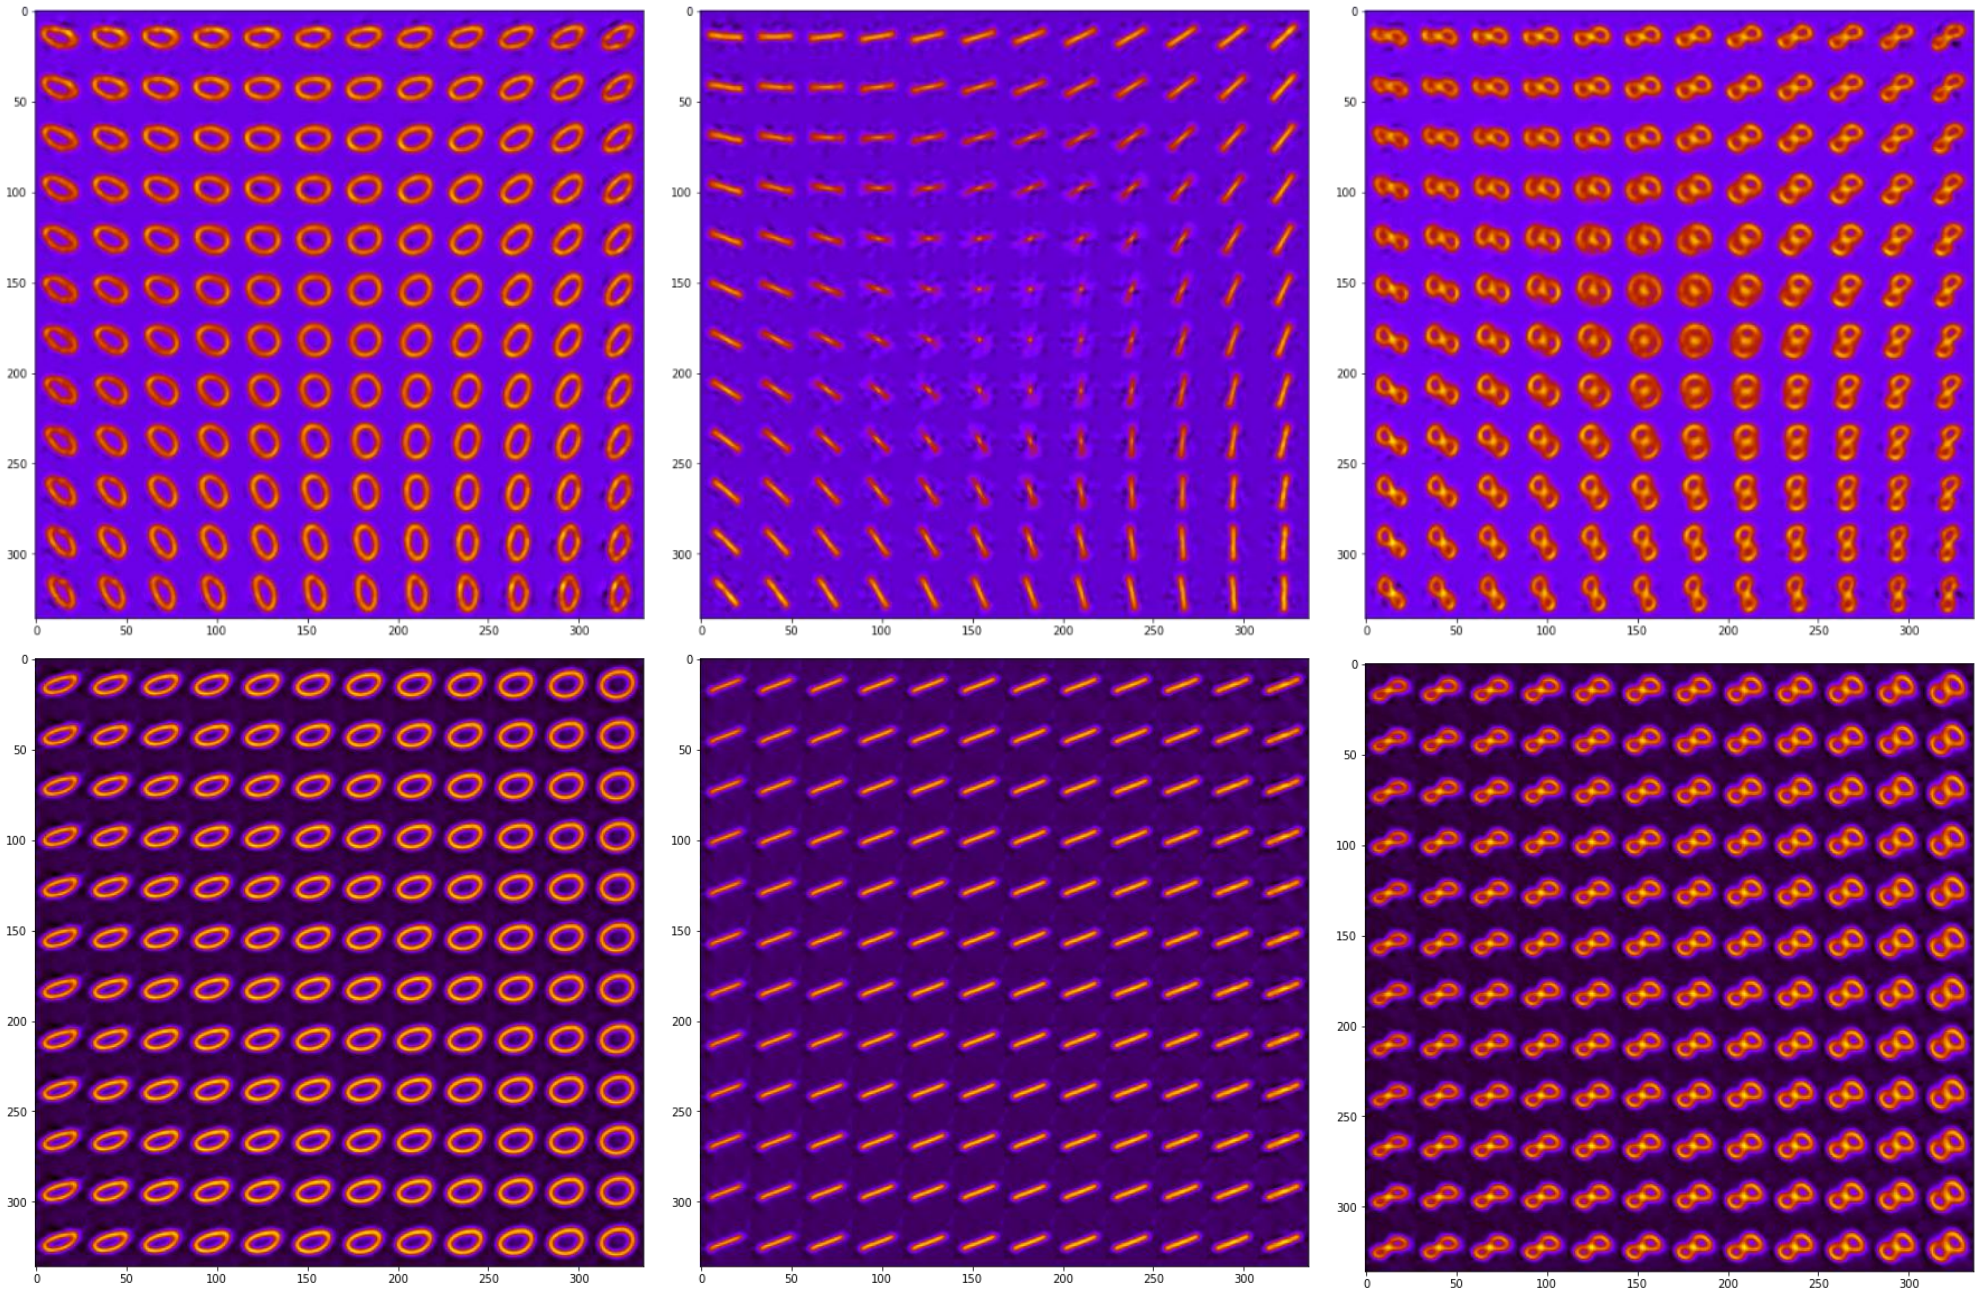

Joint VAE

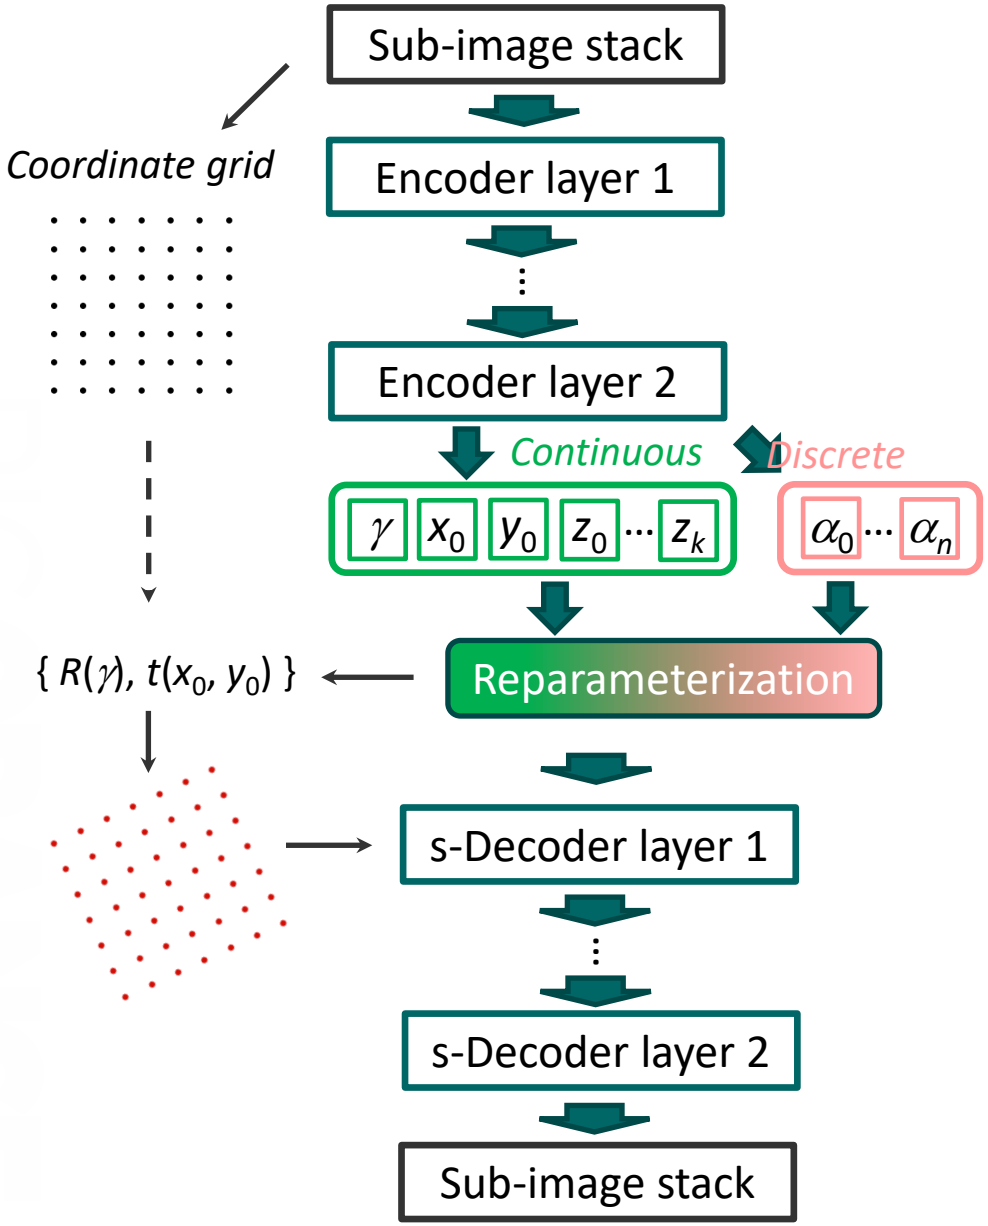

- Generative model is a function of spatial coordinate (*e.g.*, via spatial broadcasting)
- 3 additional latent variables to absorb rotations and shifts
- Disentangles rotations and translations from image content
- Learns discrete classes in unsupervised fashion
- Well-suited for analyzing microscopy (sub-) images on atomic and molecular levels

$$ELBO =$$

$$-\,Reconstruction\ Loss$$

$$-\beta_c(t)\Big|\big(\overset{\text{Structure}}{D_{KL}(q(z|x)\|p(z))} + \overset{\text{Rotation}}{D_{KL}(q(\gamma|x)\|p(\gamma))}\big) - \overset{\text{Continuous}}{C_z}\Big|$$

$$-\beta_d(t)\Big|D_{KL}\big(q(\alpha|x)\|p(\alpha)\big) - C_\alpha\Big| \quad \text{Discrete}$$

+ physics-based “loss” ?

jVAE of MNIST

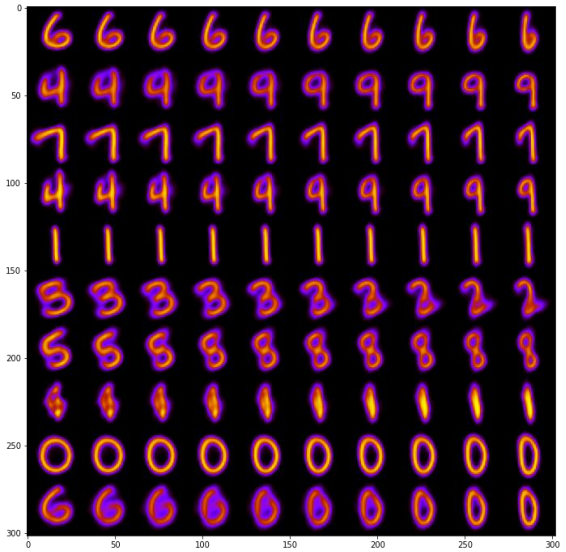

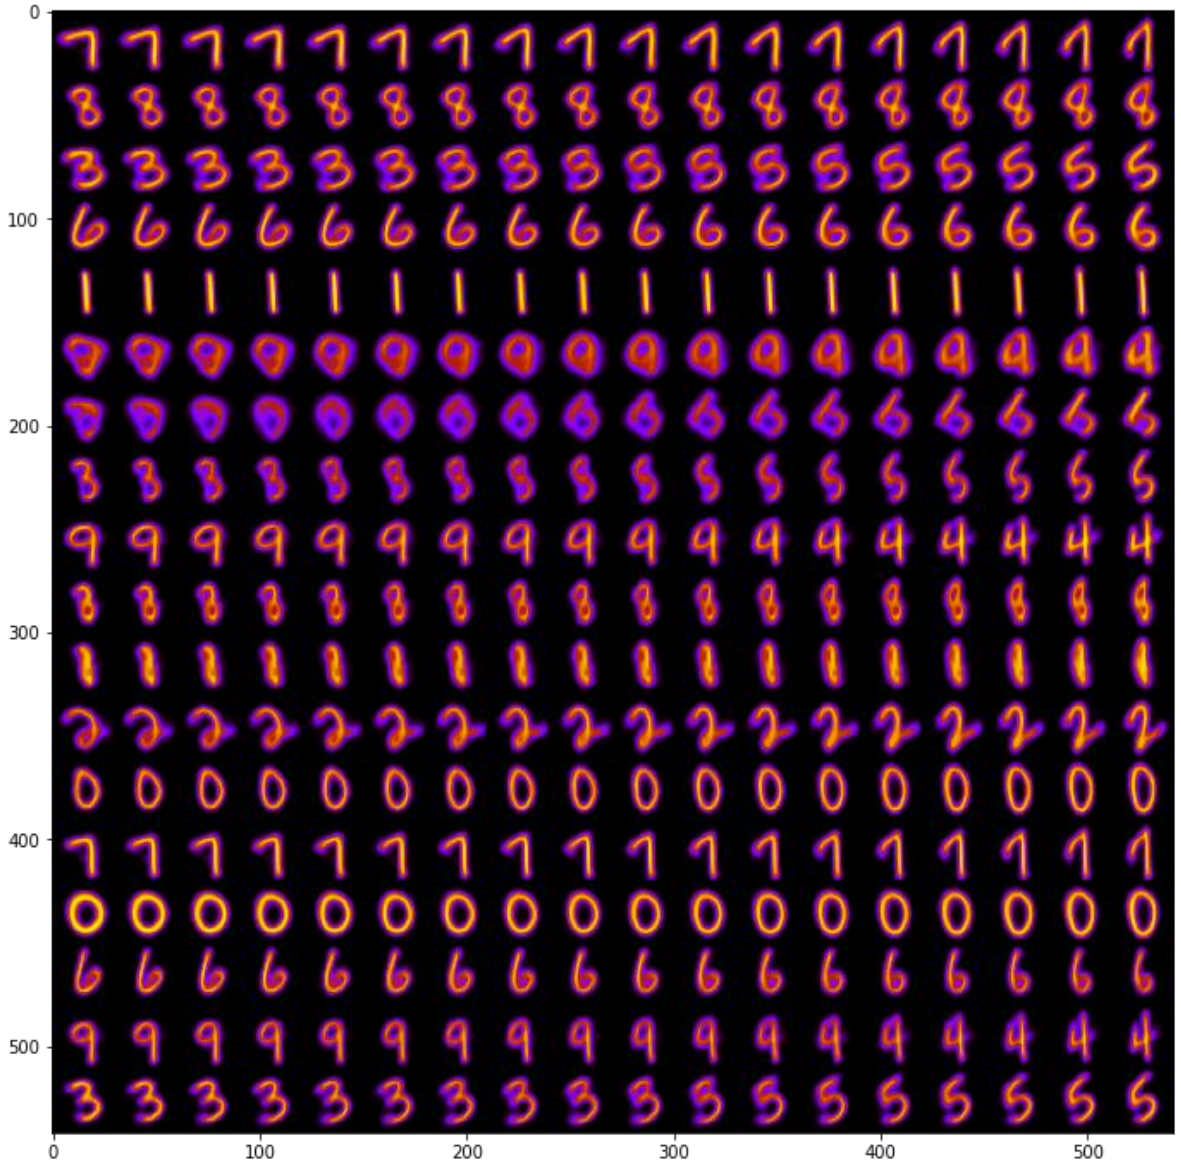

Latent representation

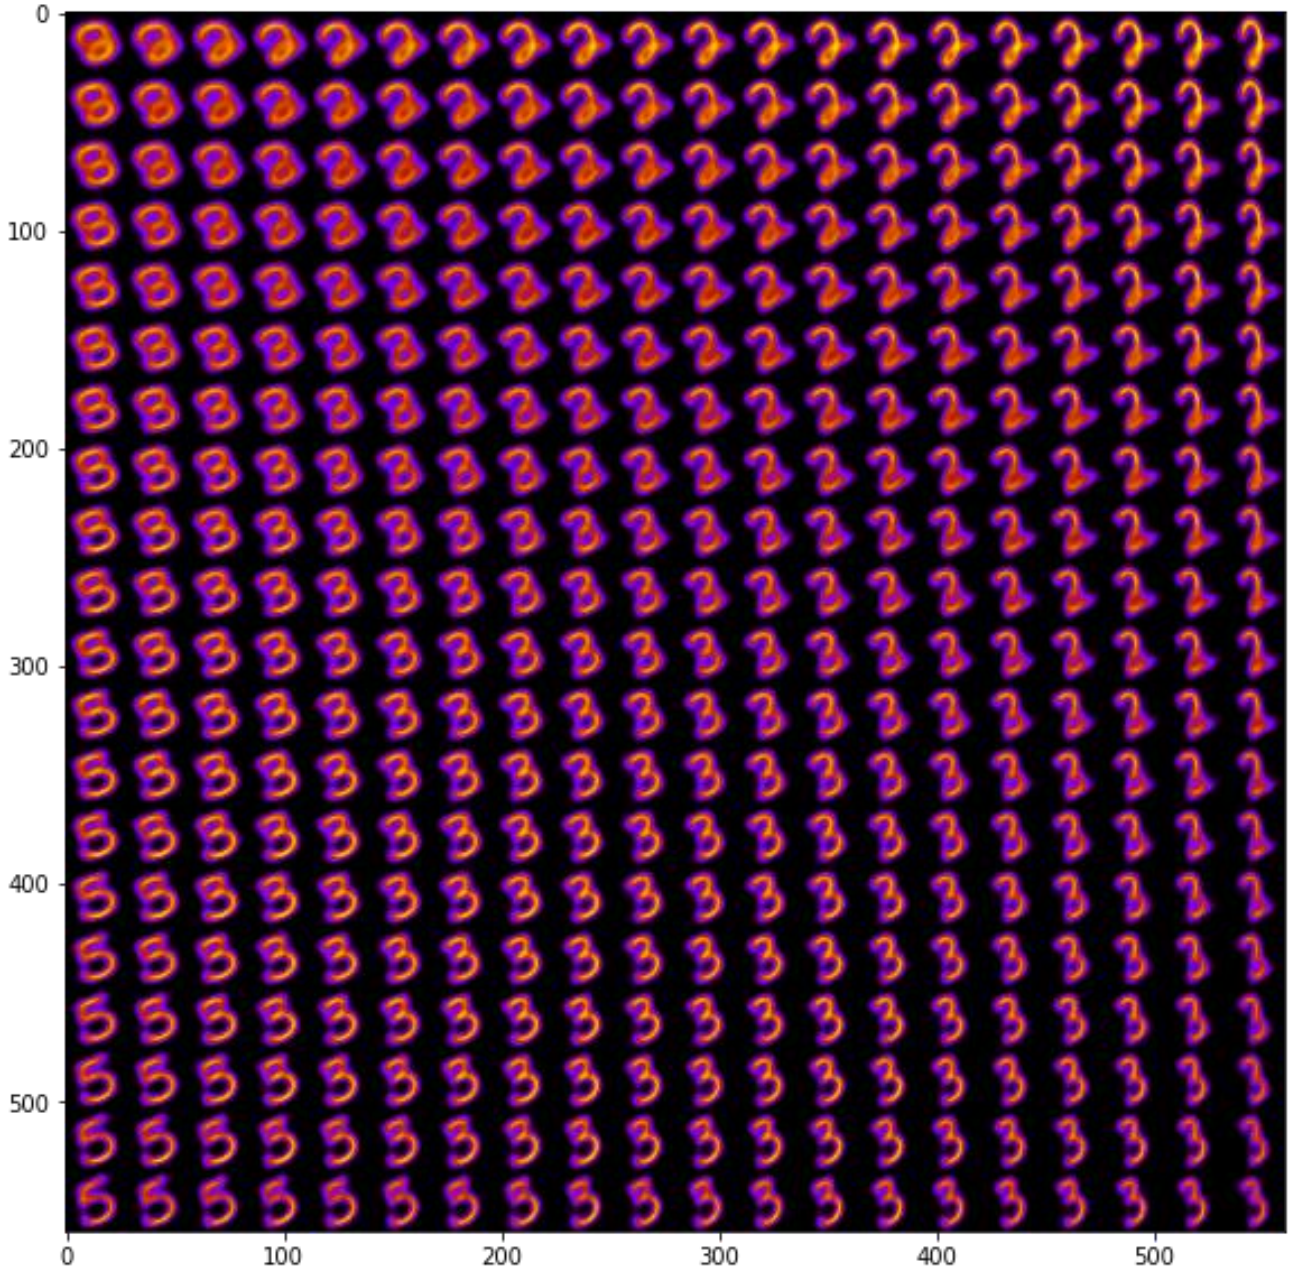

Ensemble jVAE

Predictions from different ensemble models

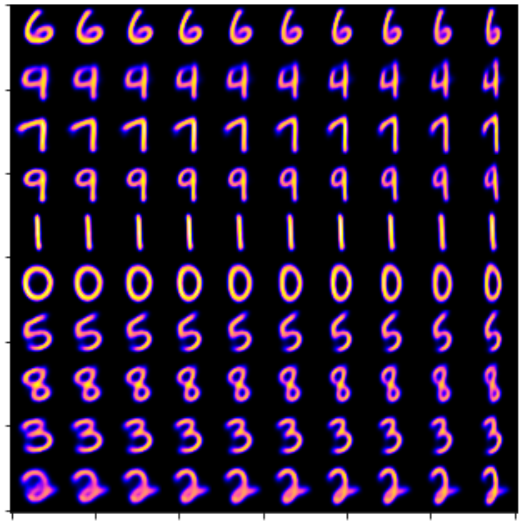

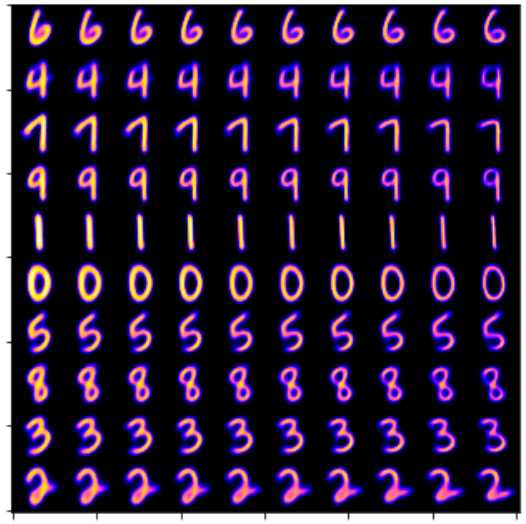

Mean prediction

Baseline: 10 epochs
Ensemble models: 8

Dispersion in predictions ('uncertainty')

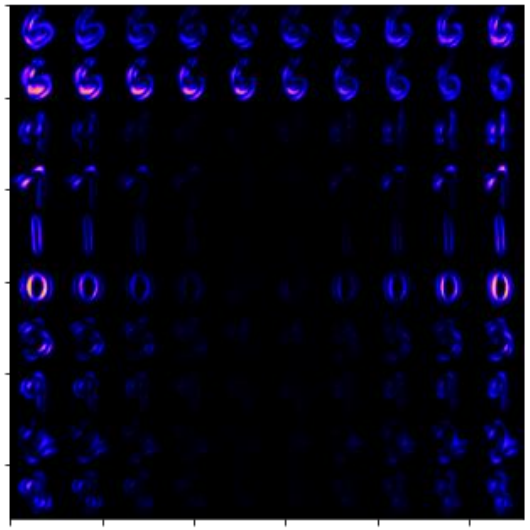

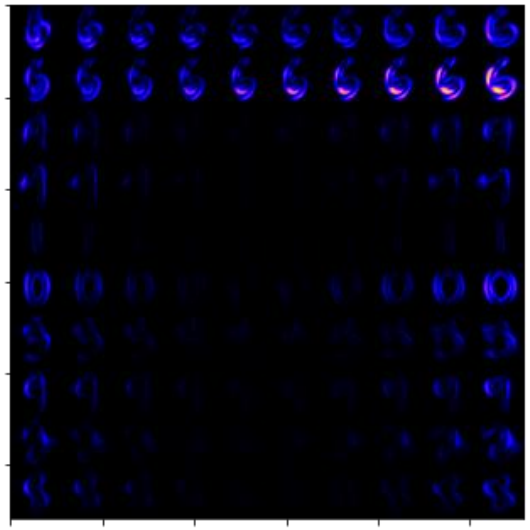

- The unstable classes show the largest "uncertainty"
- Indication of the quality of separation and/or a guide for selection of the number of classes

What can (unsupervised) classification give us

- Two things matter:
  - descriptors
  - ML method

- In analysis of EELS or CITS data, very often our descriptor is just the spectrum at each pixel. Typical analysis will be either linear or non-linear dimensionality reduction or clustering:
  - Linear dimensionality reduction: PCA, NMF, BLU
  - Clustering: k-means, GMM
  - Manifold learning: ISO, UMAP, tSNE, DBSCAN
  - Neural nets: SOFM, AEs, VAEs

- Typical result will be the components (representing behavior), and loading maps representing spatial variability of these behaviors. By construct, components will not depend on the relative spatial positions of pixel.

- What about images?

Describing the building blocks

- The classical physical descriptions (symmetry) can be defined locally only in Bayesian sense
- We can argue that local descriptors are simple, if not necessarily known
- And the rules that guide their emergence are also simple, if not known

Continuous translational symmetry

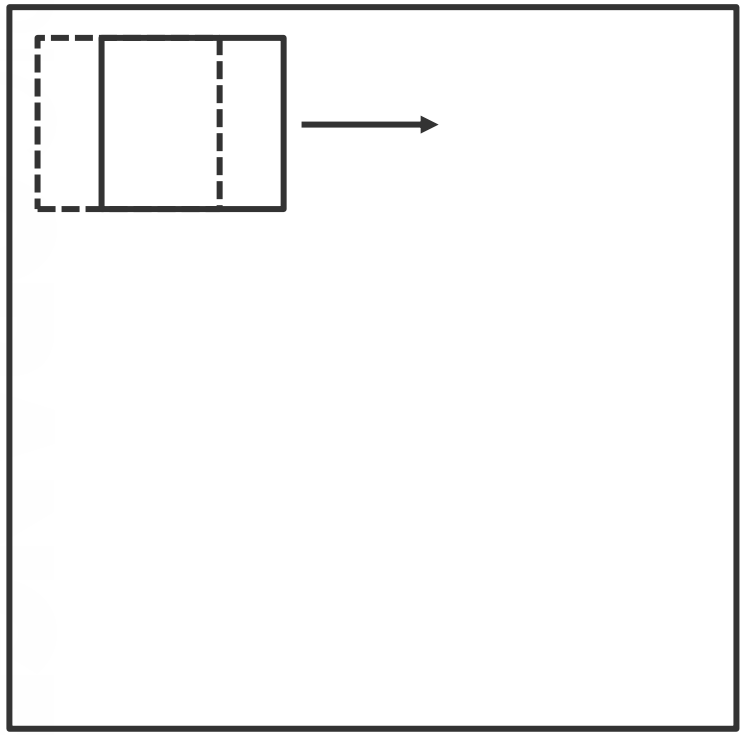

Atom based descriptions

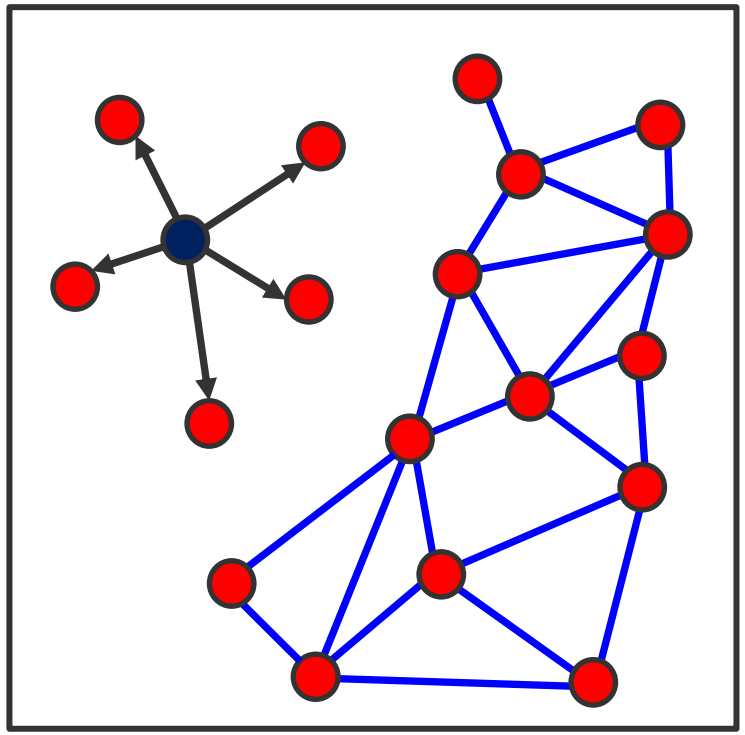

Localized sub-images

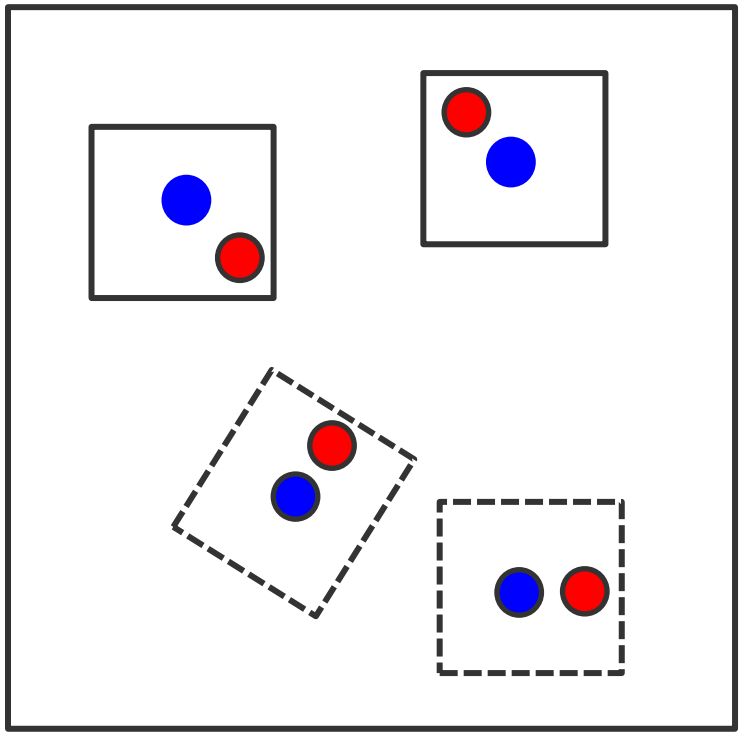

Let’s put it all together!

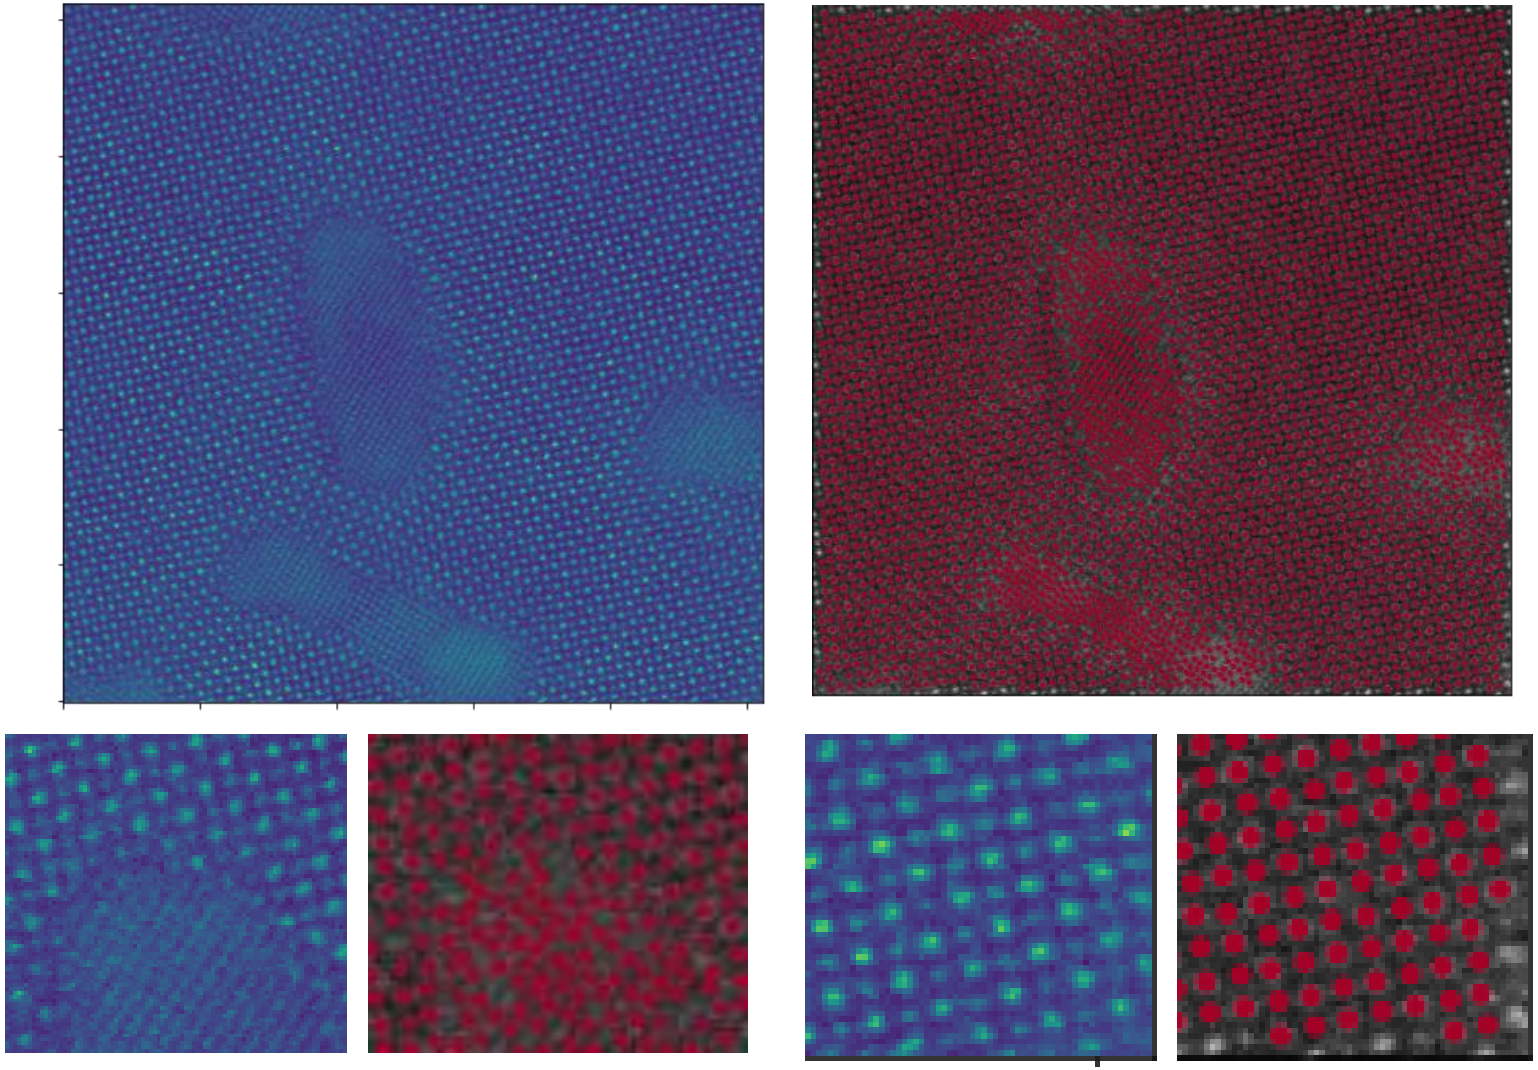

Step 1: Find all atoms (or all that you can) – use maximum finders, blob-log, or DCNNs
Step 2: Create descriptors – patches centered on atoms. Keep track on what part of image (or stack) it came from

Step 3: rVAE

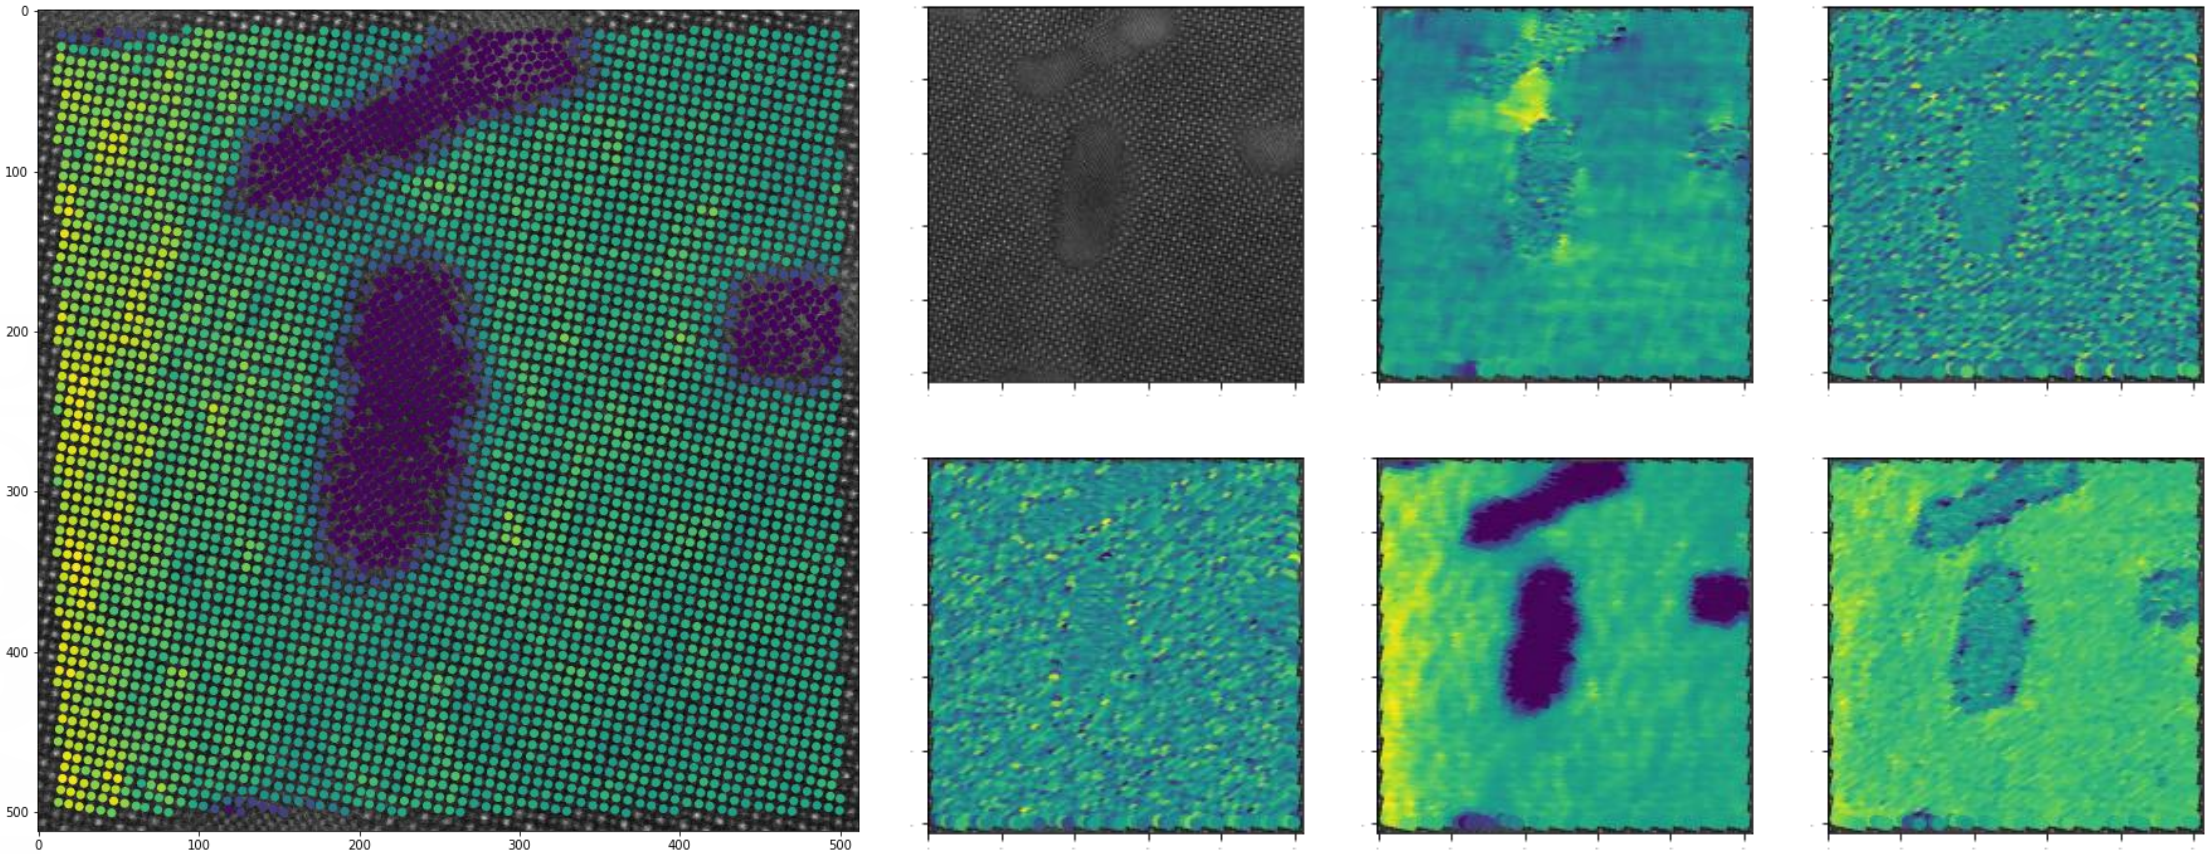

Output: Latent variable corresponding to local structure of each atomic site. Can be visualized on top of the original atomically resolved image, or as 2D maps (but – not rectangular array!)

Analysis of the NiO-LSMO

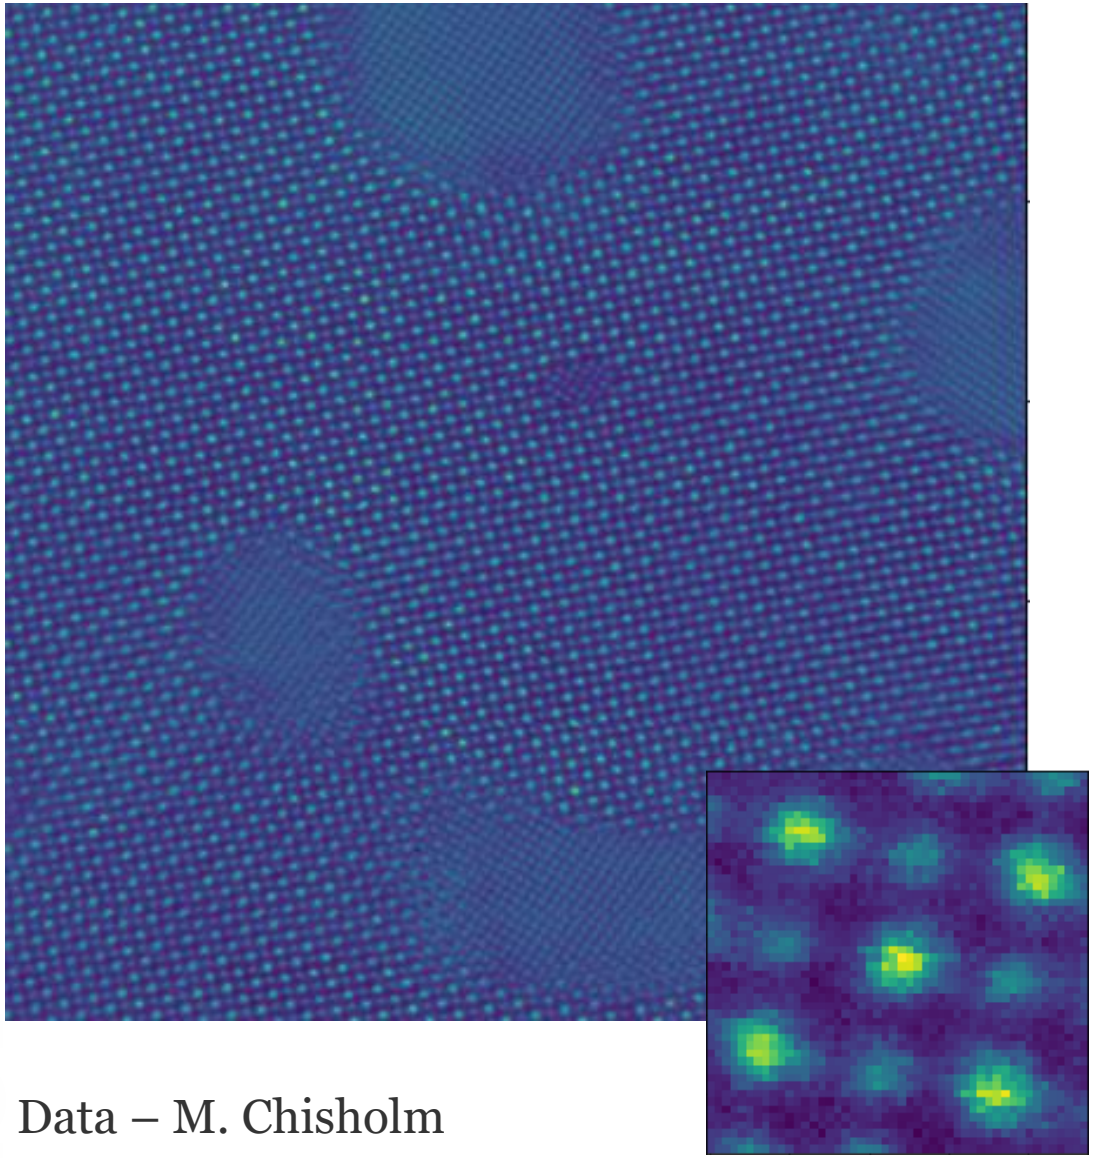

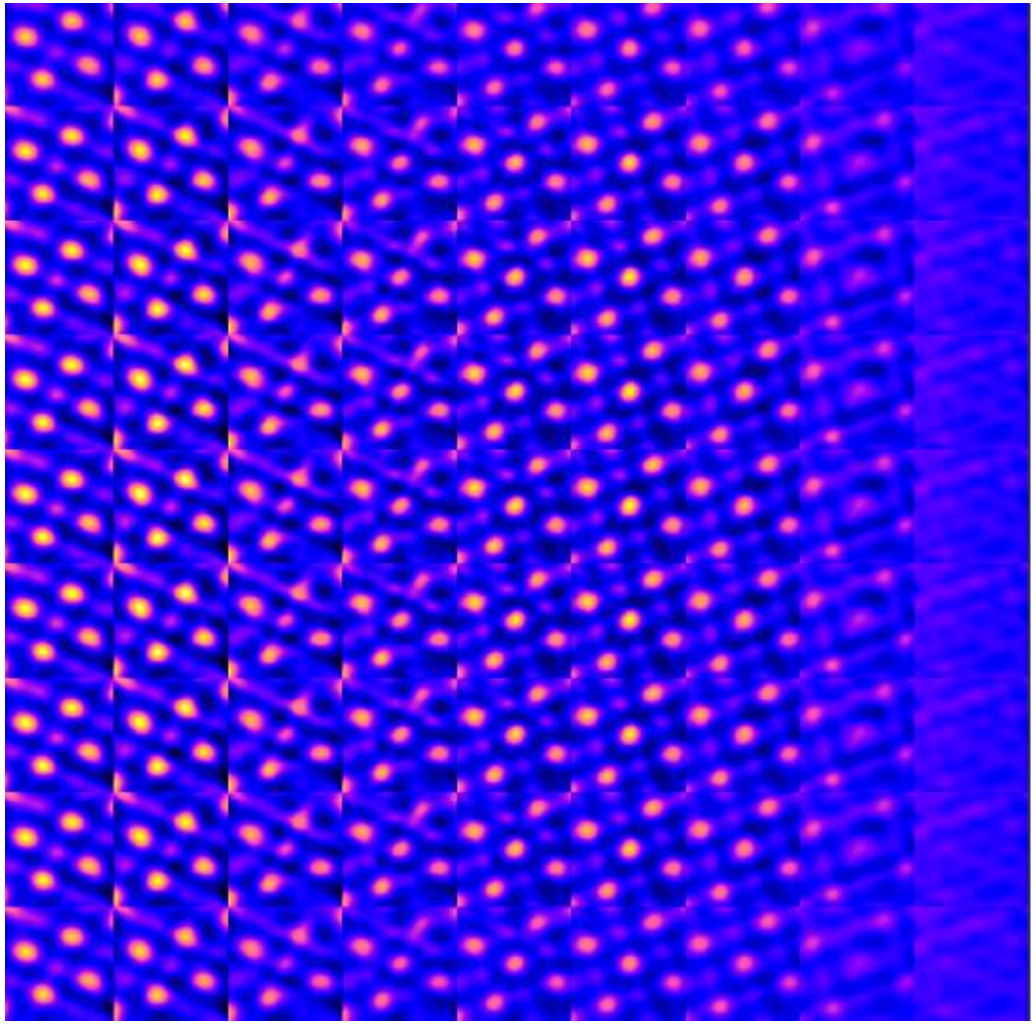

Data – M. Chisholm

Let's look at latent space

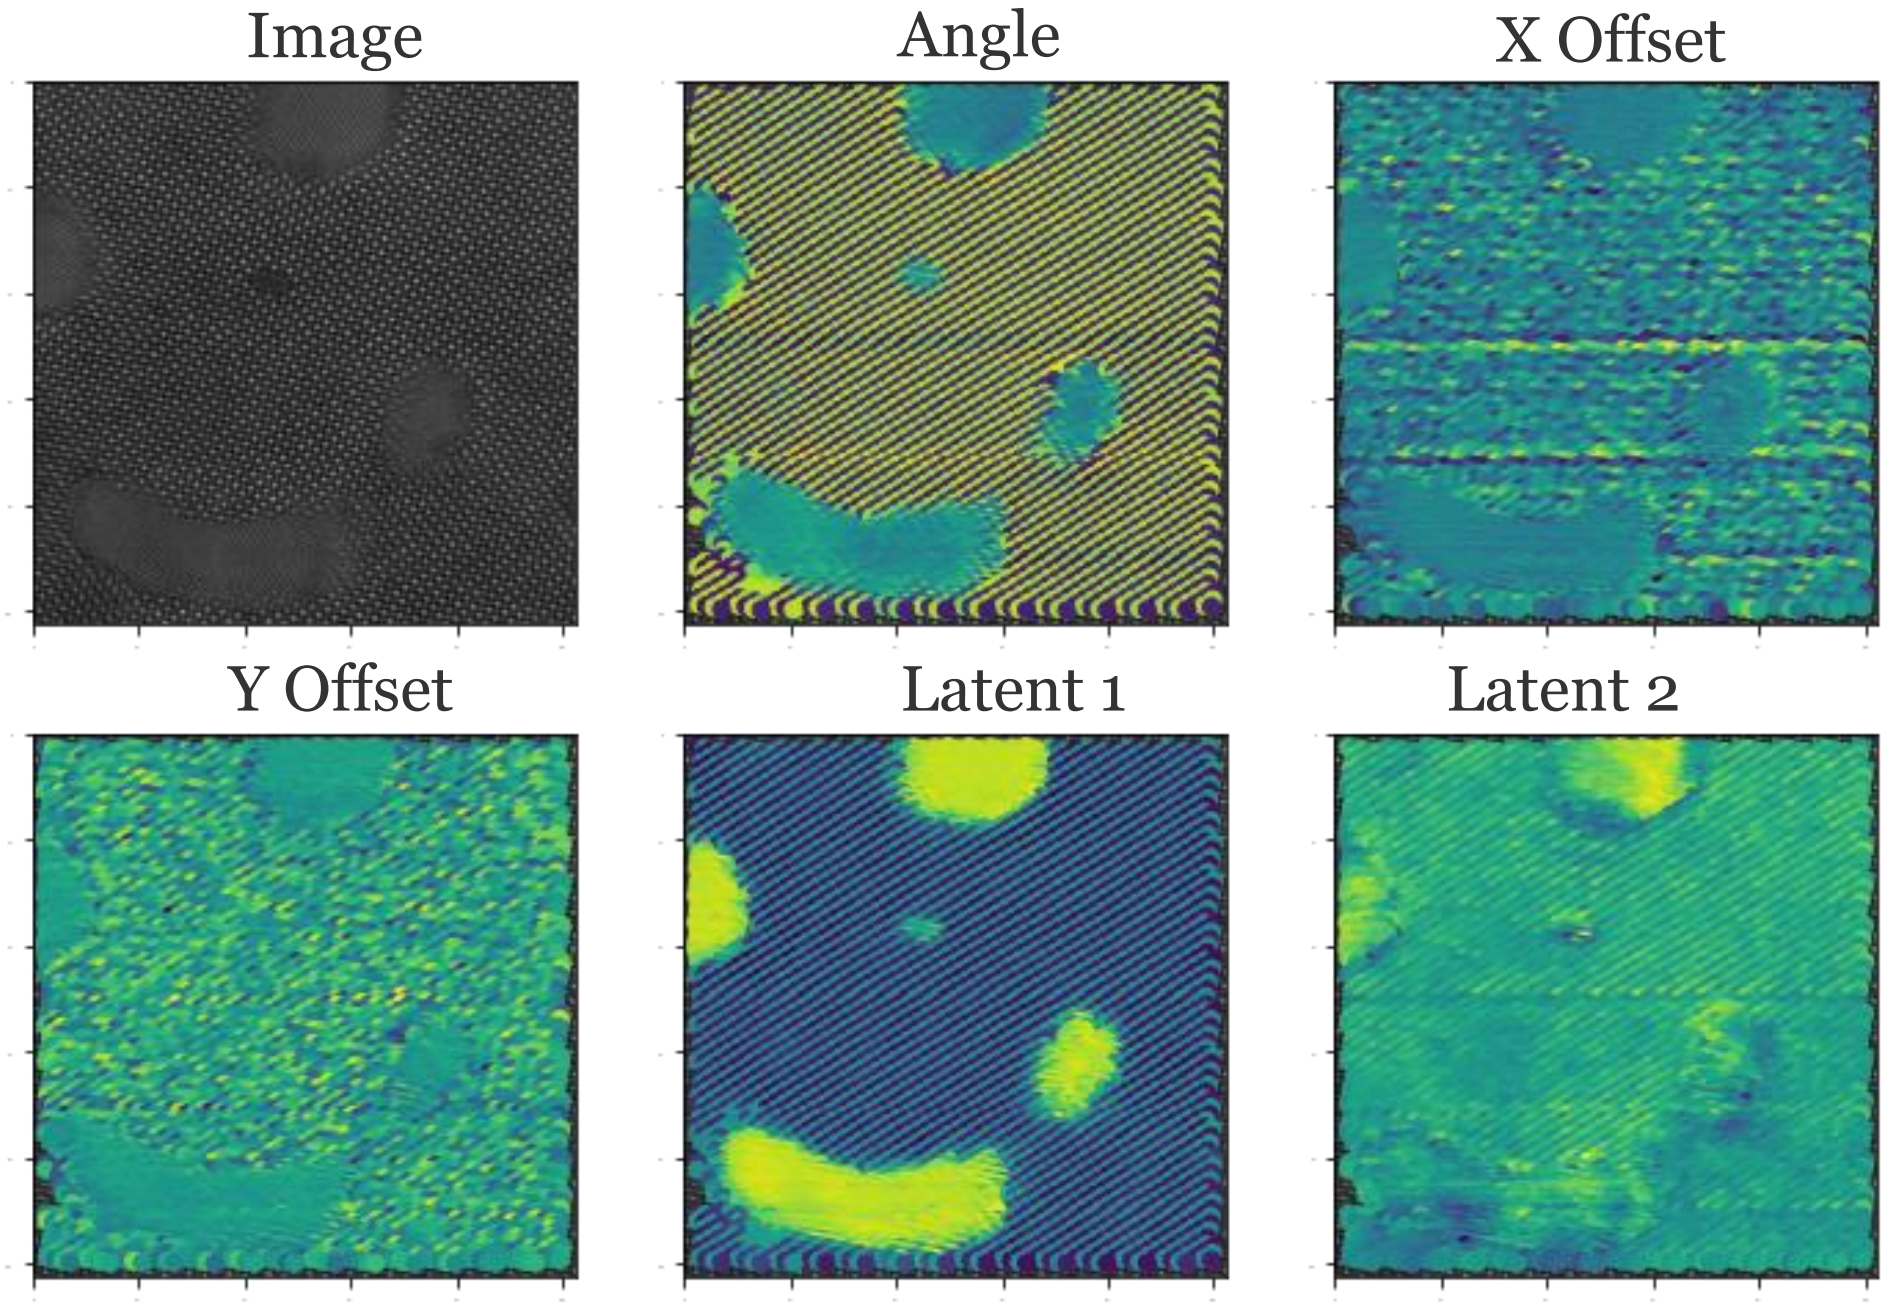

Exploring latent distributions

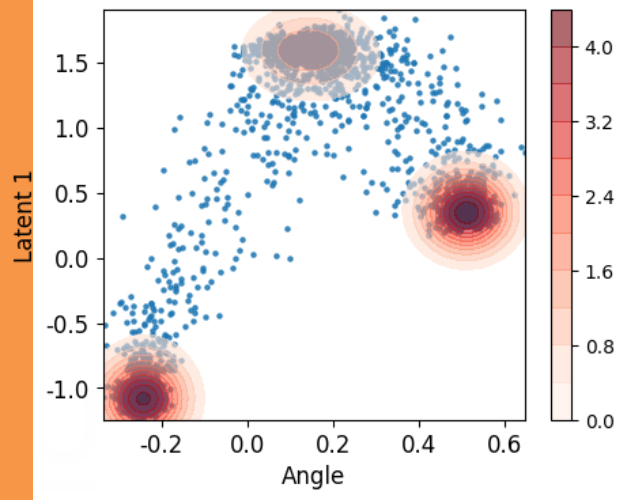

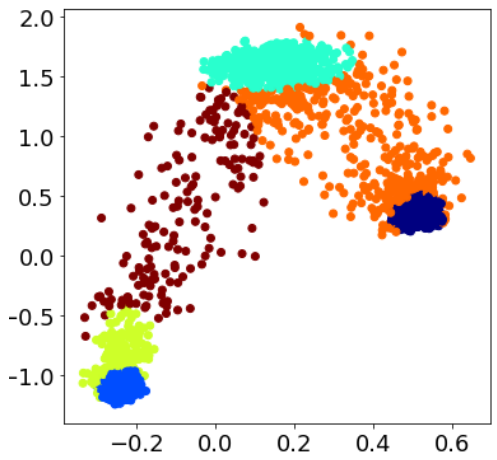

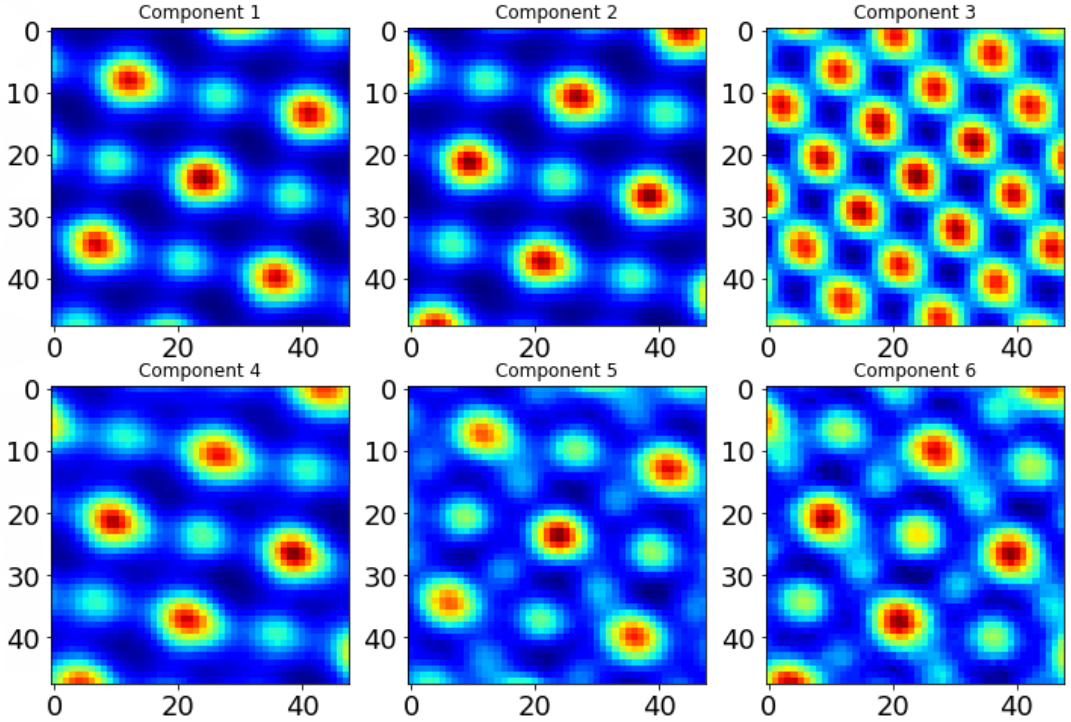

Labeled image

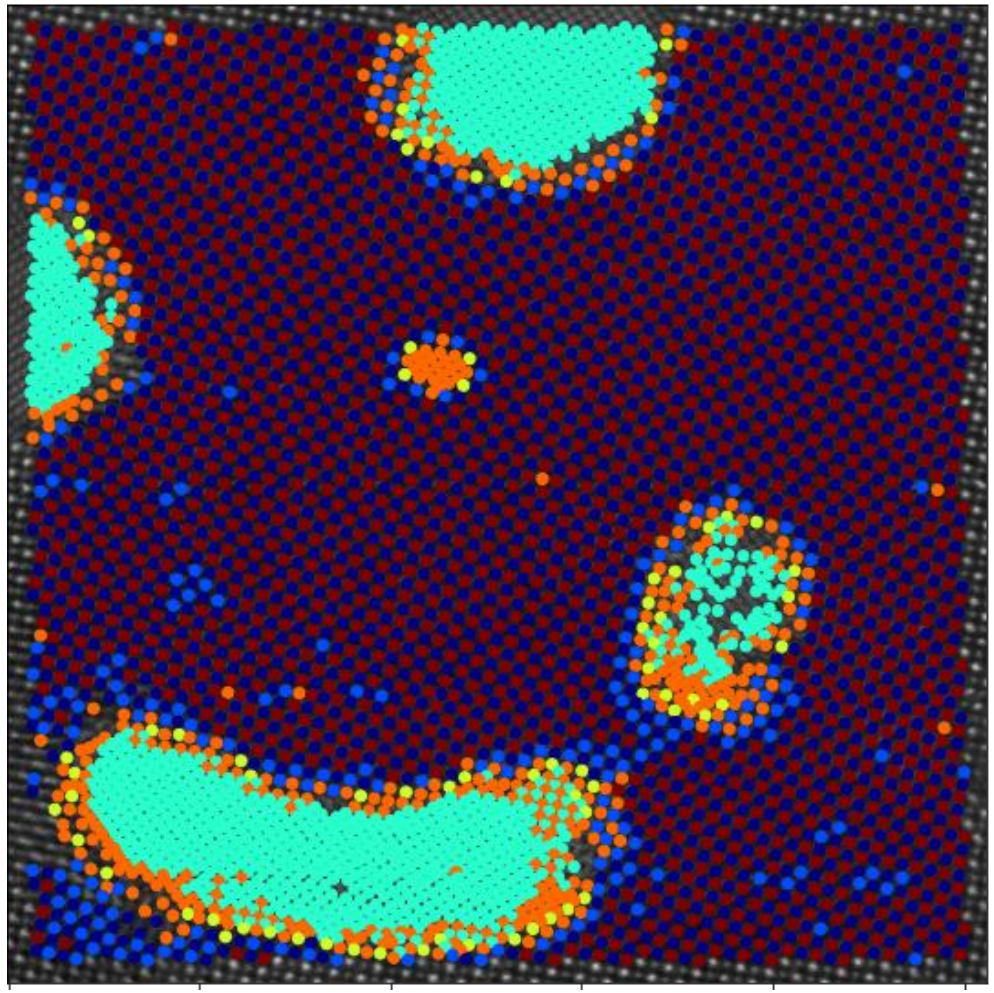

- Classes and variability are mixed in a single latent space
- Disentangling of representation

That's where the jVAE has come from

Currently, we have variants of invariant VAE that include:

- Convolutional or dense layers (reconfigurable via **kwargs)
- Rotational invariance
- With and without offsets (as latent variables)
- Multilayer inputs

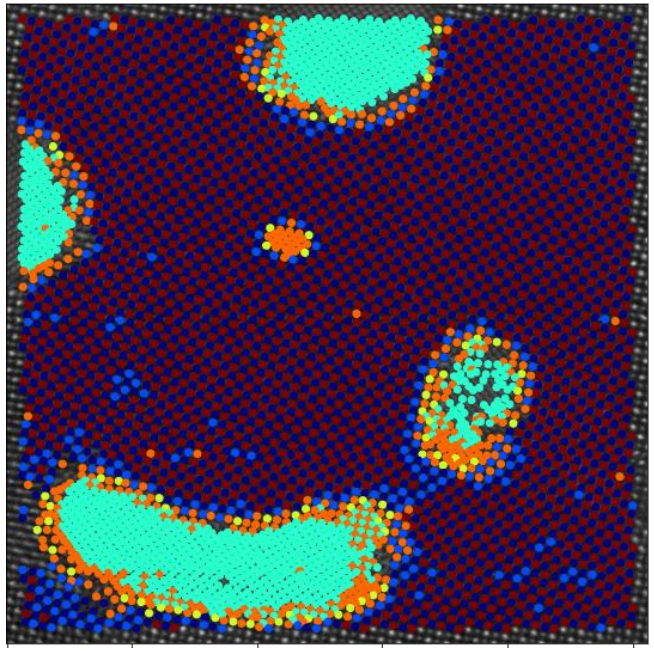

However, our rVAE collects everything in a single latent space. Realistically, very often we deal with system where we expect the presence of finite number of classes that may be known, partially known, or unknown, with certain continuous traits within classes.

- **Graphene and MX2:** structural units (discrete) and strain states
- **Crystalline solids:** phases and ferroic variants, strain states
- **Plasmonic EELS:** particle spectra, off-particle spectra, edge states
- **CITS:** lattice and defects, strain states

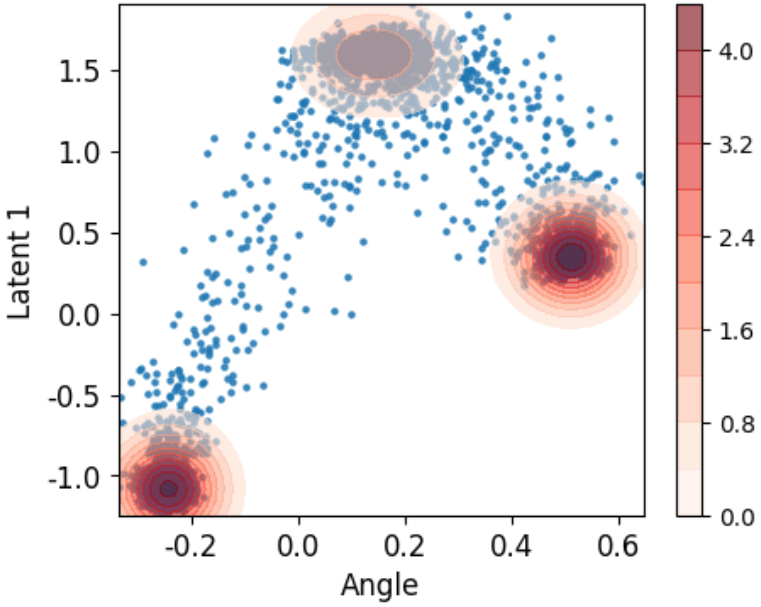

Out of curiosity: single crystal?

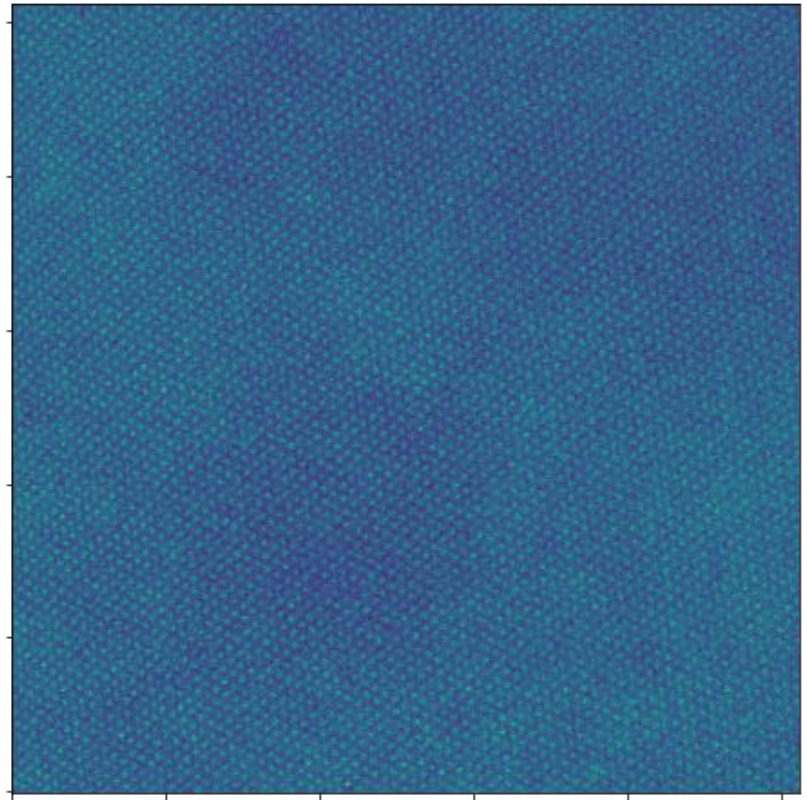

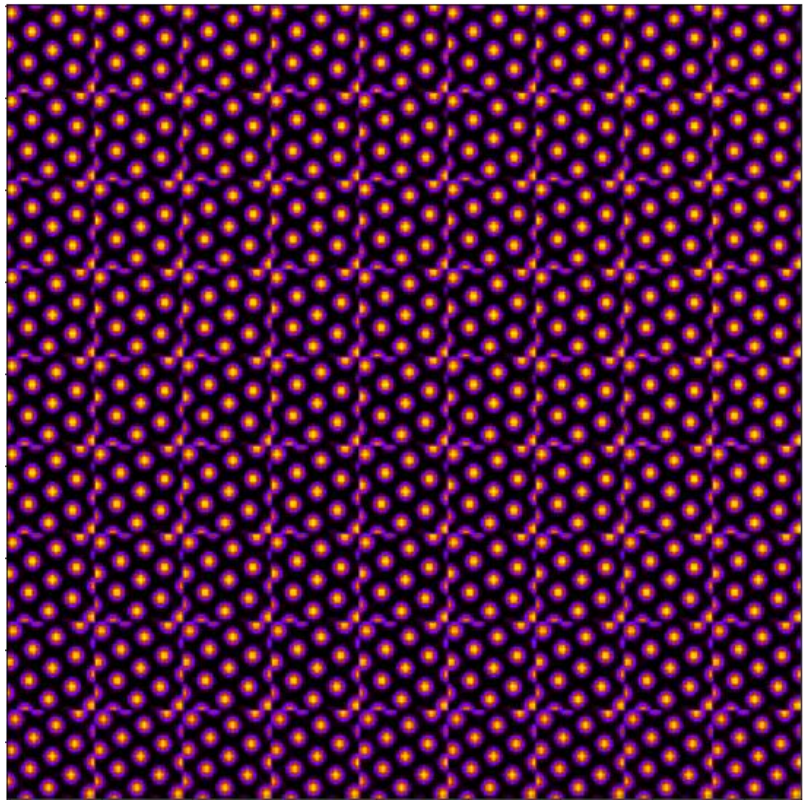

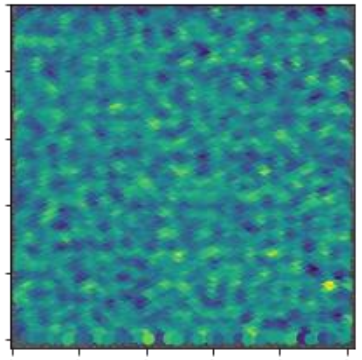

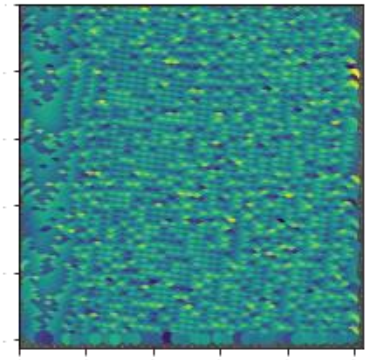

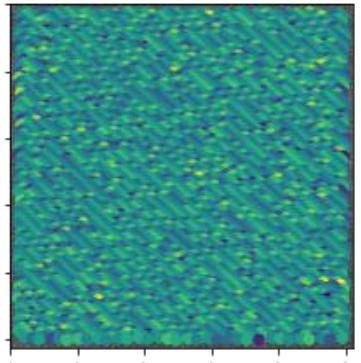

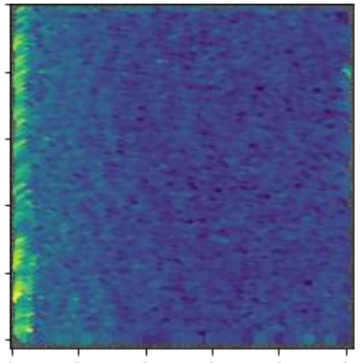

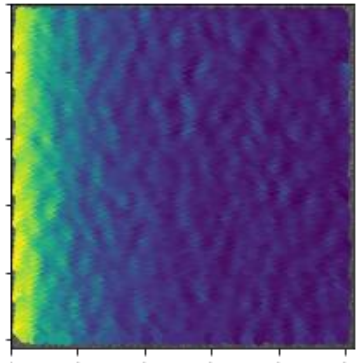

VAE without Atom Finding

Ferroelectric $BiFeO_3$

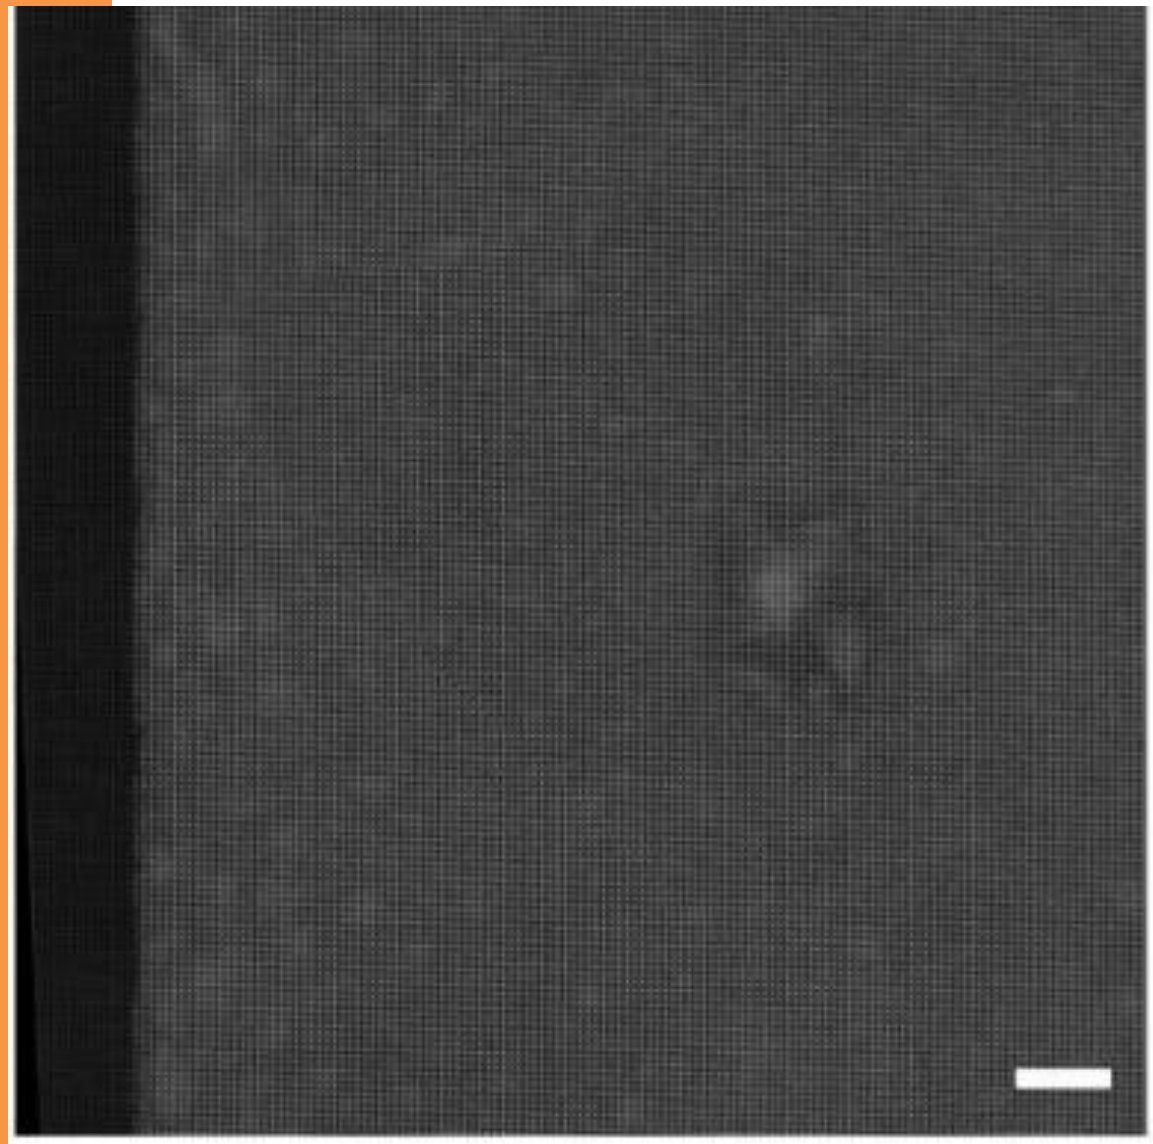

NiO – $La_xSr_{1-x}MnO_3$

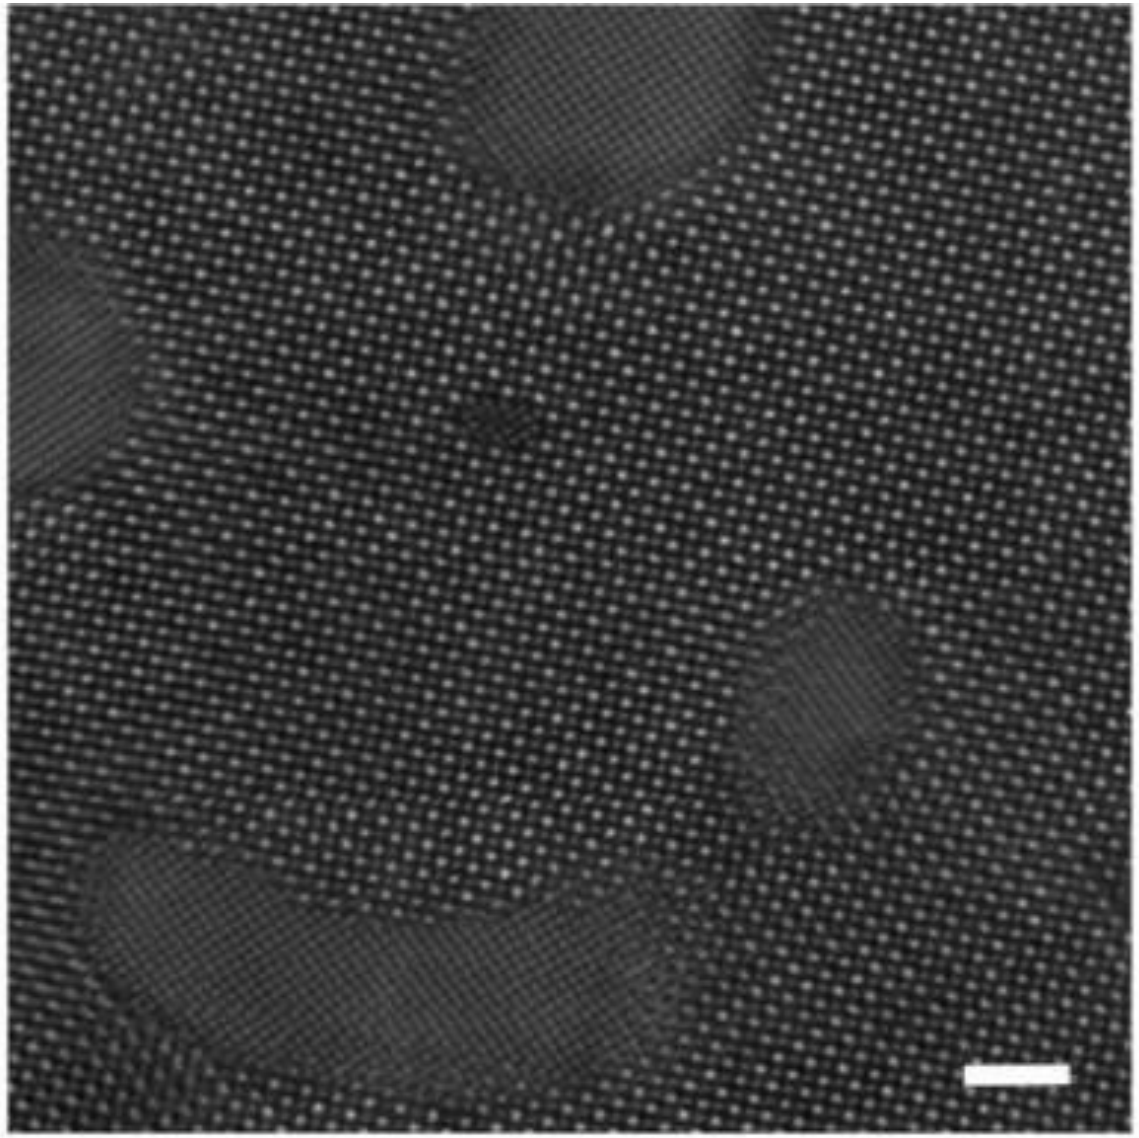

Simple VAE

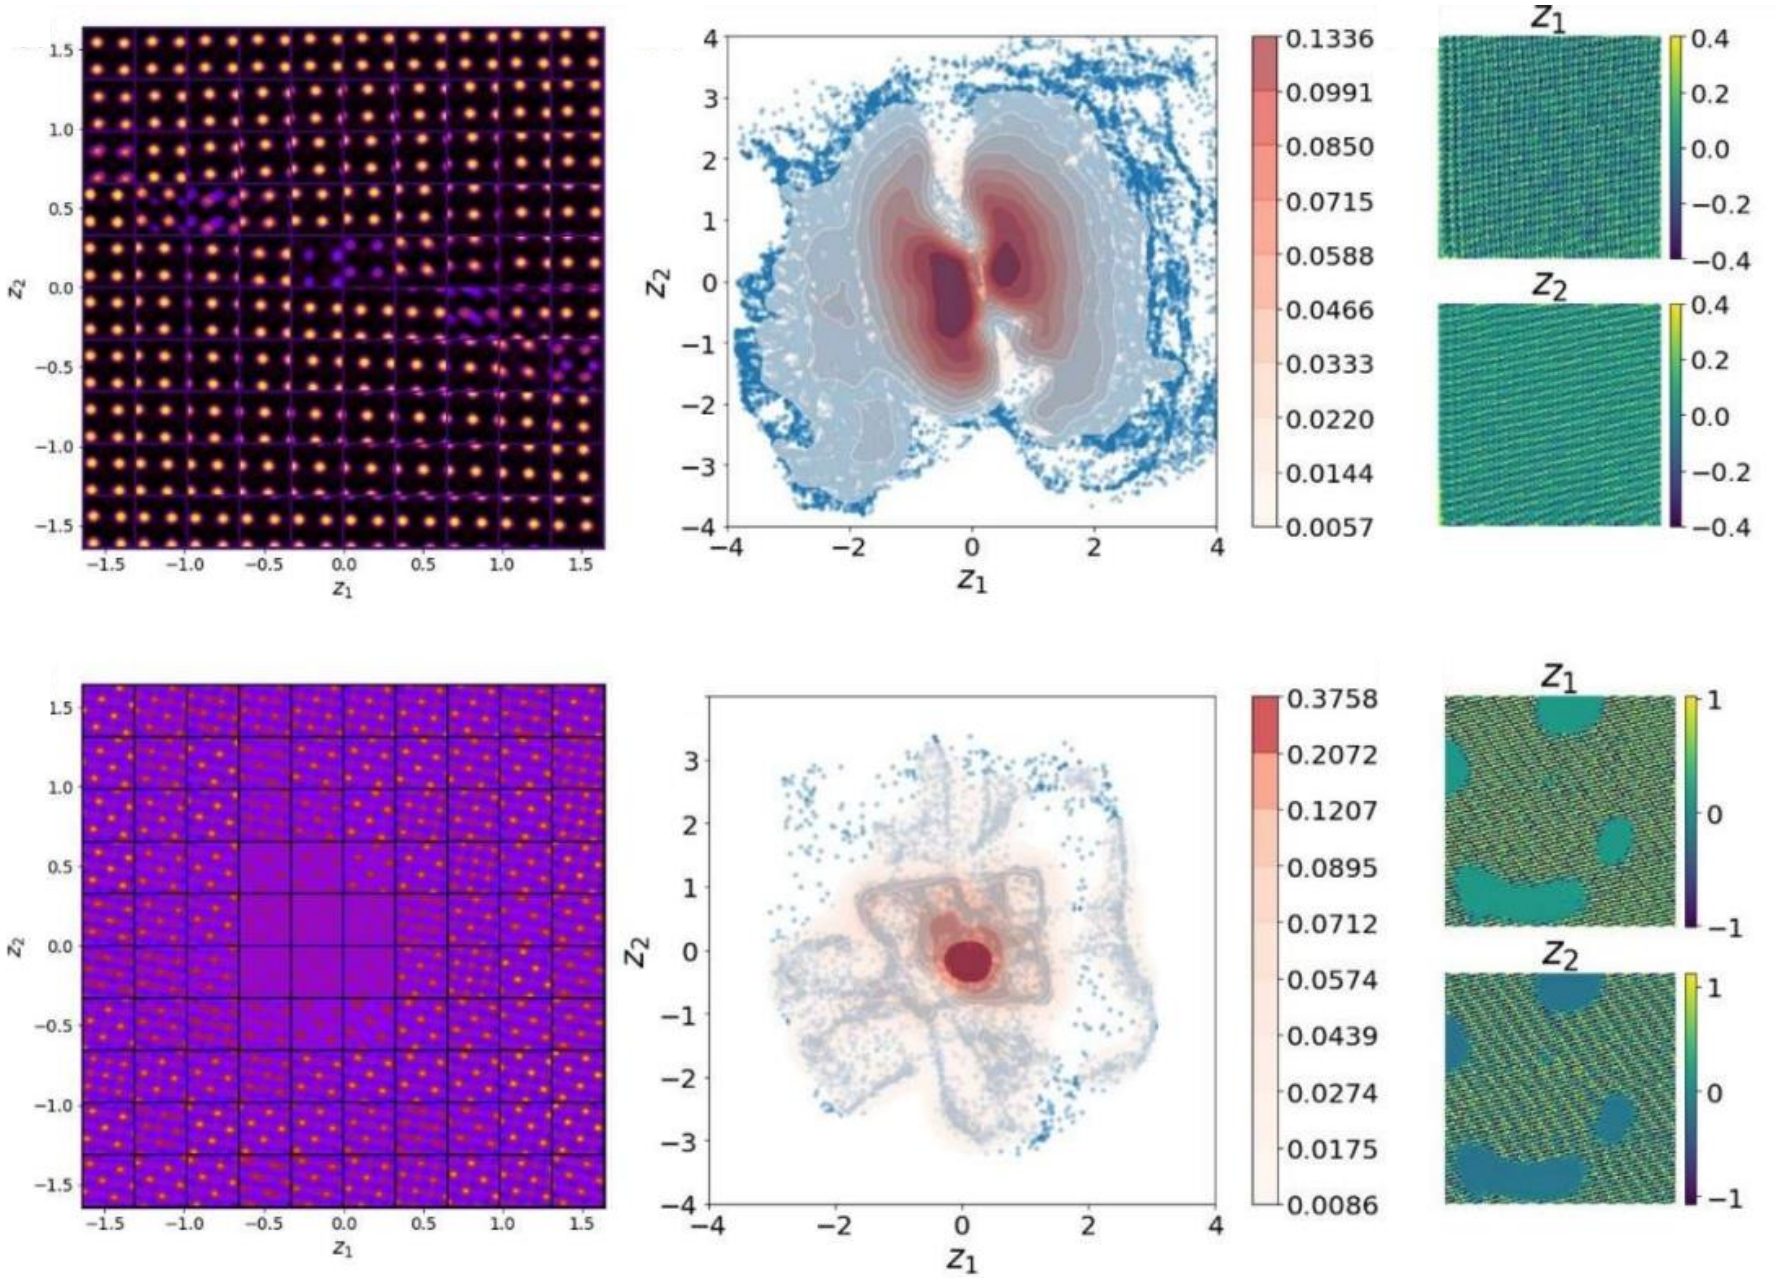
z_1
z_2
0.1336
0.0991
0.0850
0.0715
0.0588
0.0466
0.0333
0.0220
0.0144
0.0057
0.3758
0.2072
0.1207
0.0895
0.0712
0.0574
0.0439
0.0274
0.0175
0.0086

Shift VAE: Translational Invariance

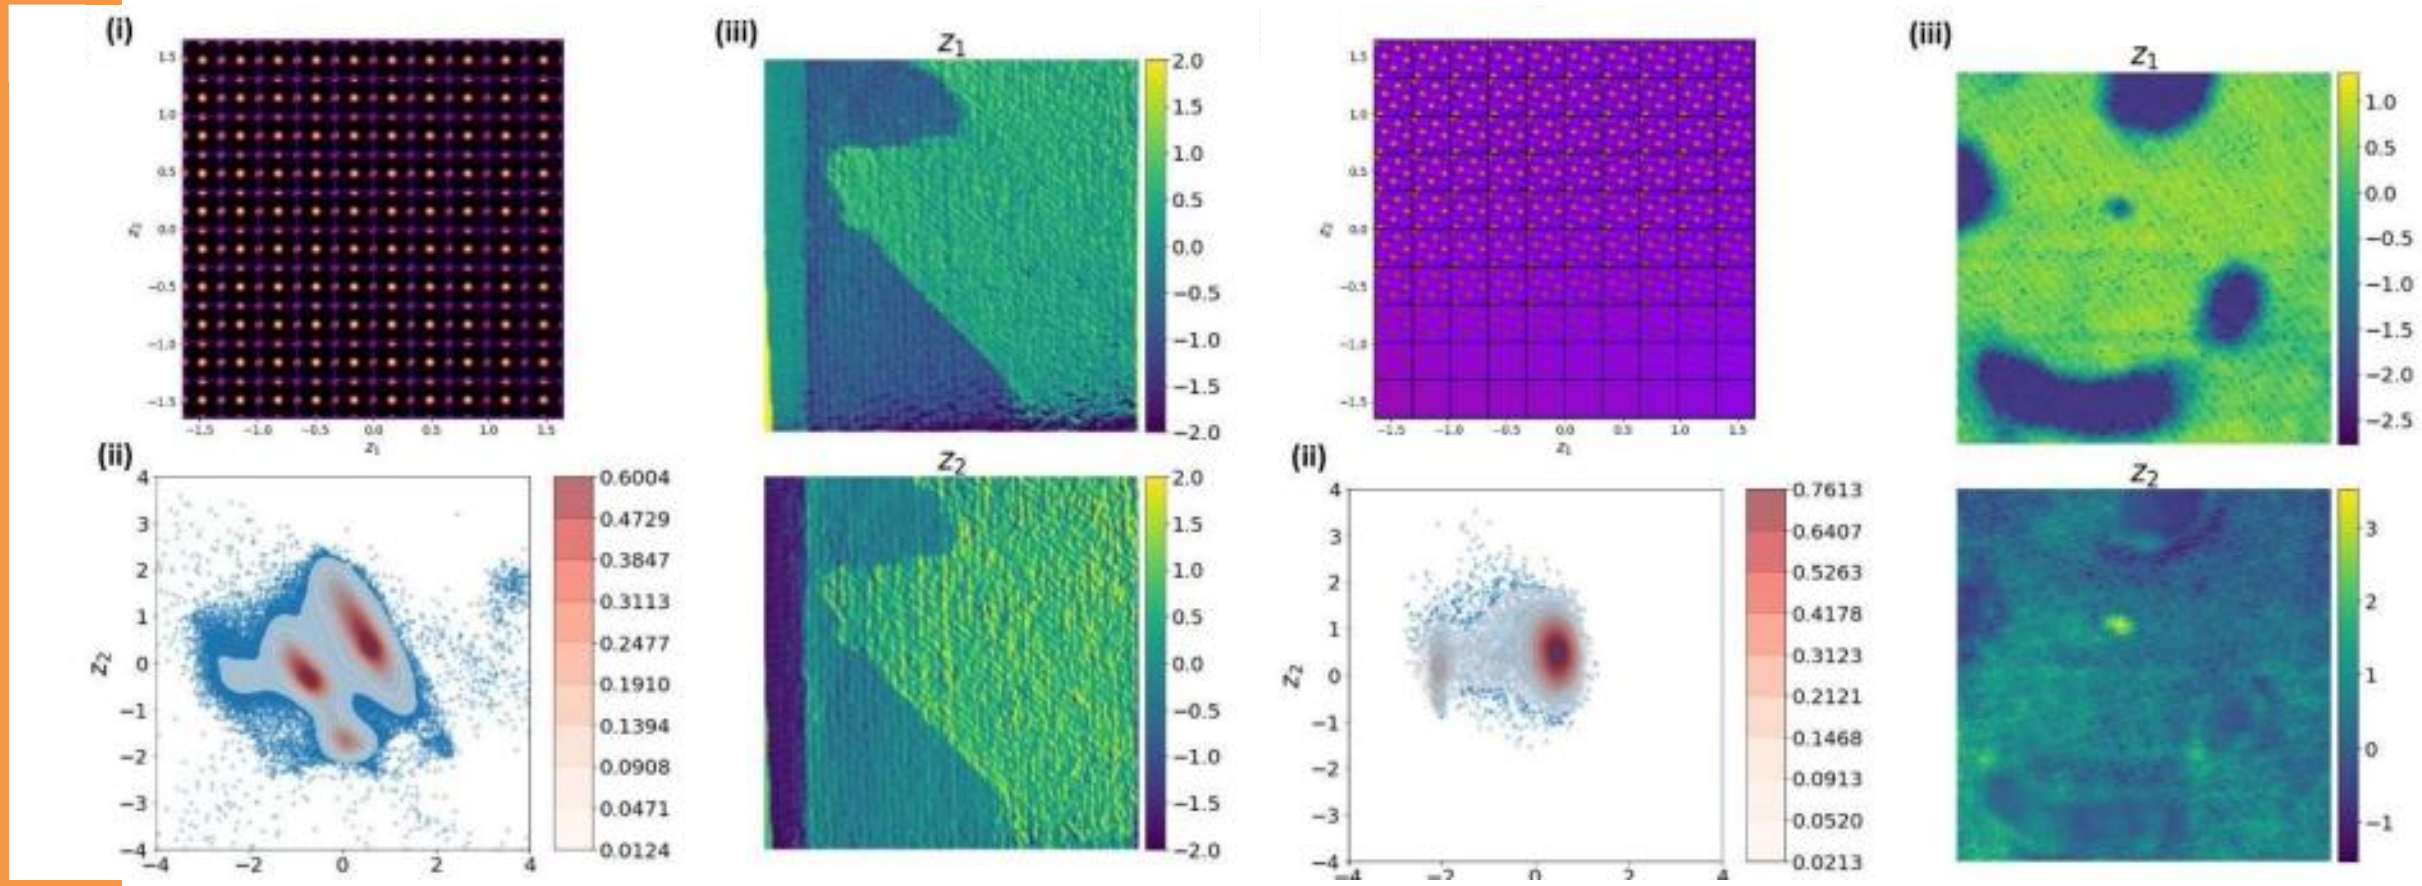

Off to chemically-disordered systems

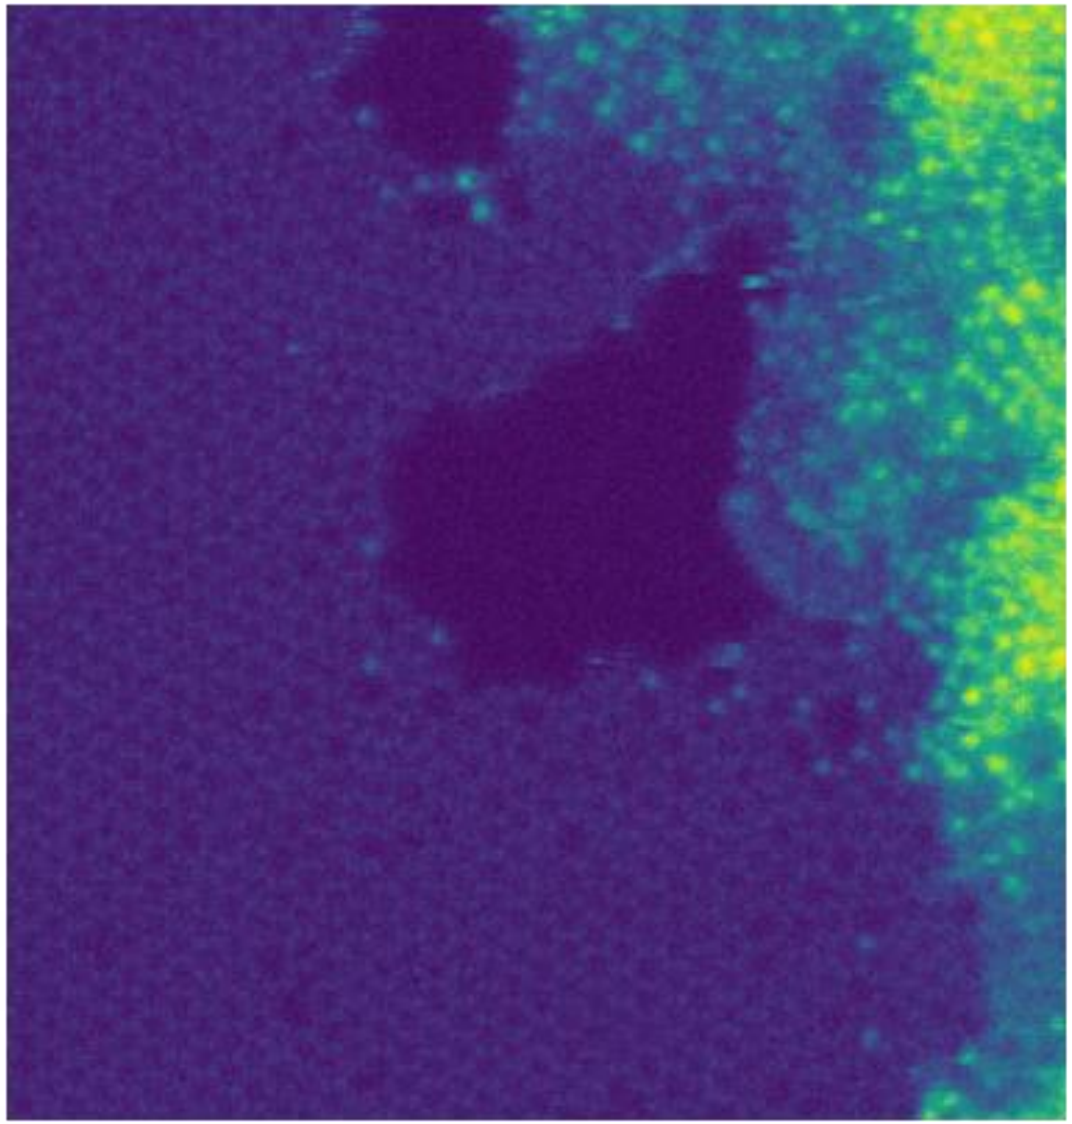

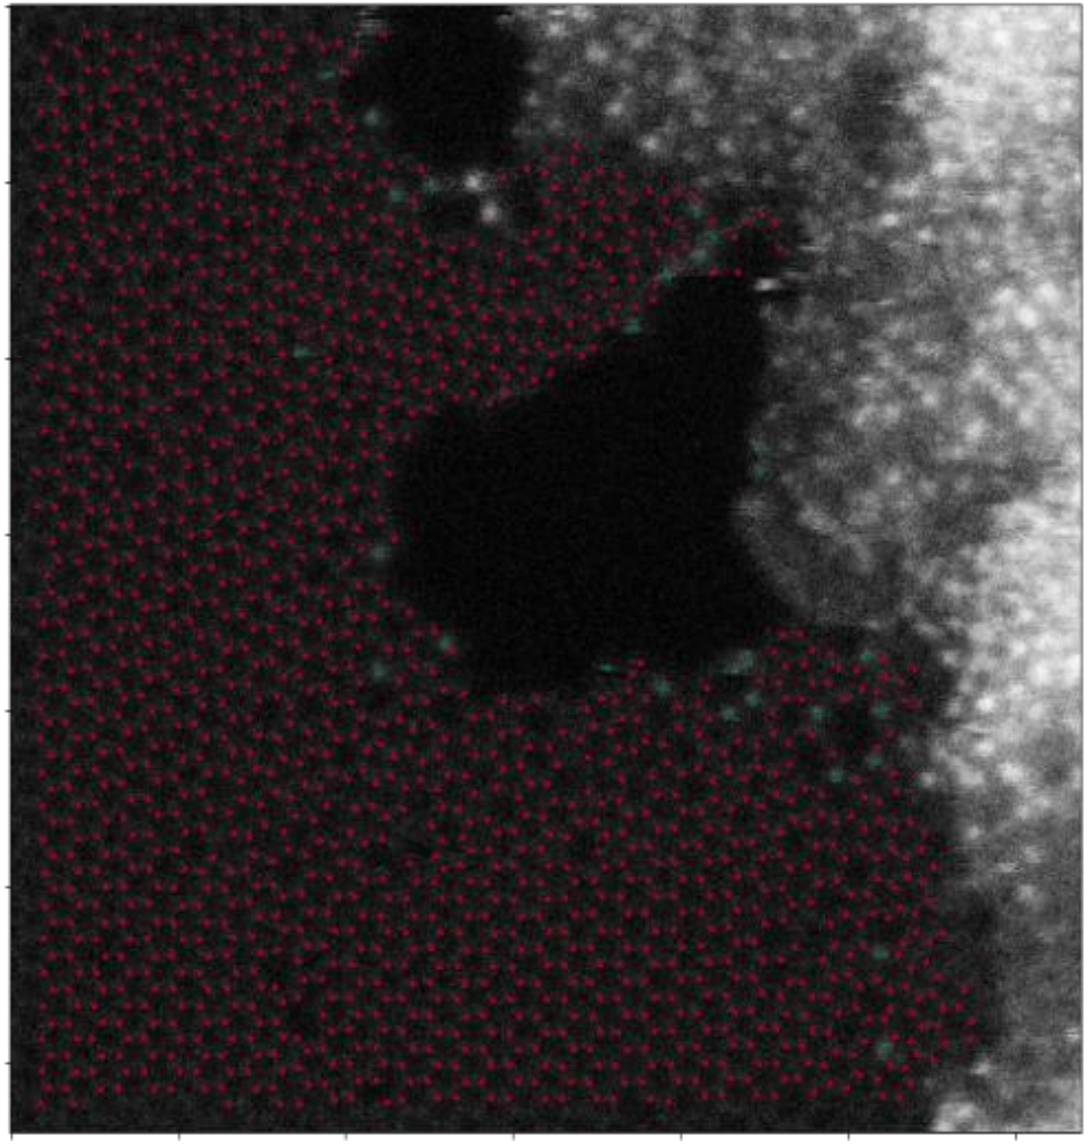

rVAE analysis at different time steps

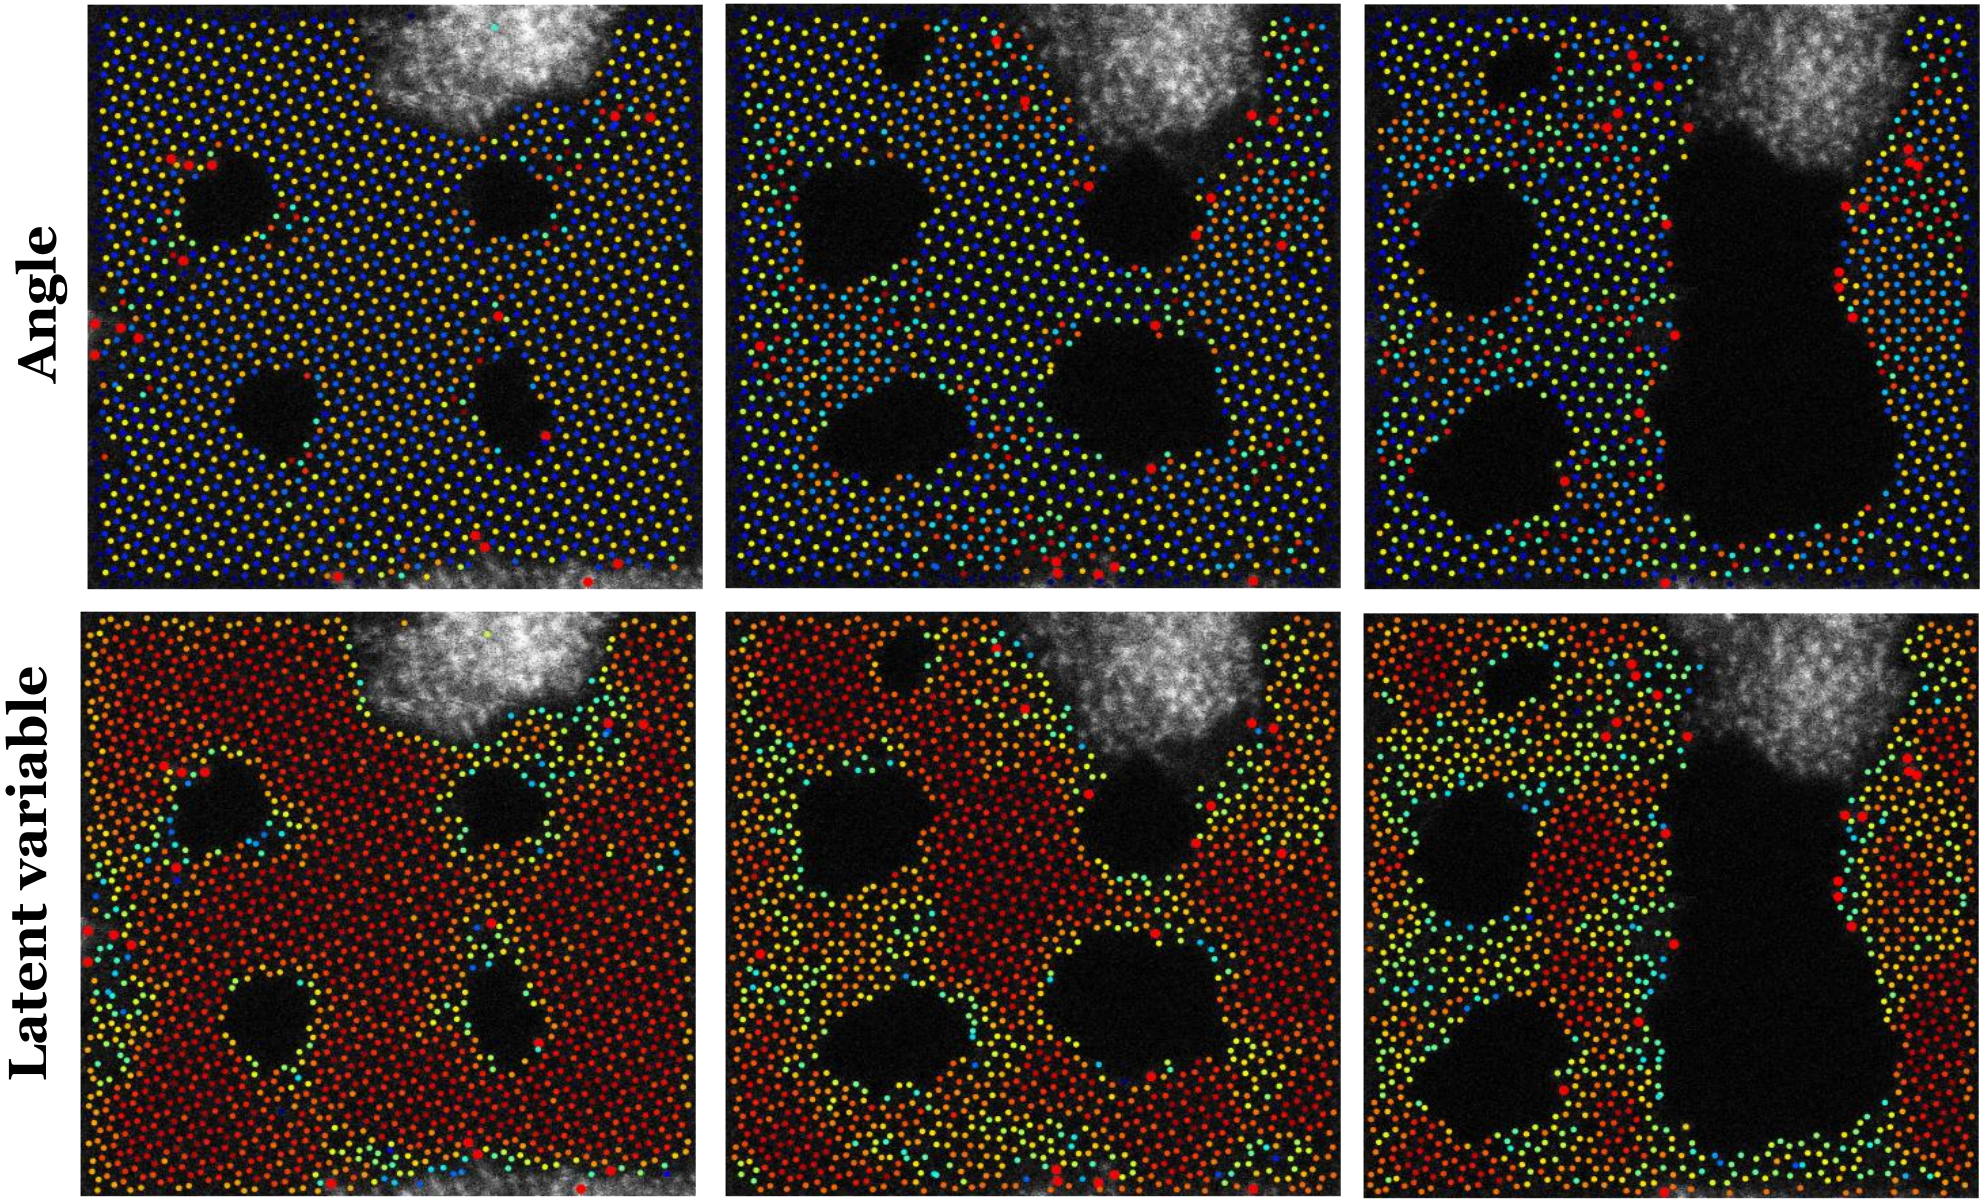

There is nothing as beautiful as training VAE

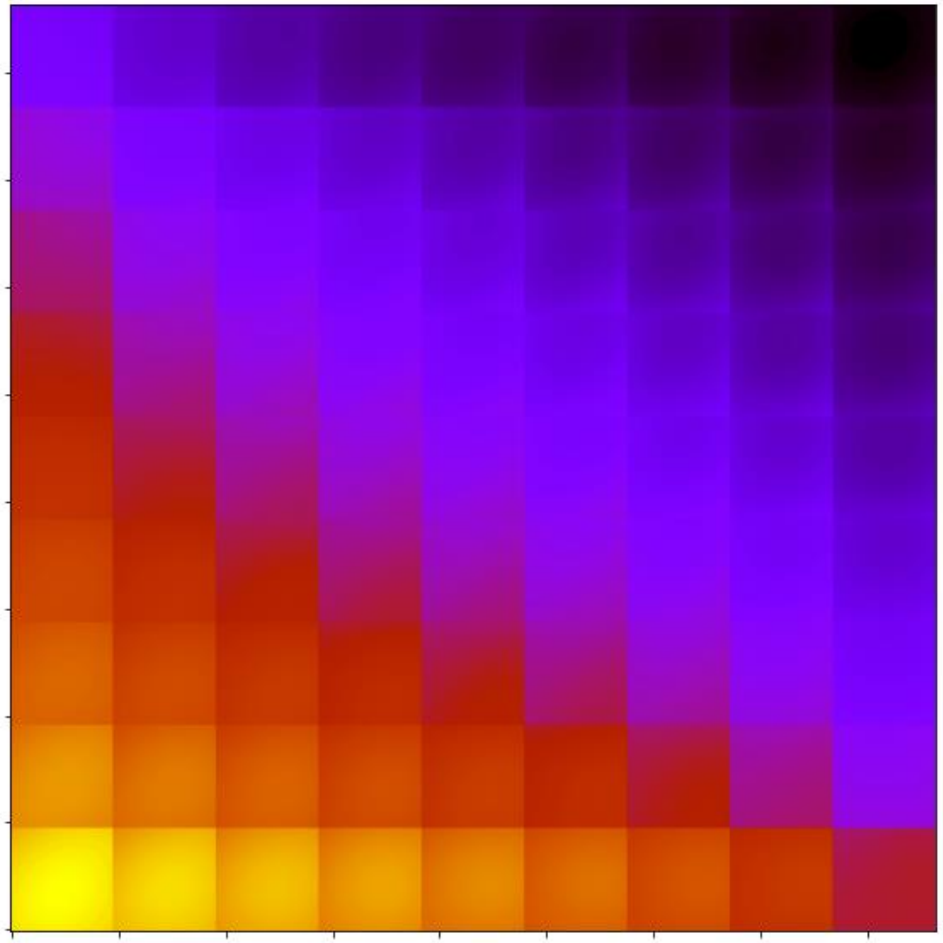

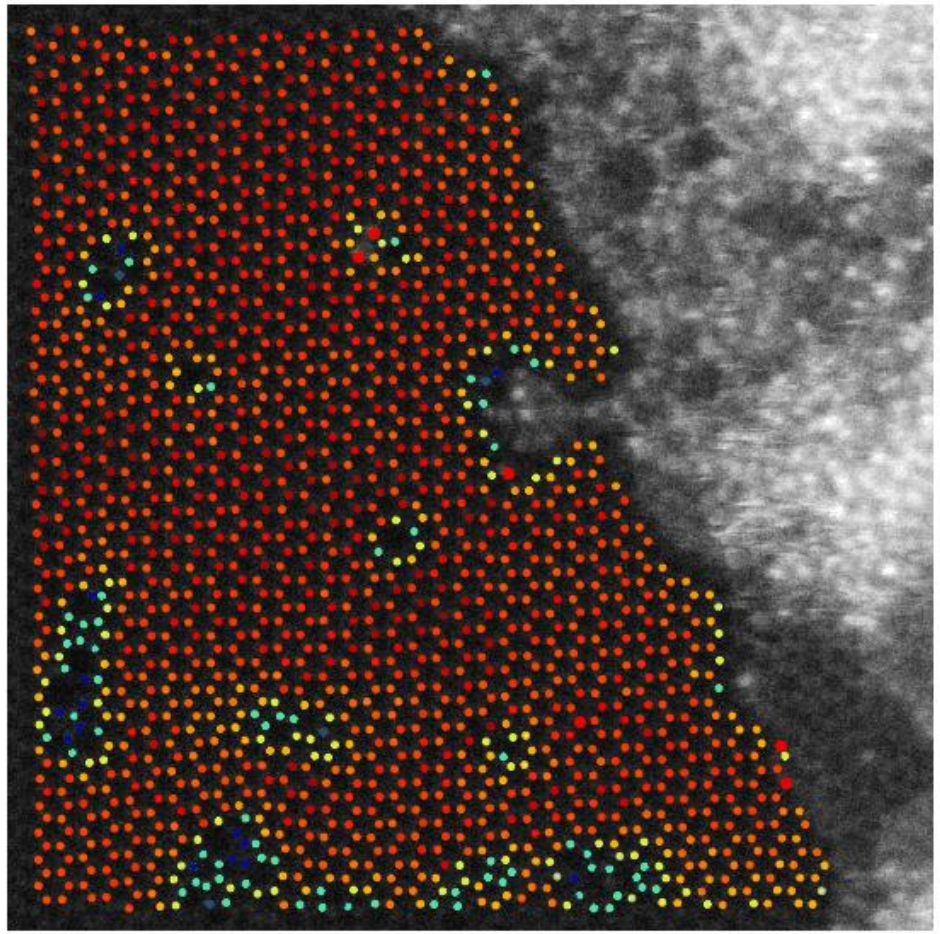

Next step: skip-rVAE

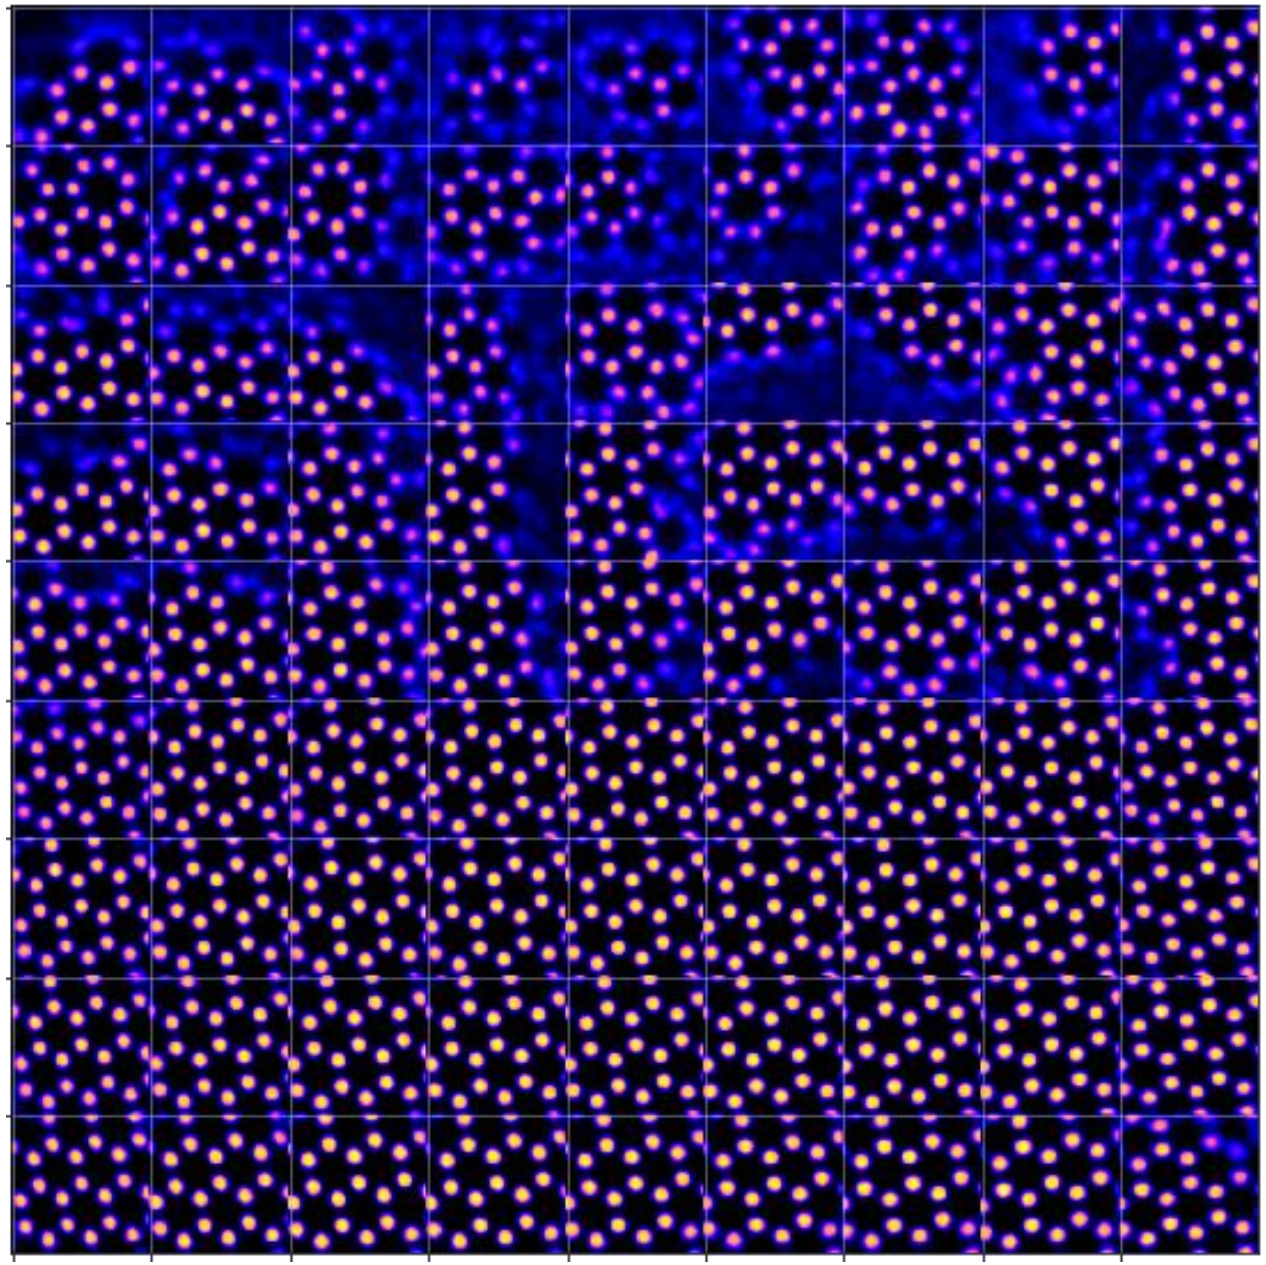

Unsupervised discovery of molecules

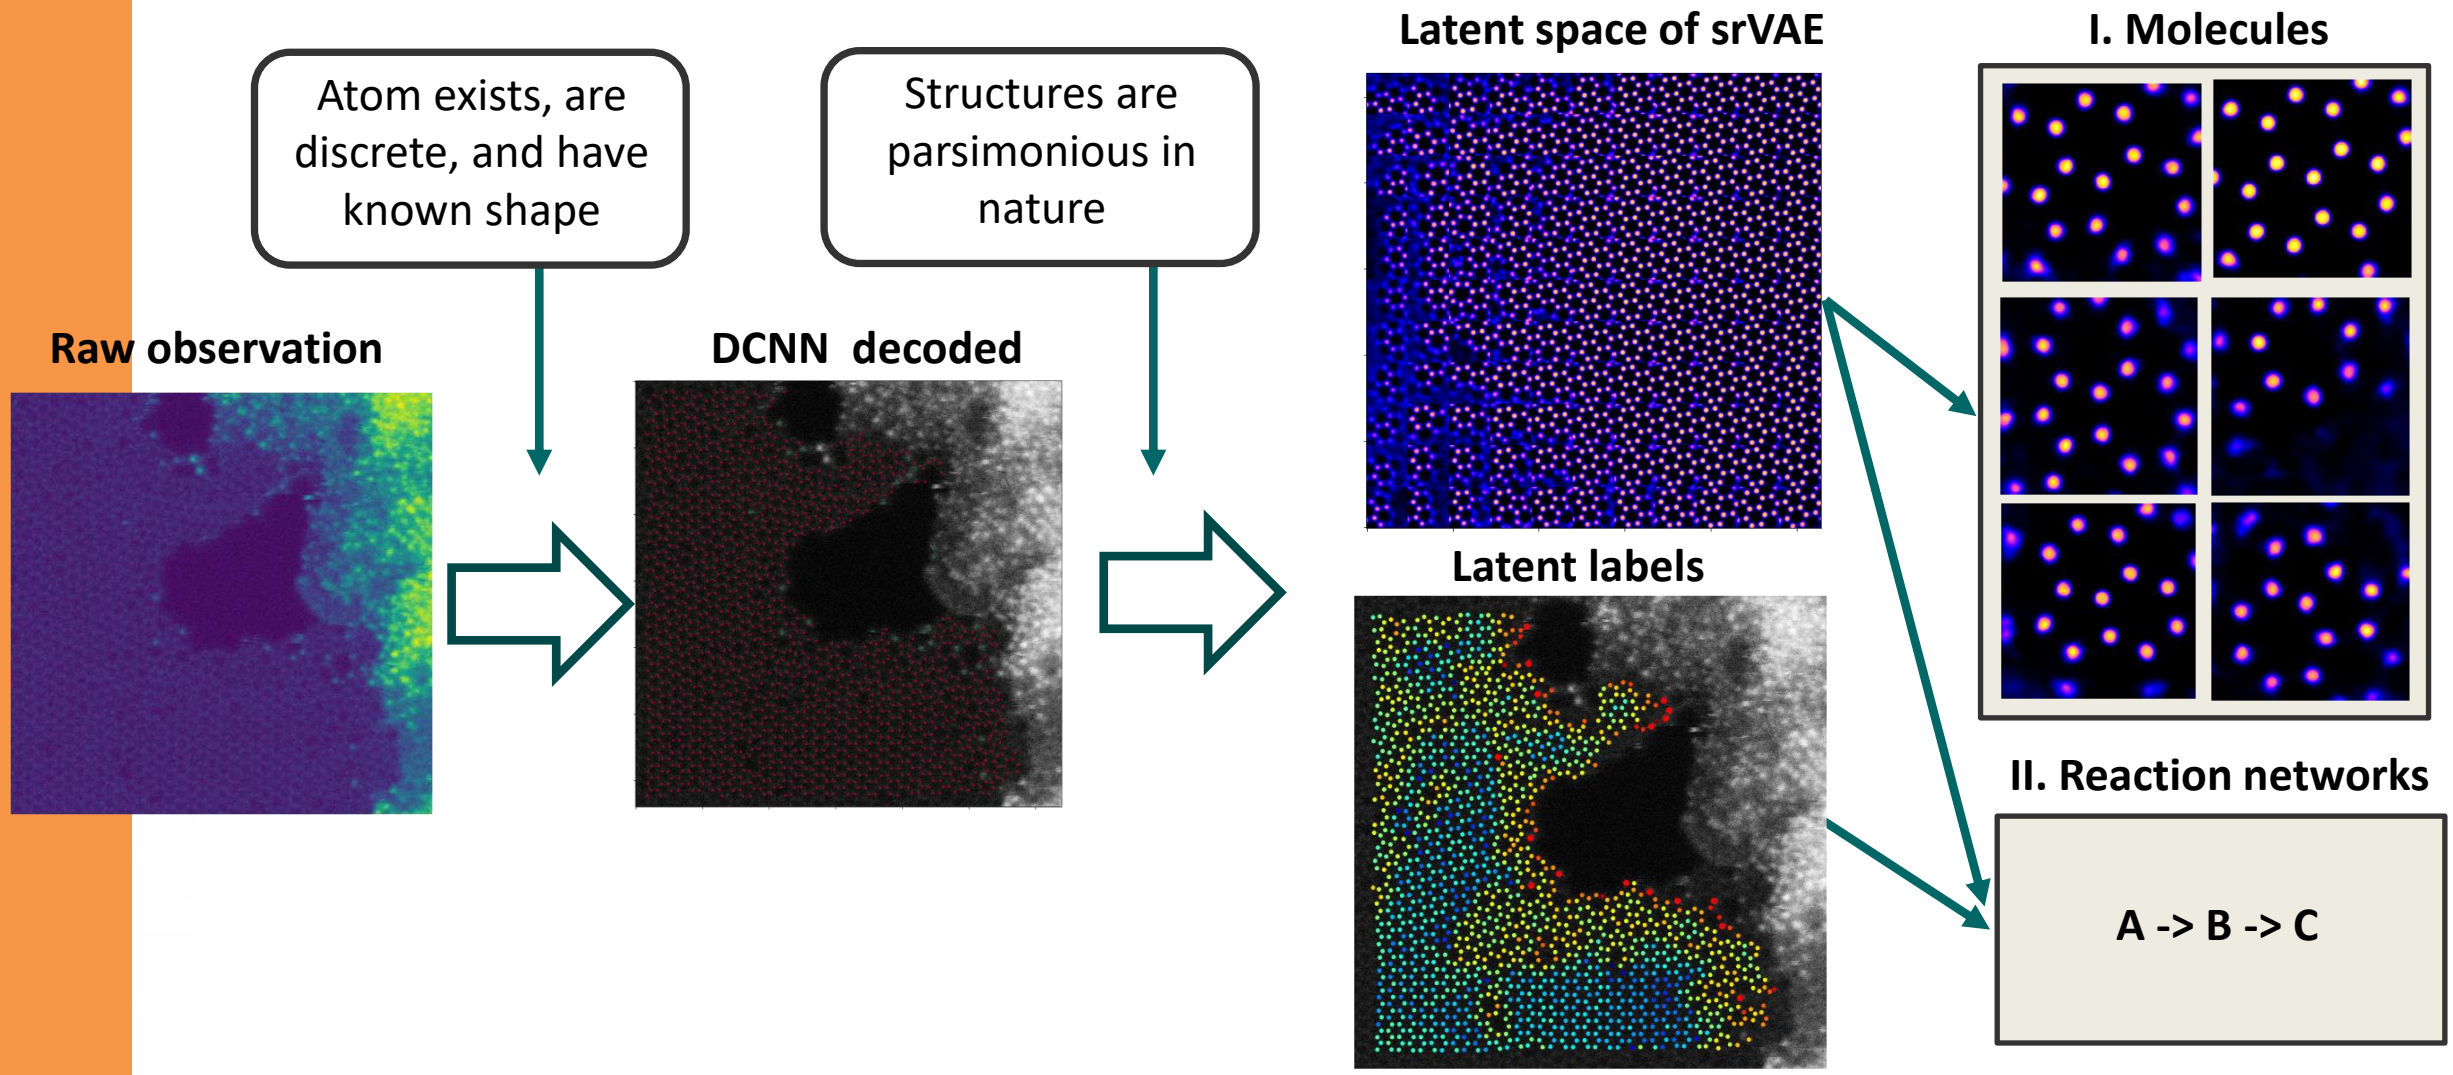

Exploring the latent space structure

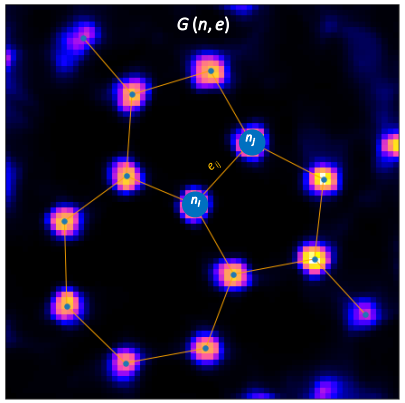



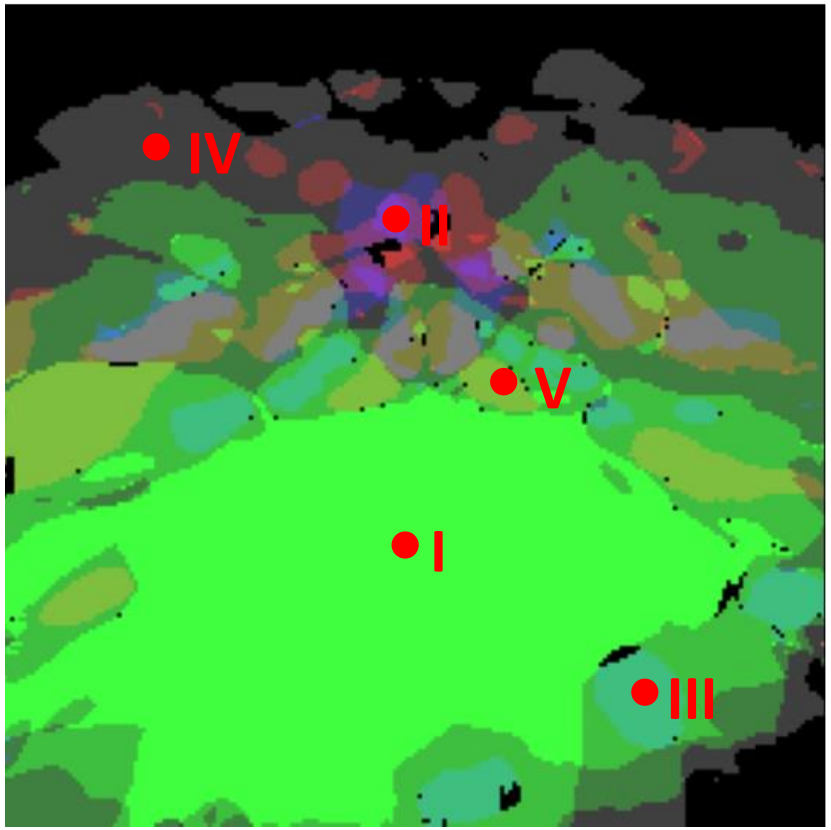

I



II

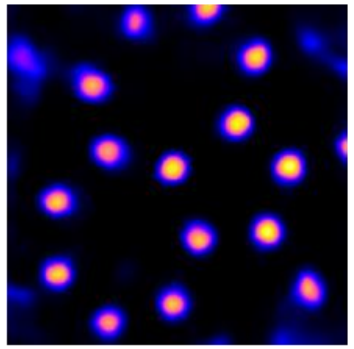

III



IV



V



Ferroelectric domain and domain walls

Amplitude

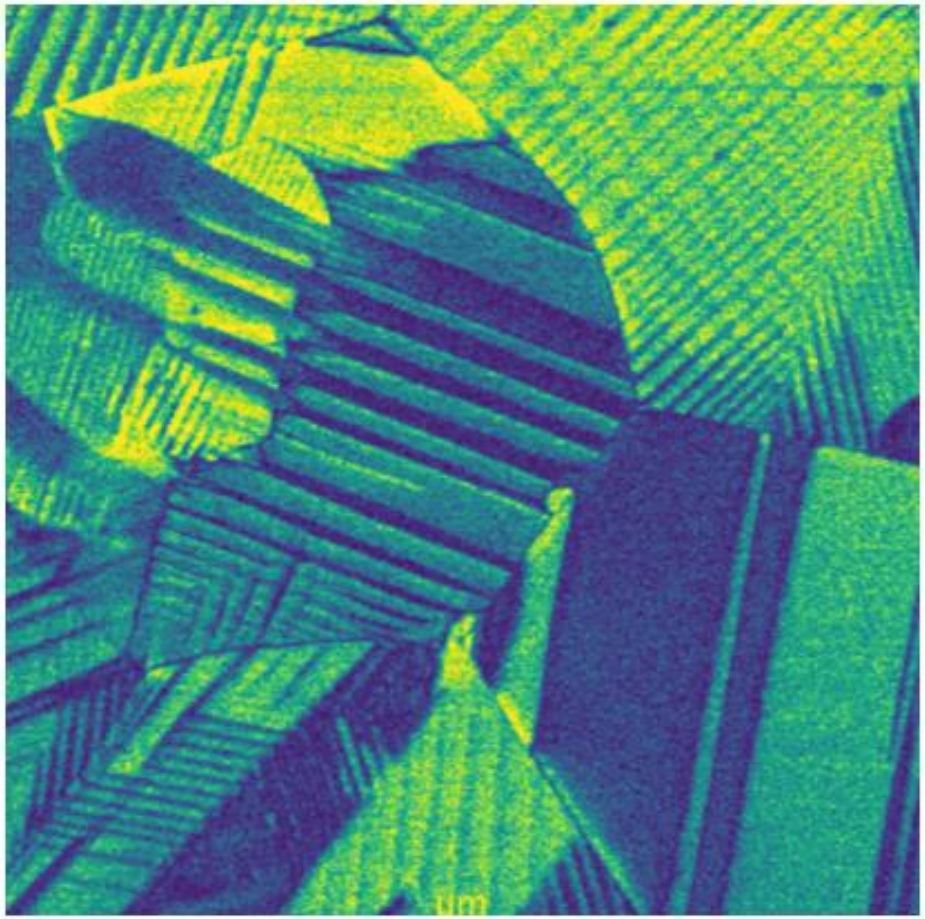

Phase

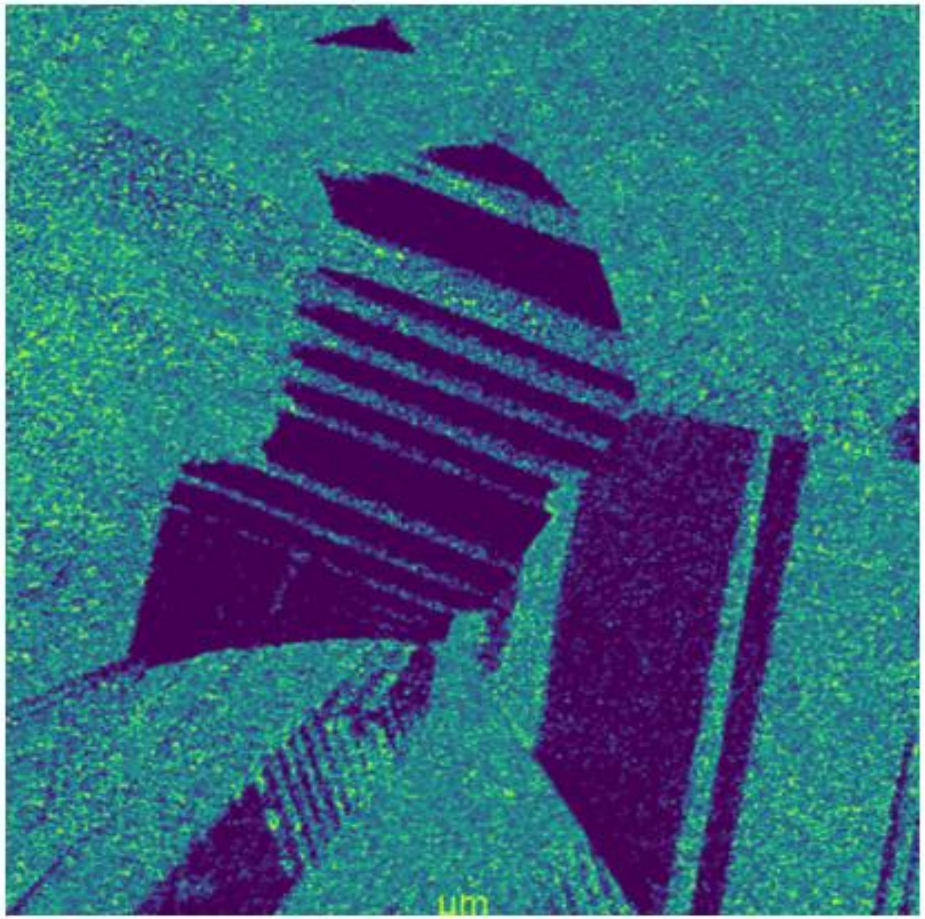

Detecting domain walls

Canny filter

Phase Image

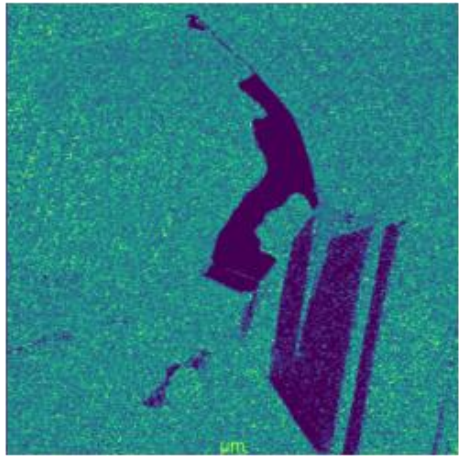

Gaussian Filter

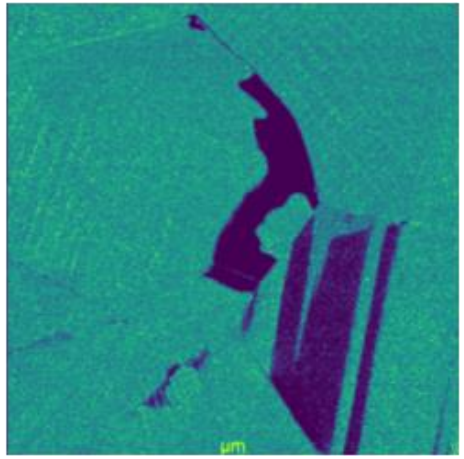

Wall by Canny Filter

DCNN Prediction

Image

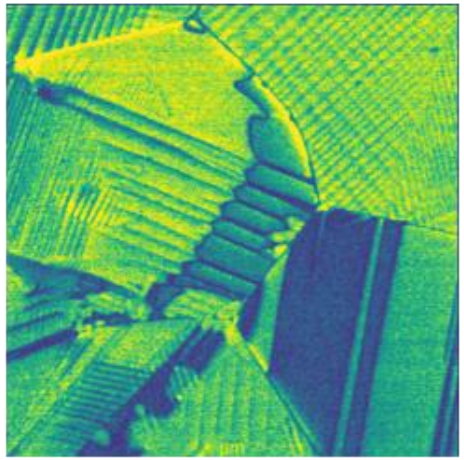

Predicted

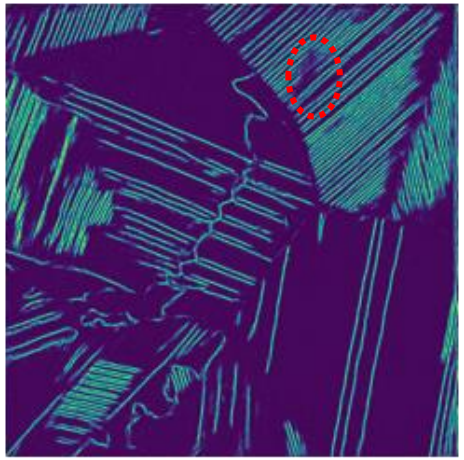

Gaussian Filter

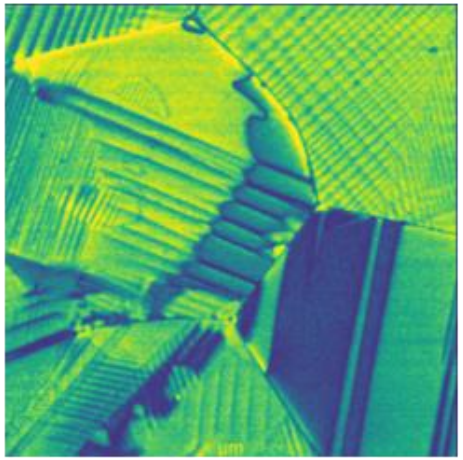

Gaussian Filter and Predicted

rVAE analysis

Latent Space

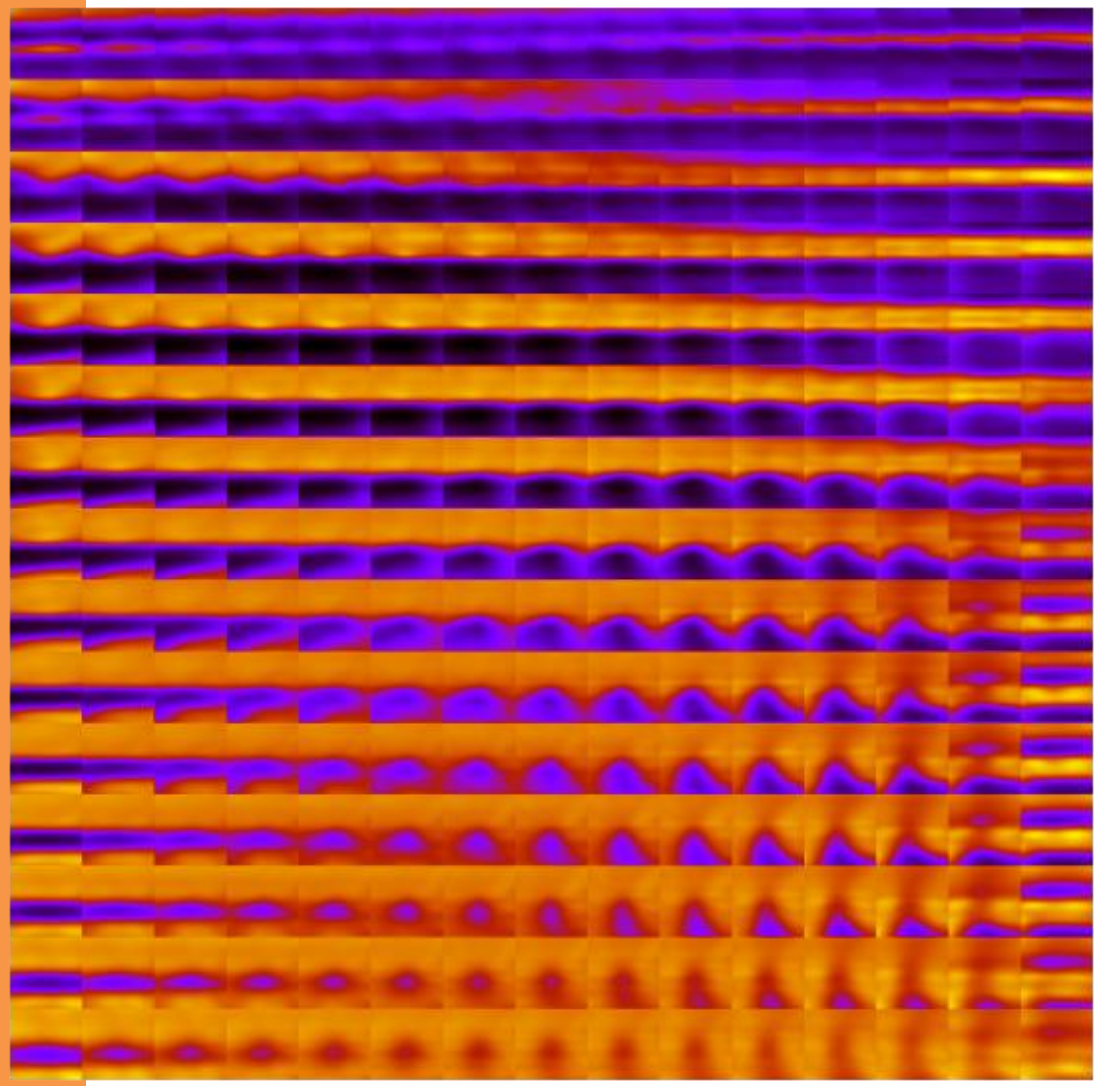

Domain Walls

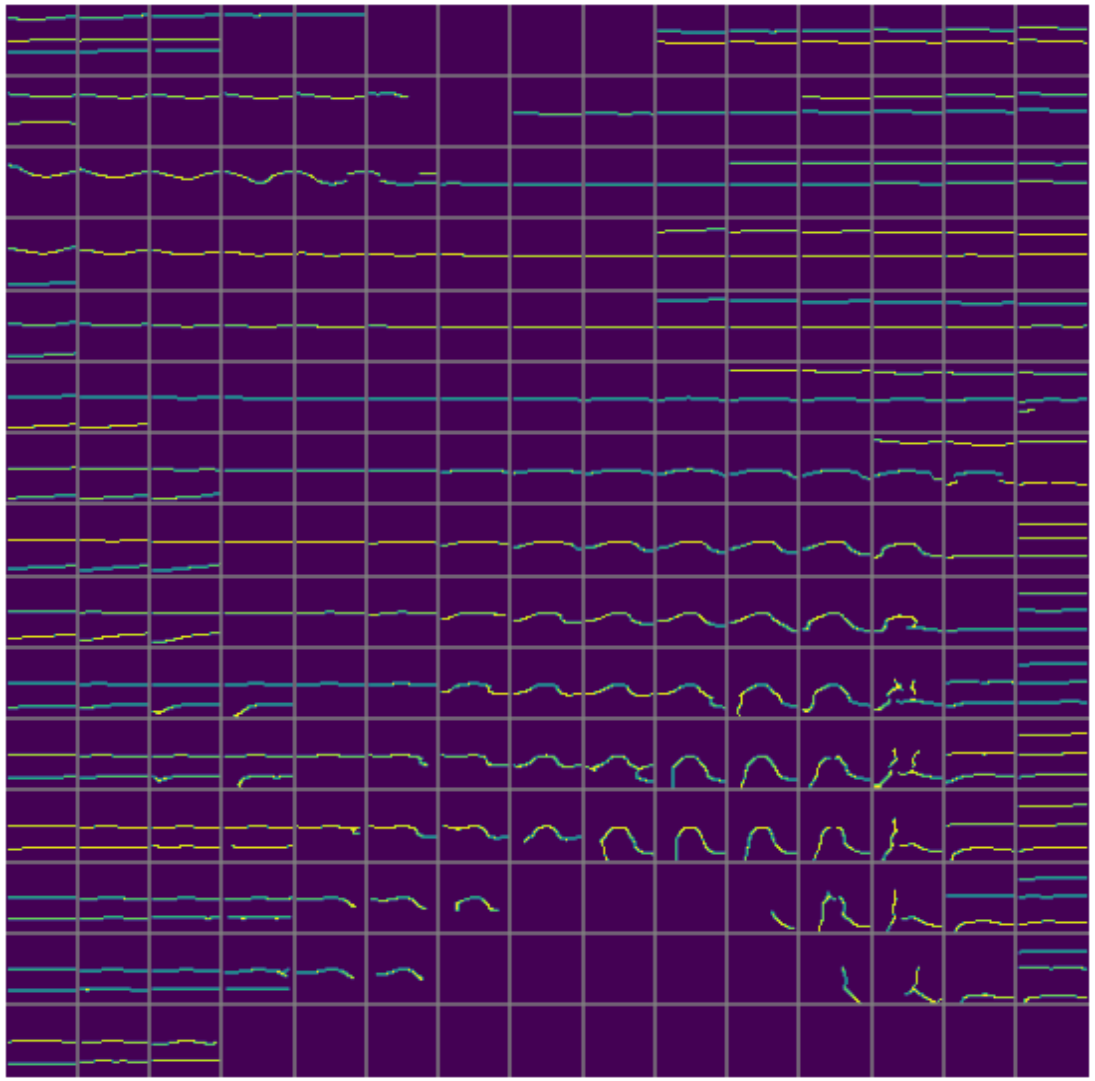

rVAE latent space

Latent Space

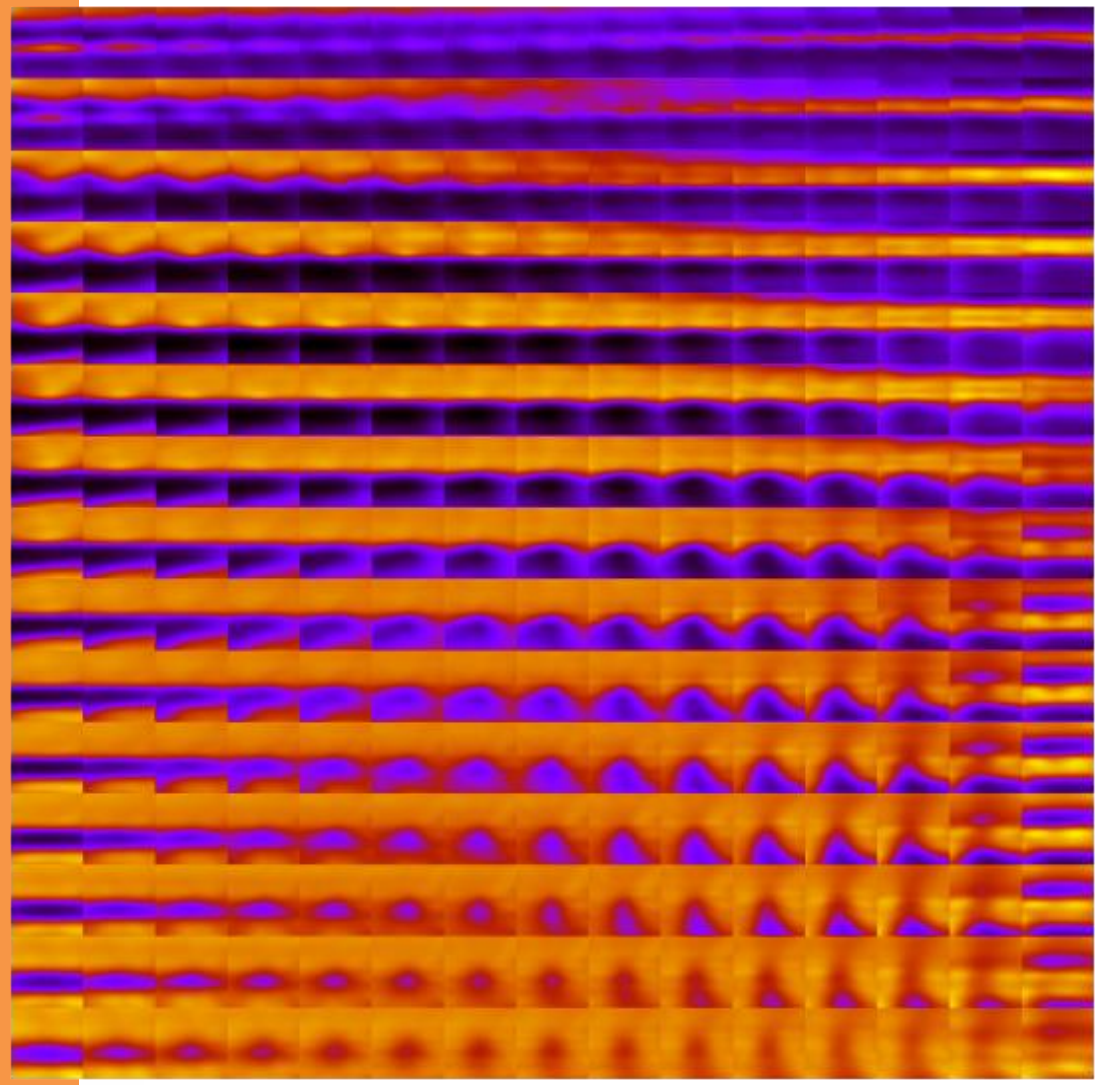

Domain wall count

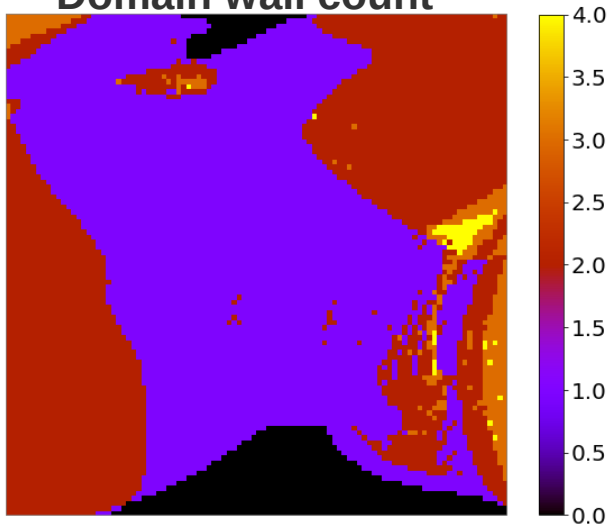

Switching degree

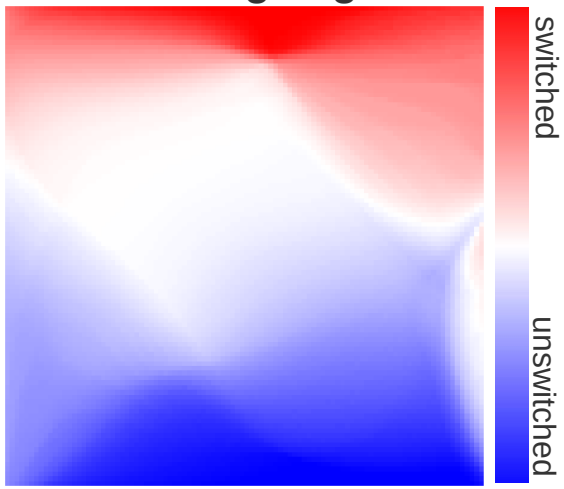

Average wall curvature

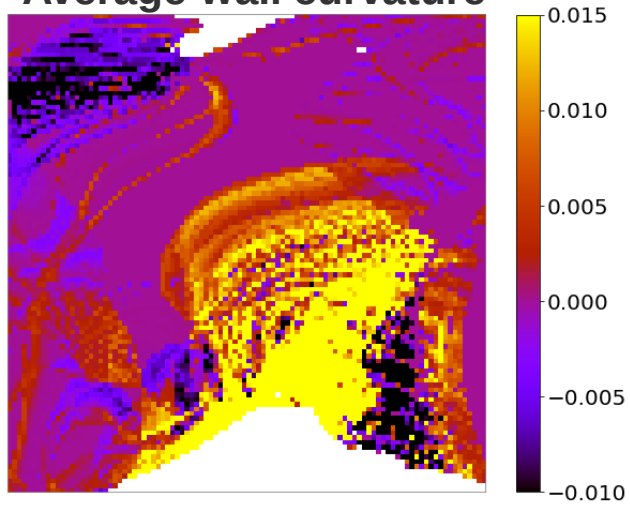

rVAE with time delay

Training dataset

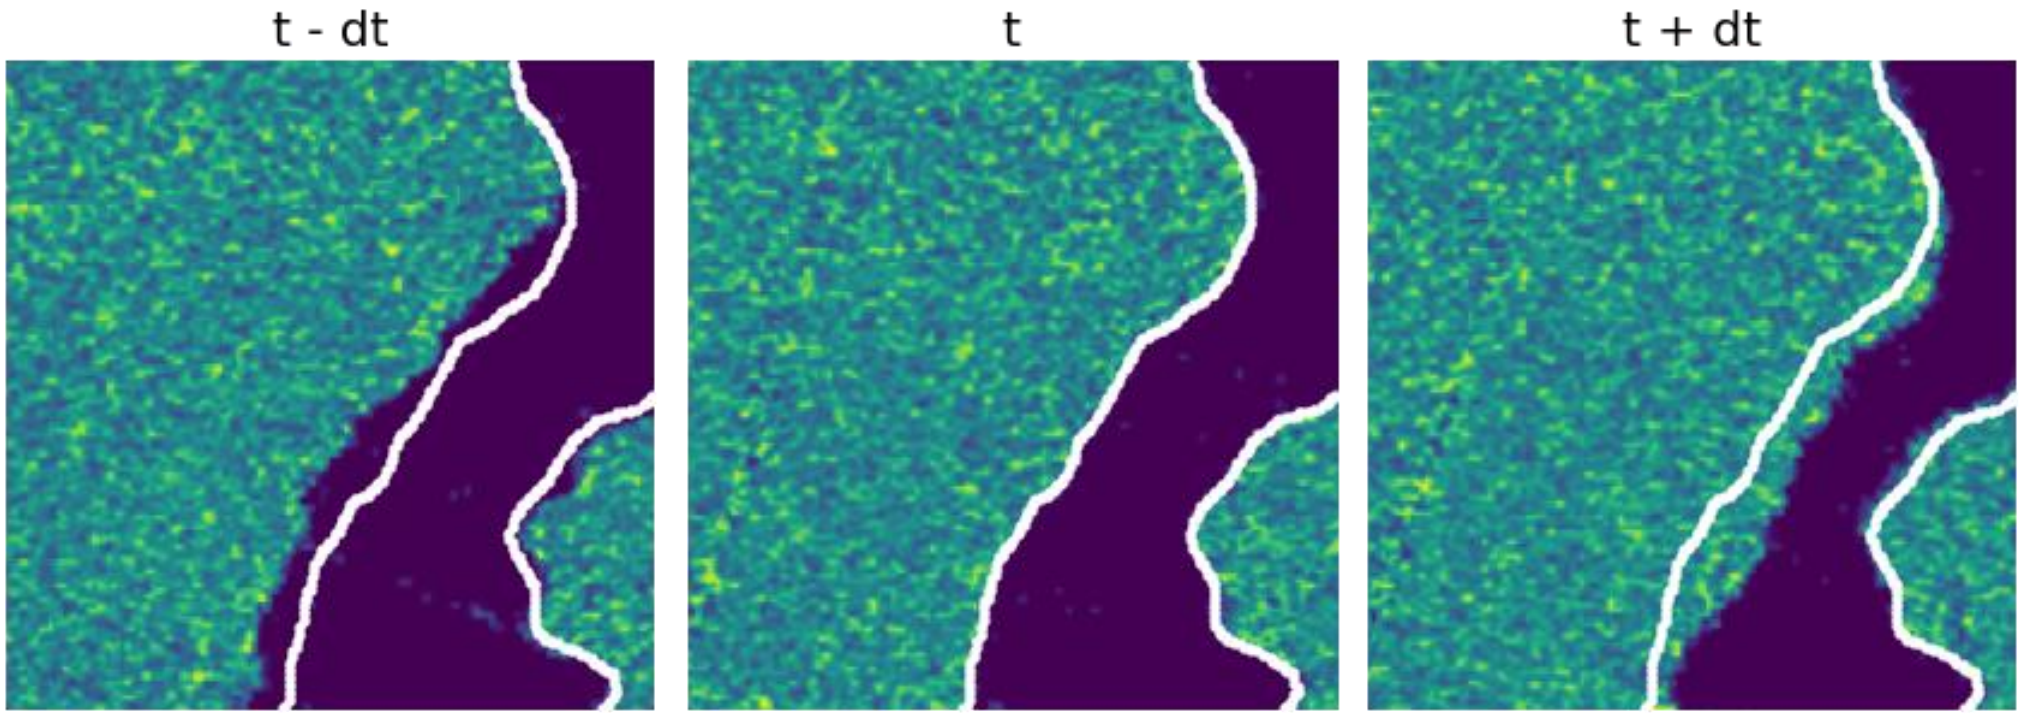

rVAE with time delay

Latent space

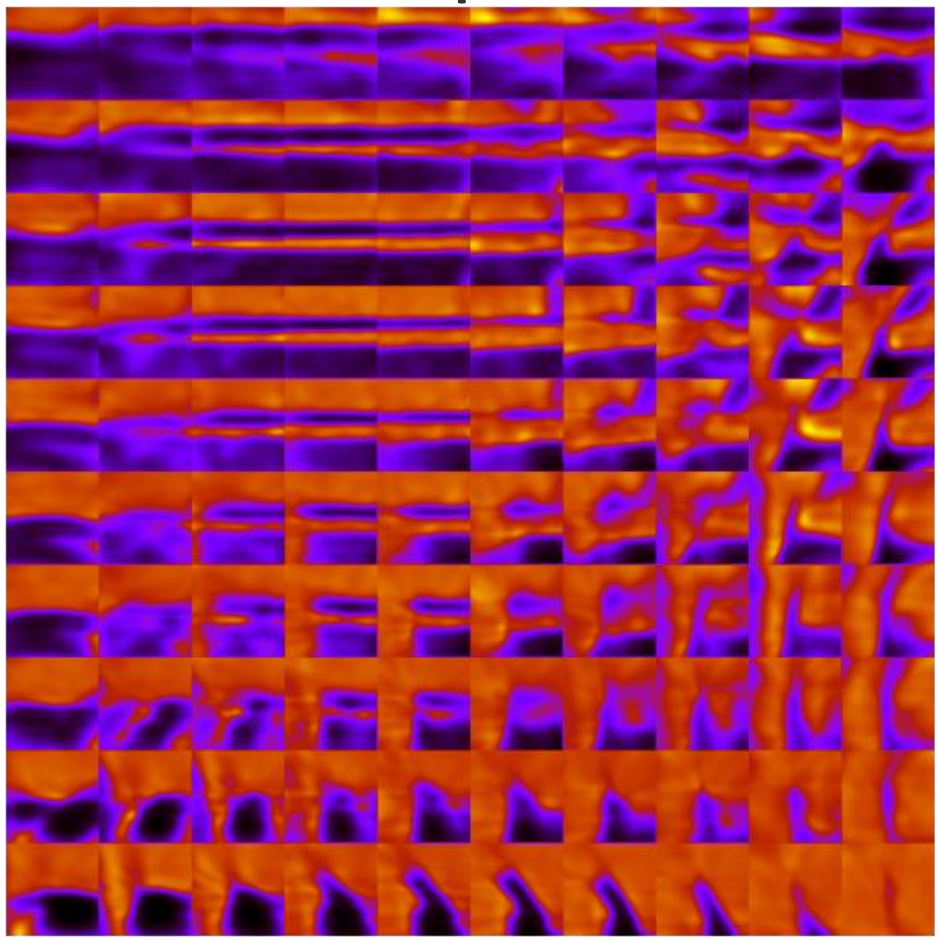

Domain wall

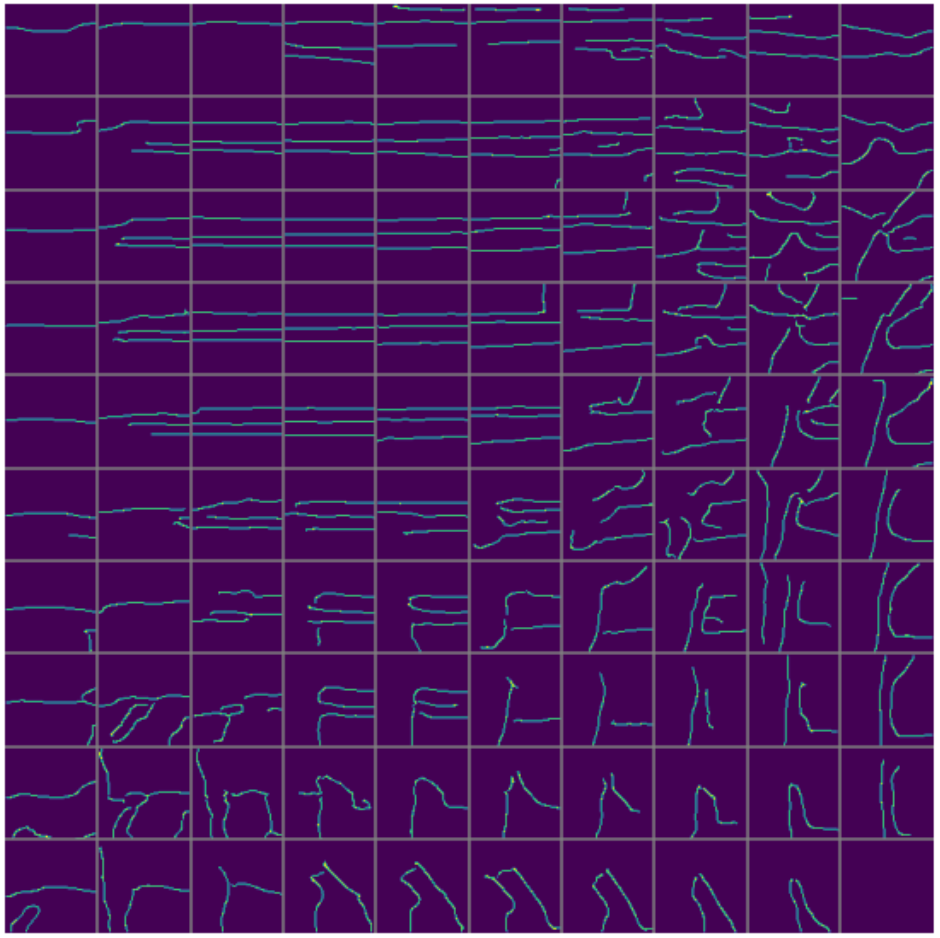

rVAE with time delay

Latent space

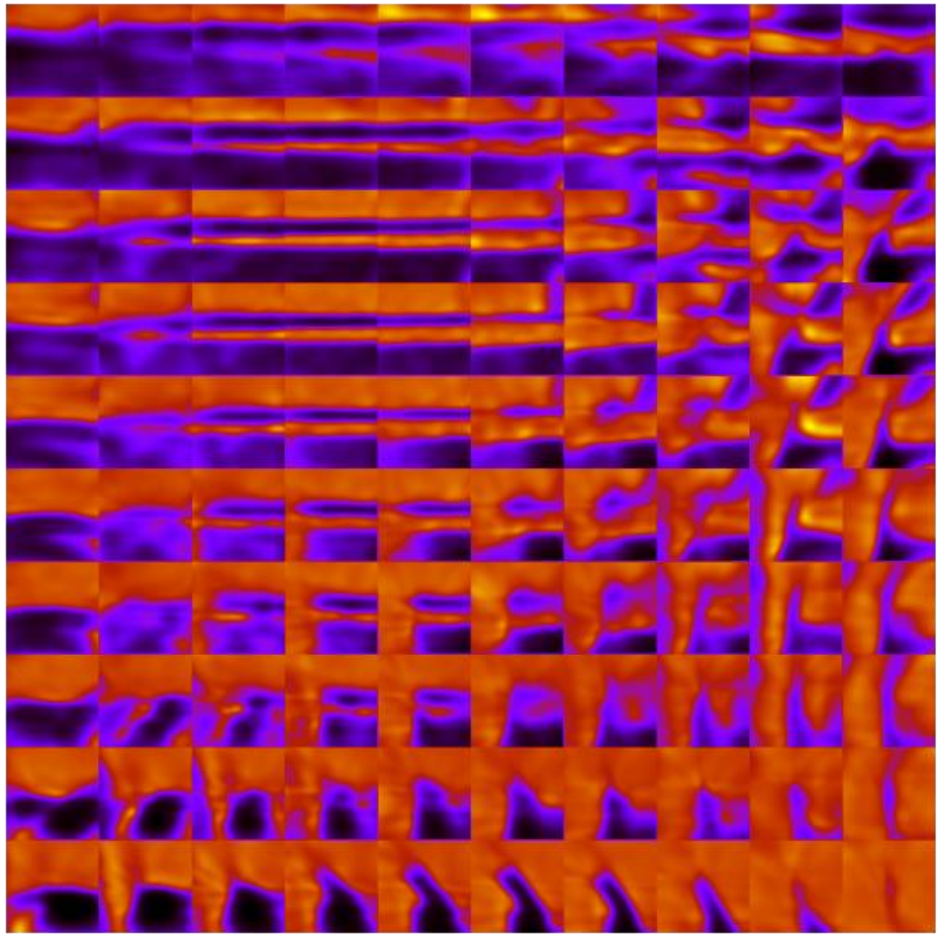

Wall count

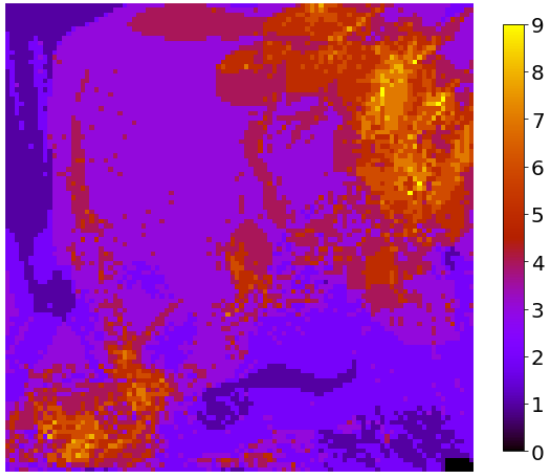

Domain convex

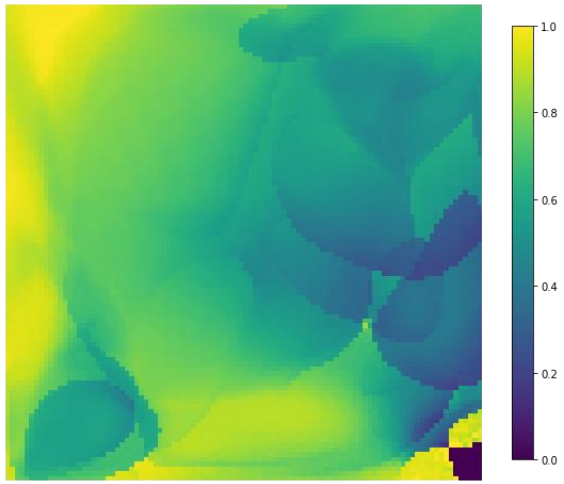

Switch significance

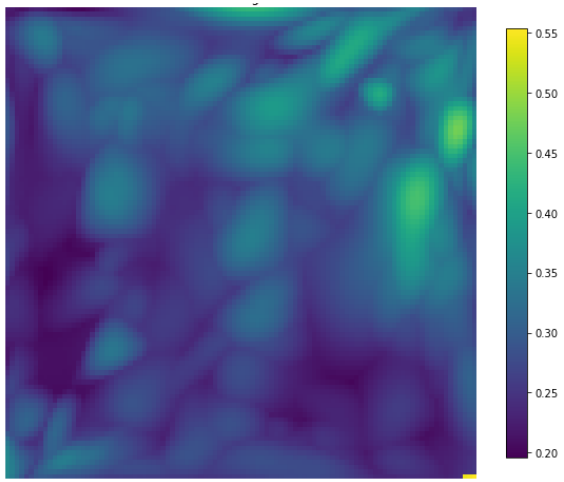

Domain wall evolution

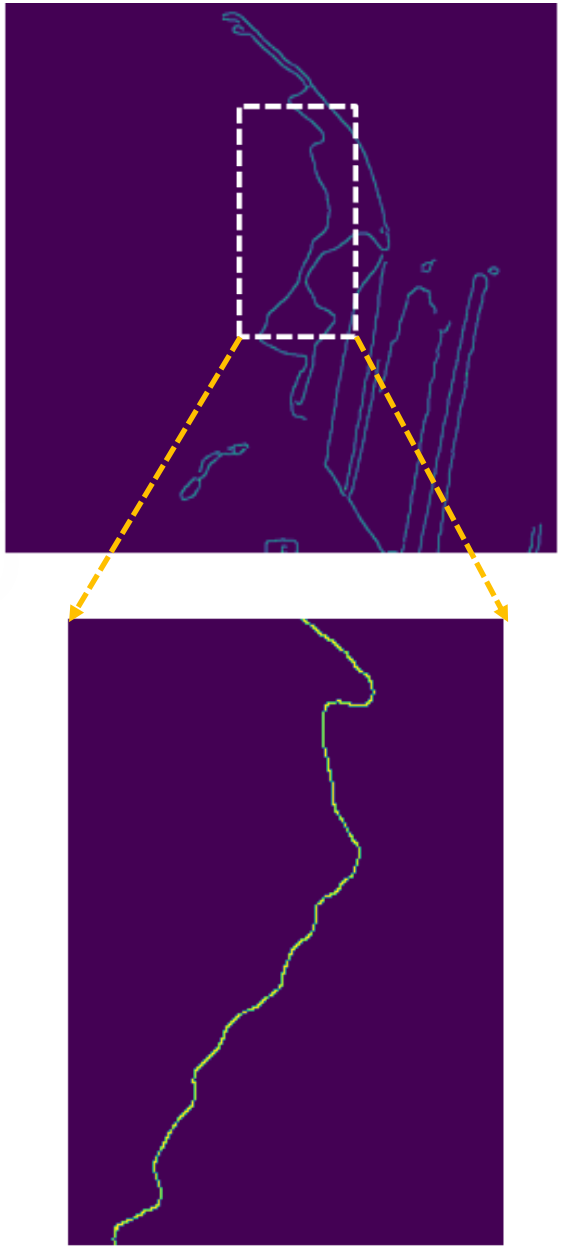

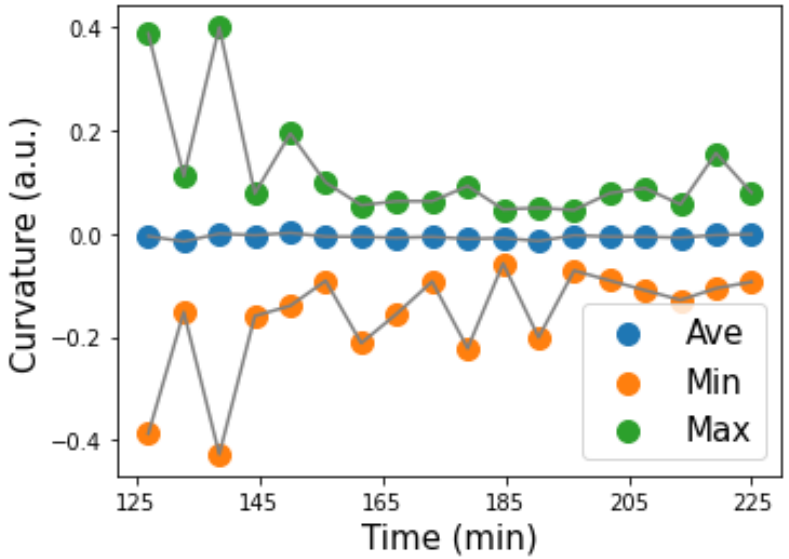

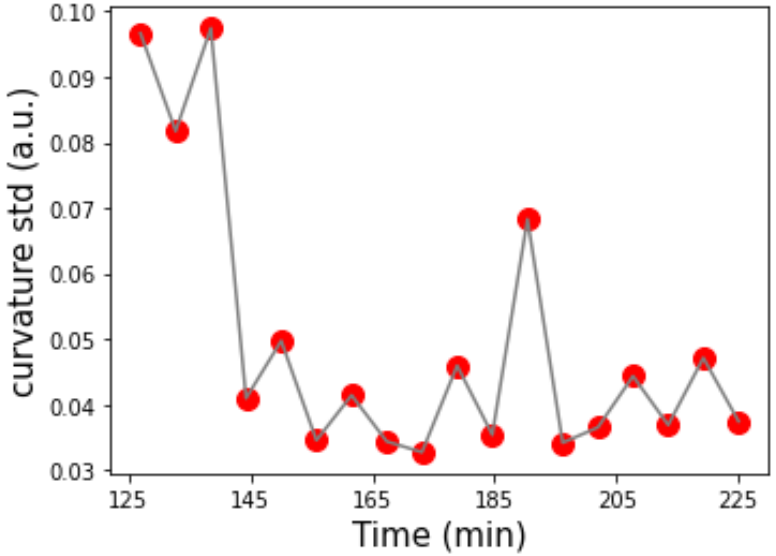

Domain wall evolution

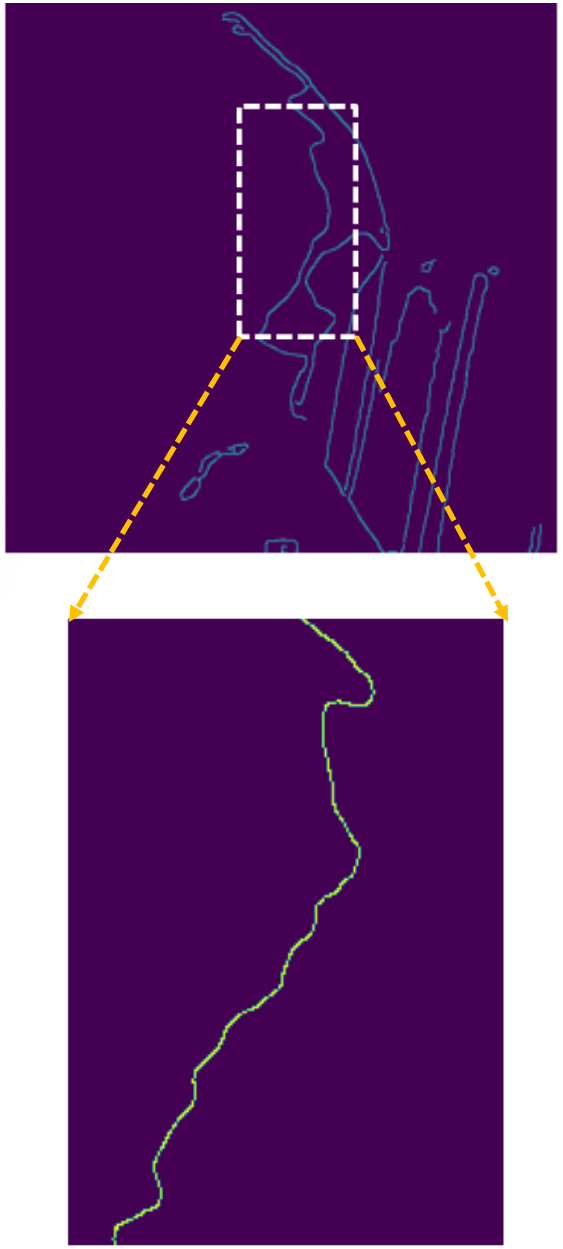

Forward:
t vs t+1

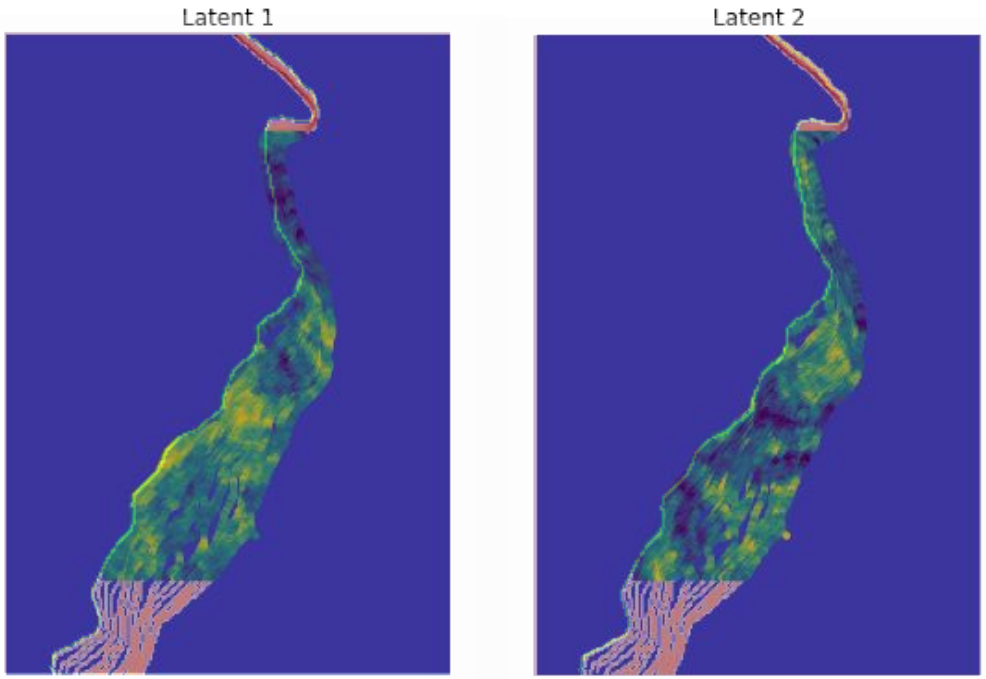

Reverse:
t vs t+1

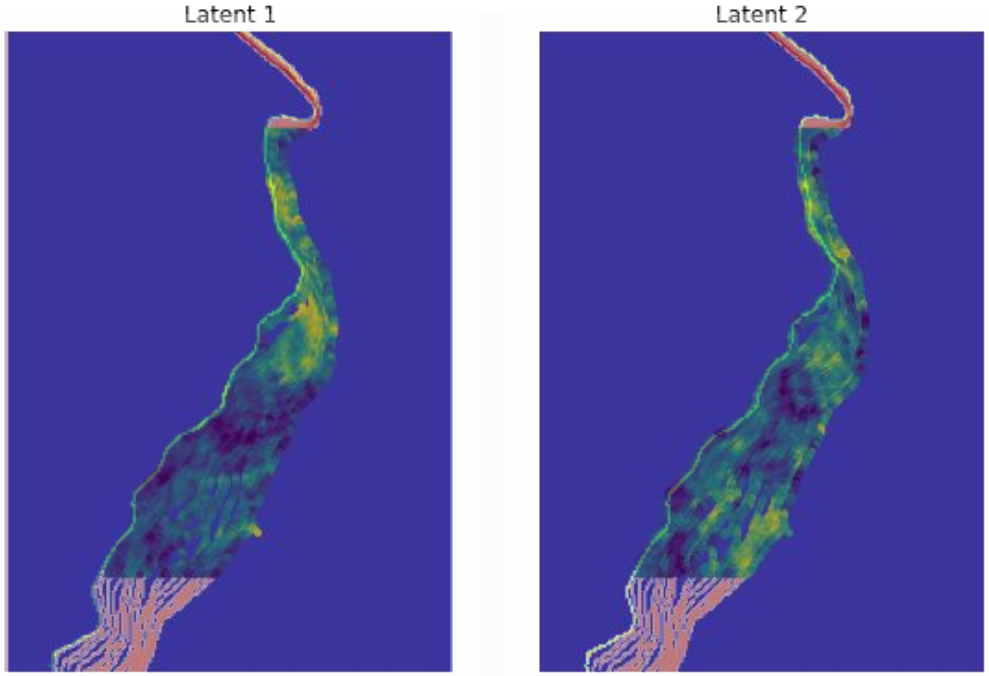

Multilayer rVAE

THE UNIVERSITY of TENNESSEE UT KNOXVILLE

180° Walls

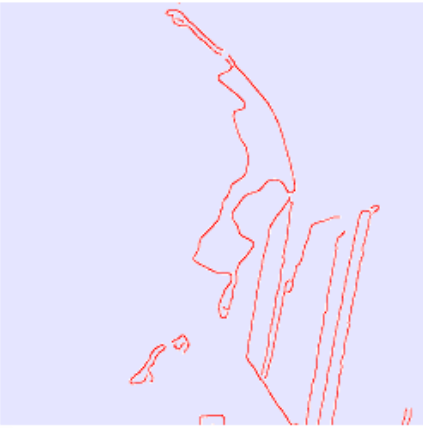

180°+Non180° Walls

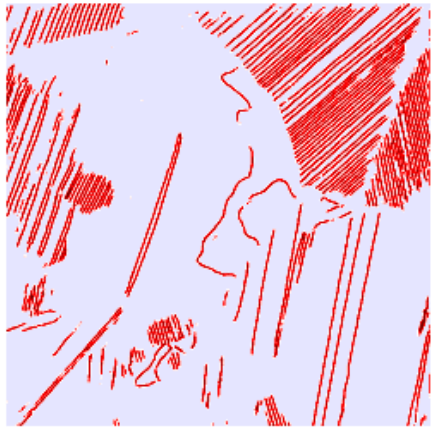

Subtraction = Non180° Walls

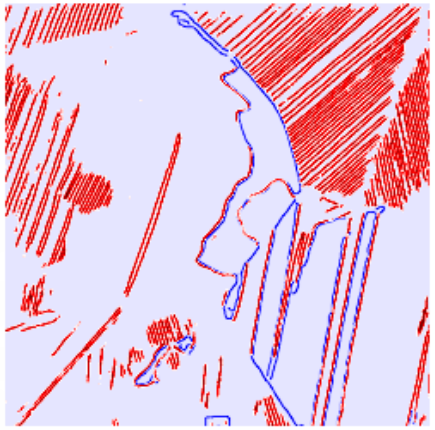

subimage of stack walls

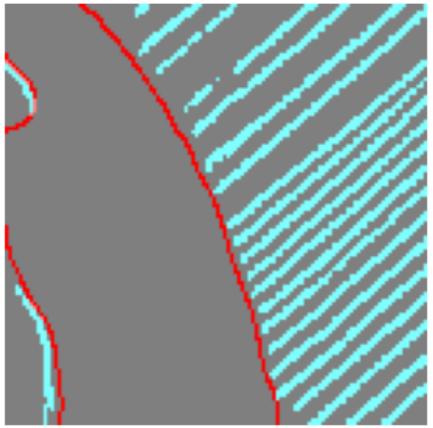

Latent Space

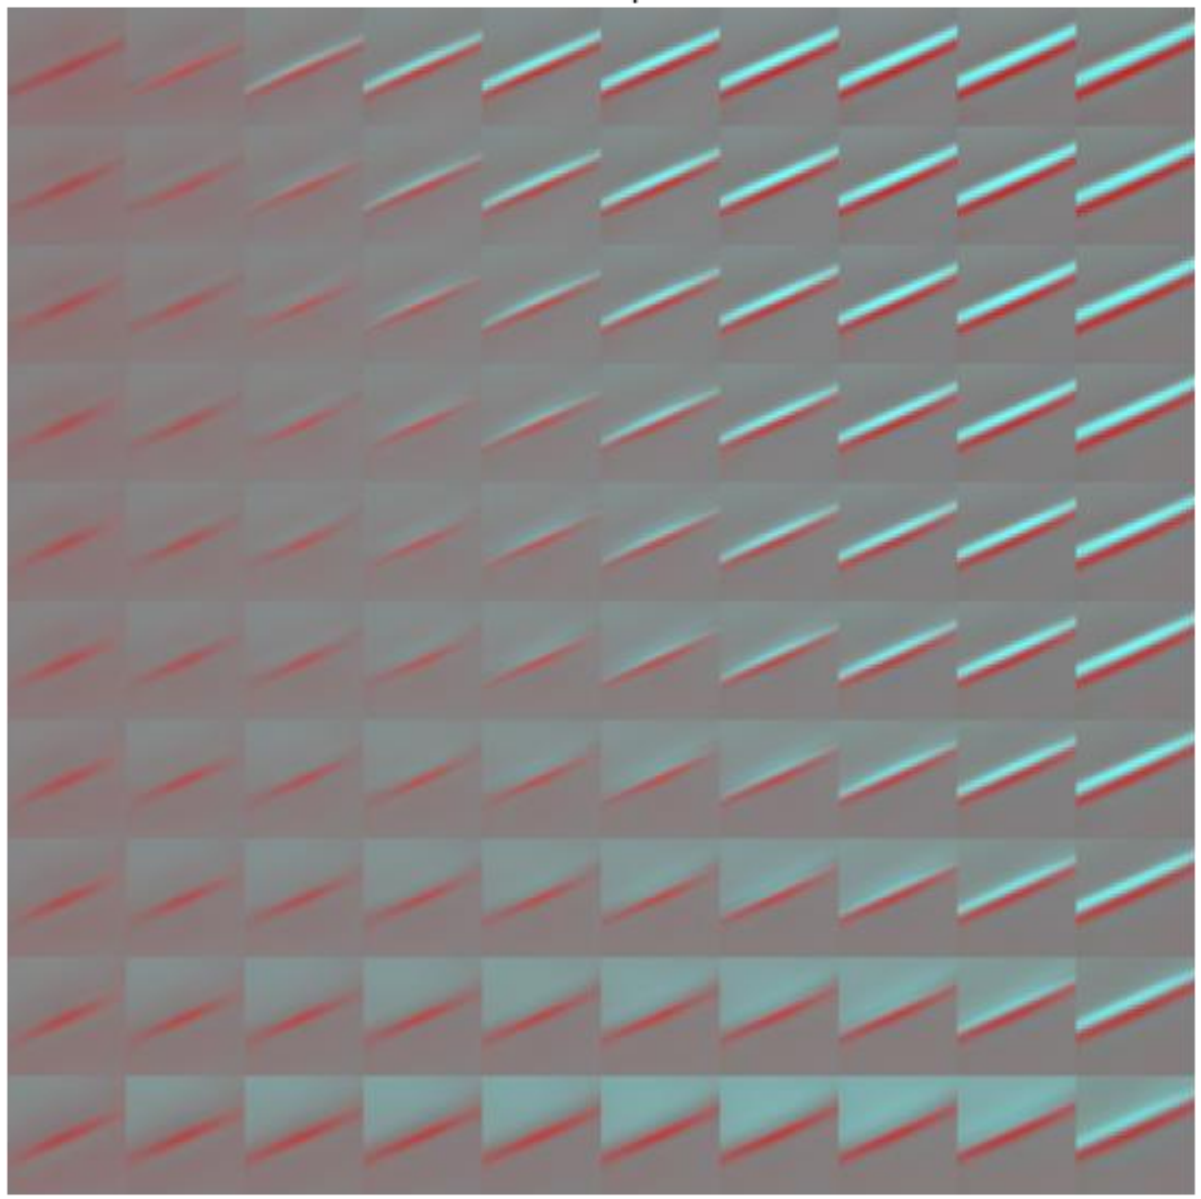

Pinning mechanism

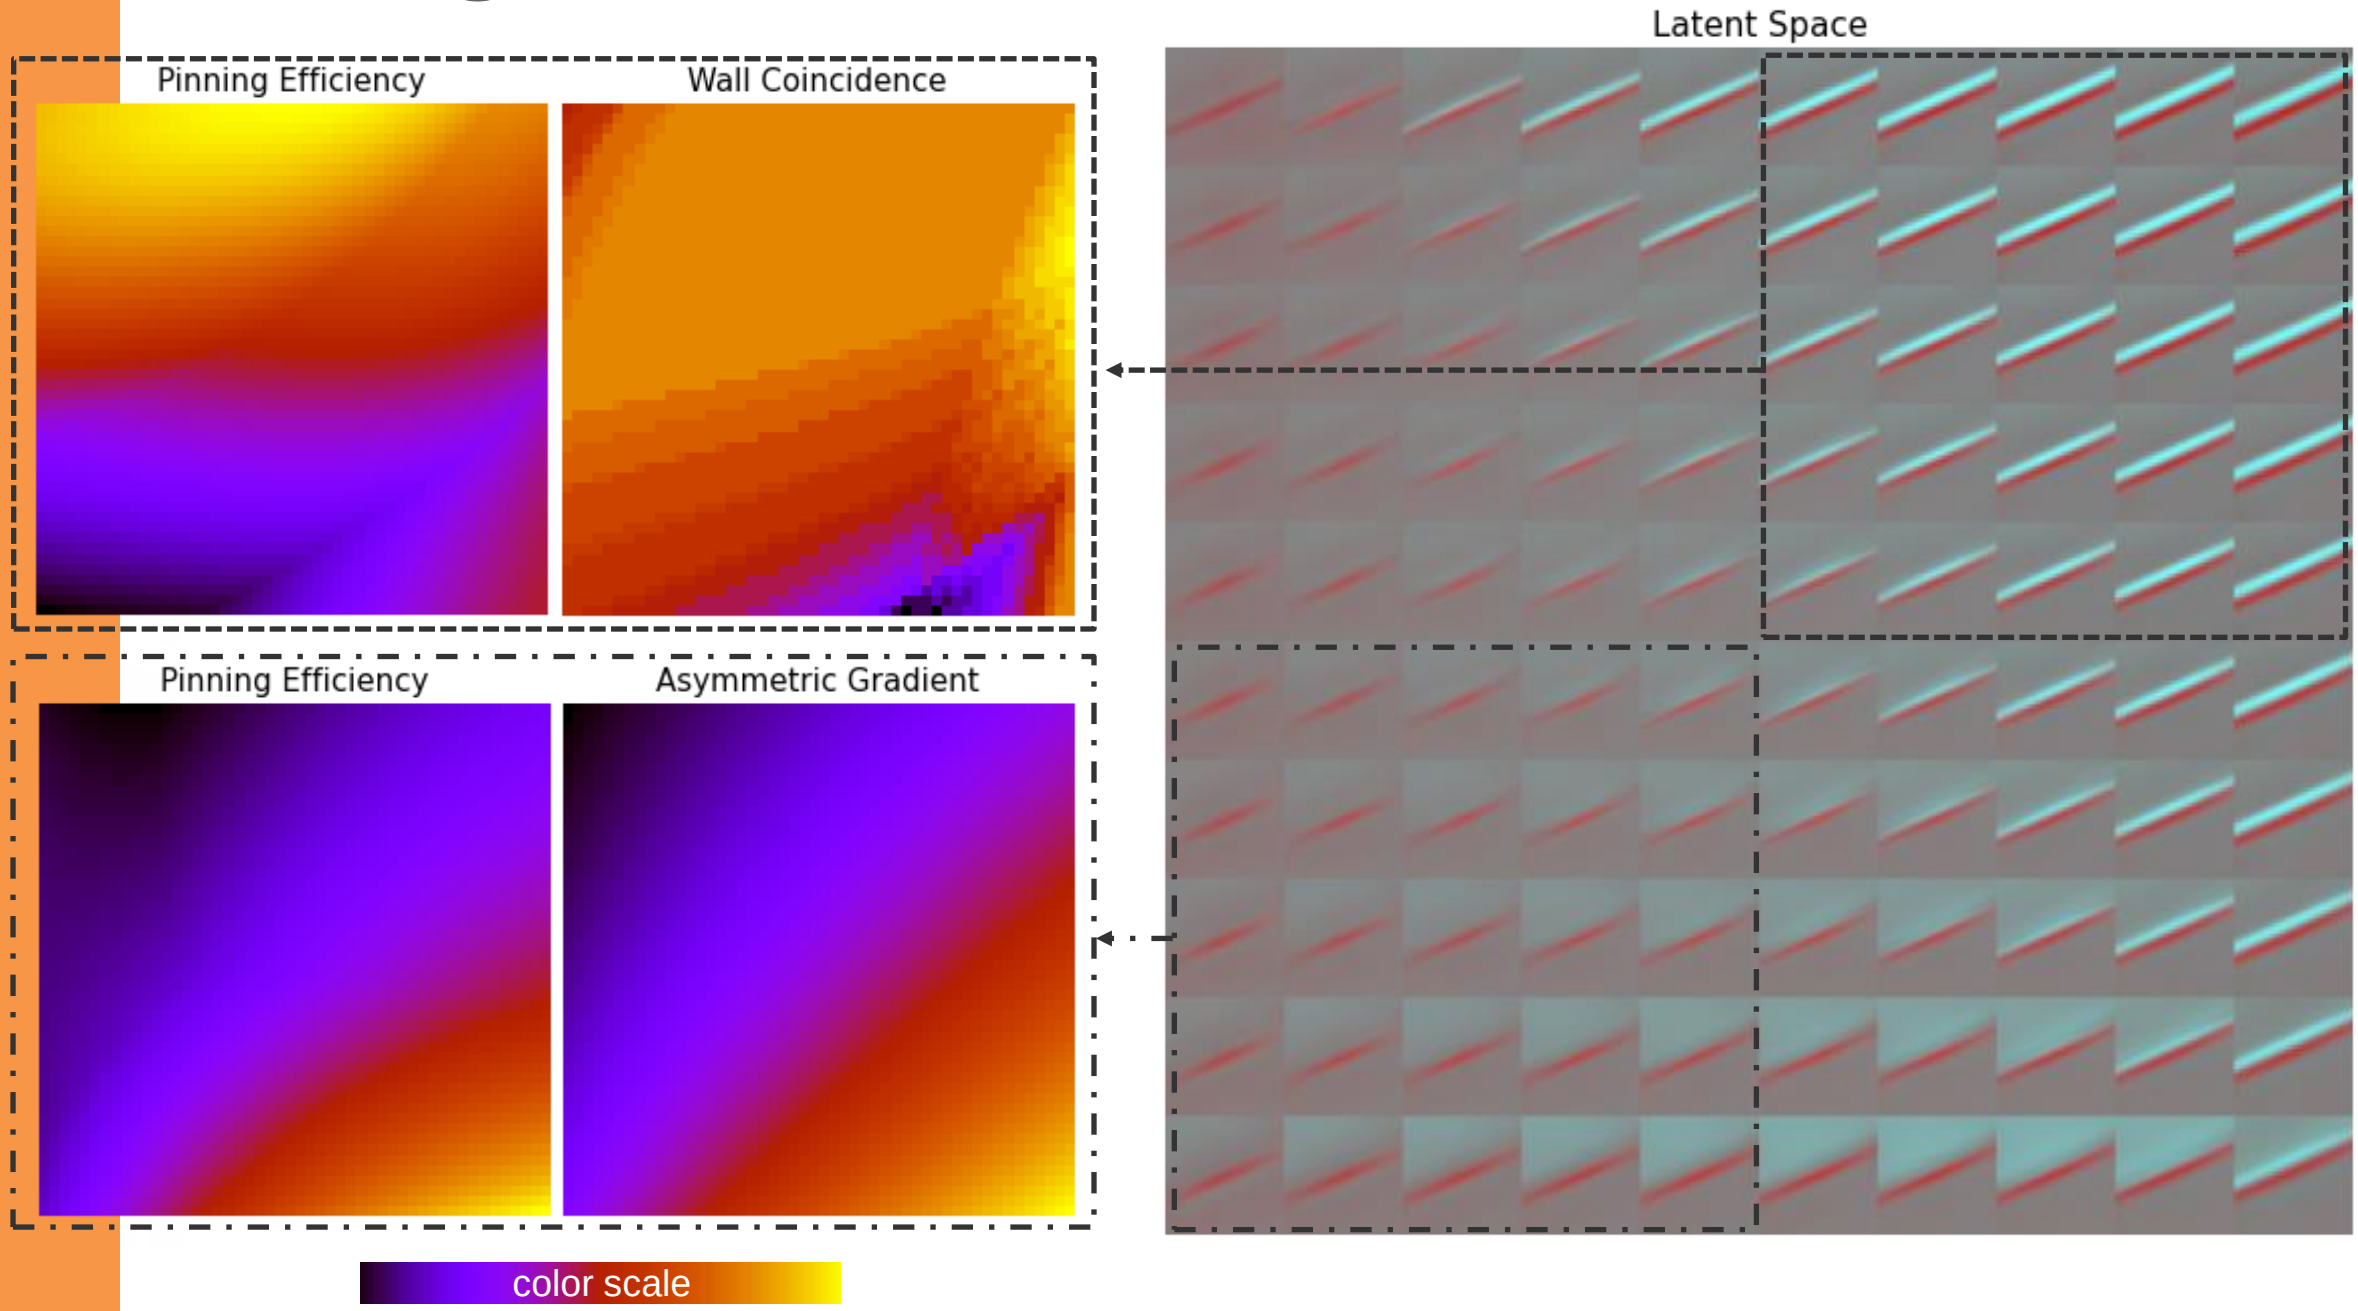

Encoders-Decoders

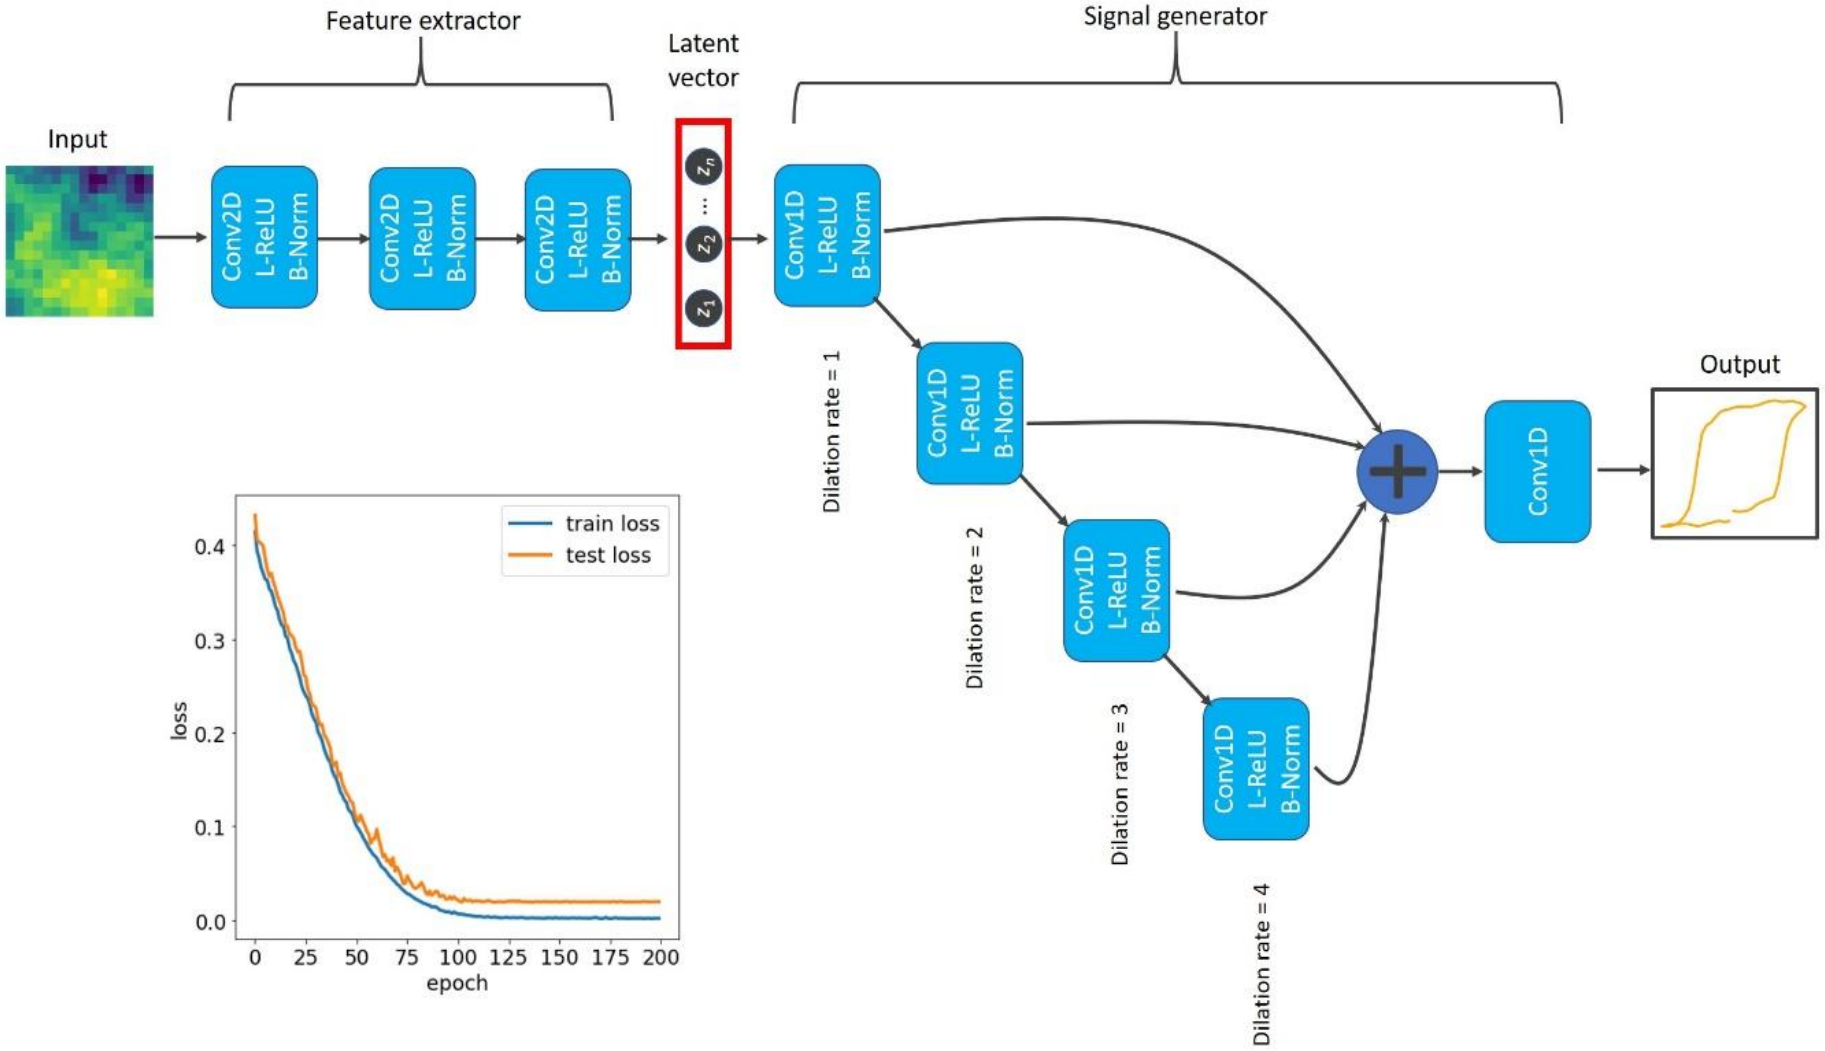

- Use encoder-decoder architecture to transform local structure to local spectra
- And spectra to images
- Predictive within the image

Latent space

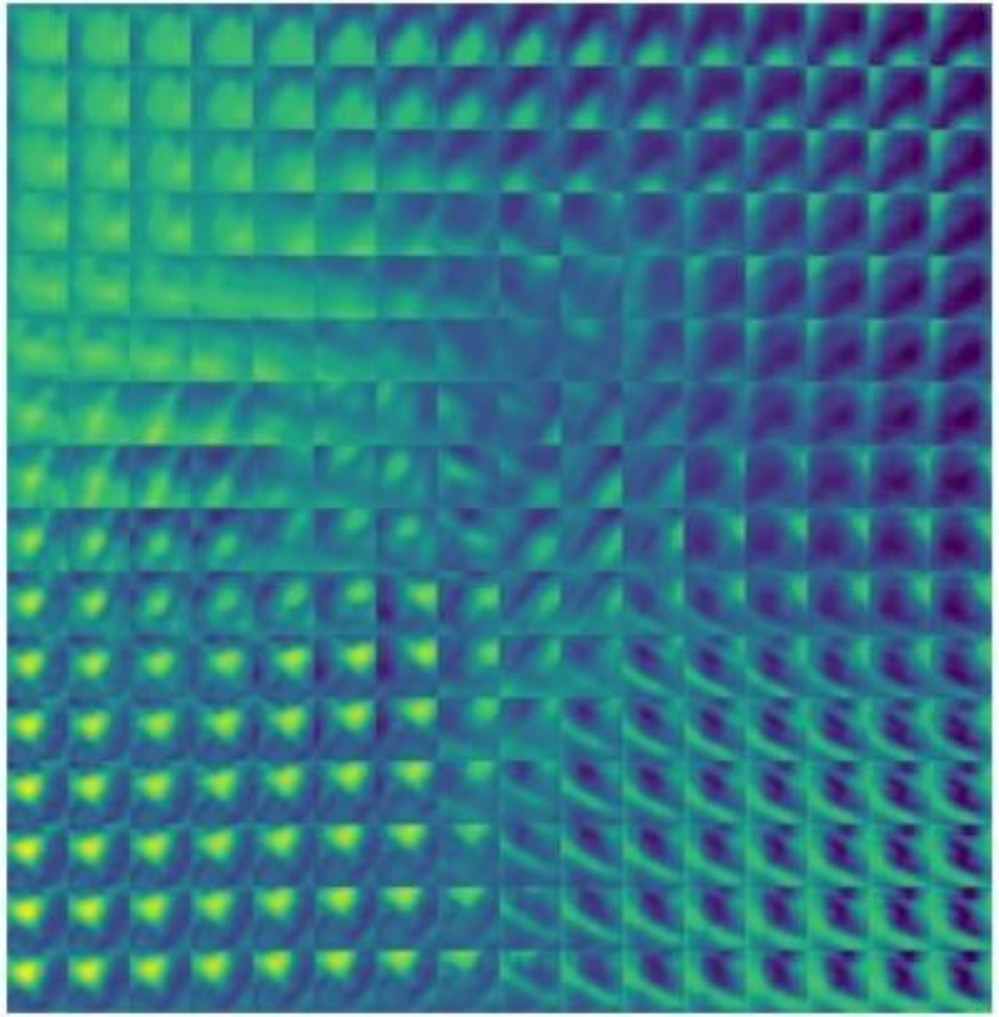

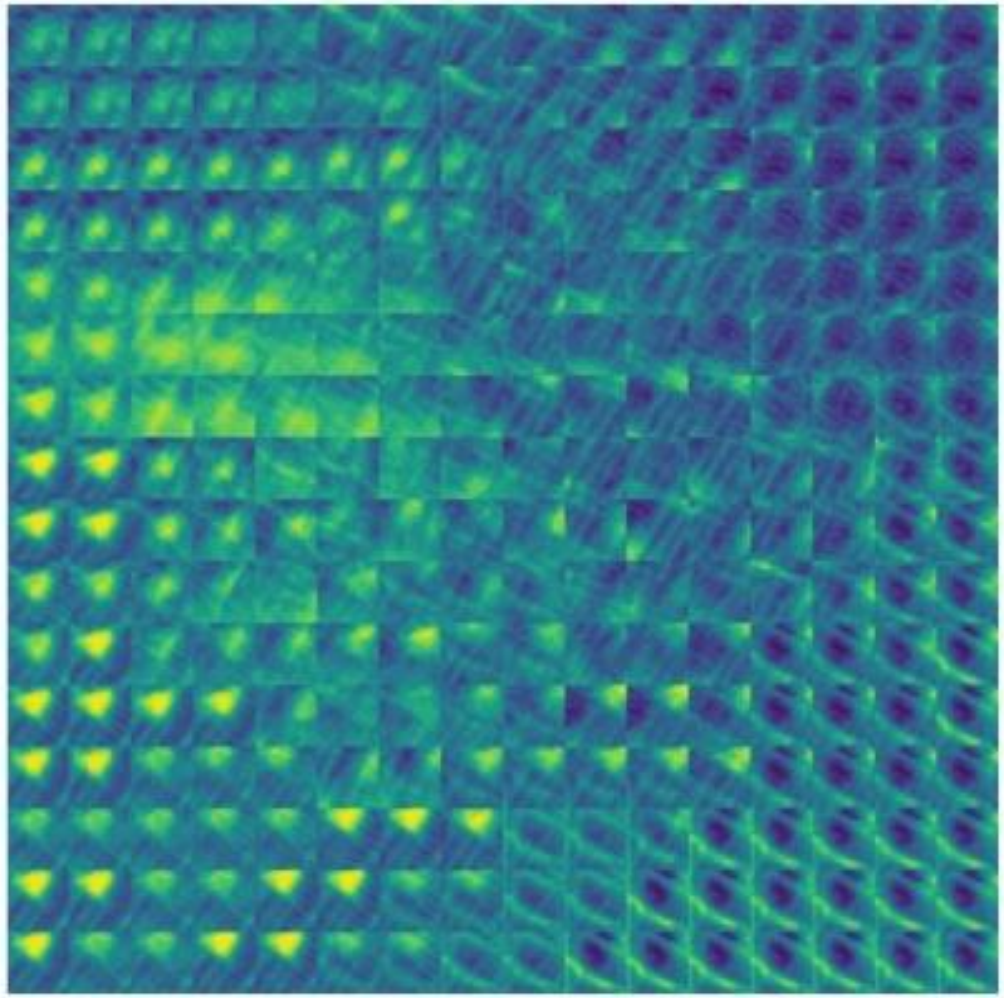

Prediction

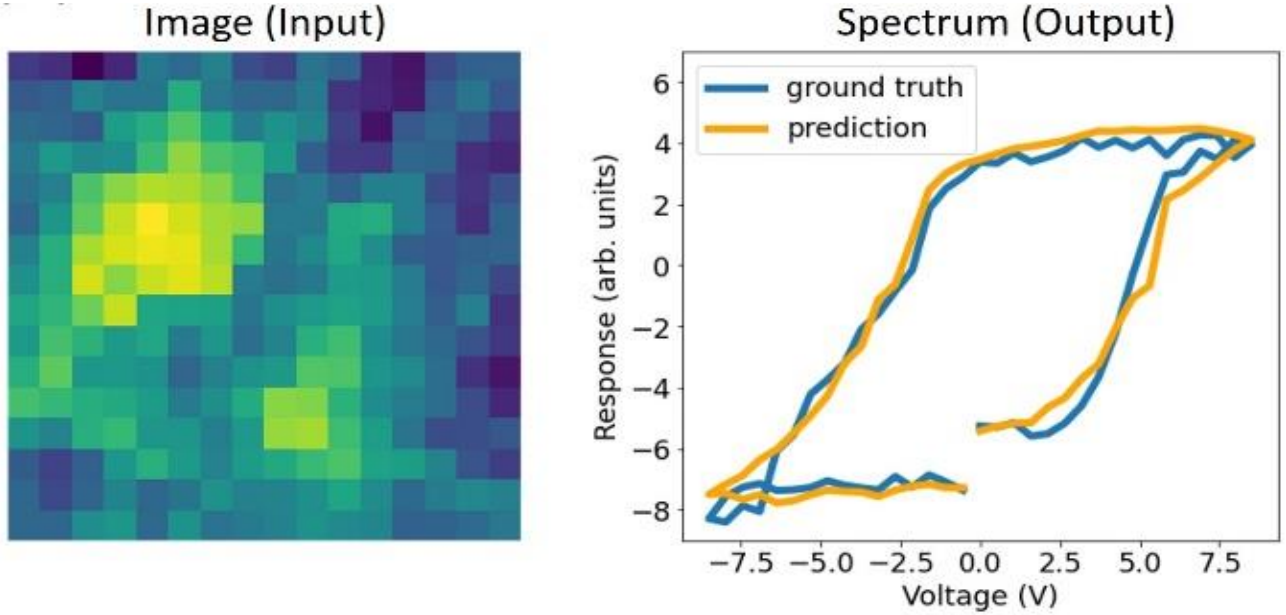
Image (Input)
Spectrum (Output)
ground truth
prediction
Response (arb. units)
Voltage (V)
6
4
2
0
−2
−4
−6
−8
−7.5
−5.0
−2.5
0.0
2.5
5.0
7.5

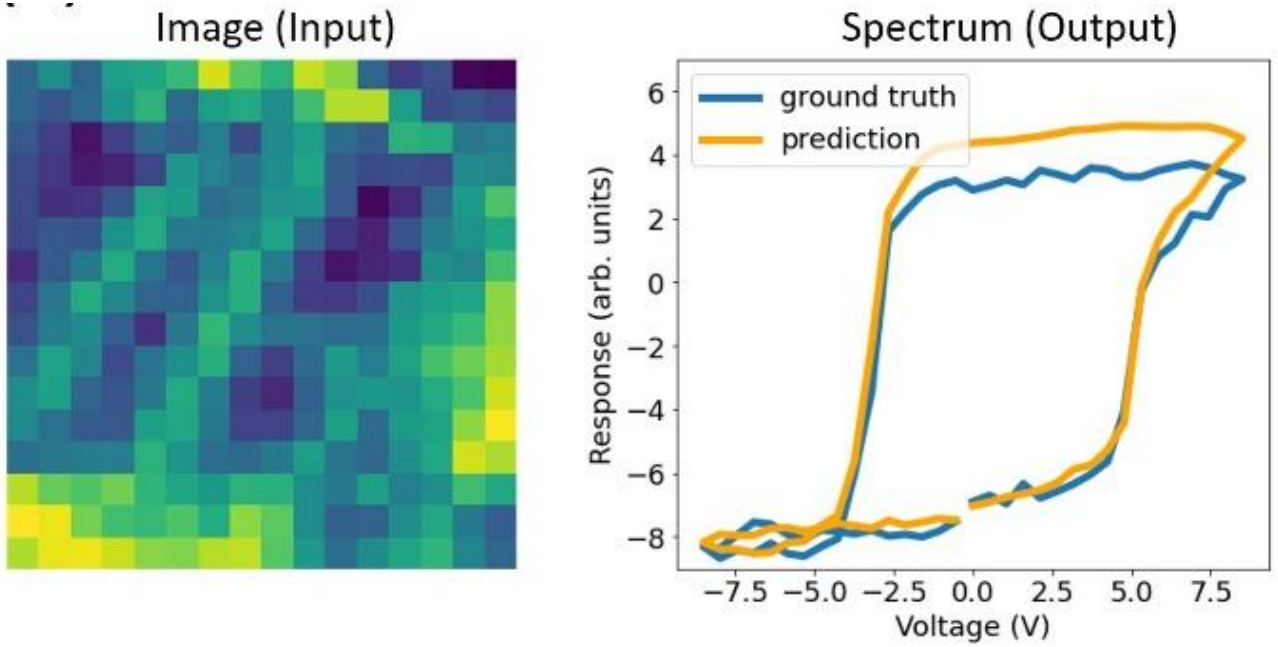
Image (Input)
Spectrum (Output)
ground truth
prediction
Response (arb. units)
Voltage (V)
6
4
2
0
−2
−4
−6
−8
−7.5
−5.0
−2.5
0.0
2.5
5.0
7.5

Plasmonic nanoparticles

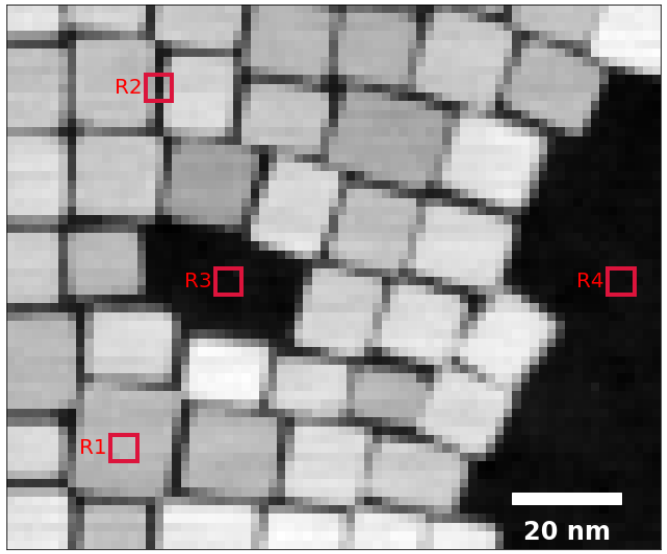

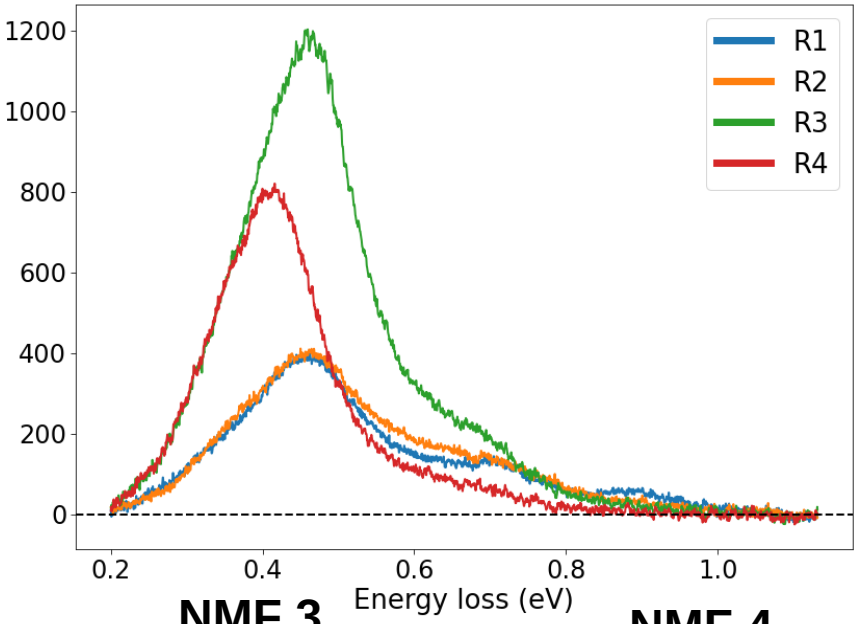

NMF 1 **NMF 2** **NMF 3** **NMF 4**

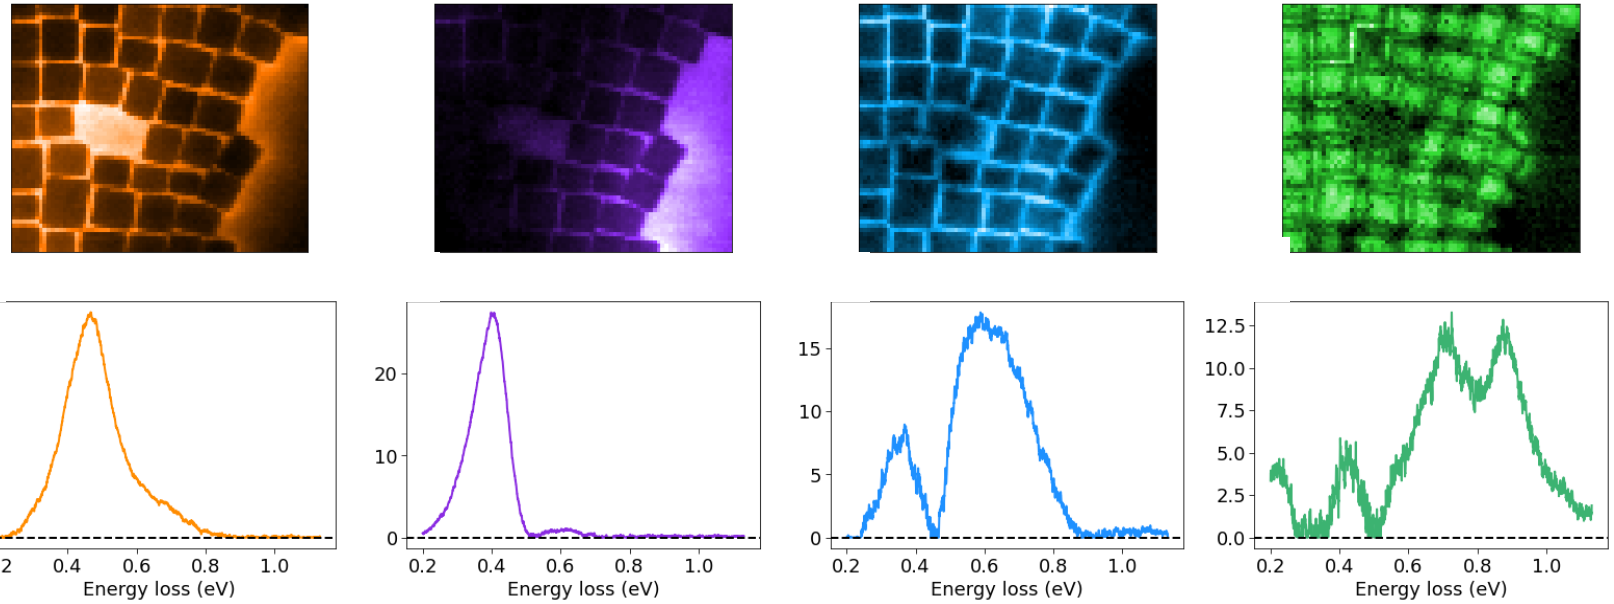

Encoders-Decoders

Sub-image **Prediction vs. truth** **Spectrum** **Prediction** **Ground truth**

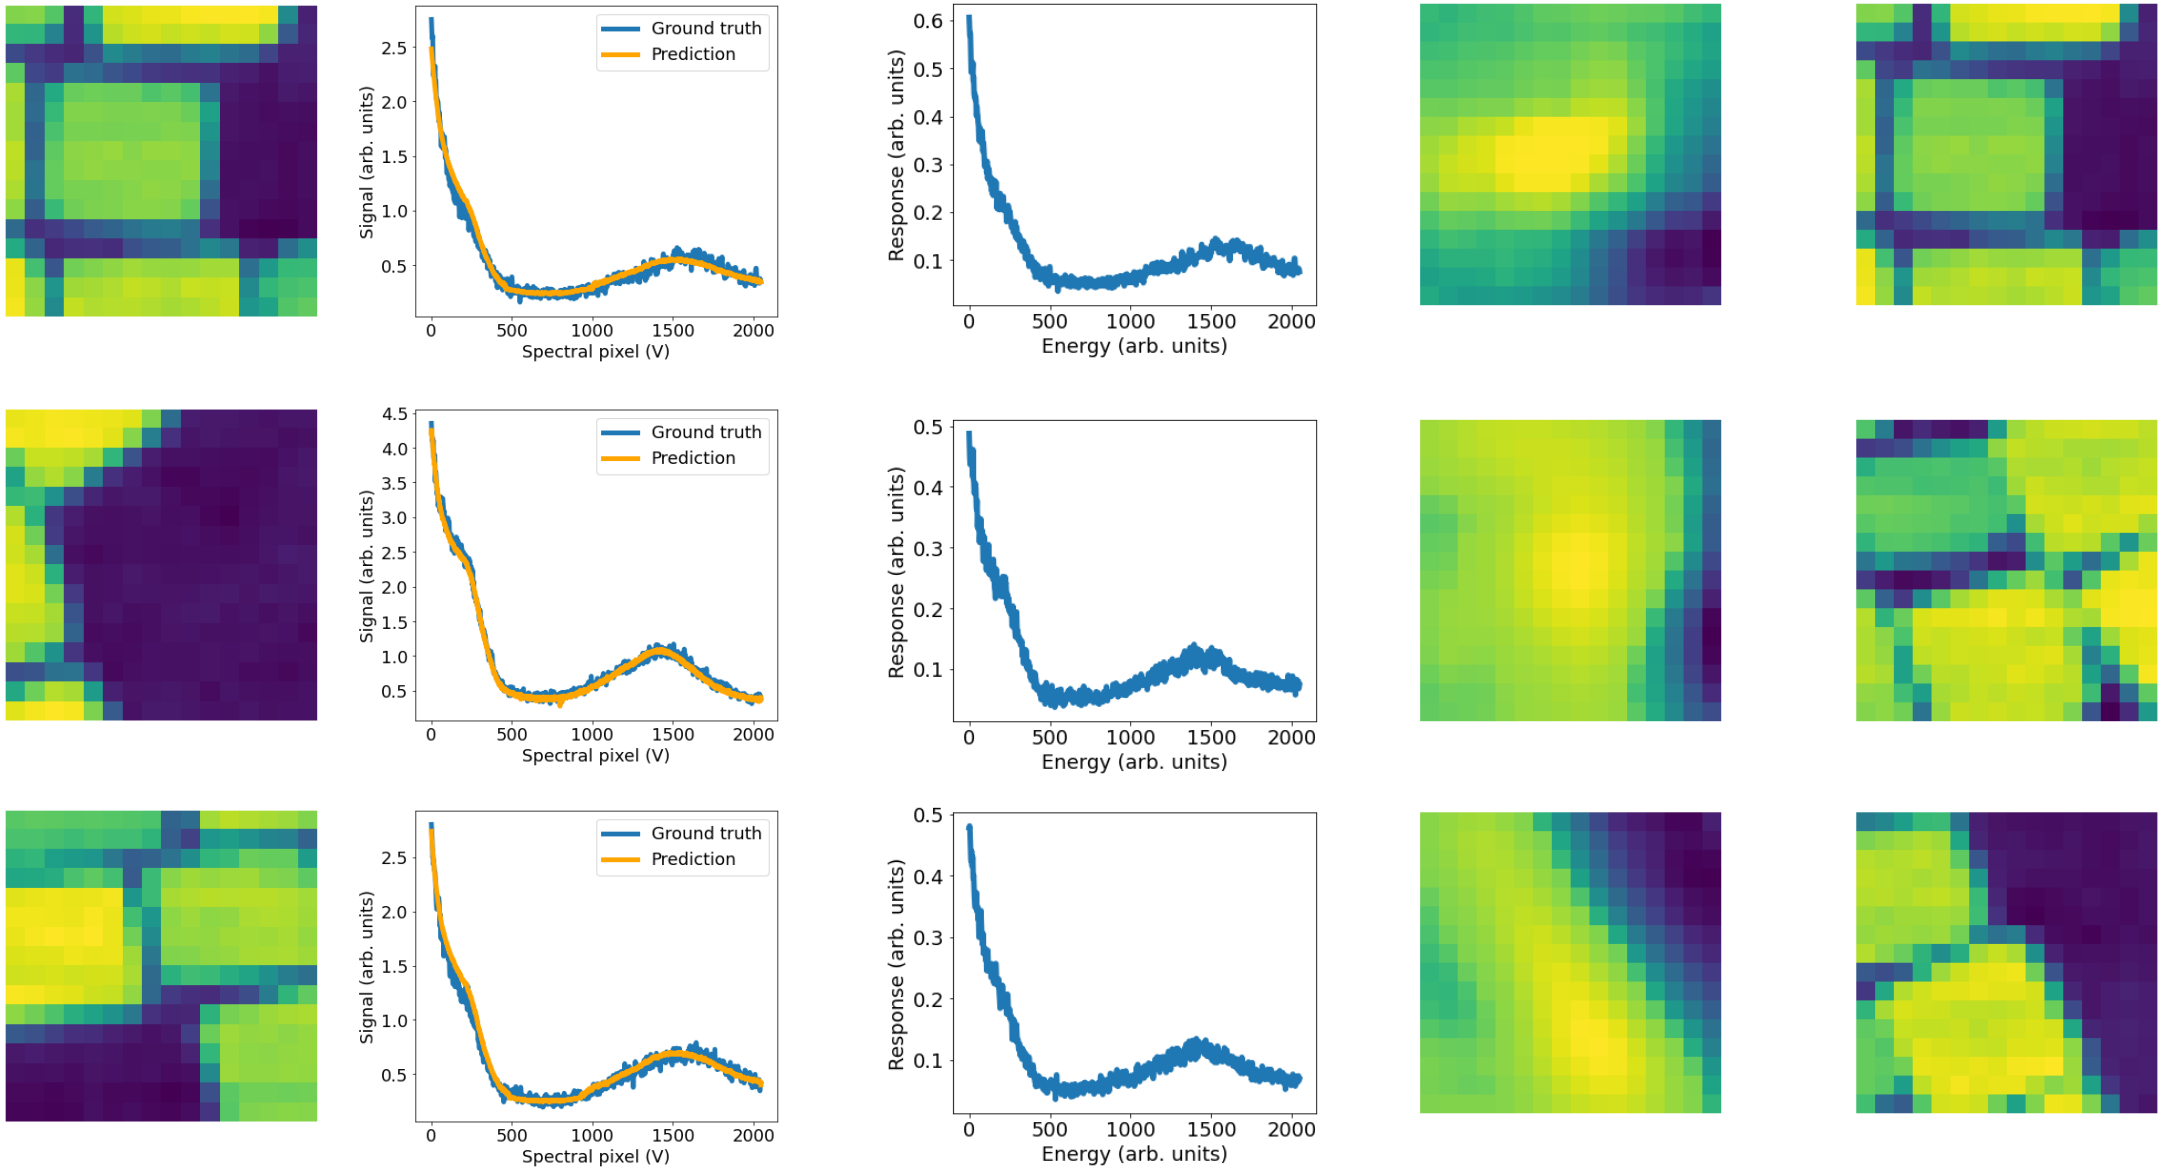

Dual VAE: structure-property relationships

SEM images: “Structure Information”

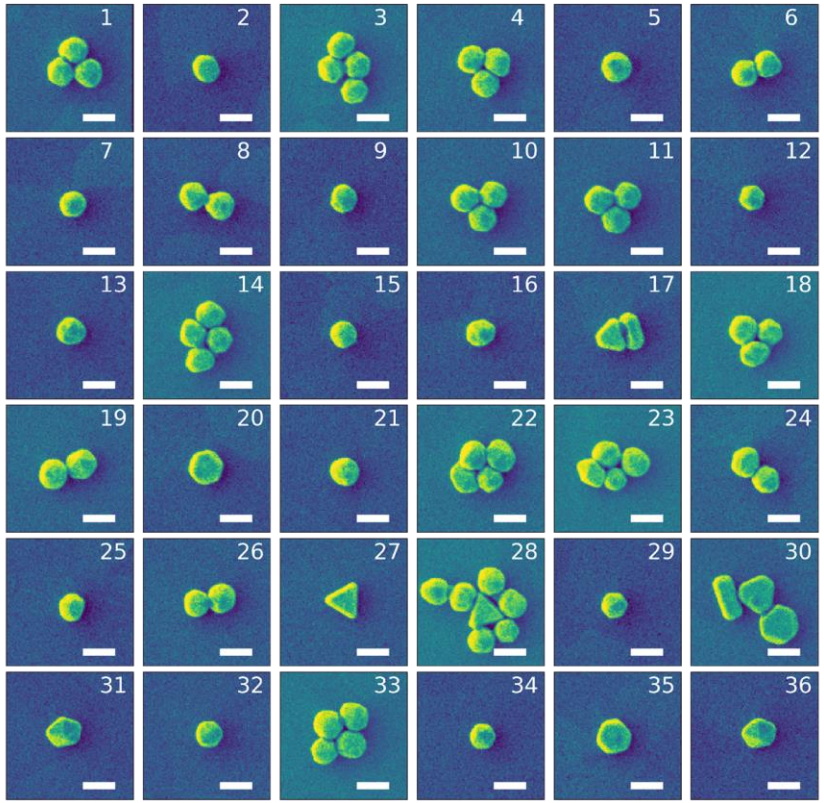

Hyperspectral microscope: “Property Information”

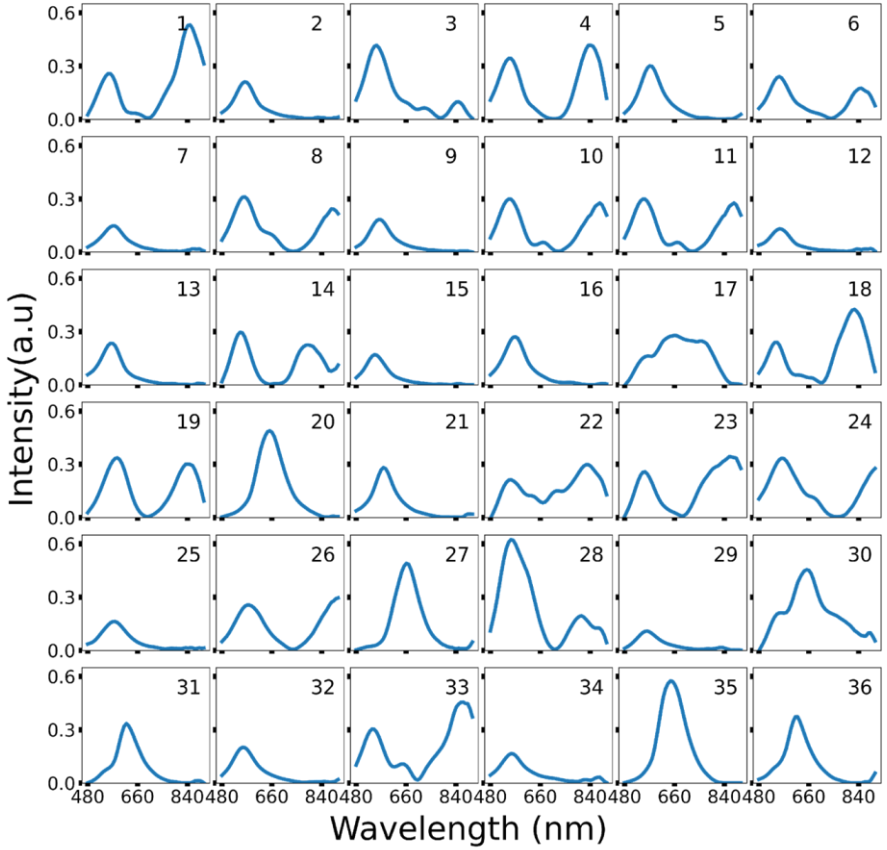

Dual VAE

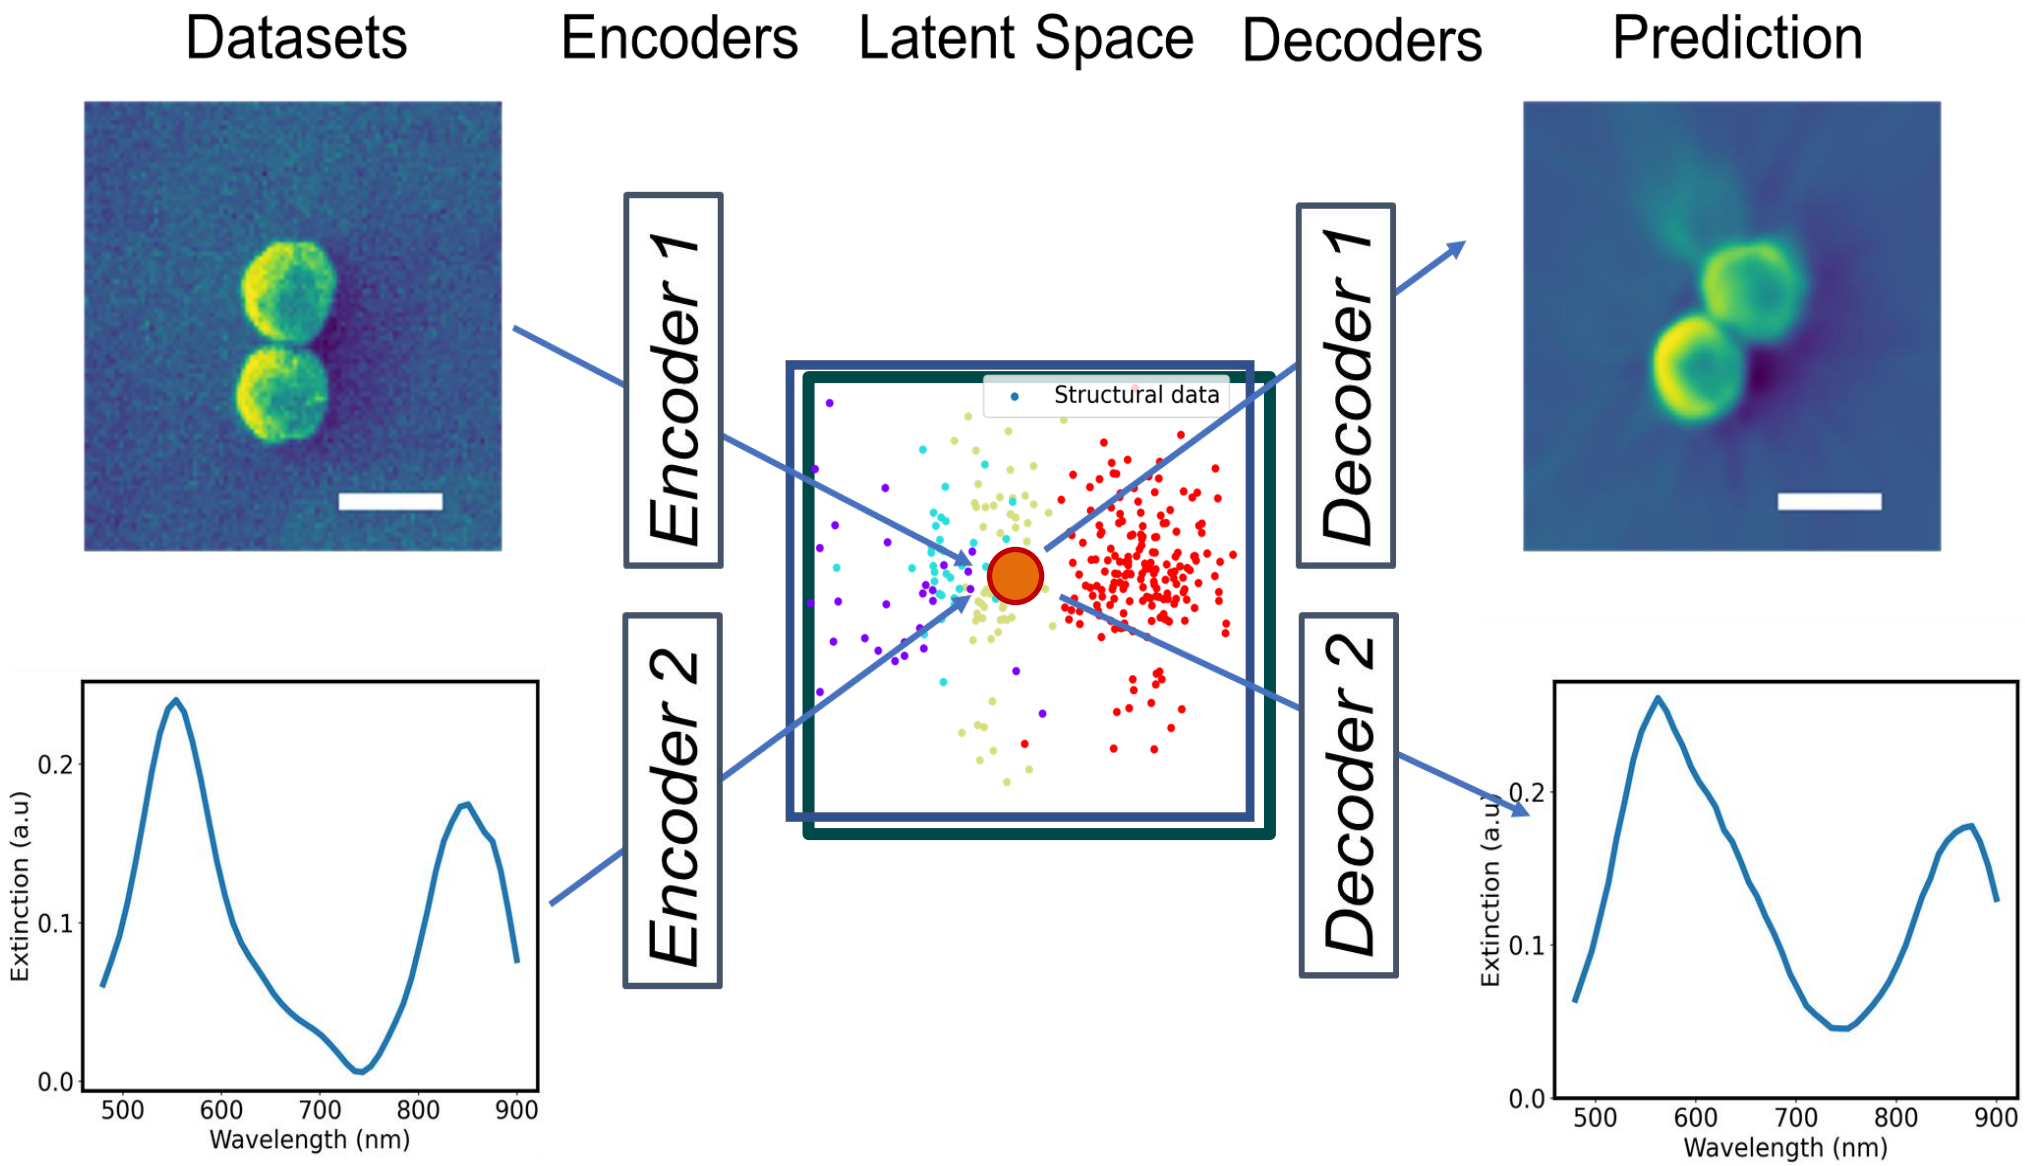
Datasets
Encoders
Latent Space
Decoders
Prediction
Encoder 1
Encoder 2
Structural data
Decoder 1
Decoder 2
Extinction (a.u)
0.0
0.1
0.2
500
600
700
800
900
Wavelength (nm)

Dual VAE: Latent Representations

Manifold Representation

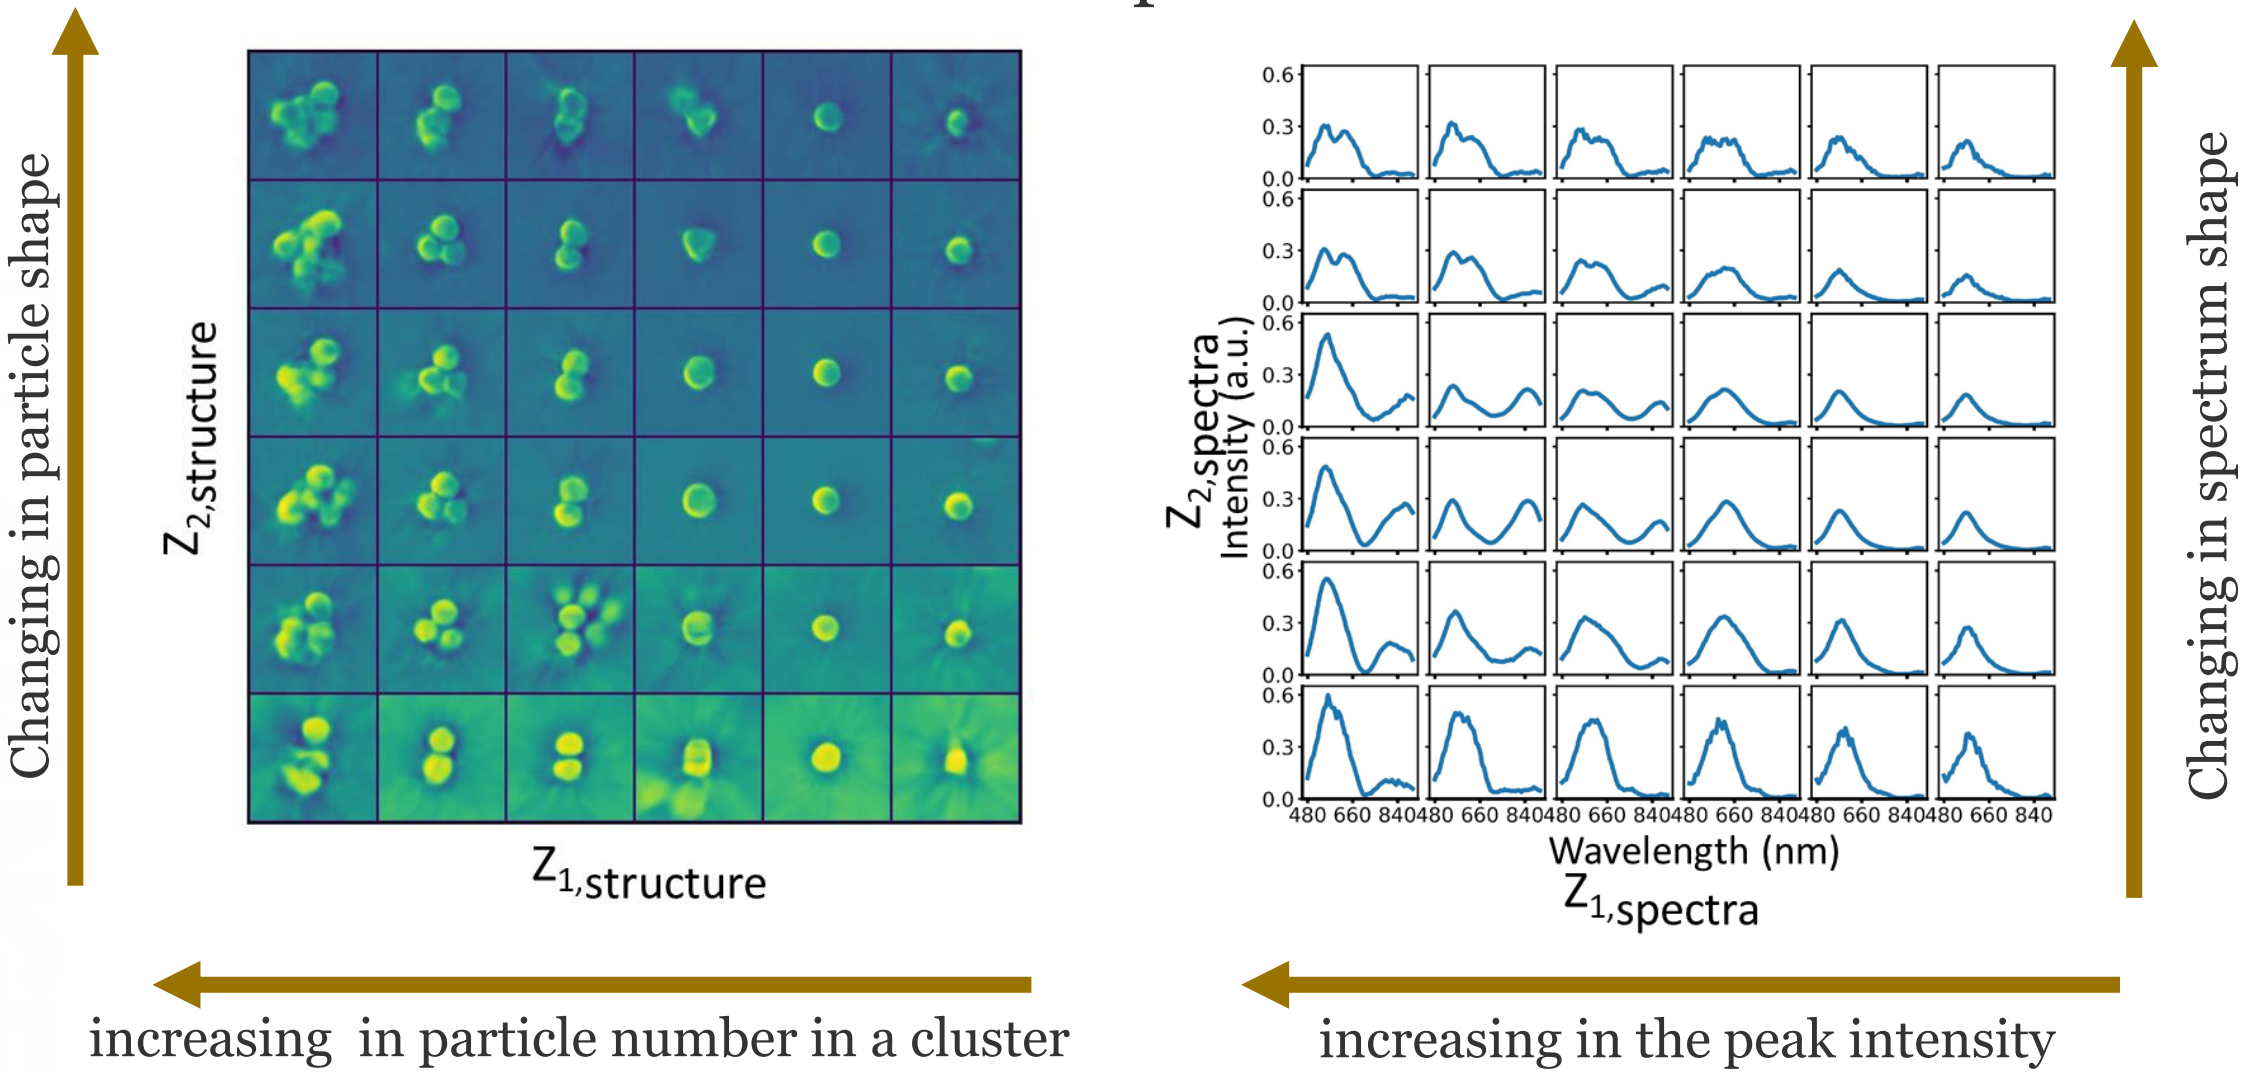

Dual VAE: Predictions

Example

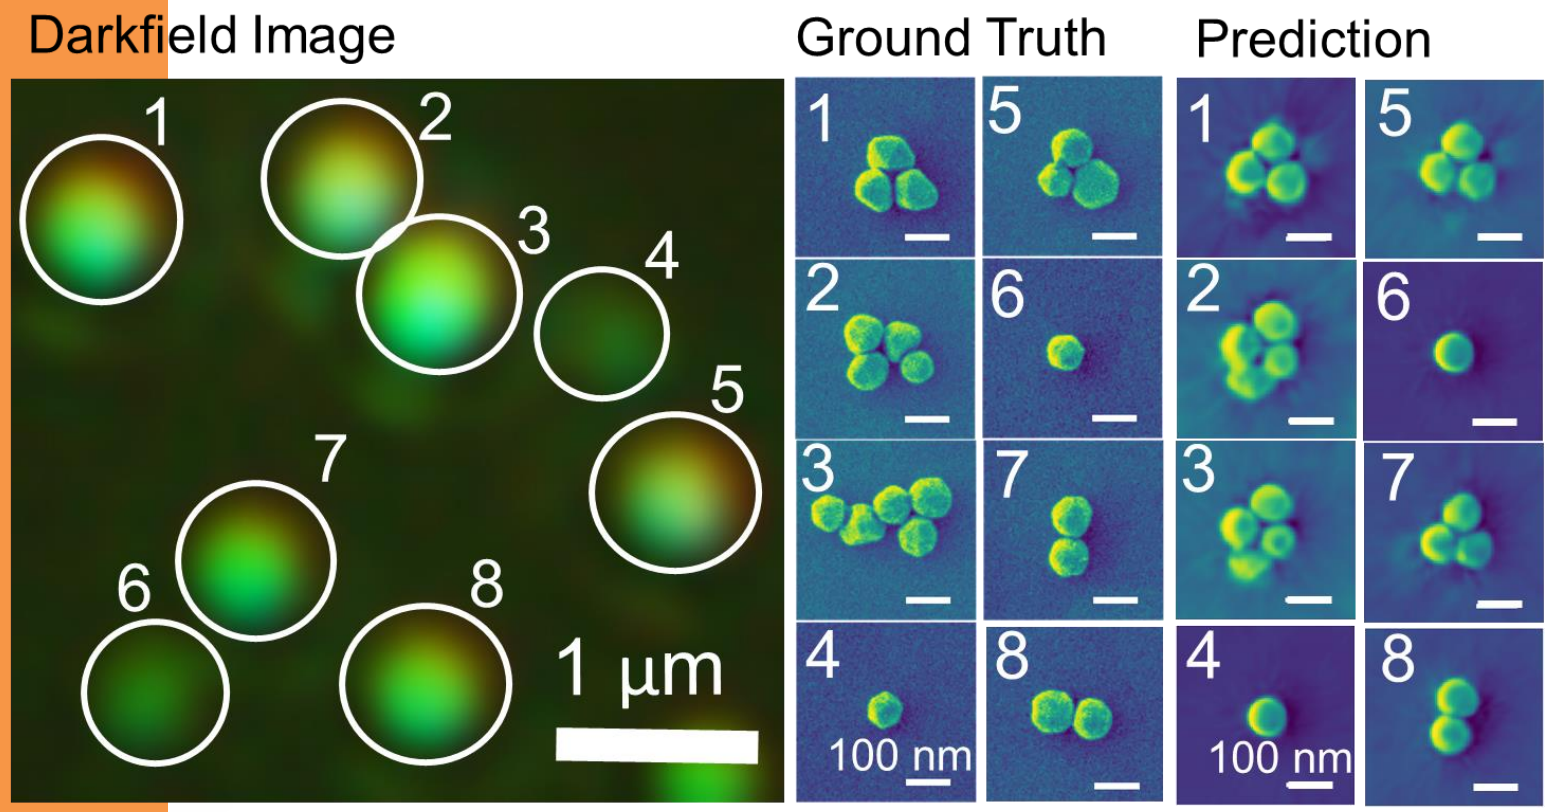
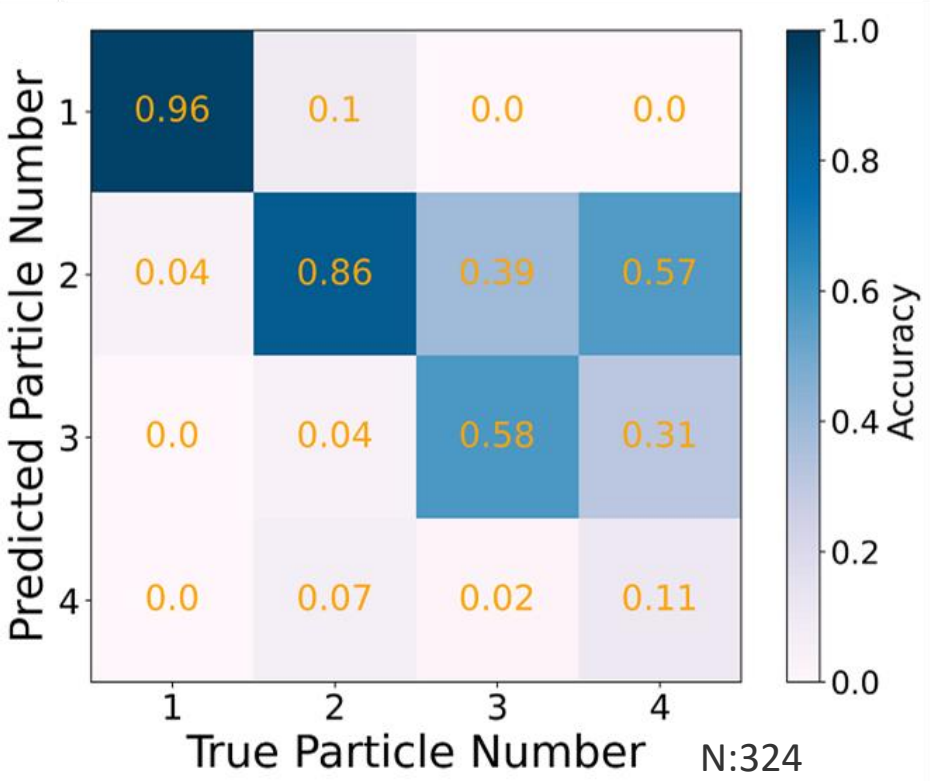
Overall Particles