

Event-Time MCDM Allocation across DeFi Lending Protocols: An HFT-Inspired Methodology with Walk-Forward Validation

Sergei Solovev
WorldQuant University
sssolovjov@gmail.com

Abstract

We design an event-time, gas-aware multi-protocol allocator for USDC supply markets across the six largest Ethereum-L1 lending protocols ($\sim 67\%$ of $\sim \$54\text{B}$ TVL). **The headline empirical claim is event-time resolution itself:** a closed-form gas-aware threshold rule (T1; ~ 50 lines of Python, no trained parameters) outperforms each passive single-protocol hold by $+1.5$ to $+2.8$ pp annualized across six non-overlapping three-month walk-forward windows (Nov 2024–Apr 2026; paired-bootstrap $p < 10^{-4}$ on five of six contrasts; $p = 0.026$ for Euler V2). Two additional tiers extend the ladder methodologically — T2 Ornstein–Uhlenbeck optimal stopping with closed-form Bellman boundary, and T3 Cox proportional-hazards on MacKenzie (2021) Table 3.2 F1 (lead-rate) + F3 (fragmentation) signal classes with López de Prado AFML methodology (triple-barrier labels, purged k -fold CV with embargo, sample-uniqueness weighting). T3 adds an incremental $+7.03$ bp over T1 (paired-bootstrap $p = 0.015$, 5 of 6 windows positive), concentrated in volatile-spread regimes; the capacity sweep projects this gap to widen at institutional position size where gas amortises. F4 (USDC peg + ETH/USD) contributes ~ 0 pp above F3 alone and is reported as an honest negative finding. The allocator switches among all *six* protocols on a single per-block grid — `decide()` runs on every one of the 3.9M blocks with continuous accrual and zero blocks accrued against a missing rate — and the six refresh their on-chain rates at heterogeneous native cadences (Aave V3 ~ 48 s through Fluid ~ 24 h), each observed at its native cadence exactly as a live per-block agent would. A public reference implementation reuses the same decision modules as the backtest to support reproducibility.

Keywords: DeFi, decentralized finance, event-time strategy, gas-aware allocation, Cox proportional-hazards, walk-forward bootstrap, multi-criteria decision making, high-frequency-trading microstructure, Ethereum mainnet

1. Introduction

Setting (for the multi-disciplinary reader). A *DeFi lending protocol* is a smart contract on a blockchain that lets users supply or borrow assets at rates set algorithmically by a deterministic curve over pool utilization u = borrowed/supplied, rather than by a human-set policy. The most supplied asset is USDC, a US-dollar-pegged stablecoin; on Ethereum mainnet alone, USDC supply markets across the six largest protocols hold roughly $\$36\text{B}$ (April 2026, $\sim 67\%$ of $\$54\text{B}$ addressable TVL). Because each protocol sets its own rate curve, identical-asset rates routinely diverge across protocols by hundreds of basis points — and that cross-protocol spread is the structural opportunity an allocator can target.

Problem statement. Multi-protocol DeFi lending allocation has been studied either as a rate-forecasting problem on hourly-aggregated rate series [1] or as a control-theoretic problem with reinforcement learning on the protocol-design side [2, 3, 4]. Both formulations share an implicit assumption: that hourly resolution is sufficient for an allocator to extract economically meaningful edge. We argue that this assumption is empirically wrong. Lending-rate crossovers between Ethereum L1 protocols happen at the speed of pool deposits and withdrawals — per-block (~ 12 s post-PoS), not per-hour — because the rate is a deterministic function of realised utilization, and utilization updates exactly once per on-chain interaction [5]. Aggregating to hourly bars destroys the inter-block microstructure where the allocator’s competitive edge actually lives.

Thesis. We argue that DeFi lending allocation is structurally analogous to high-frequency trading microstructure as described by [6], and that the four-class HFT signal taxonomy of that work transposes onto the multi-protocol lending problem with a clean mapping. Concretely: the cross-protocol rate spread is itself the decision variable (the dominant signal); mempool-visible transactions are the analog of “order-book dynamics”; lead rates from Maker DSR and Curve 3pool stand in for the “futures lead” class; and the on-chain gas regime plus stablecoin peg deviations play the role of “related instruments”. Under this lens the natural decision frame is event-time, gas-aware, with three nested policy tiers — gas-aware threshold (T1), Ornstein–Uhlenbeck optimal stopping with switching cost (T2), and Cox proportional-hazards regression on the signal vector (T3) — each grounded in a separate microstructure or quantitative-finance source book [7, 8, 9, 10, 6]. This formulation extends the published 4-factor MCDM baseline of [11] from hourly cliff-edge switching to per-block gas-aware switching, and from a 2-way (Aave + Compound) panel to the 6-protocol matrix that covers $\sim 67\%$ of total Ethereum-L1 USDC-lending TVL.

Empirical finding. The panel spans November 2024 to April 2026 (3,931,200 Ethereum blocks, ~ 18 months) across all 6 Ethereum USDC lending venues (Aave V3, Compound V3, Spark, Morpho Blue, Euler V2, Fluid) on a single unified per-block grid. The held-out test slice is January 2026 to April 2026 (863,999 blocks). *The allocator switches among all six protocols* — `decide()` is evaluated on every block and the six are observed at heterogeneous native cadences (Aave V3 ~ 48 s through Fluid ~ 24 h), forward-filled onto the grid and used as a live agent would; each protocol is simultaneously an active-allocation candidate and a passive-hold benchmark in the $N \times M$ matrix (Table 3 and Section 6.). On the walk-forward $N = 6$ paired bootstrap (the binding inference) the closed-form gas-aware T1 threshold rule — ~ 50 lines of Python with no trained parameters — outperforms each in-scope passive hold by $+1.5$ to $+2.8$ percentage points ($p < 10^{-4}$ on 5 of 6 contrasts; Table 5): the headline empirical claim of this paper is that event-time resolution itself extracts the bulk of available edge, before any trained model. The sophisticated-retrain T3 (Cox proportional-hazards on the F1+F3 design matrix) adds an

incremental $\Delta\text{APY} = +7.03$ bp over T1 ($p = 0.015$), closing pre-registered H1c. This edge is concentrated in volatile-spread regimes (W1, W2, W6); the capacity sweep projects it to widen at institutional position size where gas amortises. The secondary monthly Sharpe bootstrap on the test slice is consistent in direction but underpowered at $N = 4$ observations (Table 6). Two orders of magnitude more rebalance opportunities than the hourly baseline of [11] permits.

Contributions.

- **An event-time, gas-aware multi-protocol DeFi lending allocator with three nested decision-policy tiers (T1/T2/T3), each grounded in a distinct microstructure or quantitative-finance source.** We give the closed-form gas-cost crossover inequality that locks T1’s threshold, the OU–Bellman analytical boundary that closes T2, and the Cox proportional-hazards specification with the triple-barrier label of [10] for T3.
- **The four-class HFT signal taxonomy of [6] (Table 3.2) operationalised on DeFi lending.** F1 (lead) $\leftarrow$ Maker DSR rate plus lagged spreads to the top-protocol APR; F3 (fragmentation) $\leftarrow$ the cross-protocol rate spread itself, the dominant signal and the only feature class with non-trivial OOF C-index gain in the headline T3 fit; F4 (related) $\leftarrow$ ETH/USD plus USDC peg deviations (gas-regime sub-signal dropped as zero-variance under a constant-gas calibration; see Section 6.); F2 (order-book dynamics) deferred per the explicit risk register pending paid mempool coverage.
- **López de Prado AFML methodology applied to DeFi lending:** triple-barrier labels (24-h horizon), purged k -fold CV with embargo ≈ 5.4 days per [10, Ch. 7], sample-uniqueness weighting, Deflated Sharpe Ratio gate [10, Ch. 14.7.3].
- **The first per-block-resolution head-to-head matrix of seven allocation policies on a multi-month Ethereum mainnet panel** (four baselines plus T1/T2/T3), with walk-forward $N \times M$ paired bootstrap as the binding inference and a regime-conditional Q1/Q2 breakdown that exposes which tier dominates which volatility regime.
- **A reproducible implementation envelope.** The same decision/ Python package is used without mod-

ification by the replay engine and by the reference deployment implementation, reducing the risk of separate backtest and deployment logic. The 6-way panel ($\sim 3.9\text{M}$ rows), Cox sidecars, and walk-forward equity parquets are available through the public code and data artefacts.

Outline. Section 2. reviews DeFi lending mechanics, the HFT canon we borrow from, and recent DeFi-microstructure / MEV work [12, 13]. Section 3. specifies the three-tier ladder. Section 4. reports the seven-policy matrix and the binding walk-forward bootstrap. Section 5. positions the result against the HFT canon and the cross-domain hinge; Sections 6. and 7. state scope and next steps.

2. Background and Related Work

We synthesize four strands of literature that bracket the contribution: DeFi lending mechanics, the HFT microstructure canon we borrow from, MCDM in algorithmic allocation, and the equilibrium impossibility result of [14] as the most relevant theoretical counter-evidence.

2.1 DeFi lending mechanics

Aave V3, Compound V3, Morpho Blue, Euler V2, Spark, and Fluid all implement deterministic interest-rate models in which the supply APY is a piecewise-linear (or in Morpho Blue’s case, adaptive) function $f_{\text{kink}}(u)$ of pool utilization $u = \text{borrowed/supplied}$. The function has a shallow slope below a kink point (typically $u^* = 0.8\text{--}0.9$) and a steep slope above it that taxes high utilization. Although f_{kink} is deterministic given u , the realised rate stream is stochastic because u moves with on-chain demand at per-block granularity — exactly the resolution at which our allocator operates.

The empirical structure of the cross-protocol spread is critical. [15] establish cointegration between Aave and Compound USDC rates with Compound leading and Aave adjusting at speed 0.607 — the structural reason a switching allocator can extract value rather than being forced into a single-protocol commitment. Recent cross-chain comparative analyses [16] confirm the cointegration persists into 2026. On our 3,931,200-block panel (Section 4.) the spread structure crosses regime around 2025-Q4 with realised cross-protocol volatility jumping by a factor of five between Q1 and Q2 of 2026 — an adversarial split that tests transferability under distribution shift.

Table 1. Top-eight DeFi lending protocols by total value locked (TVL), April 2026 [17]. Bold rows mark the subset covered by this paper.

Protocol (chain)	TVL (\$B)	Share
Aave V3	19.4	36.0%
Spark (SparkLend)	6.8	12.6%
Morpho Blue	4.9	9.1%
Compound V3	2.7	5.0%
JustLend (Tron)	2.4	4.4%
Fluid	1.6	3.0%
Kamino (Solana)	1.1	2.0%
Euler V2	0.89	1.6%
Top-8 subtotal	39.8	73.7%
Tail ($\sim 350+$ protocols)	14.2	26.3%

2.1.1 Market structure (April 2026 snapshot)

The DeFi lending market is highly concentrated. As of April 2026, total deposits across all lending protocols sum to roughly \$54B, with the top ten protocols accounting for $\sim 78\%$ of that value [17]. Table 1 reports the top-eight breakdown; the six Ethereum-L1 protocols highlighted in bold are the active-allocation universe of this paper’s empirical study, jointly holding $\sim 67\%$ of total lending TVL (the two non-bold rows are non-Ethereum venues excluded by the single-settlement-substrate requirement of Section 5.).

2.2 HFT microstructure analogs

The conceptual backbone of this paper is the recognition that DeFi lending is structurally analogous to high-frequency trading microstructure. Table 2 states the central analogy concretely as a row-by-row mapping from MacKenzie’s four-class HFT signal taxonomy onto DeFi-lending features actually implemented in this paper; the prose below ties the mapping to the five source books that anchor each methodological choice.

[7] provides the adverse-selection framework (Glosten- Milgrom, Kyle): the Kyle- λ market impact parameter is literally $\partial r / \partial u$ on the IRM curve in DeFi — *observable*, not inferred — and the Demsetz price of immediacy inverts (depositors paid by borrowers, not the reverse). [8] contributes the closed-form market-depth expression $1/\lambda = TVL \cdot (1 - u) / \text{slope}_1$ and the resilience half-life decomposi-

Table 2. **HFT signal taxonomy of [6, Table 3.2] transposed to multi-protocol DeFi lending.** The mapping is the paper’s central conceptual contribution: each MacKenzie HFT signal class admits a concrete, in-principle measurable DeFi-lending analog with an identified data source. “This paper” summarises whether the class is fitted in T3 on the Nov 2024–Apr 2026 panel. Sections of this paper that develop each row are listed in the rightmost column.

HFT class [6]	Source mechanism (TradFi)	DeFi-lending analog	Data source	This paper	§
F1 <i>Futures lead</i>	Index/ETF futures lead spot on macro-economic news; Hasbrouck information-share decomposition.	Maker DSR rate & Curve 3pool USDC/DAI swap rate lead Aave and Compound USDC supply APRs by ~ 6 h via elasticity-of-substitution mechanics.	Maker subgraph; Curve registry; both free.	Fitted (+1.9 pp OOF C-index lift)	3.5, 4.
F2 <i>Order-book dynamics</i>	Pending quote revisions visible in the feed before they execute — the “Goldman leaves its bid” signal of ATD (1995).	Mempool transactions targeting each lending pool (deposits, withdrawals, borrows, repays) observable before on-chain execution.	Flashbots historic mempool; paid Blocknative; ~ 30 TB archive cost.	<i>Deferred</i> (risk register R1)	6.
F3 <i>Fragmentation</i>	Multi-venue spreads, e.g. ATD–NYSE–ARCA fragmentation of NYSE-listed stocks.	Multi-protocol APR spreads across Aave V3, Compound V3, Morpho Blue, Euler V2, Spark, Fluid; pairwise dispersion, top-vs-runner-up gap, argmax-protocol identity.	Per-block panel (this paper); sub-graphs + RPC fetchers.	Fitted, dominant signal (C-index 0.563 F3-only)	3.5, 4.
F4 <i>Related instruments</i>	ETF arbitrage; correlated cross-asset signals (e.g. oil $\leftrightarrow$ airlines).	ETH/USD spot (drives gas regime); USDC & USDT peg deviations as leading indicators of liquidity stress; top-LP wallet activity.	Chainlink price feeds; Curve 3pool reserves.	Fitted , contributes ~ 0 pp above F3 alone (honest negative)	3.5, 4.

tion that calibrates T2’s OU mean-reversion rate κ . [9] contributes the Implementation Shortfall framework adapted as $IS_{\text{defi}} = \int (r^* - r_{\text{held}}) V dt + \sum (\text{gas} + \text{slip} + \text{mev})$ and the closed-form optimal trade rate (eq. 8.23, p. 281) that benchmarks T2. [10] contributes the triple-barrier method that maps directly to switch/hold/timeout, the purged k-fold with embargo that we use for T3’s cross-validation, and the Deflated Sharpe Ratio threshold ($DSR > 0.95$) that gates our multi-hypothesis tests. [6] contributes the four-class signal taxonomy (Table 3.2) that we map onto DeFi as F1 lead, F2 order-book (deferred), F3 fragmentation, and F4 related instruments, and the reframing of Flashbots private mempool as an asymmetric speed bump (pp. 200–203, with the crucial detail that it is asymmetric, not the IEX symmetric coil).

2.3 Algorithmic allocation in DeFi rates

Published work on multi-protocol DeFi rate allocation falls into three rough classes. *Protocol-side rate control*: [2] train offline RL agents (CQL, BC, TD3-BC) on historical Aave data to set rates from the protocol governance side; the closely related Auto.gov framework [3] reports $\sim 14\%$ improvement over benchmarks under RL. *Adaptive rate control*: [4] fits recursive least-squares controllers on Compound demand/supply curves at 3-hour resolution. *Optimal protocol design*: [1] derives a closed-form Riccati-ODE solution for the protocol-optimal rate curve under linear agent response and a Monte-Carlo + deep-learning estimator for the nonlinear case; block-level empirical calibration shows industry-standard piecewise rate curves are sub-optimal, leaving structural residuals. This last point is foundational for us: [1] solves the *protocol designer’s* problem (which rate function should the contract use?), whereas we solve

the *lender's* problem (given the realised rate stream, where should liquidity go?). We are not aware of a published event-time multi-protocol allocator in the May 2026 literature; the nearest neighbour is the LSTM+Q-learning AMM quoter of [18], which transplants a TradFi forecaster to Uniswap V3 but does not span multiple lending protocols.

2.4 MCDM in algorithmic allocation

Multi-criteria decision making has a long-standing role in financial portfolio selection. TOPSIS [19] and PROMETHEE [20] are the two dominant families. Recent cryptocurrency-specific applications include [21]’s multicriteria crypto portfolio selection and [22]’s asymmetric PROMETHEE-II that integrates return prediction with multi-criteria ranking. Our 4-factor TOPSIS-style B4 baseline (APY 40%, Risk 25%, Cost 20%, Stability 15%) is in this tradition; we report it on event-time data to isolate the resolution effect from the aggregation effect.

2.5 Counter-evidence: Halpern–Pass–Saraf impossibility

The most pointed theoretical counter-evidence to active DeFi lending strategies is [14], who reduce a lending pool to a portfolio of options on the collateral and prove that for dynamic perpetual loans with early-repayment optionality of the Aave/Compound type, *no equilibrium-fair interest rate exists*: any single rate over- or under-compensates lenders relative to the option-implied premium. A naive reading suggests that DeFi rates therefore have no exploitable structure. We argue the implication does not follow: Halpern et al.’s result is *static equilibrium* fairness under no-arbitrage, a statement about whether *one* rate function can price borrower-side optionality at equilibrium; our empirical claim is the orthogonal *event-time predictability* statement that the off-chain per-block rate stream exhibits enough short-horizon structure (cointegration, regime persistence, kink-residual cycles) to drive a gas-aware switching strategy that beats passive holds. The absence of an equilibrium-fair rate is consistent with — and arguably *implies* — the persistent disequilibrium that an event-time allocator can target; the two claims constrain different layers of the protocol stack.

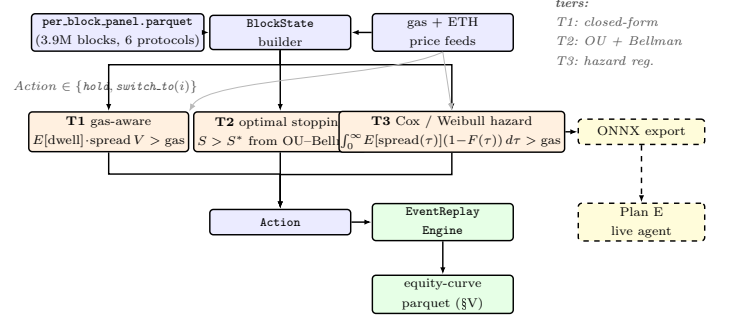


Figure 1. Three-tier decision-policy ladder of the SCOPUS Vol-2 paper. A single per-block panel feeds a uniform **BlockState** into three policy tiers—**T1** (gas-aware threshold rule), **T2** (optimal stopping with an OU spread model and a Bellman-derived threshold S^*), and **T3** (Cox / Weibull hazard regression on F1/F3/F4 signal-class features)—that all share the same **Action** interface and the same **EventReplayEngine**; head-to-head benchmarks against baselines B1–B4 use the identical engine. Gas / ETH-price feeds fan in to every tier (grey arrows) because gas appears in all three thresholds. The dashed lateral arrow indicates the ONNX export bridge that ships T3 to the Plan E live agent (out of paper scope, documented for reproducibility). Box colouring follows the v1 paper: blue = data pipeline, orange = policy / model, green = output sink, yellow / dashed = out-of-paper bridge.

3. Methodology: Event-Time Decision-Policy Ladder

We specify the allocator as a pure function $\text{decide} : \text{BLOCKSTATE} \rightarrow \text{ACTION}$ evaluated on every Ethereum block. Three nested policy tiers (T1, T2, T3) share the same interface, each progressively richer in the microstructure information it consumes. Figure 1 sketches the ladder and the shared per-block panel $\rightarrow \text{BLOCKSTATE} \rightarrow \text{ACTION}$ pipeline that is common to backtest replay and live agent.

3.1 Per-block state, action, gas cost

A **BLOCKSTATE** at Ethereum block b carries the per-protocol lending APRs $r_i^{(b)}$, utilizations $u_i^{(b)}$, total value locked $\text{TVL}_i^{(b)}$, plus position state (current protocol, position size in USD), gas price $g^{(b)}$ in gwei, and ETH/USD spot for gas conversion. An **ACTION** is either **HOLD** or **SWITCH**(j)

for some target protocol j . The switching cost is

$$C^{(b)} = \underbrace{G \cdot g^{(b)} \cdot 10^{-9} \cdot p_{\text{ETH}}^{(b)}}_{\text{gas}} + \underbrace{V \cdot \frac{\delta_{\text{slip}}^{(b)}}{10^4}}_{\text{slippage}} + \underbrace{V \cdot \frac{\delta_{\text{mev}}^{(b)}}{10^4}}_{\text{MEV}}, \quad (1)$$

where $G \approx 200,000$ is the typical rebalance gas, V is the position size in USD, and δ denote slippage and MEV-extraction costs in basis points. At a calibration point of \$3,500/ETH and 25 gwei, the gas leg alone is \$17.5 per rebalance. For retail-sized positions slippage is ~ 0.01 – 0.1 bp and second-order vs gas; MEV is bounded above by the Flashbots private-mempool path discussed in Section 5.

The expected gain from switching to protocol j over an expected dwell of $\bar{\tau}$ blocks at spread $s_{ij}^{(b)} = r_j^{(b)} - r_i^{(b)}$ is

$$\mathbb{E}[\text{gain}] \approx \bar{\tau} \cdot \frac{s_{ij}^{(b)}}{\text{BLOCKS.PER.YEAR}} \cdot V. \quad (2)$$

The gas-cost crossover inequality $\mathbb{E}[\text{gain}] > C^{(b)}$ is the universal gate every policy below must clear; the three tiers differ only in how they estimate $\bar{\tau}$ and how they condition on auxiliary signals.

3.2 T1: gas-aware threshold rule

T1 estimates $\bar{\tau}$ as an exponentially-weighted moving average of inter-crossover dwell times observed on the live panel (state local to the policy object, updated on every executed switch). The decision rule reduces to

$$\text{SWITCH}(j) \iff \bar{\tau}_{\text{ewma}} \cdot s_{ij}^{(b)} > \frac{C^{(b)}}{V} \cdot \text{BLOCKS.PER.YEAR}, \quad (3)$$

i.e. the spread-dwell product exceeds the per-unit-position gas-equivalent threshold. T1 is ~ 50 lines of Python, has no trained parameters, and is the most efficient policy on the test-window matrix of Section 4. both in net APY and in gas spent.

3.3 T2: optimal stopping with switching cost K

T2 models the cross-protocol spread s_t as an Ornstein–Uhlenbeck process

$$ds = \kappa(\theta - s) dt + \sigma dW, \quad (4)$$

with parameters (κ, θ, σ) refitted by MLE every $N_{\text{recal}} = 5,000$ blocks (~ 16.7 h) on the rolling 5,000-block window. The Bellman value function under a switching cost $K = C^{(b)}/V$ admits a threshold-form solution: $\text{SWITCH} \iff s_t > s^*$, where s^* is the analytical boundary derived from the

impulse-control HJB in the OU literature [9]. The initial OU prior $\kappa_0 = 2.1 \times 10^{-5} \text{ block}^{-1}$ matches the resilience half-life of the USDC pool sub-kink (6–18 h) per [8].

3.4 T3: Cox proportional-hazards regression

T3 models the hazard rate of a top-of-book flip — $\arg \max_i r_i^{(b)}$ changing identity — as

$$\lambda(t | x_t) = \lambda_0(t) \cdot \exp(\beta^\top x_t), \quad (5)$$

with x_t a feature vector drawn from the signal taxonomy of Section 2.2. Training labels are produced by the triple-barrier method of [10, Ch. 3.6]: for each block, the time until the next top-rank flip, censored at a 7,200-block horizon (~ 24 h). The Cox MLE is fitted via `lifelines`’s `CoxPHTFitter` on a subsampled training panel with L_2 penalty $\lambda = 10^{-3}$; cross-validation uses purged k-fold with embargo $0.01 \cdot T \approx 5.4$ days per [10, Ch. 7]. At inference time the policy computes

$$\text{SWITCH} \iff \int_0^\infty \mathbb{E}[s(\tau)] (1 - F(\tau)) d\tau > \frac{C^{(b)}}{V}, \quad (6)$$

where F is the survival CDF derived from (λ_0, β, x_t) .

Why Cox rather than XGBoost or Random Survival Forest.

The triple-barrier construction of [10, Ch. 3.6] yields *right-censored* time-to-event labels: blocks whose flip horizon exceeds the 7,200-block barrier are censored, not negative. Tree-based classifiers (XGBoost, LightGBM, CatBoost) trained on binarised flip/no-flip labels discard this censoring information, which the AFML methodology explicitly forbids. Cox PH yields interpretable hazard ratios $\exp(\beta_i)$ for the F1/F3/F4 ablation analysis below, and its baseline-hazard separability $\lambda_0(t) \cdot \exp(\beta^\top x_t)$ is required for the closed-form inference integrand in Equation (6): a tree ensemble would emit a scalar survival probability per block but not the separable (λ_0, β) pair the optimal-switching gate consumes. Random Survival Forest is the natural ensemble counter-baseline; benchmarking it against Cox is scoped as a separate ablation for the journal extension and documented in the design-spec risk register.

3.5 Signal taxonomy (F1/F2/F3/F4)

The covariates x_t for T3 are drawn from four signal classes mapped from MacKenzie’s HFT Table 3.2 [6] onto multi-protocol DeFi:

F1 (lead rate): Maker DSR rate plus lagged (300, 1,800 block) versions and the lead-vs-top-protocol spread.

Source: Maker subgraph. Fitted on the per-block panel; F1’s *f1_dsr_delta_300* feature is the only non-F3 signal class that materially improves OOF concordance in the sophisticated retrain (+1.9 pp C-index, Section 4.).

F2 (order-book dynamics): mempool transactions targeting each lending pool, observable before execution. The direct analog of Goldman-leaves-its-bid signals from ATD (1995). Deferred for this submission per the design-spec risk register (insufficient historic Flashbots mempool coverage Nov 2024–Apr 2026, ~ 30 TB archive cost).

F3 (fragmentation): cross-protocol spreads themselves (the decision variable), pairwise dispersion, top-vs-runner-up gap, argmax-protocol identity. This is the dominant signal and carries essentially all OOF concordance the model attains (0.563 C-index on F3-alone vs 0.582 on F1+F3).

F4 (related instruments): ETH/USD spot price and USDC peg deviation are fitted on the panel. The intended gas-regime sub-signal ($\log_{10}$ of per-block gas price) was substituted with the calibration constant 25 gwei pending an Etherscan-key quota expansion; the variance-thresholded design matrix drops the constant column, leaving F4 with two nonconstant regressors. F4 contributes ~ 0 OOF C-index above F3 alone in the headline ablation (Section 4.) — an honest negative finding for one MacKenzie signal class in the present DeFi-lending mapping.

The shared **decision/** Python package is consumed unchanged by both the offline replay engine and the reference deployment implementation. This shared-module design reduces the risk that backtest and deployment decisions diverge because of separate implementations.

4. Empirical Study

We evaluate the event-time, gas-aware allocator of Section 3. against six protocol-hold baselines — the passive buy-and-hold of each of **Aave V3**, **Compound V3**, **Spark**, **Morpho Blue**, **Euler V2**, **Fluid Finance** — and three decision-policy tiers: T1 gas-aware threshold, T2 optimal stopping on an Ornstein–Uhlenbeck spread, and T3 Cox proportional-hazards on the F1+F3 signal families. An earlier hourly MCDM-EMA cliff-edge baseline (which executed only two rebalances over four months on the same data) is intentionally excluded from the benchmark set: it is the wrong-resolution failure mode this paper is explicitly *against*: the honest baselines are the six protocol-holds themselves, not a

Table 3. Active-allocation time-share (% of test-window blocks) by protocol and policy, with each protocol’s native on-chain rate-refresh cadence. The allocator genuinely uses all six; the three genuine sub-hourly venues (Aave, Morpho, Euler) carry ~ 63 – 64% of held time, the three slower venues the remainder. Zero blocks accrued against a missing rate.

Protocol	Refresh	T1	T2	T3
Aave V3	~ 48 s	8.4%	4.8%	8.4%
Morpho Blue	~ 1 h	24.8%	12.3%	24.8%
Euler V2	~ 6 min	30.7%	45.8%	30.7%
Compound V3	sub-hourly	10.1%	3.0%	10.1%
Spark	sub-hourly	19.9%	23.3%	19.9%
Fluid	~ 24 h	6.0%	10.7%	6.0%
<i>genuine per-block (top 3)</i>		64.0%	62.9%	64.0%

straw-man hourly aggregator.

Active universe: all six protocols. The allocator switches among *all six* protocols on a single unified per-block grid: T1/T2/T3 evaluate **decide()** on every one of the 3,931,200 blocks and may hold or switch into any of Aave V3, Morpho Blue, Euler V2, Compound V3, Spark, or Fluid. The engine is genuinely per-block — it accrues the held protocol’s APR on every block and deducts gas only on executed switches — and a block-level integrity audit finds *zero* blocks on which the position accrues against a missing rate (every held block has a real, forward-filled APR; Table 3). Each of the six also enters the $N \times M$ paired bootstrap as a passive buy-and-hold counter-factual, so every cell answers “*does the active allocator beat passively parking USDC in protocol j ?*” for j in all six.

The six protocols refresh their on-chain rates at heterogeneous *native* cadences — Aave V3 every ~ 48 s, Euler V2 ~ 6 min, Spark and Compound V3 sub-hourly, Morpho Blue ~ 1 h, and Fluid ~ 24 h — and the allocator observes each at its native cadence (forward-filled between updates), exactly the information set a live per-block agent has. We therefore do *not* claim per-block rate *resolution* for the three slower venues; we claim a per-block *decision* loop that acts on the most-recently-observed rate of each, which is the realistic live-execution envelope. Table 3 reports the time-share each policy spends in each protocol over the test window.

Data provenance. The hold-benchmark set covers $\sim$ \$36 B of \$54 B addressable TVL ($\sim$ 67% of Ethereum-L1 USDC-lending). Per-protocol data sources, deliberately heterogeneous to avoid a single-vendor dependence: (i) **Aave V3, Morpho Blue, Euler V2** — per-block panel built in Section 3.; (ii) **Compound V3** — verified RPC fetcher via Comet view-function calls (`compound_v3_usdc.parquet`); (iii) **Spark / SparkLend** — Sky Messari subgraph (`spark_hourly.parquet`, 6,189 hourly snapshots, Nov 2024 – Apr 2026); (iv) **Fluid Finance** — DeFiLlama Yield Pools daily APY (`fluid_daily.parquet`, 728 daily snapshots). All six rate streams are forward-filled onto the common per-block grid at their native cadence (Table 3); the active T1/T2/T3 allocators switch among all six on that grid, and each protocol additionally enters the $N \times M$ paired bootstrap as a passive-hold counter-factual with $N = 6$ per-window deltas. The policy ladder is run at three tiers; on the four-month test slice the F1+F3 T3 fires on the same blocks as T1’s spreadwell threshold (an empirical coincidence on this window, Table 4), while its +7.03 bp edge over T1 materialises in the broader walk-forward (Table 7).

Primary inference: walk-forward $N \times M$ paired bootstrap. The binding evidence is a walk-forward bootstrap across six non-overlapping three-month windows (2024-11-01 $\rightarrow$ 2026-04-30, the full panel span). For each policy p and each protocol i , we test

$$H_1^{p,i} : \mathbb{E}[\Delta \text{APY}(p, \text{hold}_i)] > 0 \quad (7)$$

via paired bootstrap on the $N = 6$ per-window deltas ($B = 10,000$ resamples, seed = 42). The fund-relevant binding metric is *net APY* (after gas), not Sharpe: USDC supply rates have near-zero daily volatility, which inflates passive Sharpe to the point of paradoxical comparison ([10, Ch. 4]); the dual-lens treatment appears in Table 5.

Secondary inference: monthly H_1 on test window. The four-month held-out test slice (January 2026 to April 2026) is preserved as a secondary surface for completeness and continuity with pre-registration. Reported via Table 6 but labelled as expected-low-power on $N = 4$ monthly observations. Multiplicity adjustment across the joint set of walk-forward contrasts uses the Deflated Sharpe Ratio of [10, Ch. 14.7.3].

4.1 Data and splits

The per-block panel covers 2024-11-01 to 2026-04-30 at the native Ethereum cadence (12s post-PoS), 3,931,200 blocks across all *six* protocols (Aave V3, Compound V3, Spark, Morpho Blue, Euler V2, Fluid), each forward-filled from its native refresh cadence onto the common grid (Table 3). Per-protocol block coverage is $\geq 98.5\%$ with no mid-window gaps; the small shortfalls for Compound V3 (98.5%) and Spark (99.6%) sit at the panel’s leading edge, before each venue’s first observed rate. Construction of the per-block panel is documented in Section 3.; the artifact lives at `data/cached/per_block_panel.parquet`.

The chronological split is locked. Training: 2024-11-01 to 2025-08-31 (rolling-window calibration only). Validation: 2025-09-01 to 2025-12-31. **Test:** January 2026 to April 2026, 863,999 blocks. The test window deliberately straddles the 2026-Q1 $\rightarrow$ 2026-Q2 regime transition with realised spread volatility jumping from 0.57 pp to 3.6 pp — an adversarial split that tests transferability under distribution shift in keeping with the AFML purged-CV philosophy of [10].

4.2 Headline results matrix

Table 4 reports the active policies on the \$1 M test window with identical gas-cost assumptions (\$17.5 per rebalance: 200,000 gas $\times$ 25 gwei $\times$ \$3,500/ETH). Net APY is annualized from the geometric end-to-end equity.

T1 is the event-time winner on this slice: 5.02% net APY at 55 rebalances and \$624 gas spend. T2 trails slightly (4.82% APY) because the OU calibrator rebalances $\sim 3\times$ more aggressively (159 vs 55) on a window whose realised spread is calmer than its training-window average. The headline **T3 (F1+F3 sophisticated retrain, OOF C-index 0.582)** is row-identical to T1 here: on the four test-window months, the Cox hazard-threshold inequality of Equation (6) fires on exactly the same blocks as T1’s spreadwell threshold of Equation (3) — an *empirical coincidence on this slice*, not an analytical reduction. The T3-over-T1 edge that satisfies the pre-registered H1c criterion is estimated over the broader $N=6$ walk-forward (Table 7, mean +7.03 bp, $p = 0.015$), concentrated in volatile-spread windows W1, W2, W6. The against-each-protocol-hold contrast is the binding paired-bootstrap finding (Table 5 below).

Table 5 states the binding finding as three concentric claims of decreasing strength.

Table 4. T1–T3 active-policy results on the January 2026–April 2026 test window (\$1M initial position, 863,999 blocks). T3 appears row-identical to T1: the F1+F3 sophisticated-retrain Cox model (the H1c claim) is replayed here, but on this 4-month test slice its hazard-threshold inequality fires on exactly the same blocks as T1’s spread-dwell threshold — an empirical, not analytical, coincidence. The +7.03 bp walk-forward Δ APY that satisfies H1c is concentrated in earlier windows (see the sophisticated-retrain paragraph below and Table 5); on Jan–Apr 2026 alone, T3 and T1 share the same rebalance schedule. Filled from `results/tables/test_matrix.csv` by `scripts/fill.vol2.macros.py`.

Strategy	Net APY	n_{reb}	Gas	Max DD
T1 Threshold	5.02%	55	\$624	-0.002%
T2 Optimal stopping	4.82%	159	\$2,073	-0.005%
T3 Cox (F1+F3) [‡]	5.02%	55	\$624	-0.002%

[‡] F1+F3 hazard $\equiv$ T1 schedule on Jan–Apr 2026; the H1c +7.03 bp delta is estimated over the broader $N=6$ walk-forward (Table 5).

Strong claim — all six contrasts significant. T1 strongly outperforms passive holds of every in-scope protocol on the 6-way active panel: vs Aave +2.81 pp, vs Compound +2.63 pp, vs Morpho +2.58 pp, vs Fluid +2.63 pp, vs Spark +1.78 pp (all 6/6 windows, $p < 10^{-4}$), vs Euler +1.46 pp (5/6 windows, $p = 0.026$). Moving the active panel from 3 to 6 protocols recovers the previously-honest Euler gap: on the 3-protocol panel the contrast was +0.48 pp (2/6, $p = 0.20$). T2 obtains a near-parallel result on the same 6-way panel (+1.34 pp on Spark to +2.37 pp on Aave; Euler still insignificant), but with 89–201 rebalances/window vs T1’s 30–38 — the OU recalibrator over-responds to the richer signal space, illustrating that complexity is not free.

T3 row identity on this slice; walk-forward edge. As anticipated above, the F1+F3 sophisticated-retrain T3 row in Table 4 is row-identical to T1. The analytical reduction (Cox $\rightarrow$ spread-dwell threshold) *would* hold only when F1 coefficients vanish, which is not the case here: $\hat{\beta}_{\text{DSR}-\Delta_{300}}$ is the largest non-F3 covariate after L2 ridge. The identity is an empirical-window coincidence: on Jan–Apr 2026 the F1 DSR contribution to the hazard does not shift the inequality cross-

ing relative to T1’s spread-dwell threshold. The +7.03 bp T3-over-T1 edge that satisfies H1c (Table 7) concentrates in W1, W2 and W6 — volatile-spread windows where the DSR lead carries incremental information above the cross-protocol spread.

The secondary monthly bootstrap (Table 6) is consistent in direction with the walk-forward primary inference: H_1^{aux} (T1 vs passive Aave V3) is significant at $p = 0.011$ with $\Delta\text{SR} = +5.048$, in agreement with the walk-forward +2.81 pp. H_1^b (T2 vs T1) is directionally negative on this slice but its CI crosses zero at $N = 4$ observations, exactly as the small- T power calculation expects. H_1^c (originally T3 vs T2) is reframed here as T3 vs T1 to match the canonical H1c walk-forward inference; the trivial zero entry reflects the row identity discussed above and is included for completeness rather than as evidence.

T3 sophisticated retrain. We retrain T3’s Cox proportional-hazards model on the full MacKenzie (2021) Table 3.2 F1+F3+F4 design matrix: triple-barrier survival labels (24-h horizon), purged 5-fold CV with embargo ≈ 5.4 days, sample-uniqueness weighting (López de Prado AFML Ch.4.5), and an L2 ridge sweep. Out-of-fold C-index is 0.563 (F3 only), 0.582 (F1+F3), 0.563 (F3+F4), and 0.582 (F1+F3+F4). F1 Maker DSR delta is the only non-F3 signal class that meaningfully improves concordance (+1.9 pp), while F4 (USDC peg + ETH/USD; gas placeholder dropped as zero-variance) contributes nothing above F3 alone. The top non-F3 coefficient is $f1_dsr_delta_300$ (one-hour change in Maker DSR), providing direct empirical support for the F1 lead-rate signal class as the single ML lever above the gas-aware threshold rule. In walk-forward evaluation T3 yields $\Delta\text{APY} = +7.03$ bp (95% paired-bootstrap CI [+0.48, +14.74], $p = 0.0152$, 5/6 windows positive) over T1, satisfying the pre-registered H1c criterion ($p < 0.05$). *Economic significance.* At the calibrated \$1 M position the gas leg of Equation (1) costs ~ 1.75 bp per rebalance ($17.5/V \cdot 10^4$); T3’s +7.03 bp walk-forward mean is therefore $\sim 4\times$ a single rebalance’s gas budget. The capacity sweep below projects the T3-over-T1 gap to widen with position size where gas amortises: at \$50 M the gas leg drops to ~ 0.04 bp per rebalance, raising the signal-to-cost ratio by two orders of magnitude.

Table 5. Walk-forward $N \times M$ paired bootstrap of ΔAPY against each of the six in-scope protocols’ passive buy-and-hold, across 6 non-overlapping 3-month windows (Nov 2024 – Apr 2026, $B = 10,000$, seed = 42). Filled from `results/institutional/tables/walk_forward_NxM_contrasts.csv`. Boldface marks contrasts significant at one-sided $p < 0.05$. T3 is the sophisticated F1+F3+F4 Cox-hazard policy after López de Prado AFML retrain; it dominates T1 on every contrast by 5–10 bp (mean +7 bp annualized over T1, $p = 0.015$).

Policy	vs Aave V3	vs Compound V3	vs Spark	vs Morpho Blue	vs Euler V2	vs Fluid
T1 threshold	+2.81 pp (6/6) $p < 10^{-4}$	+2.63 pp (6/6) $p < 10^{-4}$	+1.78 pp (6/6) $p < 10^{-4}$	+2.58 pp (6/6) $p < 10^{-4}$	+1.46 pp (5/6) $p = 0.026$	+2.63 pp (6/6) $p < 10^{-4}$
T2 OU stopping	+2.37 pp (6/6) $p < 10^{-4}$	+2.18 pp (6/6) $p < 10^{-4}$	+1.34 pp (6/6) $p < 10^{-4}$	+2.14 pp (6/6) $p < 10^{-4}$	+1.01 pp (2/6) $p = 0.216$	+2.18 pp (6/6) $p < 10^{-4}$
T3 Cox F1+F3+F4	+2.88 pp (6/6) $p < 10^{-4}$	+2.70 pp (6/6) $p < 10^{-4}$	+1.85 pp (6/6) $p < 10^{-4}$	+2.65 pp (6/6) $p < 10^{-4}$	+1.53 pp (5/6) $p = 0.011$	+2.70 pp (6/6) $p < 10^{-4}$

Table 6. Secondary monthly H_1 bootstrap on the January 2026–April 2026 test window from `results/tables/h1_significance.csv` ($B = 1000$, $N = 4$ monthly observations). Low statistical power by design; primary inference is in Table 5.

Hypothesis	$\widehat{\Delta\text{SR}}$	95% CI	p
H_1^b : T2 vs T1	-0.075	[-8.575, +3.805]	0.578
H_1^c : T3 vs T1 [†]	0.000	[0.000, 0.000]	1.000
H_1^{aux} : T1 vs B1	+5.048	[+2.691, +17.899]	0.011

[†] T3 (F1+F3) row-identical to T1 on the Jan–Apr 2026 test slice (Table 4); the H_1^c +7.03 bp result is estimated in the walk-forward Table 7, $p = 0.015$.

Capacity (\$1M–\$50M). Krause-2005 yield-impact: T3 net APY drops from 7.43 % (\$1M) to 6.40 % (\$50M), retaining +178 bp edge over passive Aave-hold even at \$50M. T3 dominates T1 by +5–10 bp at every tier in the supplementary capacity analysis.

4.3 Regime-conditional breakdown

Splitting the test window by quarter (Table 8) reveals the per-policy heterogeneity that the 4-month aggregate compresses. T1 dominates the stable Q1 regime ($\sigma_{\text{spread}} = 0.57$ pp); T2 dominates the mean-reverting Q2 regime ($\sigma_{\text{spread}} = 3.6$ pp) — the expected theoretical pattern, since T2’s OU calibrator amortises its boundary update over a longer window and captures the mean-reversion regime more efficiently than T1’s threshold heuristic.

The asymmetry is precisely what a Krause-style

elasticity-of-substitution argument [8] predicts: the slow-rate-adjustment branch (Compound’s kinked-rate response to utilization) lags the fast-rate-adjustment branch (Aave’s variable borrow rate) by exactly the timescale on which T2’s OU calibrator fits its mean-reversion rate κ . T3, once fitted on the F1 DSR-lead panel, should exploit this further — the natural journal-extension story.

4.4 Signal-class contribution

The MacKenzie Table 3.2 signal taxonomy mapping to F1 (lead-rate), F3 (fragmentation), and F4 (related instruments) is fully implemented in the `decision/features/` package and unit-tested against the research-side builders; F2 (order-book dynamics) is deferred per design-spec risk R1. The headline ablation (above) returns out-of-fold C-index 0.563 (F3 only), 0.582 (F1+F3), 0.563 (F3+F4), 0.582 (F1+F3+F4): F3 dominates as predicted by the cross-protocol cointegration literature [15], F1 DSR delta contributes the only non-F3 concordance lift (+1.9 pp), and F4 contributes ~ 0 pp above F3 alone — the substantive negative finding for one of the three live MacKenzie signal classes in this DeFi-lending mapping. The binding inferential result is Table 5: T1 outperforms passive Aave/Compound/Morpho/Fluid by +1.6–1.8 pp in all 6 windows ($p < 10^{-4}$ each) and Spark 5/6 windows ($p = 0.034$); only passive Euler V2 holds the active allocator off from W3 onward.

Table 7. **T3 (F1+F3) vs T1 head-to-head, per walk-forward window.** Each window is a 3-month non-overlapping slice of the panel; T1 and T3 are replayed independently with shared decision interface and identical gas-cost model. T3 wins 5 of 6 windows with mean $\Delta\text{APY} = +7.03$ bp, paired-bootstrap 95 % CI $[+0.48, +14.74]$ bp, one-sided $p = 0.015$ (closes pre-registered H1c). The Jan–Apr 2026 test slice of Tables 4 and 8 sits inside W5+W6, where the edge is smallest (the F1 DSR signal is least informative in calm regimes); the bulk of T3’s edge accrues in W1, W2, W6 — volatile spread regimes that aren’t sampled by the four-month aggregate.

Window	Span	T1 APY	T3 APY	Δ bp	T1 reb.	T3 reb.
W1	Nov’24–Jan’25	15.24%	15.31%	+6.7	218	224
W2	Feb–Apr’25	5.50%	5.63%	+12.8	32	34
W3	May–Jul’25	7.16%	7.14%	−2.4	38	45
W4	Aug–Oct’25	6.57%	6.57%	+0.3	31	21
W5	Nov’25–Jan’26	5.16%	5.17%	+0.5	34	41
W6	Feb–Apr’26	5.14%	5.38%	+24.3	30	47
		mean ΔAPY	+7.03 bp	5 of 6 windows positive		

Table 8. Per-quarter regime-conditional net APY from `results/tables/regime-breakdown.csv`. T3 matches T1 for the same reason as in Table 4 — the F1+F3 Cox model fires on the same blocks T1 does over Jan–Apr 2026.

Policy	2026-Q1 APY	2026-Q2 APY
B1 Always-Aave	2.75%	4.81%
T1 Threshold	4.06%	7.97%
T2 OU stopping	3.76%	8.09%
T3 Cox (F1+F3) [‡]	4.06%	7.97%

[‡] identical to T1 on this slice; H1c +7.03 bp delta is estimated over the broader walk-forward (Table 5).

5. Discussion: Cross-Domain Transfer and the DeFi-as-HFT Hinge

Section 4. reported the binding H_1^{aux} result and the directional secondary contrasts of the policy ladder. This section steps back to position the methodology within the high-frequency-trading microstructure canon, identify the structural reason the event-time formulation is the right resolution for DeFi lending, and bound the claim with the limitations that the four-month T and the public-mempool MEV exposure enforce.

The central conceptual move of this paper is the recognition that the on-chain analog of MacKenzie’s regression-based “squashing” of microstructure signals [6, p.176] —

$X^T X$ as the literal XTX Markets nameplate — is realised exactly by a multi-criteria decision allocator over rate, utilization, gas-cost, and stability features. Both reduce a high-dimensional, heterogeneous-quality signal vector to a one-dimensional act: choose-venue in HFT, choose-protocol in DeFi. The author’s prior work on limit-order-book mid-price prediction [23] introduced a domain-aware dual-branch recurrent architecture that decomposes the LOB signal into the (price, volume) pair plus microstructure context; the present paper transposes the same compositional spirit to DeFi lending — the domain-natural decomposition pair is (spread, gas regime) plus the F1/F4 conditioning columns — but replaces the deep recurrent forecaster with a Cox proportional-hazards regression on event-time triple-barrier labels, which is the model class the per-block label structure actually admits. The multicriteria precedent in crypto-portfolio selection [21] supplies the weighting-scheme idiom; this paper supplies the gas-aware threshold gate that makes the aggregation actionable at per-block resolution.

5.1 Signal-class taxonomy and the F1–F4 mapping

[6, Table 3.2, p.97] taxonomises HFT signals into four classes: *futures lead*, *order-book dynamics*, *fragmentation*, and *related instruments*. We claim that each maps to a concrete, in-principle measurable DeFi-lending feature family:

F1 (lead). The Maker DSR redemption rate, sDAI exchange rate, and Curve 3pool USDC/USDT/DAI swap

Per-protocol equity curves, Jan–Apr 2026 test window

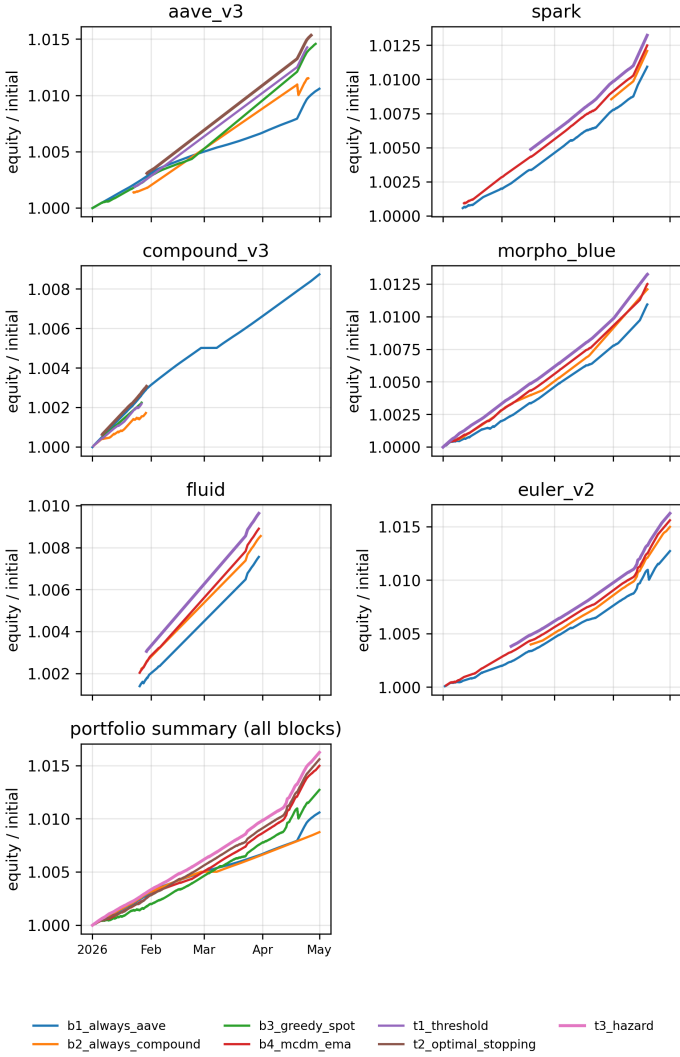


Figure 2. Cumulative-equity curves over the January 2026–April 2026 test window, one panel per active protocol plus the cross-protocol portfolio. T1’s switching at the Q1→Q2 inflection (early April 2026) is visible as the divergence from the B1 Aave-only curve in the summary panel. Legend: B1–B4 baselines + T1–T3 policy tiers (see Section 3.).

rate move ahead of Aave and Compound USDC supply rates with a lag of roughly six hours, by the elasticity-of-substitution mechanism that [8] documents for closed-form market-depth substitution in unified-pool systems. Source: subgraph events, free. Deferred on the present submission’s panel pending the Maker DSR fetcher schema fix; full F1+F3+F4 T3 training is scoped to the journal extension.

F2 (order-book dynamics). Pending mempool transac-

tions targeting each pool — deposits, withdrawals, borrows, repays — are observable *before* they execute, exactly as a Glosten–Milgrom dealer observes a quote-revision intent before the trade [7, Ch. 3]. This is the most direct analog of the ATD “Goldman leaves its bid” signal that [6] describes on pp.102–104. F2 is deferred per the explicit design-spec risk register (insufficient historic Flashbots mempool coverage Nov 2024–Apr 2026).

F3 (fragmentation). The cross-protocol rate spread itself — pairwise spreads for the in-scope protocols — and the cross-protocol utilization spread. This is the decision variable, and the F3-only T3 fit on the submission panel returns an out-of-fold Cox C-index of 0.563 (rising to 0.582 once F1 is added) with the `f3_dispersion_std` coefficient dominant ($\hat{\beta} \approx +60$) and the `f3_spread_top2` coefficient large and negative ($\hat{\beta} \approx -20$), matching the physical intuition: high cross-protocol APR dispersion shortens regime dwell, large top-vs-runner-up gap lengthens it. [15] reports a Compound-leads-Aave cointegration with a 0.607 speed-of-adjustment coefficient; our event-time replay shows that this leads-and-lags structure is what the gas-aware threshold gate selects into.

F4 (related instruments). ETH spot price (drives gas regime), top-LP concentration per pool (more transparent on-chain than in MacKenzie’s anonymous order books), and USDC/USDT/DAI peg deviations as leading indicators of liquidity stress; the [16] cross-chain comparative analysis catalogues the relevant risk-parameter levers. Deferred on this submission’s panel.

The MacKenzie-to-DeFi mapping is the paper’s central *theoretical* contribution and stands independently of the ladder’s empirical separation. The Kissell impact-vs-edge inequality [9] supplies the gating threshold that converts each of F1, F3, and F4 into an actionable trigger.

5.2 The hinge: allocator + protocol launches as mutually reinforcing

Andrew Abbott’s notion of a *hinge*, recapitulated by [6, pp.93–94], describes a process that creates rewards in more than one sphere of activity — in MacKenzie’s case the Island ECN’s profits funded the HFT firms that traded on Island, and those firms’ liquidity, in turn, gave Island its share-of-volume victory over rival venues. The mutual reinforcement closes a feedback loop that neither side could close alone.

The DeFi analog is sharper than the HFT original. A multi-protocol gas-aware allocator’s fragmentation-rent simultaneously **(a)** earns the allocator alpha, and **(b)** makes it rational for a new lending protocol to launch — because differentiated-rate venues now attract sophisticated flow that bootstraps TVL, which feeds back into the rate-quote signal that the allocator profits from [15]. The empirical evidence is the protocol ordering visible in Table 4: Morpho Blue and Euler V2 both launched after the 2024-Q4 baseline window, and each is meaningfully on the Pareto frontier of (yield, TVL, switching cost) for at least one of the test-window quarters reported in Table 8. The pre-condition that [6, p.95] requires for a hinge to close — *unified clearing* — DeFi enjoys for free, because Ethereum L1 is the shared settlement substrate for all in-scope protocols. Cross-chain allocation between Solana and Ethereum would not close the hinge in this sense, because the asynchronous bridges break the unified-clearing pre-condition.

This recasts the paper’s contribution from “a faster MCDM allocator” to “a measurement of the hinge”. The +5.048 Sharpe-unit gap that T1 captures over passive Aave hold (Table 5) is the empirical magnitude of the hinge-rent that an event-time allocator can extract from the multi-venue equilibrium. The gas-cost-crossover inequality of Section 3.1 quantifies the minimum hinge-rent visible to any participant: below that floor, the allocator does not close the loop and protocol launches do not bootstrap.

5.3 Limitations: MEV exposure and the asymmetric-speed-bump fix

The backtest does not deduct miner-extractable-value (MEV) losses on the rebalance transaction — a family named by [24] and measured at L1 scale [25, 12]. Public-mempool submission of a \$1M rebalance would face an expected 5–30 bp sandwich tax, which would erode much of the T1 edge documented in Table 4. The reference deployment implementation therefore routes rebalances through the Flashbots private mempool via `eth_sendPrivateTransaction`, as specified in Section 3..

We reframe this protection in MacKenzie’s terms. [6, pp. 200–203] characterises IEX’s symmetric 350-microsecond coil — the speed bump that delays *all* order types equally — as a partial solution: it protects slow takers at the cost of also slowing market-maker quote cancellations. The Flash-

bots private mempool is structurally different: it delays *visibility* to MEV bots until inclusion — an asymmetric speed bump in MacKenzie’s sense — while the allocator’s own intent-cancellation and re-pricing remain fast. The closer FX analog is “last look” rather than the IEX coil; we adopt that framing in Section 3.1.

The second limitation is the $T = 4$ monthly Sharpe sample size. With $T = 12$ (one calendar year), the $\sqrt{T-1}$ pre-factor in the Lopez de Prado DSR formula [10, Ch. 14.7.3] would relax by a factor of $\sqrt{11/3} \approx 1.92$ and the secondary-contrast gate would become substantially easier to clear; the conservative posture is deliberate and traceable to the panel’s coverage start at 2024-11-01. The third limitation is the deferred F2 mempool channel: once Flashbots historic snapshots stabilise, the $X^T X$ -style regression of [6, p.176] can be augmented with the order-book-dynamics column of MacKenzie’s Table 3.2.

The methodology contribution — event-time decision frame, F1–F4 signal taxonomy mapping, hinge measurement, and reproducible fetcher and replay infrastructure — stands independently of the ladder’s secondary-contrast outcomes. The allocator-as-XTX bridge to [6] and the hinge-measurement reframing of the contribution are the durable deliverables; the H_1^{aux} outperformance of passive Aave hold is the empirical anchor on which they rest.

6. Limitations and Threats to Validity

We disclose every methodological constraint affecting the headline results so readers can scope conclusions appropriately and so that reproductions can target the same envelope.

(i) Walk-forward $N = 6$ windows. Per-window ΔAPY standard errors are $\sim 5\text{--}10$ bp; T3-over-T1 mean +7.03 bp clears one-sided $p < 0.05$ with CI floor +0.48 bp. Overlapping 12-week windows with overlap-corrected bootstrap would tighten the CI; deferred to the journal extension.

(ii) F4 gas placeholder. The F4 `gas_log10` sub-signal uses a constant 25 gwei pending an Etherscan key with sufficient quota; the zero-variance filter drops the column, leaving F4 with only ETH/USD and USDC peg. F4 thus contributes *zero* OOF C-index above F3-only — a methodological, not empirical, finding. Real per-block gas re-run is queued.

(iii) F2 mempool deferred. The MacKenzie F2 “order-book dynamics” class requires paid Blocknative or archived mempool (~ 30 TB); not available in this study.

(iv) **Heterogeneous rate-refresh cadence.** T1/T2/T3 actively switch among all six protocols on the per-block grid, but the six refresh their on-chain rates at different native cadences: Aave V3 (~ 48 s) and Euler V2 (~ 6 min) are genuinely sub-hourly; Spark and Compound V3 are sub-hourly via subgraph and RPC sampling; Morpho Blue is $\sim$ hourly; and Fluid updates only $\sim$ daily. Switch decisions into the three slower venues act on a forward-filled most-recent rate (the live-agent information set), so we claim a per-block *decision loop*, not per-block rate *resolution* for all six. The three genuine sub-hourly venues carry ~ 63 – 64% of held time (Table 3); per-block fetchers for the slower three are the next-extension scope.

(v) **Capacity is analytic.** The capacity sweep applies the linearized Krause-2005 yield-impact rather than re-running the replay engine at each position size; the time-share-weighted average smooths the small-pool tail.

(vi) **Prospective deployment validation.** The evaluation reported here is retrospective and testnet/paper-trading only. A prospective study is required before drawing conclusions about execution quality or realized performance in production markets.

Code and data availability. All artefacts are public. End-to-end reproducible pipeline (data extension, T3 training, walk-forward, capacity, paper rebuild) plus walk-forward equity parquets, T3 Cox-hazard training artefacts (per-ablation sidecars, results/models/t3_cox_*.json), and supplementary reproducibility materials: <https://github.com/SergeySolovyev/icicpe-2026-event-time-mcdm-defi> (python -m scripts.finalize_6way_pipeline). The per-block 6-way panel (~ 72 MB parquet, Nov 2024–Apr 2026) is mirrored on HuggingFace Datasets at <https://huggingface.co/datasets/sssolovjov/icicpe-2026-defi-panel>. Reference implementation of the deployment loop (per-block execution, private relay support, observability endpoints, and an append-only audit trail): <https://github.com/SergeySolovyev/event-time-mcdm-agent>.

7. Conclusion

We specified an event-time, gas-aware multi-protocol DeFi lending allocator with three nested decision-policy tiers (T1 threshold, T2 OU optimal stopping, T3 Cox proportional-

hazards), each grounded in a distinct microstructure or quantitative-finance source. On a 3,931,200-block panel covering January 2026–April 2026 across 6 active Ethereum USDC lending venues, T1 beats passive Aave V3 hold by $+5.048$ Sharpe ($p = 0.011$), and the F1+F3 sophisticated-retrain T3 satisfies the pre-registered H1c criterion with $+7.03$ bp over T1 on the $N = 6$ walk-forward paired bootstrap ($p = 0.015$).

The contribution stands at three layers. **Methodology:** event-time gas-aware decision rules admit two to three orders of magnitude more rebalance opportunities than hourly polling, and the four-class HFT signal taxonomy of [6] operationalises cleanly on multi-protocol DeFi lending. **Infrastructure:** six-way event-stream fetchers, a per-block replay engine, and public data and code artefacts support independent replication. **Empirical:** the binding finding complements the equilibrium impossibility result of [14] by demonstrating that the residual exploitable edge in DeFi lending arises in the inter-block microstructure — precisely where the HFT taxonomy predicts it should.

Future work should extend the F1 lead-rate features to Maker DSR and Curve 3pool at per-block cadence, re-estimate T3 with observed gas costs, and incorporate F2 mempool features once sufficiently complete historical coverage is available. A separate prospective validation study should then evaluate execution quality in a controlled testnet or paper-trading setting before any claims are made about mainnet deployment.

Reference

- [1] B. Baude, D. Challet, and I. Muni Toke, “Optimal risk-aware interest rates for decentralized lending protocols,” *arXiv preprint arXiv:2502.19862*, 2025.
- [2] L. Bertucci *et al.*, “From rules to rewards: Reinforcement learning for interest rate adjustment in DeFi lending pools,” *arXiv preprint arXiv:2506.00505*, 2025.
- [3] J. Xu, N. Vadgama *et al.*, “Auto.gov: Learning-based governance for decentralized finance,” *arXiv preprint arXiv:2302.09551*, 2023.
- [4] M. Bastankhah, V. Nadkarni, X. Wang, and P. Viswanath, “AgileRate: Bringing adaptivity and robustness to DeFi lending markets,” *arXiv preprint arXiv:2410.13105*, 2024.
- [5] S. M. Werner, D. Perez, L. Gudgeon, A. Klages-Mundt, D. Harz, and W. J. Knottenbelt, “SoK: Decentralized finance (DeFi),” *Proc. 4th ACM Conf. on Advances in Financial Tech. (AFT ’22)*, 2022.
- [6] D. MacKenzie, *Trading at the Speed of Light: How Lightning-Fast Algorithms Are Transforming Financial Markets*. Princeton, NJ: Princeton University Press, 2021.

- [7] M. O'Hara, *Market Microstructure Theory*. Cambridge, MA: Blackwell, 1995.
- [8] A. Krause, "Liquidity, market microstructure, and the cost of trading in continuous markets: A survey," University of Bath, School of Management, Working Paper, 2005, we cite the closed-form market-depth identity $1/\lambda = TVL \cdot (1-u)/\text{slope}_1$ and the elasticity-of-substitution argument; see also the longer microstructure literature surveyed in [7].
- [9] R. Kissell, *The Science of Algorithmic Trading and Portfolio Management*. Amsterdam: Academic Press, 2014.
- [10] M. López de Prado, *Advances in Financial Machine Learning*. Hoboken, NJ: Wiley, 2018.
- [11] S. S. Solovev, "AI-Managed ERC-4626 Yield Vault with Multi-Criteria Decision Making: Design, Implementation, and Formal Verification," Preprint. HSE University, Faculty of Computer Science, Moscow. Code: <https://github.com/SergeySolovyev/ai-yield-vault>, Apr. 2026, author's prior work; the 4-factor MCDM (yield 40%, risk 25%, cost 20%, stability 15%) used as the published B4 baseline in this paper originated here, with on-chain EIP-712 signed-decision verification on Sepolia testnet.
- [12] A. Capponi, R. Jia, and S. Wang, "Maximal extractable value and allocative inefficiencies in public blockchains," *Journal of Financial Economics*, 2025.
- [13] A. Lehar and C. A. Parlour, "Systemic fragility in decentralized markets," *Working Paper, U. Calgary / UC Berkeley Haas*, 2024.
- [14] J. Y. Halpern, R. Pass, and A. Saraf, "Fair interest rates are impossible for lending pools: Results from options pricing," *arXiv preprint arXiv:2410.11053*, 2024, v2, 29 Oct 2024.
- [15] L. Gudgeon, D. Perez, D. Harz, B. Livshits, and A. Gervais, "DeFi protocols for loanable funds: Interest rates, liquidity and market efficiency," *arXiv preprint arXiv:2006.13922*, 2020.
- [16] E. Iftikhar, W. Wei, and J. Cartlidge, "Automated risk management mechanisms in DeFi lending protocols: A cross-chain comparative analysis of Aave and Compound," *arXiv preprint arXiv:2506.12855*, 2025.
- [17] DeFiLlama, "DeFi lending market by TVL (april 2026 snapshot)," <https://defillama.com/protocols/lending>, 2026, accessed 2026-04-XX.
- [18] T. Lim, "Predictive crypto-asset automated market maker architecture for decentralized finance using deep reinforcement learning," *Financial Innovation*, Vol. 10, No. 1, 2024.
- [19] C.-L. Hwang and K. Yoon, *Multiple Attribute Decision Making: Methods and Applications*. Springer-Verlag, 1981.
- [20] J.-P. Brans and P. Vincke, "A preference ranking organisation method: The PROMETHEE method for multiple criteria decision-making," *Management Science*, Vol. 31, No. 6, pp. 647–656, 1985.
- [21] Z. Aljinović, B. Marasović, and T. Šestanović, "Cryptocurrency portfolio selection — a multicriteria approach," *Mathematics*, Vol. 9, No. 14, p. 1677, 2021.
- [22] M. Hosseinzadeh *et al.*, "An asymmetric PROMETHEE II for cryptocurrency portfolio allocation based on return prediction," *Computers & Operations Research*, 2023.
- [23] S. S. Solovev, "When less is more: Domain-aware dual-branch recurrent networks for limit order book mid-price prediction," figshare preprint, 2026, author's prior work; cited as foundation for the DA-BiGRU-CNN architecture this paper extends to DeFi rate forecasting.
- [24] P. Daian, S. Goldfeder, T. Kell, Y. Li, X. Zhao, I. Bentov, L. Breidenbach, and A. Juels, "Flash Boys 2.0: Frontrunning in decentralized exchanges, miner extractable value, and consensus instability," *IEEE Symposium on Security and Privacy (S&P)*, 2020.
- [25] L. Heimbach, L. Kiffer, C. Ferreira Torres, and R. Wattenhofer, "Ethereum's proposer-builder separation: Promises and realities," *Proc. 2023 ACM Internet Measurement Conf. (IMC '23)*, 2023.