

LIROS Regatta 2000 02000

Very low-stretch line for halyards, spinnaker and genoa sheets. An extremely light and durable high-performance rope with abrasion resistant braided cover and inner cover. Specialised core of coated Dyneema® SK78.

- *working stretch < 1,5%*
- *extreme break resistant, light and durable*
- *30% more abrasion resistant than conventional Polyester*
- *LIROS Heat-Stretch-System*

Cover
Special Polyester high-twisted

Construction

2–3 mm	16-plaited
4 mm and up	1:1 plaited

Core
Coated Dyneema® SK78,
8 mm and up with additional cover plait

Dyneema®
LIROS HSS Heat Stretch System
LIROS LCS LIROS Coating System

Ø mm	Breaking strength kg	Weight g/m	Length of spool m
2	270	3	250
2,5	390	5	250
3	550	7	250
4	800	11	250
5	1100	15	250
6	2500	25	200
8	3800	42	200
10	5000	61	200
12	7200	88	200
14	9500	132	150
16	12600	150	100
18	15300	180	100
20	18500	236	100
22	20000	282	100
24	23000	321	100

Colours



354 Steel-blue-Red



212 Steel-blue-Blue


352 Steel-blue-Yellow


353 Steel-blue-Green


213 Steel-blue-White


205 Silver

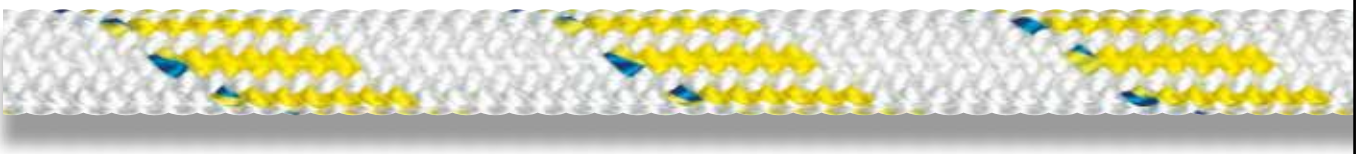

952 Steel-blue-Neon Orange


228 White


525 Black NF



705 Beige NF (8-12 mm)



LIROS Dynamic Plus 02004


Easy-handling, abrasion resistant line with low stretch, premium Polyester cover and Dyneema® SK78 core. Suitable for use as a highend sheet, or low-stretch halyard by advanced cruising sailors.

- *working stretch < 2%*
- *kink-free, low-stretch sheets for cruiser-racers*
- *easy to splice*
- *LIROS Heat-Stretch-System*

Ø mm	Breaking strength kg	Weight g/m	Length of spool m
3	500	7	250
4	750	11	250
5	900	17	250
6	1300	21	200
8	2500	38	200
10	3400	69	200
12	4800	89	200
14	6500	119	150

Colours


228 White


229 White-Blue


231 White-Yellow

Dyneema®
LIROS HSS Heat Stretch System
LIROS LCS LIROS Coating System


232 White-Green


236 White-Red

Cover
Polyester high twisted

Construction

3–5 mm	16-plaited
6–8 mm	24-plaited
10 mm and up	32-plaited

Core
Dyneema® coated,
6 mm and up with additional cover plait