
IMPLEMENTATION HANDBOOK

Connect your system to NUERS

NUERS-ingestion-1 | Review draft v1.0 | 18 October 2026

Read this before connecting

This guide documents the current API and clearly labels proposed changes. The audit found tax, data and environment gaps. Use synthetic data in isolated staging until the review findings are resolved; do not treat the examples as authorization to send a live sale.

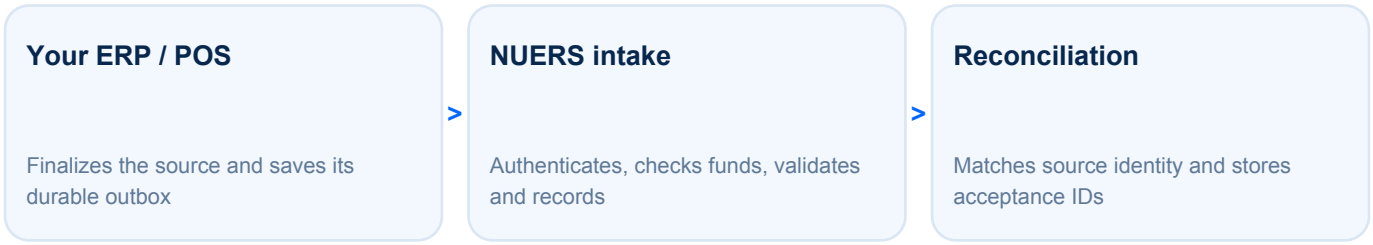

Who this is for

Developers integrating ERP, POS and ecommerce backends; merchant administrators configuring account and branch access; operations teams reconciling pending and accepted transactions. No SDK installation automatically connects an external business system.

How to use this guide

Pages	Topic
2-3	Scope, readiness, credentials and endpoints
4-5	Request fields, units and source identity
6-8	VAT design, mixed worked examples and supported cases
9-11	Version-1 JSON, PHP and Node.js examples
12-14	Acknowledgement, wallet, errors and batch recovery
15-16	Offline source outbox and manual portal retry
17-18	Security, reconciliation, acceptance tests and references

Legend: CURRENT = implemented contract observed locally. PROPOSED = requires approval and implementation. PENDING = requires real deployment or connector evidence. All examples use synthetic identifiers and contain no real keys.

CURRENT / READINESS

Before the first transaction

Review edition | 18 October 2026

Check	Owner / action	Current API effect
Business account	Merchant Admin completes Business Profile and administrator review.	Pending or inactive business cannot create keys or submit new events.
Seller registration	Review VAT status and relevant tax facts against business registration.	The server reads merchant.vat_registered. Do not derive registration from an API payload.
Branch identity	Confirm the exact five-digit BIR branch, preserving leading zeros.	Payload branch_code must equal the key's branch.
Issuance evidence	Maintain the authority currently required by NUERS and branch/system configuration.	Active status alone does not satisfy assertCanIssue().
Legal series	Set up exactly one current supported series per branch / document family.	Source number must be the next prefix + eight-digit number. Missing, expired or exhausted series returns 409.
Wallet	Read available balance, fee revision, threshold and intake preference.	New eligible events need sufficient available balance at commit time.
Connector readiness	Install and test a server-side source outbox and reconciliation process.	The NUERS page cannot retrieve unsent records from an offline external ERP.

Current integration scope

The version-1 API persists finalized source events but also creates issued receipt records under the NUERS series. It is not a generic historical archive importer. Arbitrary existing ERP numbering, multiple concurrent legal series per family and backfill require design review; never renumber an issued source merely to pass validation.

Proposed readiness panel

Show account activation, registration, branch, capture/issuance mode, authority, series, wallet and connector status separately. An active account should not produce an unexplained generic “not ready” state.

CURRENT / CREDENTIALS

Keys, permissions and endpoints

Review edition | 18 October 2026

1. Sign in as the registered Merchant Admin. Open API Integration and complete fresh MFA for credential changes. 2. Generate one key for the intended system, exact branch and environment. 3. Copy its secret once into a server-side secret manager. 4. Restrict backend egress IPs where stable. 5. Rotate before its 90-day expiry and revoke the old key after controlled cutover.

Method / path	Purpose	Required scope
POST /api/integrations/transactions	Submit one finalized source event.	transactions:write
POST /api/integrations/transactions/batch	Submit 1-50 complete events atomically.	transactions:write
GET /api/integrations/transactions/{id}	Read the durable intake result identified by inbox id.	transactions:read
GET /api/integrations/transactions/wallet	Read the merchant wallet, pricing and intake preference.	transactions:read

```
X-NUERS-API-Key: <server-held-key>
Content-Type: application/json
Accept: application/json
```

Base example: https://nuers.net. Use the transaction_endpoint published by your merchant API metadata, particularly when a deployment has a path prefix. No separate auth/token exchange is required for these merchant integration endpoints.

Current sandbox limitation

Synthetic Testing Tools performs validation without writing records. A sandbox key is not a complete isolated staged ledger. The audit reproduced a sandbox-to-live status-read gap; close that gap before distributing sandbox credentials broadly.

Least privilege

Grant write only to a sender and read only to a status monitor where appropriate. The portal Manual Retry tool requires both read and write for its merchant/branch wallet preflight. Never put a key in storefront JavaScript, mobile app code, a URL, a PDF, a payload, a screenshot or a support message.

CURRENT / SCHEMA

Required envelope and identity fields

Review edition | 18 October 2026

Field	Version-1 requirement / meaning
schema_version	Exactly NUERS-ingestion-1.
source_system	Stable connector identifier, maximum 120 characters; letters, numbers, underscore, dot or hyphen. Never change it for a retry.
source_event_id	Immutable event identifier, maximum 120 characters. Generate once in the source.
external_reference	Original source document reference, maximum 120 characters. Do not replace it with a retry counter.
event_type	invoice.finalized for a primary invoice; payment.recorded for supplementary payment evidence.
occurred_at	Original ISO 8601 timestamp with Z or an explicit offset, e.g. 2026-10-18T10:00:00+08:00. At most five minutes in the future.
branch_code	Exactly five digits; must match the credential branch, including leading zeros.
receipt_number	Original legal document number. Under current issuance logic it must match the next configured NUERS series value.
document_type	One of the documented eight enum values; must match event family and computed classifications. See page 8 for limits.
payment_method	cash, card, bank_transfer, e_wallet, credit or other.
tax_type	vatable, vat_exempt, zero_rated or non_vat. Supplies a default for lines, not seller registration.
gross_amount	Recommended explicit final invoice total in PHP pesos, including VAT. Use a decimal string with no more than two decimal places.
items	One to 100 complete line objects. No aggregate-only sales import.

Prefer gross_amount and omit legacy amount to avoid ambiguous VAT-exclusive input. Supplying both is not an extra reconciliation check today: gross_amount takes precedence. Tenant and wallet ownership are derived from the authenticated credential, never a merchant_id in JSON.

CURRENT / MONEY

Lines, totals and preserved originals

Review edition | 18 October 2026

Field	Current handling
description	Required nonempty description; maximum 1,000 characters.
quantity	Positive, maximum 1,000,000; calculation supports up to four decimal places. Prefer quantity over the qty alias.
unit_price	PHP pesos, at most two money decimals, maximum 100,000,000 per unit. Prefer unit_price over price.
tax_type	Optional line classification; defaults to header. Send it explicitly on every line for mixed documents.
vat_rate	Ordinary VATable lines require 12; zero/exempt/non_vat compute zero VAT. Do not encode an exemption only by setting a VAT rate to zero.
discount_pct	Optional 0-100 percentage. This generic discount is not a complete statutory discount eligibility model.
line_total	Optional supplied total; server reconciles it. The current calculator rounds per line using centavo arithmetic.
vat_inclusive	One document-level boolean, default true; applies to every item price. Normalize mixed source pricing conventions before import.
customer_name / customer_tin	Optional name and supported TIN format. Buyer address and CWT are not preserved by this API today; see proposal on page 8.

Units must stay explicit

Transaction API amounts are PHP pesos: "560.00" means PHP560. Wallet available_centavos and fee_centavos are integer centavos: 300 means PHP3. The separate portal invoice API uses a different monetary contract. Do not reuse its raw values without conversion.

Identity and immutability

NUERS independently constrains the source event and the merchant + branch + source system + document family + external reference. An exact normalized validated replay returns the original result. Changed accepted content returns 409. Preserve field types, source time and complete original values; do not add or remove optional fields during a retry. Version 1 currently hashes validated fields, so unsupported fields are not protected as part of that identity.

PROPOSED / TAX MODEL

Two levels of tax classification

Review edition | 18 October 2026

Seller registration is authoritative

An API key identifies a system and branch. It must not offer a VAT / Non-VAT switch that can override the seller's reviewed registration. Provide a read-only registration summary and a configurable default line treatment instead.

Seller profile	Permitted proposed line treatment	Document outcome
VAT registered	VATable 12%; VAT-Exempt; Zero-Rated, subject to the applicable transaction facts and evidence.	VAT invoice family; mixed totals when treatments differ.
Non-VAT	Non-VAT taxable / SSPT, or legally exempt, as applicable to that seller and transaction.	Non-VAT invoice; retain SSPT and exempt separation when required. No VAT charged.

Product mapping is a default, not a legal decision

Proposed mapping: source SKU → default category → transaction-specific eligibility → reviewed effective-date rule → immutable line snapshot. Customer circumstances, export or incentive qualification, statutory exemptions and dates can alter treatment. Do not classify solely from the product name, zero amount, the buyer's VAT registration or a zero tax rate.

Keep these cases distinct

VAT-Exempt: an exempt transaction does not become a zero-rated transaction. Zero-Rated: a qualifying taxable transaction at 0%, with its own legal basis. Non-VAT: describes the seller's registration and relevant non-VAT treatment. It is not the label for every untaxed line sold by a VAT registrant.

Source basis: [S1-S3], with ordinary VAT rate context [S6]. This matrix is the proposed software rule, subject to the relevant facts. Qualified RBE/EOE zero-rating evidence must follow current applicable rules [S7-S8]; do not impose a blanket prior-BIR-approval rule or assume every business buyer qualifies.

TAX WORKED EXAMPLES

Mixed products on one VAT invoice

Review edition | 18 October 2026

Illustrative amounts in PHP. Assume a reviewed VAT-registered seller and that the exempt and zero-rated lines have valid treatment. These values demonstrate arithmetic; they do not classify actual products.

Line / treatment	Price basis	Sales base	VAT	Line total
Ordinary taxable item	112.00 inclusive	100.00	12.00	112.00
Qualifying exempt item	100.00	100.00	0.00	100.00
Qualifying zero-rated item	200.00	200.00	0.00	200.00
Invoice totals		400.00	12.00	412.00

Reconciliation

```
VATable sales        = 100.00
VAT amount           =  12.00
VAT-exempt sales     = 100.00
Zero-rated sales     = 200.00
Gross invoice total  = 412.00
```

Inclusive ordinary VAT: base = price / 1.12; VAT is the difference after the current line rounding. Exclusive ordinary VAT: VAT = base × 12%; line total = base + VAT. The current calculator was checked against this 412.00 mixed example.

Default and override

A merchant may default products to VATable, then set a qualifying line to VAT-Exempt or Zero-Rated with a recorded basis. Do not change the whole API to Non-VAT for that exempt item. Proposed UI should show the resulting document type and grouped totals before the mapping is enabled.

Non-VAT mixed example

If a Non-VAT seller has PHP300 SSPT sales and PHP200 legally exempt sales, preserve a PHP500 Non-VAT invoice with those two distinct subtotals and zero VAT. Current version 1 collapses both into vat_exempt_sales; do not use it as a complete SSPT reporting model.

CONTRACT BOUNDARIES

Document types and missing fields

Review edition | 18 October 2026

Current API value	Meaning / important limit
vat_invoice	Primary VAT invoice with VATable lines.
non_vat_invoice	Primary Non-VAT invoice. Current server does not consistently enforce seller-family compatibility.
vat_exempt_invoice	VAT invoice for VAT-exempt sales; not a substitute for a Non-VAT seller's invoice.
zero_rated_invoice	VAT invoice for qualifying zero-rated sales.
mixed_sales_invoice	Current resolver selects this when more than one line tax_type occurs. Registration-specific mixed handling needs repair.
sales_invoice	Auto-classifies from lines. It does not solve the registration defects.
payment_receipt	Supplementary payment evidence, event payment.recorded; not an additional primary sale.
official_receipt	Payment alias of payment_receipt. Do not use it to represent a second primary sale.

Proposed versioned additions - not accepted fields today

Preserve buyer registered address; a line tax-basis/effective-date reference; distinct Non-VAT SSPT and exempt subtotals; CWT amount and basis; gross invoice total and amount due; original source-system/authority snapshot; and explicit source-capture, issuance, replacement or correction linkage. Final names and schema version require review. Example design: invoice total PHP1,120 and applicable CWT PHP20 produce amount due PHP1,100 while preserving PHP1,000 VATable sales and PHP120 VAT. This illustrates separate balances only, not a withholding-rate determination. A CWT deduction must not silently reduce the original VAT base.

Do not silently send unsupported financial fields

Version 1 drops customer_address, withholding_tax and tax_basis_reference supplied by a connector. Until supported, hold documents requiring those fields for reviewed integration handling. RR 6-2026 requires applicable CWT shown separately [S4].

CURRENT / JSON EXAMPLE

Version-1 mixed invoice payload

Review edition | 18 October 2026

Synthetic example only. Change source identities, branch and legal series once when creating a real event; then preserve the saved payload for every retry. Configure the series and authorization first. Do not send this sample as a live sale. New proposal fields are deliberately excluded.


```
{
  "schema_version": "NUERS-ingestion-1",
  "source_system": "sample-erp",
  "source_event_id": "SAMPLE-invoice-0001",
  "external_reference": "SAMPLE-INV-0001",
  "event_type": "invoice.finalized",
  "occurred_at": "2026-10-18T10:00:00+08:00",
  "branch_code": "00000",
  "receipt_number": "INV-00000001",
  "document_type": "mixed_sales_invoice",
  "payment_method": "cash",
  "gross_amount": "412.00",
  "tax_type": "vatable",
  "vat_inclusive": true,
  "customer_name": "SAMPLE Customer",
  "items": [
    {
      "description": "SAMPLE taxable item",
      "quantity": 1,
      "unit_price": "112.00",
      "tax_type": "vatable"
    },
    {
      "description": "SAMPLE exempt item",
      "quantity": 1,
      "unit_price": "100.00",
      "tax_type": "vat_exempt"
    },
    {
      "description": "SAMPLE zero-rated item",
      "quantity": 1,
      "unit_price": "200.00",
      "tax_type": "zero_rated"
    }
  ]
}
```


Top-level tax_type defaults unclassified lines; it is not the seller registration. In mixed documents, send explicit tax_type on every item. Do not set the header to "mixed": that value is not accepted by current validation.

CURRENT / PHP TRANSPORT

Send the original JSON from PHP

Review edition | 18 October 2026

Read the immutable payload from your durable source outbox. Load the endpoint and key from server configuration. This transport returns an HTTP outcome; a separate acknowledgement transaction must decide whether the outbox entry was accepted.

```
<?php
$eventJson = $outboxRow['original_json'];
$url = rtrim(getenv('NUERS_ENDPOINT'), '/');
// NUERS_ENDPOINT is the published transaction endpoint.
$key = getenv('NUERS_API_KEY');
if (!$key || !$url) throw new RuntimeException('Config missing');
$ch = curl_init($url);
curl_setopt_array($ch, [
  CURLOPT_POST => true,
  CURLOPT_RETURNTRANSFER => true,
  CURLOPT_CONNECTTIMEOUT => 10,
  CURLOPT_TIMEOUT => 30,
  CURLOPT_FOLLOWLOCATION => false,
  CURLOPT_SSL_VERIFYPEER => true,
  CURLOPT_SSL_VERIFYHOST => 2,
  CURLOPT_HTTPHEADER => [
    'X-NUERS-API-Key: '.$key,
    'Content-Type: application/json',
    'Accept: application/json',
  ],
  CURLOPT_POSTFIELDS => $eventJson,
]);
$raw = curl_exec($ch);
$http = (int) curl_getinfo($ch, CURLINFO_RESPONSE_CODE);
$networkError = ($raw === false);
curl_close($ch);
if ($networkError) {
  // UNKNOWN outcome: keep pending, retry identical JSON later.
  return;
}
try {
  $body = json_decode($raw, true, 512, JSON_THROW_ON_ERROR);
} catch (JsonException $e) {
  // Never acknowledge HTML, a login page, or malformed JSON.
  return;
}
// Apply the identity-matched acknowledgement on page 12.
// 402: funding required; 409/422: operator review.
// 429/5xx: bounded backoff, without changing the source.
```

Do not log $key, full headers or buyer data. Sanitize errors. A timeout does not prove that the transaction failed at NUERS; the server may have committed before the connection dropped.

CURRENT / NODE.JS TRANSPORT

Send the original JSON from Node.js

Review edition | 18 October 2026

Server-side example. Supply the exact configured HTTPS endpoint; do not accept a destination URL from an untrusted customer request. The original JSON comes from the source database, not a new object assembled at retry time.

```
async function sendOriginal(originalJson) {
  const endpoint = process.env.NUERS_ENDPOINT;
  const key = process.env.NUERS_API_KEY;
  if (!endpoint || !key) throw new Error('Config missing');
  let response;
  try {
    response = await fetch(endpoint, {
      method: 'POST',
      redirect: 'error',
      headers: {
        'X-NUERS-API-Key': key,
        'Content-Type': 'application/json',
        'Accept': 'application/json'
      },
      body: originalJson,
      signal: AbortSignal.timeout(30000)
    });
  } catch (error) {
    return {kind: 'unknown'};
  }
  let body;
  try { body = await response.json(); }
  catch { return {kind: 'unknown'}; }
  return {
    kind: 'http', status: response.status, body,
    retryAfter: response.headers.get('retry-after')
  };
}
// Store outcome using source identity checks on page 12.
// Do not acknowledge every 2xx response automatically.
```

Wallet and status requests

```
// Reuse the same server-only key with transactions:read.
// GET <published endpoint>/wallet
// GET <published endpoint>/<inbox id>
// Keep HTTPS, no redirect, timeout and error handling.
// Use id from a validated response, not receipt_id.
```

These examples are transport recipes, not a full connector worker. Your adapter must add transactional local storage, retry scheduling, alerting, access controls, redaction and reconciliation. It must also implement the merchant's realtime or batch preference.

CURRENT / ACCEPTANCE

Acknowledge exactly one durable event

Review edition | 18 October 2026

Send original
Keep local record pending

>

Validate result
Match immutable source IDs

>

Commit ACK
Save NUERS IDs atomically

Expected success shape - illustrative

```
{
  "id": "<inbox-uuid>",
  "receipt_id": "<receipt-uuid>",
  "transaction_id": "<transaction-uuid>",
  "source_event_id": "SAMPLE-invoice-0001",
  "external_reference": "SAMPLE-INV-0001",
  "status": "durably_recorded",
  "duplicate": false,
  "bir_acceptance": "not_verified",
  "status_url": "<published status URL>",
  "wallet": { "fee_centavos": 0 }
}
```

A first acceptance returns 201. An exact replay returns 200 with duplicate=true and the original resource IDs and accepted time. Current batch responses use 201 even when all results are already accepted; inspect every result instead of inferring new sales from the HTTP status.

Required acknowledgement checks

Require HTTP 200/201, parsed JSON, status=durably_recorded, matching source_event_id and external_reference, and nonempty inbox id and receipt_id. Save the IDs and original response in the same local transaction that marks the outbox accepted. If identity or schema checks fail, leave it pending for reconciliation.

Duplicate identity is independent of key rotation

Rotate a credential for the same merchant/branch without changing the source event. A different key does not require a new invoice. A known accepted ID can be polled with an authorized same-branch read key. If the response was lost before the ID was known, resend the same original event to retrieve the prior result.

Three statuses to keep separate

Client finalized → NUERS durably recorded → BIR outcome. NUERS acceptance and a PDF or QR code do not establish BIR acceptance. Current integration responses explicitly report bir_acceptance=not_verified.

CURRENT / WALLET

Fee admission and error recovery

Review edition | 18 October 2026

The published starting policy is PHP3 per eligible primary sale of PHP500 and above. Fees may be changed prospectively by Super Admin. Read the current fee, threshold and revision rather than hard-coding this starting rate. This is a NUERS service fee, not the sale's VAT or a payment-gateway fee.

Outcome	What the connector should do
201 / 200 duplicate	Validate identities, save original response and acknowledge locally. Accepted retries do not incur another fee.
402 / insufficient funds	Pause eligible intake. Keep the original on the client, notify the merchant, obtain confirmed funding and retry unchanged. No new financial write or series advance commits. HTTP logs and quota use may still be recorded.
401 / 403	Stop repeated automatic authentication attempts; inspect key, expiry, scopes, IP, branch and account status. Preserve sources. Resume after correction.
409	Review identity conflict, changed content, environment, series, authority or exhausted numbering. Do not change a legal number to force acceptance.
422	Fix the connector mapping before first acceptance; keep the original source record and a traceable rejected-attempt history. An accepted original cannot be overwritten.
429	Honor Retry-After where supplied; bounded exponential backoff and jitter. Shared network quotas may apply before a key's own limit.
Timeout / 5xx / bad success body	Outcome unknown. Reconcile by exact replay; never create a new source ID or assume failure.

Limits observed in the current contract

100 lines/event; 50 events/batch; 600 requests/minute/key plus configured daily budget; batch route adds 10 requests/minute; network protection can limit first. These are configuration ceilings, not measured production throughput. Use bounded polling and an authorized staging load test.

Sub-PHP500 primary sales, supplementary payment receipts and already accepted replays do not create an extra primary-sale fee under the current policy. Wallet checks are repeated at commit time; a preflight balance is not a reservation.

CURRENT / BATCH

Realtime, batch and all-or-none writes

Review edition | 18 October 2026

Mode	Connector action
Realtime	Commit the finalized source and local outbox first; attempt submission promptly. If funds or internet are unavailable, retain the outbox event.
Batch	Retain finalized source events and transmit on the configured schedule or operator action. Group by branch and source series. The portal preference alone does not install a worker.
Manual	Export the unchanged original events from the source and use a reviewed server sender or the NUERS Manual Retry tab. Do not retype accepted invoices.

Batch request

```
POST <published transaction endpoint>/batch
X-NUERS-API-Key: <server-held-key>

{
  "events": [
    <complete original event 1>,
    <complete original event 2>
  ]
}
```

Use 1-50 complete version-1 events for one exact credential branch. Sort by the current legal series order. A failure in any new item rolls back every new financial write, sequence reservation, preparation and debit in that request. A previously accepted exact duplicate remains accepted and free.

Accept the batch only when every result matches

Require atomic=true, the expected result count, and identity-matched durable results for every original event. Store acknowledgements transactionally in the source. A partial or malformed result leaves the local group pending until reconciled by unchanged replay.

Series discipline

Stop on the first unaccepted document in a series. Do not send later source numbers around a wallet, validation or authority failure. For historical or differently formatted legal numbers, use the proposed external-capture design; current v1 requires its exact next series number.

CONNECTOR DESIGN

Survive internet loss without duplicates

Review edition | 18 October 2026

Recommended source adapter design. This is a connector responsibility; the NUERS server cannot save an event it has never received. A browser queue is an additional recovery tool, not the primary source of truth.

```
BEGIN local database transaction
  finalize source document using authorized source workflow
  INSERT outbox (
    stable_source_event_id, original_document_reference,
    original_occurred_at, original_json, payload_hash,
    branch_code, state = 'pending', next_attempt_at
  )
COMMIT

worker locks next due source event in series order
send the saved original_json
if validated durable acceptance:
  BEGIN local database transaction
    save NUERS IDs and response; set state = 'accepted'
  COMMIT
else if 402: state = 'funding_required'; alert merchant
else if 409/422: state = 'review'; alert operator
else: retain pending; schedule bounded retry
```

Four common failure scenarios

Scenario	Safe recovery
Internet fails before request	Source outbox remains pending. Send the same saved event after recovery.
NUERS commits, response is lost	Exact replay returns the original IDs and no extra fee.
Source crashes before saving ACK	Read its pending row and replay unchanged. Do not generate a replacement identity.
Wallet becomes insufficient	Keep the source locally; after confirmed funding, resume the earliest blocked event and reconcile.

Offline invoice issuance has its own legal workflow. RMC 98-2026 IV.11 addresses authorized manual invoices and linked electronic replacements after recovery [S5]. A pending outbox or low wallet balance is not an extension of an invoicing deadline. The current API lacks an explicit replacement-reference field; that workflow is proposed, not implemented.

CURRENT / OPERATOR RUNBOOK

Use Manual Retry from the portal

Review edition | 18 October 2026

1. Export. From the external system export the original source events as an array or {"events":[...]}. Limit the file to 50 events and 2 MB. Exclude credentials and unrelated customer data.
2. Sign in. Open Merchant → API Integration → Manual Retry for the correct merchant. Keep the source system's independent backup.
3. Unlock. Use a private recovery passphrase of at least 16 characters. It derives an encryption key; NUERS cannot recover this browser queue if the passphrase is lost. Store it securely outside the queue.
4. Import and review. Check branch, source system, original reference, timestamp and values. The queue encrypts payloads and responses using AES-GCM and tenant-bound associated data. Do not clear browser storage while pending records exist.
5. Authenticate. Supply a valid matching live branch key with read and write scopes in memory. Wallet preflight verifies merchant and branch before source submission. Do not put the key into the imported JSON.
6. Transmit. Resume after funds are sufficient. The sender selects that branch's queued events. A different branch remains pending; use its own matching credential. The first unaccepted source stops ordered replay.
7. Reconcile. Match accepted source IDs in Invoices & Receipts and persist NUERS IDs back in the source system. Preserve review/funding rows until resolved. Protect both source backups and browser recovery material.

Storage limitations

The portal displays the latest 1,000 queue metadata rows and retains older encrypted records. Browser storage can be deleted, evicted or exhausted; it is not the merchant's five-year server archive. Local crypto tests do not prove browser restart, quota or device-recovery behavior in every deployment.

Credential or passphrase issue

For an expired/revoked key, replace it with a permitted same-merchant, same-branch credential and retry unchanged. For the wrong recovery passphrase, preserve encrypted data and use the correct passphrase. If browser storage is lost, recover the original JSON from the authoritative source outbox; do not reconstruct new source IDs.

No automatic external-system access

The NUERS portal cannot reach an ERP that is offline or export its local data. The customer's connector or operator must provide the saved source event when the connection is restored.

OPERATIONAL CONTROLS

Security, reconciliation and support

Review edition | 18 October 2026

Protect data and access

Use TLS with certificate verification; do not follow unexpected redirects with credentials. Keep API keys in a backend secret manager and restrict exact egress IPs where possible. An empty allowlist permits any IP possessing the valid key. Maintain trusted-edge proxy configuration rather than trusting arbitrary forwarded headers.

Separate environments, merchant tenants and branches. Apply least privilege, redact headers and buyer data from logs, limit queue access, encrypt source backups, track credential expiry and revoke compromised keys. A rotated key must not change transaction identity. Current findings A3 and A4 require remediation before full security sign-off.

Reconcile daily and after outages

Compare	Resolve
Source finalized vs NUERS durable	Match branch, source event, source reference and original amount. Pending sources remain visible to operators.
Sales totals vs payment evidence	Count the primary invoice once. A supplementary payment collection must not add a second sale.
Wallet debits vs accepted eligible sales	Match fee revision, original resource, debit and balance. Do not charge exact replay again.
Tax buckets and copies	Compare source line categories, grouped bases, VAT and due amounts. Hold documents needing unsupported fields.
Delivery status vs BIR status	Recorded in NUERS and sent to customer are separate from authenticated BIR response evidence.

Logs and webhooks

Usage & Logs records scoped intake-attempt metadata with status and latency. It is not a complete performance/APM system or proof that every network request reached the application. Merchant callbacks remain platform-controlled and paused on the current page. Use polling with bounded backoff; a saved callback URL does not prove delivery.

Support evidence should contain a sanitized source reference, branch, timestamp, HTTP status, request correlation or inbox ID, and redacted error. Never send a live API key, password, recovery code or full customer payload in a ticket.

ACCEPTANCE / SOURCES

Staging sign-off and reference material

Review edition | 18 October 2026

Test before production	Expected result
Pending / inactive merchant	New writes denied; no financial side effects.
Wrong tenant, branch or environment	No source data leakage or cross-boundary write. Environment-read defect must be fixed.
First event / same event / changed event	One record and one eligible fee; exact replay original IDs; changed accepted payload conflict.
VAT / Non-VAT / mixed / CWT	Registration-safe family, preserved fields and all grouped totals reconcile. Resolve A1-A2 before sign-off.
Insufficient funds / late batch error	No new financial writes, fees or series progress commit.
Lost response / restart / key rotation	Identical source replay restores acknowledgement; no duplicate or extra fee.
Audit storage failure on key change	Key change and audit roll back together; resolve A4 first.

[S1] RR 7-2024, Section 6(B), pp. 12-14
Open official source
[S2] RMC 77-2024, Q25 and Q28, pp. 9-10
Open official source
[S3] RMC 77-2024, official samples A1-A2 / B1-B6
Open official source
[S4] RR 6-2026, Sections 2, 3 and 6
Open official source
[S5] RMC 98-2026, IV.2, IV.11-15
Open official source
[S6] RA 10963, amendments to Sections 106 and 108
Open official source
[S7] RMC 66-2025, qualified RBE zero-rating evidence
Open official source
[S8] BIR advisory, 11 June 2025, EOE/RBE zero-rating
Open official source
Research checked 18 October 2026. Product eligibility and legal evidence must be maintained as rules change. The detailed audit accompanies this draft. Proposed fields, capture modes, PDF download wiring and environment fixes have not been implemented.