

Presentación:

Nombre:

Algelis Severino

Tema:

Introducción a la Programación y Diagrama de flujo.

Tecnico:

Ciberseguridad Semipresencial

Facilitador:

Kevin Feliz Henriquez

Centro:

Diapiato Pro salud



Descripción:

En este documento .pdf adjunto capturas del reto 11 de 30 days of code de HackerRank.

Link GitHub:

<https://github.com/SeverinoCyber/30-days-of-code/tree/main/Hackerrank/day18>

Python 3:

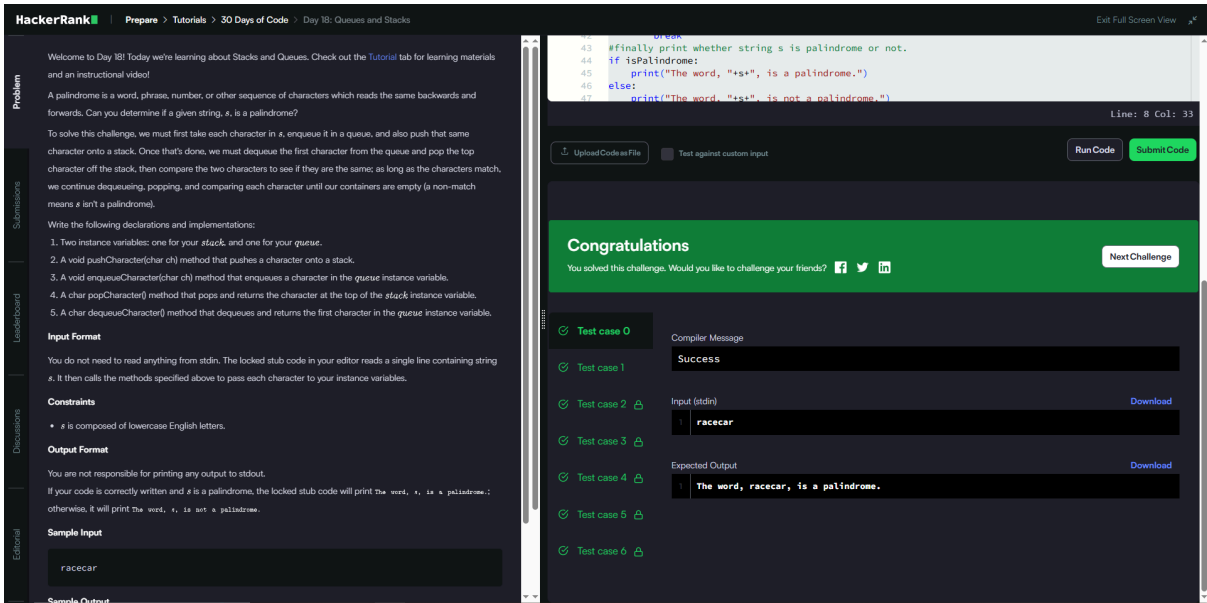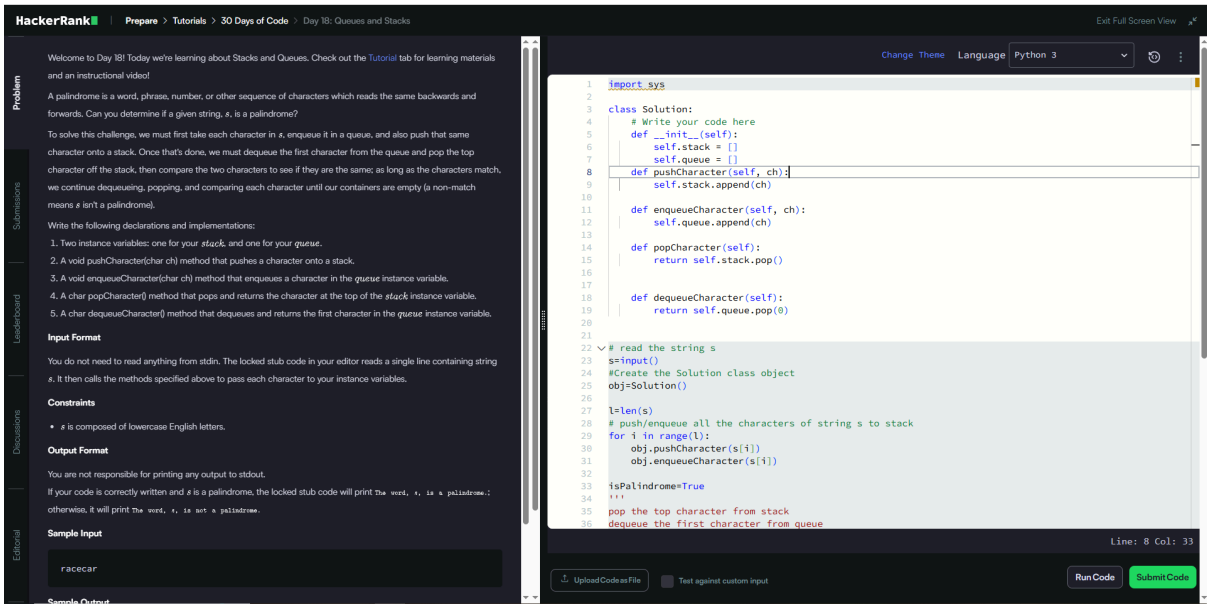

JavaScripts:

Problem

Submissions

Leaderboard

Discussions

Editorial

Problem

Submissions

Leaderboard

Discussions

Editorial

Welcome to Day 18! Today we're learning about Stacks and Queues. Check out the [Tutorial](#) tab for learning materials and an instructional video!

A palindrome is a word, phrase, number, or other sequence of characters which reads the same backwards and forwards. Can you determine if a given string, *s*, is a palindrome?

To solve this challenge, we must first take each character in *s*, enqueue it in a queue, and also push that same character onto a stack. Once that's done, we must dequeue the first character from the queue and pop the top character off the stack, then compare the two characters to see if they are the same; as long as the characters match, we continue dequeuing, popping, and comparing each character until our containers are empty (a non-match means *s* isn't a palindrome).

Write the following declarations and implementations:

1. Two instance variables: one for your *stack*, and one for your *queue*.

2. A void `pushCharacter(char ch)` method that pushes a character onto a stack.

3. A void `enqueueCharacter(char ch)` method that enqueues a character in the *queue* instance variable.

4. A `char popCharacter()` method that pops and returns the character at the top of the *stack* instance variable.

5. A `char dequeueCharacter()` method that dequeues and returns the first character in the *queue* instance variable.

Input Format

You do not need to read anything from `stdin`. The locked stub code in your editor reads a single line containing string *s*. It then calls the methods specified above to pass each character to your instance variables.

Constraints

- s* is composed of lowercase English letters.

Output Format

You are not responsible for printing any output to `stdout`.
If your code is correctly written and *s* is a palindrome, the locked stub code will print `The word, s, is a palindrome.`; otherwise, it will print `The word, s, is not a palindrome.`

Sample Input

racecar

Sample Output

40

> process.stdin.resume(); --

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

> function main() { --

Change Theme

Language

JavaScript (Node.js)

Exit Full Screen View

Line: 40 Col: 17

Upload Code as File

Test against custom input

Run Code

Submit Code

Welcome to Day 18! Today we're learning about Stacks and Queues. Check out the [Tutorial](#) tab for learning materials and an instructional video!

A palindrome is a word, phrase, number, or other sequence of characters which reads the same backwards and forwards. Can you determine if a given string, *s*, is a palindrome?

To solve this challenge, we must first take each character in *s*, enqueue it in a queue, and also push that same character onto a stack. Once that's done, we must dequeue the first character from the queue and pop the top character off the stack, then compare the two characters to see if they are the same; as long as the characters match, we continue dequeuing, popping, and comparing each character until our containers are empty (a non-match means *s* isn't a palindrome).

Write the following declarations and implementations:

1. Two instance variables: one for your *stack*, and one for your *queue*.

2. A void `pushCharacter(char ch)` method that pushes a character onto a stack.

3. A void `enqueueCharacter(char ch)` method that enqueues a character in the *queue* instance variable.

4. A `char popCharacter()` method that pops and returns the character at the top of the *stack* instance variable.

5. A `char dequeueCharacter()` method that dequeues and returns the first character in the *queue* instance variable.

Input Format

You do not need to read anything from `stdin`. The locked stub code in your editor reads a single line containing string *s*. It then calls the methods specified above to pass each character to your instance variables.

Constraints

- s* is composed of lowercase English letters.

Output Format

You are not responsible for printing any output to `stdout`.
If your code is correctly written and *s* is a palindrome, the locked stub code will print `The word, s, is a palindrome.`; otherwise, it will print `The word, s, is not a palindrome.`

Sample Input

racecar

Sample Output

40

> process.stdin.resume(); --

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

> function main() { --

Change Theme

Language

JavaScript (Node.js)

Exit Full Screen View

Line: 40 Col: 17

Upload Code as File

Test against custom input

Run Code

Submit Code

Congratulations

You solved this challenge. Would you like to challenge your friends?

Next Challenge

Test case 0

Compiler Message

Success

Input (stdin)

Download

Expected Output

Download

Test case 1

Test case 2

Test case 3

Test case 4

Test case 5

Test case 6

Test case 0

Test case 1

Test case 2

Test case 3

Test case 4

Test case 5

Test case 6

C#:

Problem

Submissions

Leaderboard

Discussions

Editorial

HackerRank

Prepare > Tutorials > 30 Days of Code > Day 18: Queues and Stacks

Exit Full Screen View

Welcome to Day 18! Today we're learning about Stacks and Queues. Check out the [Tutorial](#) tab for learning materials and an instructional video!

A palindrome is a word, phrase, number, or other sequence of characters which reads the same backwards and forwards. Can you determine if a given string, *s*, is a palindrome?

To solve this challenge, we must first take each character in *s*, enqueue it in a queue, and also push that same character onto a stack. Once that's done, we must dequeue the first character from the queue and pop the top character off the stack, then compare the two characters to see if they are the same; as long as the characters match, we continue dequeuing, popping, and comparing each character until our containers are empty (a non-match means *s* isn't a palindrome).

Write the following declarations and implementations:

- Two instance variables: one for your *stack*, and one for your *queue*.
- A void `pushCharacter(char ch)` method that pushes a character onto a stack.
- A void `enqueueCharacter(char ch)` method that enqueues a character in the *queue* instance variable.
- A char `popCharacter()` method that pops and returns the character at the top of the *stack* instance variable.
- A char `dequeueCharacter()` method that dequeues and returns the first character in the *queue* instance variable.

Input Format

You do not need to read anything from stdin. The locked stub code in your editor reads a single line containing string *s*. It then calls the methods specified above to pass each character to your instance variables.

Constraints

- s* is composed of lowercase English letters.

Output Format

You are not responsible for printing any output to stdout.

If your code is correctly written and *s* is a palindrome, the locked stub code will print the word, *s*, is a palindrome.; otherwise, it will print the word, *s*, is not a palindrome.

Sample Input

```
racecar
```

Sample Output

Change Theme Language C#

```
1 > using System;...
2
3
4
5 class Solution {
6     //Write your code here
7     List<char> stack;
8     List<char> queue;
9     public Solution(){
10         stack = [];
11         queue = [];
12     }
13     public void pushCharacter(char ch){
14         this.stack.Add(ch);
15     }
16     public void enqueueCharacter(char ch){
17         this.queue.Add(ch);
18     }
19     char popCharacter(){
20         int lastIndex = stack.Count - 1;
21         char c = stack[lastIndex];
22         this.stack.RemoveAt(lastIndex);
23         return c;
24     }
25     char dequeueCharacter(){
26         char c = queue[0];
27         this.queue.RemoveAt(0);
28         return c;
29     }
30
31 > ...
```

Line: 31 Col: 1

Upload Codes as File

Test against custom input

Run Code

Submit Code

Problem

Submissions

Leaderboard

Discussions

Editorial

HackerRank

Prepare > Tutorials > 30 Days of Code > Day 18: Queues and Stacks

Exit Full Screen View

Welcome to Day 18! Today we're learning about Stacks and Queues. Check out the [Tutorial](#) tab for learning materials and an instructional video!

A palindrome is a word, phrase, number, or other sequence of characters which reads the same backwards and forwards. Can you determine if a given string, *s*, is a palindrome?

To solve this challenge, we must first take each character in *s*, enqueue it in a queue, and also push that same character onto a stack. Once that's done, we must dequeue the first character from the queue and pop the top character off the stack, then compare the two characters to see if they are the same; as long as the characters match, we continue dequeuing, popping, and comparing each character until our containers are empty (a non-match means *s* isn't a palindrome).

Write the following declarations and implementations:

- Two instance variables: one for your *stack*, and one for your *queue*.
- A void `pushCharacter(char ch)` method that pushes a character onto a stack.
- A void `enqueueCharacter(char ch)` method that enqueues a character in the *queue* instance variable.
- A char `popCharacter()` method that pops and returns the character at the top of the *stack* instance variable.
- A char `dequeueCharacter()` method that dequeues and returns the first character in the *queue* instance variable.

Input Format

You do not need to read anything from stdin. The locked stub code in your editor reads a single line containing string *s*. It then calls the methods specified above to pass each character to your instance variables.

Constraints

- s* is composed of lowercase English letters.

Output Format

You are not responsible for printing any output to stdout.

If your code is correctly written and *s* is a palindrome, the locked stub code will print the word, *s*, is a palindrome.; otherwise, it will print the word, *s*, is not a palindrome.

Sample Input

```
racecar
```

Sample Output

Line: 31 Col: 1

Upload Codes as File

Test against custom input

Run Code

Submit Code

Congratulations

You solved this challenge. Would you like to challenge your friends? [f](#) [t](#) [in](#)

Next Challenge

Test case 0

Compiler Message

Success

Test case 1

Input (stdin)

Download

1 racecar

Test case 2

Expected Output

Download

1 The word, racecar, is a palindrome.

Test case 3

Test case 4

Test case 5

Test case 6