Presentación:

Nombre:

Algelis Severino

Tema:

Introducción a la Programación y Diagrama de flujo.

Tecnico:

Ciberseguridad Semipresencial

Facilitador:

Kevin Feliz Henriquez

Centro:

Diapiato Pro salud

Descripción:

En este documento .pdf adjunto capturas del reto 11 de 30 days of code de HackerRank.

Link GitHub:

JavaScripts:

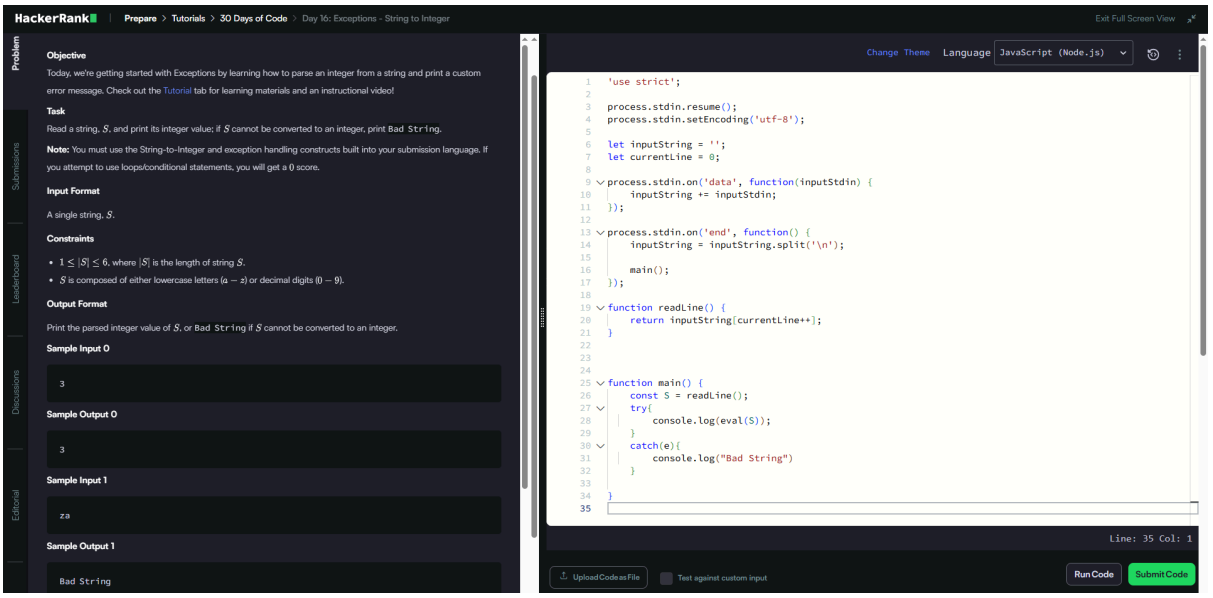

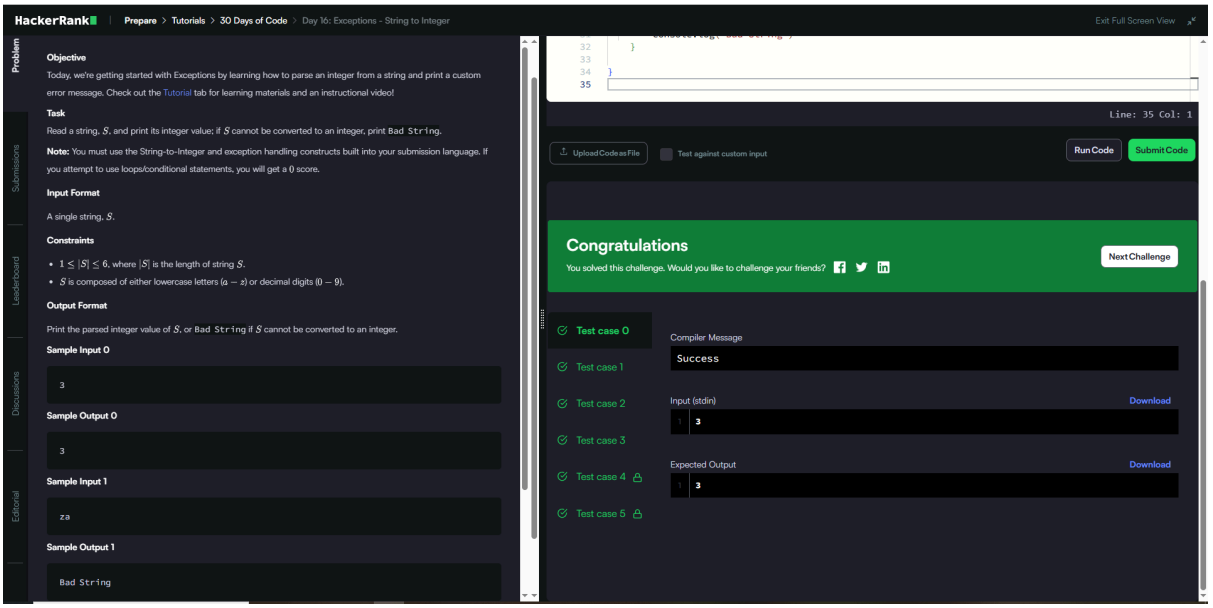

Python3:

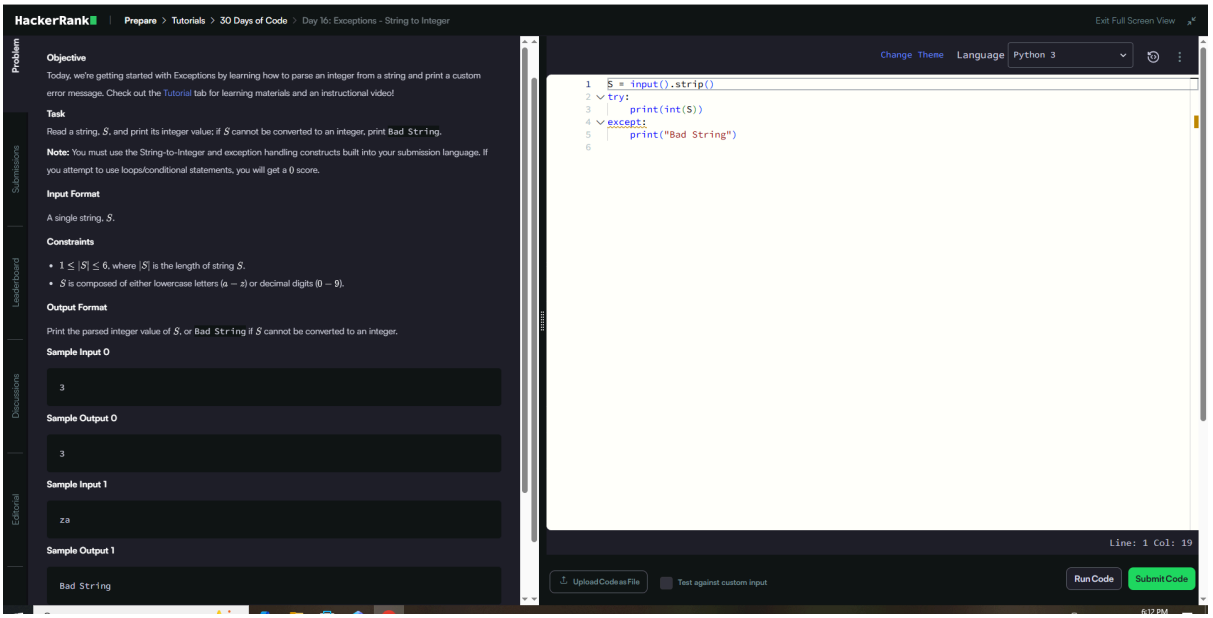
HackerRank
Prepare > Tutorials > 30 Days of Code > Day 16: Exceptions - String to Integer
Exit Full Screen View
Problem
Submissions
Leaderboard
Discussions
Editorial
Objective
Today, we're getting started with Exceptions by learning how to parse an integer from a string and print a custom error message. Check out the Tutorial tab for learning materials and an instructional video!
Task
Read a string, S, and print its integer value; if S cannot be converted to an integer, print Bad String.
Note: You must use the String-to-Integer and exception handling constructs built into your submission language. If you attempt to use loops/conditional statements, you will get a 0 score.
Input Format
A single string, S.
Constraints
$1 \leq |S| \leq 6$, where $|S|$ is the length of string S.
S is composed of either lowercase letters (a – z) or decimal digits (0 – 9).
Output Format
Print the parsed integer value of S, or Bad String if S cannot be converted to an integer.
Sample Input 0
3
Sample Output 0
3
Sample Input 1
za
Sample Output 1
Bad String
Change Theme
Language
Python 3
S = input().strip()
try:
print(int(S))
except:
print("Bad String")
Line: 1 Col: 19
Upload Code as File
Test against custom input
Run Code
Submit Code

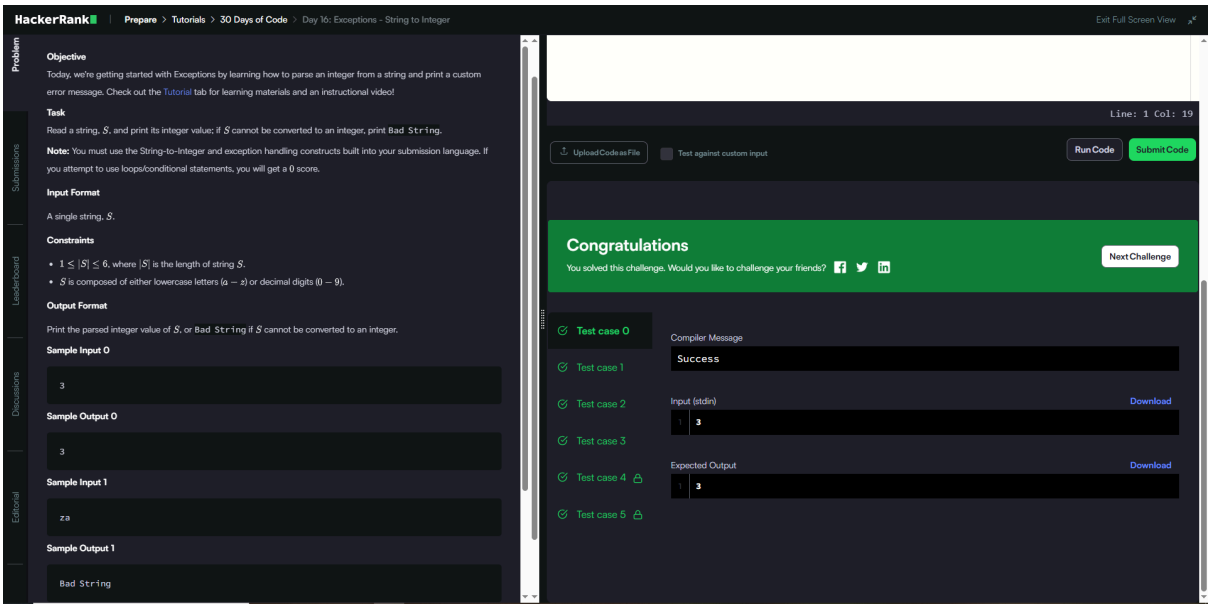
HackerRank
Prepare > Tutorials > 30 Days of Code > Day 16: Exceptions - String to Integer
Exit Full Screen View
Problem
Submissions
Leaderboard
Discussions
Editorial
Objective
Today, we're getting started with Exceptions by learning how to parse an integer from a string and print a custom error message. Check out the Tutorial tab for learning materials and an instructional video!
Task
Read a string, S, and print its integer value; if S cannot be converted to an integer, print Bad String.
Note: You must use the String-to-Integer and exception handling constructs built into your submission language. If you attempt to use loops/conditional statements, you will get a 0 score.
Input Format
A single string, S.
Constraints
$1 \leq |S| \leq 6$, where $|S|$ is the length of string S.
S is composed of either lowercase letters (a – z) or decimal digits (0 – 9).
Output Format
Print the parsed integer value of S, or Bad String if S cannot be converted to an integer.
Sample Input 0
3
Sample Output 0
3
Sample Input 1
za
Sample Output 1
Bad String
Line: 1 Col: 19
Upload Code as File
Test against custom input
Run Code
Submit Code
Congratulations
You solved this challenge. Would you like to challenge your friends?
Next Challenge
Test case 0
Test case 1
Test case 2
Test case 3
Test case 4
Test case 5
Compiler Message
Success
Input (stdin)
Download
3
Expected Output
Download
3

C#:

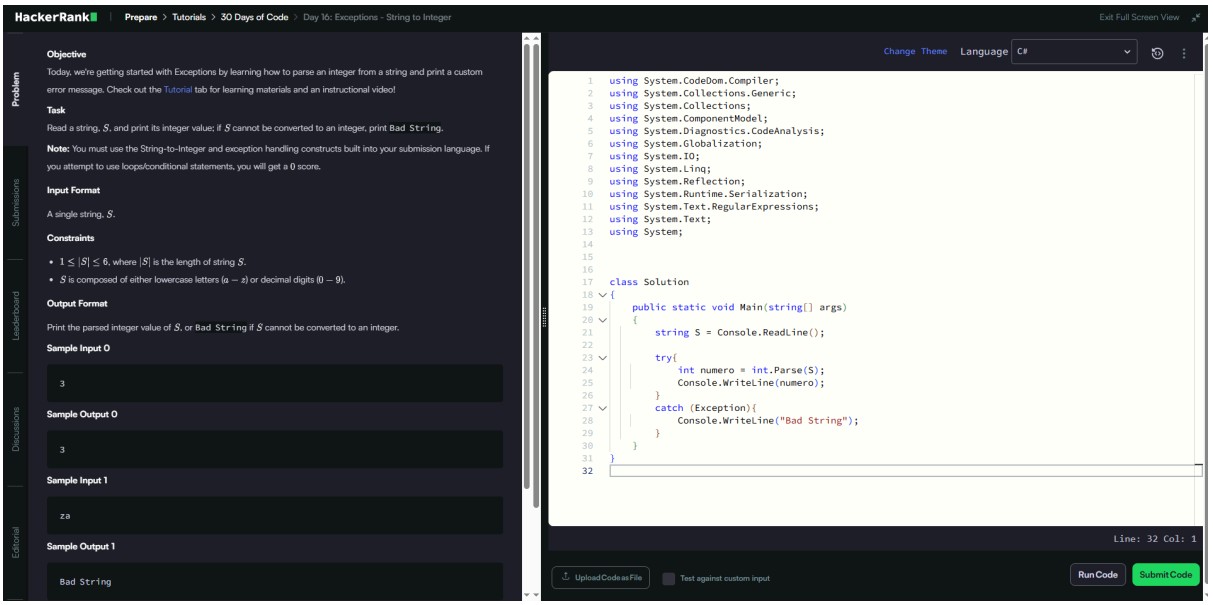
HackerRank
Prepare > Tutorials > 30 Days of Code > Day 16: Exceptions - String to Integer
Exit Full Screen View
Problem
Submissions
Leaderboard
Discussions
Editorial
Objective
Today, we're getting started with Exceptions by learning how to parse an integer from a string and print a custom error message. Check out the Tutorial tab for learning materials and an instructional video!
Task
Read a string, S, and print its integer value; if S cannot be converted to an integer, print Bad String.
Note: You must use the String-to-Integer and exception handling constructs built into your submission language. If you attempt to use loops/conditional statements, you will get a 0 score.
Input Format
A single string, S.
Constraints
$1 \leq |S| \leq 6$, where $|S|$ is the length of string S.
S is composed of either lowercase letters (a – z) or decimal digits (0 – 9).
Output Format
Print the parsed integer value of S, or Bad String if S cannot be converted to an integer.
Sample Input 0
3
Sample Output 0
3
Sample Input 1
za
Sample Output 1
Bad String
Change Theme
Language
C#
using System.CodeDom.Compiler;
using System.Collections.Generic;
using System.Collections;
using System.ComponentModel;
using System.Diagnostics.CodeAnalysis;
using System.Globalization;
using System.IO;
using System.Linq;
using System.Reflection;
using System.Runtime.Serialization;
using System.Text.RegularExpressions;
using System.Text;
using System;
class Solution
{
public static void Main(string[] args)
{
string S = Console.ReadLine();
try{
int numero = int.Parse(S);
Console.WriteLine(numero);
}
catch (Exception){
Console.WriteLine("Bad String");
}
}
}
Line: 32 Col: 1
Upload Code as File
Test against custom input
Run Code
Submit Code

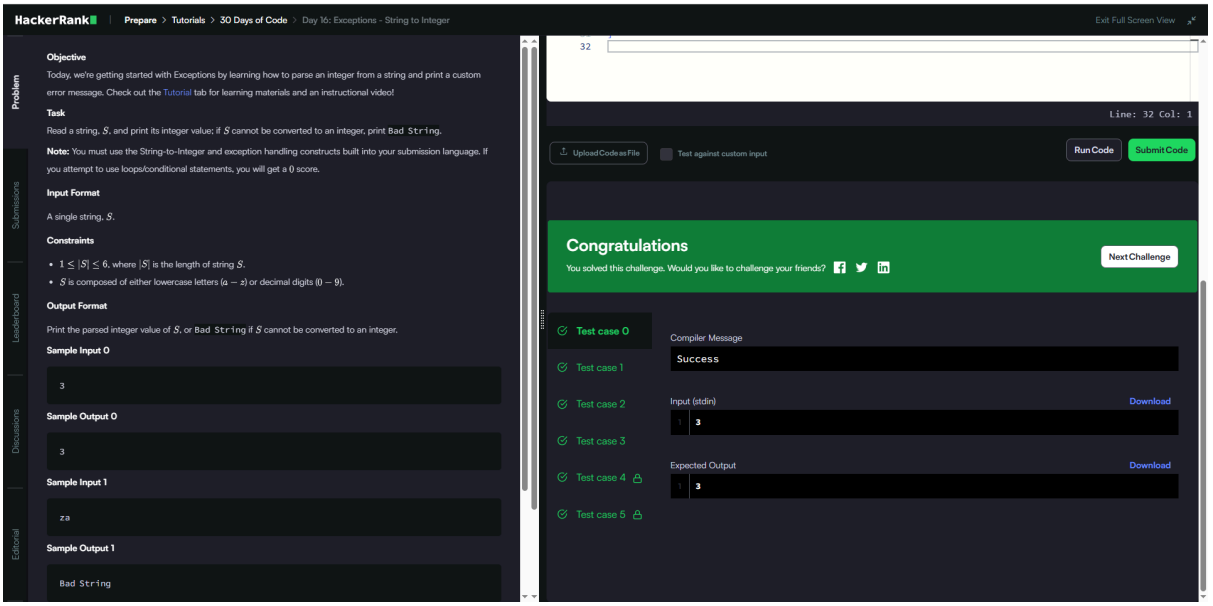
HackerRank
Prepare > Tutorials > 30 Days of Code > Day 16: Exceptions - String to Integer
Exit Full Screen View
Problem
Submissions
Leaderboard
Discussions
Editorial
Objective
Today, we're getting started with Exceptions by learning how to parse an integer from a string and print a custom error message. Check out the Tutorial tab for learning materials and an instructional video!
Task
Read a string, S, and print its integer value; if S cannot be converted to an integer, print Bad String.
Note: You must use the String-to-Integer and exception handling constructs built into your submission language. If you attempt to use loops/conditional statements, you will get a 0 score.
Input Format
A single string, S.
Constraints
$1 \leq |S| \leq 6$, where $|S|$ is the length of string S.
S is composed of either lowercase letters (a – z) or decimal digits (0 – 9).
Output Format
Print the parsed integer value of S, or Bad String if S cannot be converted to an integer.
Sample Input 0
3
Sample Output 0
3
Sample Input 1
za
Sample Output 1
Bad String
32
Line: 32 Col: 1
Upload Code as File
Test against custom input
Run Code
Submit Code
Congratulations
You solved this challenge. Would you like to challenge your friends?
Next Challenge
Test case 0
Test case 1
Test case 2
Test case 3
Test case 4
Test case 5
Compiler Message
Success
Input (stdin)
Download
3
Expected Output
Download
3