

Presentación:

Nombre:
Algelis Severino

Tema:
Introducción y Fundamentos de Redes.

Tecnico:
Ciberseguridad Semipresencial

Facilitador:
Kevin Feliz Henriquez

Centro:
Diapiato Pro salud

Descripción:
En este documento .pdf está el hackeo de mi primera máquina en HTB (HackTheBox) de dificultad muy fácil a través de la enumeración de usuarios con credenciales por defecto, usare el protocolo telnet para conectarme de manera remota.

¿De qué trata la máquina Meow?


Meow es una máquina Linux muy fácil que guía a los jugadores en la configuración de sus máquinas de ataque, la conexión a los laboratorios de HTB a través de una VPN y demuestra la estrategia sobre cómo completarlas. La máquina se centra en técnicas de enumeración para principiantes y muestra la explotación de un servicio Telnet vulnerable a través de credenciales por defecto.

Teniendo las dos máquinas corriendo entramos en accion.

Ip maquina Meow: 10.129.47.247

Comando 1:

ip a:

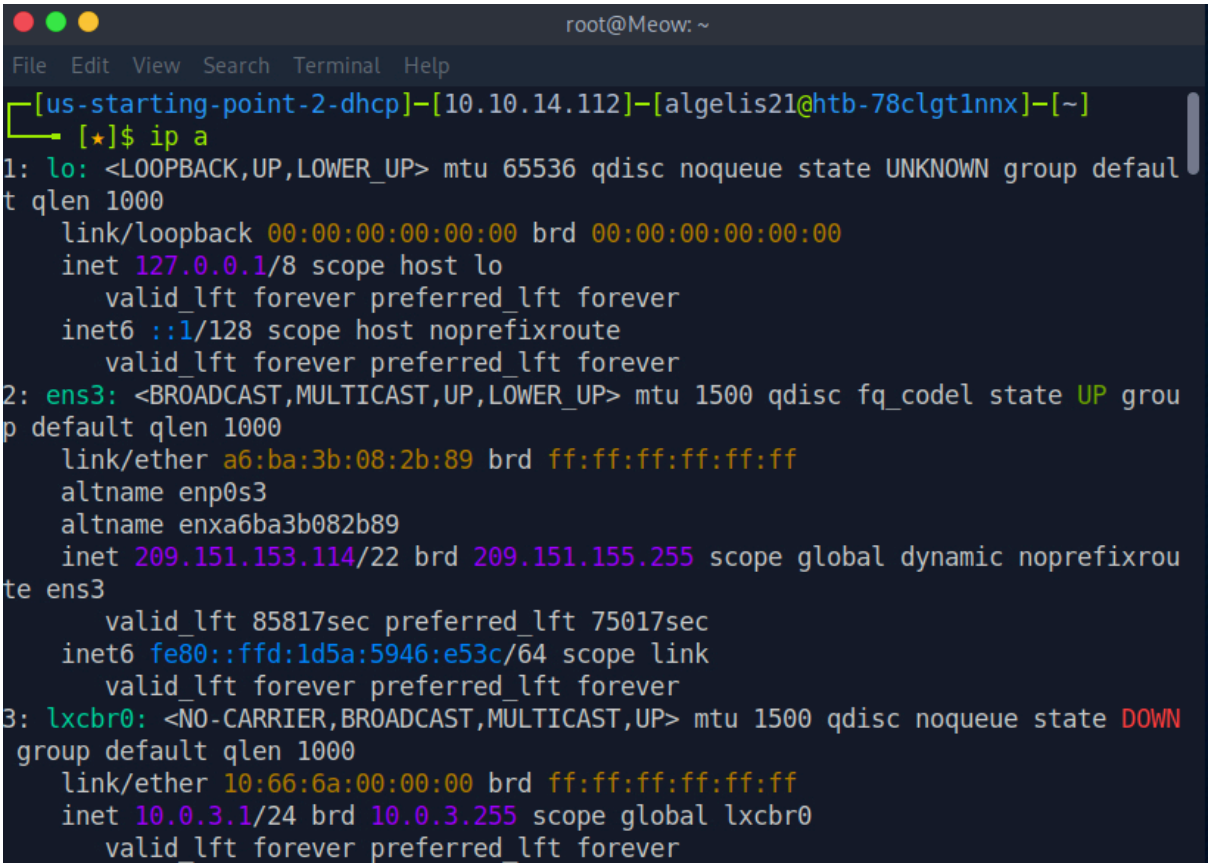

Comando 2:
ping -c 1 10.129.47.247
Para ver si la maquina me responde.

```
       valid_lft forever preferred_lft forever
┌─[us-starting-point-2-dhcp]─[10.10.14.112]─[algelis21@htb-78clgt1nnx]─[~]
└──╼ [★]$ ping -c 1 10.129.47.247
PING 10.129.47.247 (10.129.47.247) 56(84) bytes of data.
64 bytes from 10.129.47.247: icmp_seq=1 ttl=63 time=6.94 ms

--- 10.129.47.247 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 6.941/6.941/6.941/0.000 ms
```


Comando 3:
nmap -p- –open -vvv -sCV -n 10.129.47.247

```
File  Edit  View  Search  Terminal  Help
└──╼ [★]$ nmap -p- --open -vvv -sCV -n 10.129.47.247
Starting Nmap 7.95 ( https://nmap.org ) at 2026-10-08 22:19 EDT
NSE: Loaded 157 scripts for scanning.
NSE: Script Pre-scanning.
NSE: Starting runlevel 1 (of 3) scan.
Initiating NSE at 22:19
Completed NSE at 22:19, 0.00s elapsed
NSE: Starting runlevel 2 (of 3) scan.
Initiating NSE at 22:19
Completed NSE at 22:19, 0.00s elapsed
NSE: Starting runlevel 3 (of 3) scan.
Initiating NSE at 22:19
Completed NSE at 22:19, 0.00s elapsed
Initiating Ping Scan at 22:19
Scanning 10.129.47.247 [2 ports]
Completed Ping Scan at 22:19, 0.01s elapsed (1 total hosts)
Initiating Connect Scan at 22:19
Scanning 10.129.47.247 [65535 ports]
Discovered open port 23/tcp on 10.129.47.247
Completed Connect Scan at 22:19, 3.88s elapsed (65535 total ports)
Initiating Service scan at 22:19
Scanning 1 service on 10.129.47.247
Completed Service scan at 22:20, 10.04s elapsed (1 service on 1 host)
NSE: Script scanning 10.129.47.247.
NSE: Starting runlevel 1 (of 3) scan.
Initiating NSE at 22:20
Completed NSE at 22:20, 10.03s elapsed
NSE: Starting runlevel 2 (of 3) scan.
Initiating NSE at 22:20
Completed NSE at 22:20, 0.00s elapsed
NSE: Starting runlevel 3 (of 3) scan.
Initiating NSE at 22:20
Completed NSE at 22:20, 0.00s elapsed
Nmap scan report for 10.129.47.247
Host is up, received conn-refused (0.0065s latency).
Scanned at 2026-10-08 22:19:53 EDT for 24s
Not shown: 65512 closed tcp ports (conn-refused), 22 filtered tcp ports (no-response)
Some closed ports may be reported as filtered due to --defeat-rst-ratelimit
PORT   STATE SERVICE REASON  VERSION
23/tcp open  telnet  syn-ack Linux telnetd
```


Hallazgos:

```
Some closed ports may be reported as filtered due to --defeat-rst-ratelimit
PORT   STATE SERVICE REASON  VERSION
23/tcp open  telnet  syn-ack Linux telnetd
```

Comando 4:
telnet 10.129.47.247

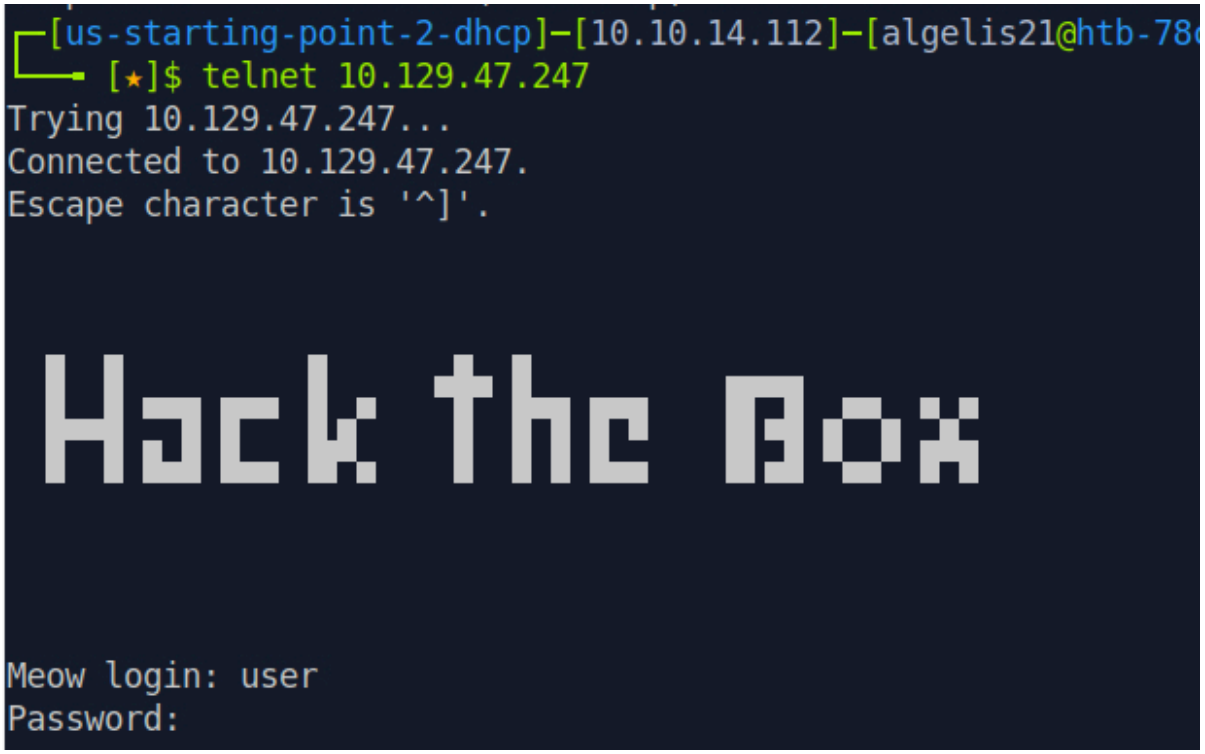

La máquina trata de estrategias de enumeración utilizando contraseñas por defecto entonces procedí a probar contraseñas por defecto.

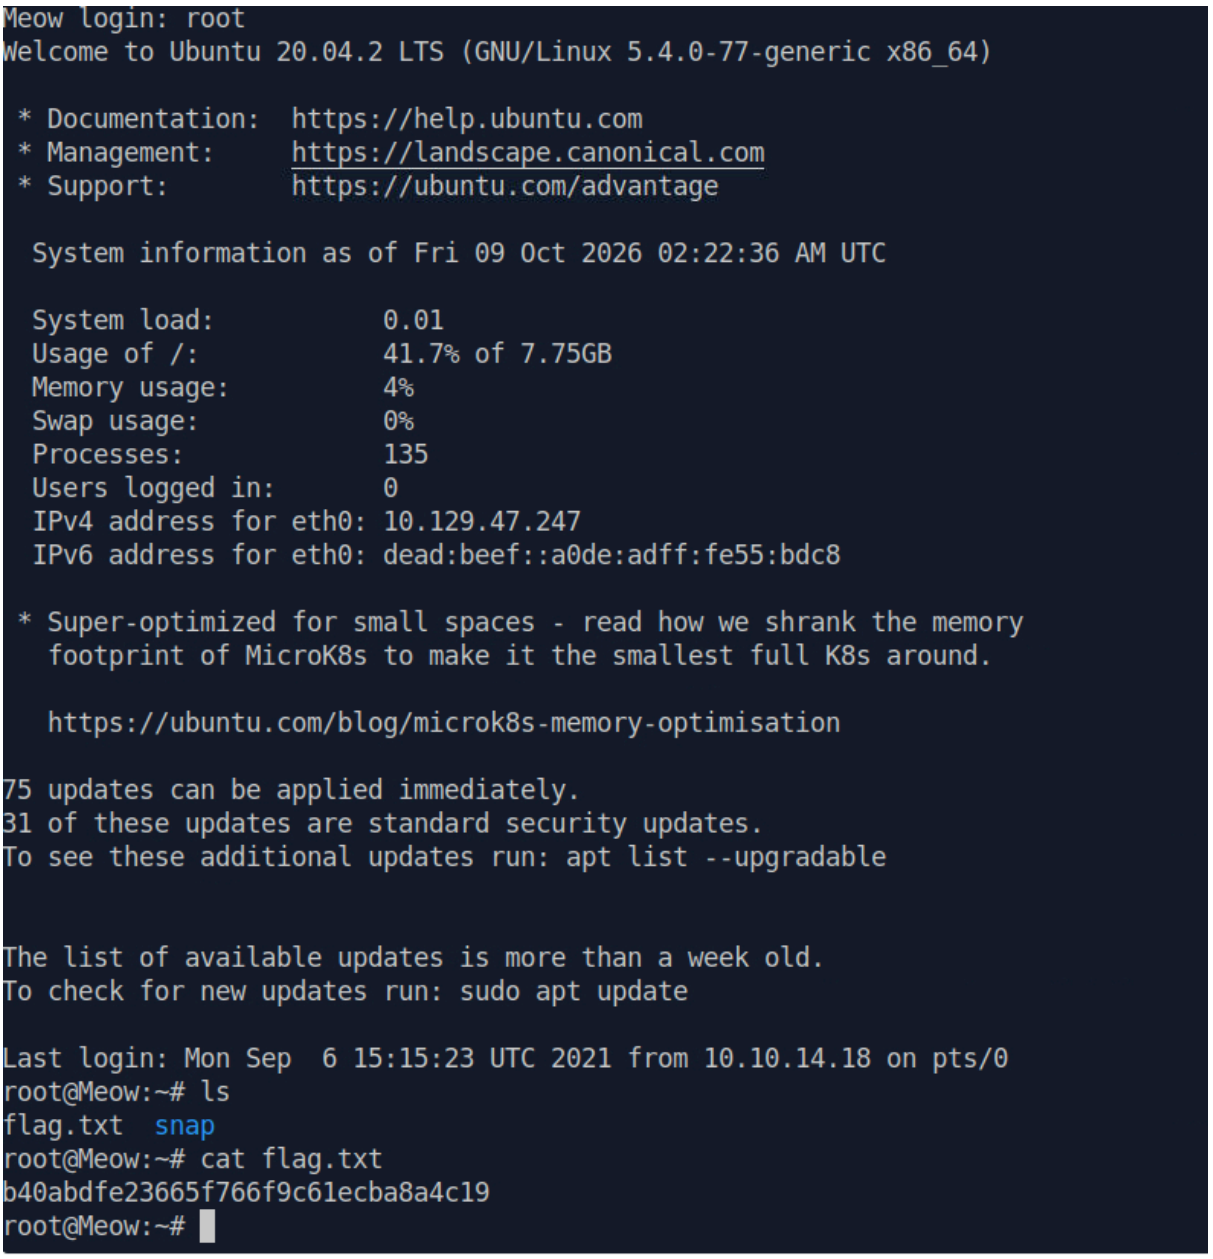

Hasta que iba a probar user: root y password: root, pero con solo escribir en el user la palabra root me dio acceso con privilegios de root a la máquina meow ya con ls y cat obtuve mi flag.