There are **two main ways** to upload your project (folder/code) to GitHub:

1. **Super easy method** (no commands needed) → Best if your project is small (< 100 files) or you're just starting
2. **Proper / recommended method** (using Git commands) → Best for real projects, future updates, version control, teams, etc.

Method 1: Upload Directly from Browser (Quick & Simple)

1. Go to https://github.com and **log in** (create free account if you don't have one).
2. Click **+** (top right) → **New repository**
3. Fill in:
    - Repository name (e.g. my-awesome-project)
    - Description (optional)
    - Public / Private (Public = anyone can see)
    - **Do NOT** tick "Add a README file", ".gitignore", or license (we'll add files ourselves)
4. Click **Create repository**
5. On the empty repo page → click **Add file** → **Upload files**
6. Drag & drop your whole project folder (or click "choose your files" and select everything)
7. Scroll down → write a commit message like "Initial upload of my project"
8. Click **Commit changes**

Done! Your project is now on GitHub.

→ This method has limits (slow with many files, no good history for updates).

Sarfaraz

Method 2: Best Way – Using Git Commands (Recommended)

Prerequisites (do once on your computer):

- Install **Git** → https://git-scm.com/downloads
- Have a GitHub account

Steps (do this every time you want to upload/update a project):

1. **Create empty repository on GitHub** (same as above)
    - Go to GitHub → + → New repository
    - Give name, keep it empty (no README, no .gitignore)
    - Create repository
    - Copy the HTTPS URL (looks like: https://github.com/your-username/your-repo-name.git)
2. **Open terminal / command prompt / PowerShell / Git Bash or click on gitbash**

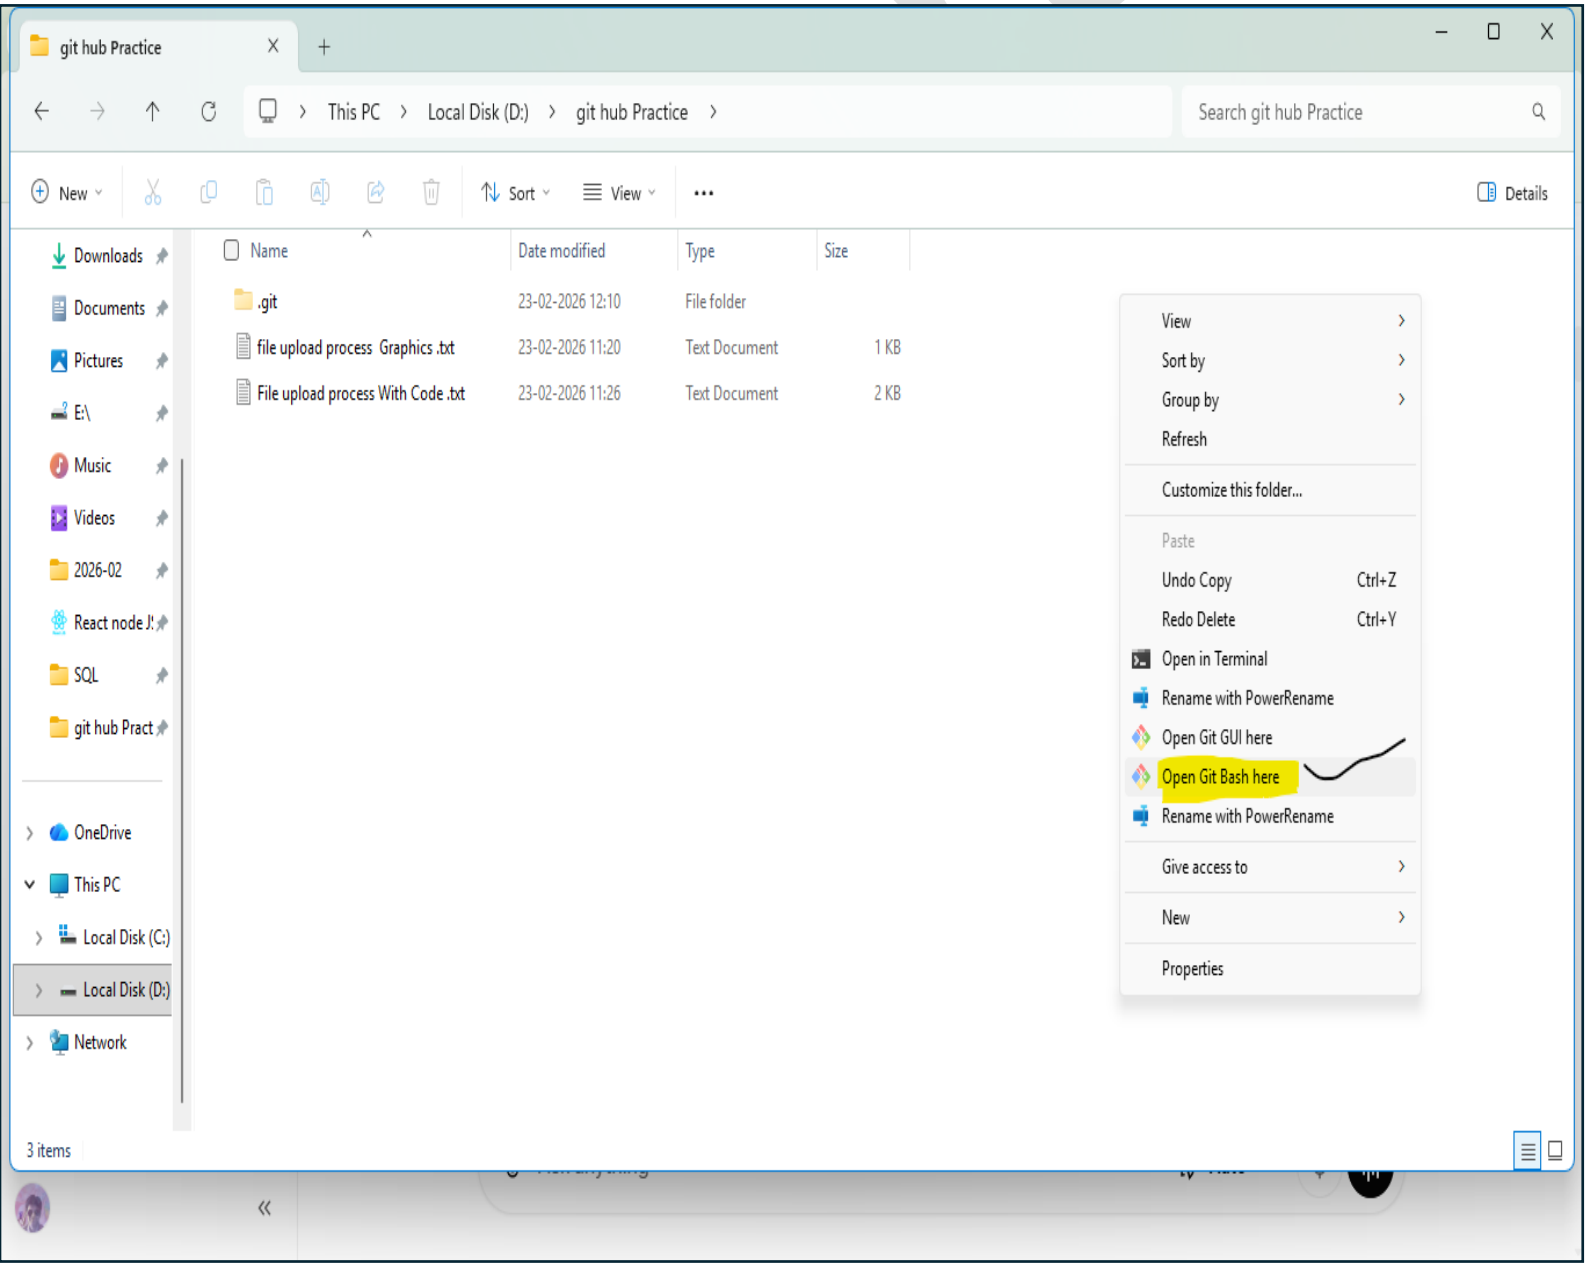

1. Initialize git (only first time)

Code : git init

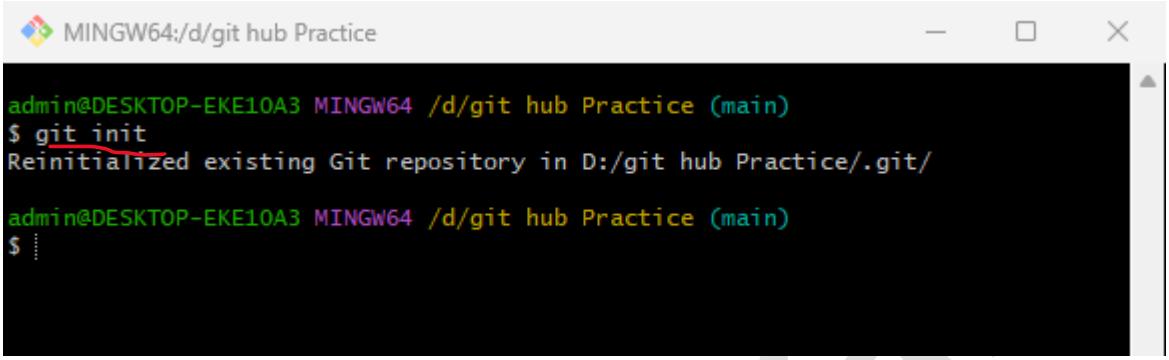

2. Add all files

Code :git add .

Or Add Single File

Code :git add sarfaraz.txt

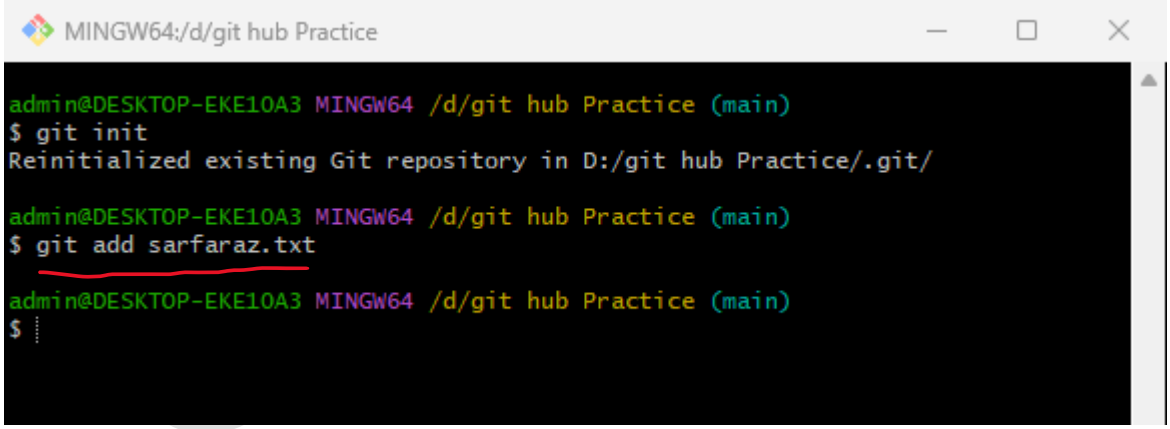

3. Create first commit

Code : git commit -m "uploading Sarfaraz file"

MINGW64:/d/git hub Practice

```
admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git init
Reinitialized existing Git repository in D:/git hub Practice/.git/

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git add sarfaraz.txt

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git commit -m "uploading Sarfaraz file"
[main ae0caf0] uploading Sarfaraz file
 1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 sarfaraz.txt

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$
```

4. Connect to GitHub (replace with YOUR url use from Github)

Code: git remote add origin https://github.com/your-username/your-repo-name.git

MINGW64:/d/git hub Practice

```
admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git init
Reinitialized existing Git repository in D:/git hub Practice/.git/

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git add sarfaraz.txt

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git commit -m "uploading Sarfaraz file"
[main ae0caf0] uploading Sarfaraz file
 1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 sarfaraz.txt

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git remote add origin https://github.com/Sfz0533/Git-Hub-File-Upload
error: remote origin already exists.

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$
```

5. Set main branch name (most common in 2025-2026)

Code: git branch -M main

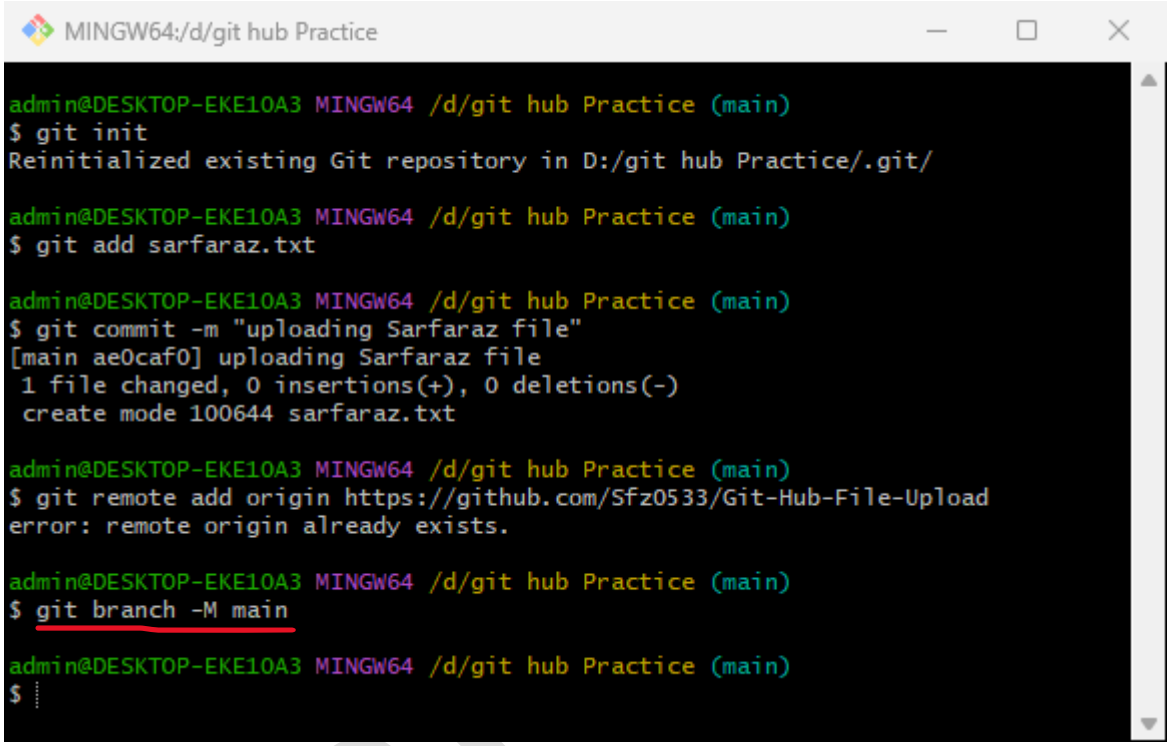

6. Push to GitHub (first time use -u)

Code : git push -u origin main

```
MINGW64:/d/git hub Practice
 create mode 100644 sarfaraz.txt

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git remote add origin https://github.com/Sfz0533/Git-Hub-File-Upload
error: remote origin already exists.

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git branch -M main

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git push -u origin main
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 4 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 279 bytes | 93.00 KiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/Sfz0533/Git-Hub-File-Upload.git
   5284aed..ae0caf0  main -> main
branch 'main' set up to track 'origin/main'.

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$
```

Delete Using Git Commands (Best for Real Projects)

Do this if you already have the repository cloned locally.

1. Open terminal / command prompt / Git Bash.
2. Go to your project folder:
3. Make sure you're on the right branch:

or whatever your branch name is

Code :git checkout main

Sarfaraz

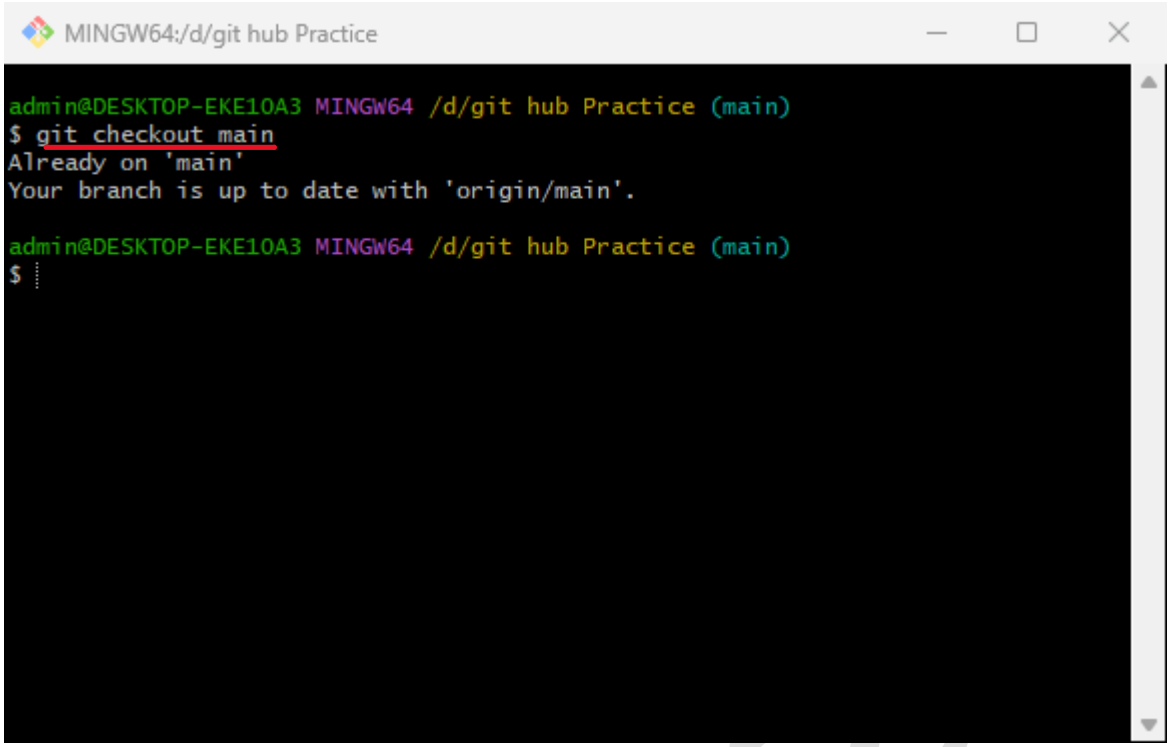

Code :git pull

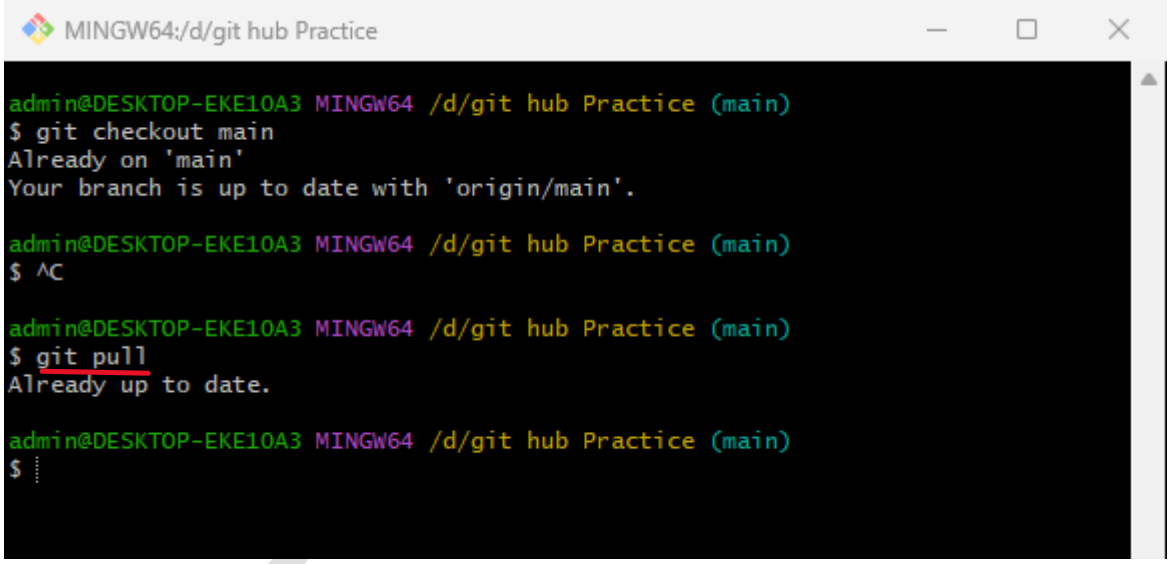

Deletes file from both Git + your computer

Code: git rm sarfaraz.txt

OR: delete from Git only (keep file on your computer)

Code: git rm --cached sarfaraz.txt

For a whole folder (recursive)

git rm -r path/to/folder/

```
MINGW64:/d/git hub Practice

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git checkout main
Already on 'main'
Your branch is up to date with 'origin/main'.

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ ^C

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git pull
Already up to date.

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git rm sarfaraz.txt
rm 'sarfaraz.txt'

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$
```

Commit the deletion:

Code : git commit -m “delete files”

```
MINGW64:/d/git hub Practice

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git checkout main
Already on 'main'
Your branch is up to date with 'origin/main'.

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ ^C

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git pull
Already up to date.

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git rm sarfaraz.txt
rm 'sarfaraz.txt'

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git commit -m
error: switch `m' requires a value

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$
```

Push to GitHub:

git push origin main

```
MINGW64:/d/git hub Practice
Already on 'main'
Your branch is up to date with 'origin/main'.

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ ^C

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git pull
Already up to date.

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git rm sarfaraz.txt
rm 'sarfaraz.txt'

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git commit -m
error: switch `m' requires a value

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git push origin main
Everything up-to-date

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$
```

UPDATE at Github

1. Code: git add .
2. Code: git commit -m "Sarfaraz Updated "
3. Code: git push origin main

```
MINGW64:/d/git hub Practice

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git add .

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git commit -m
error: switch `m' requires a value

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git commit -m "update"
[main 000f61b] update
 2 files changed, 1 insertion(+), 18 deletions(-)
 delete mode 100644 sarfaraz.txt

admin@DESKTOP-EKE10A3 MINGW64 /d/git hub Practice (main)
$ git push origin main
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 4 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 252 bytes | 252.00 KiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/Sfz0533/Git-Hub-File-Upload.git
```

Sarfaraz