EXPERIMENT - 8 (a)

AIM:

To discover live host using NMAP scans (ARP, ICMP, TCP/UDP) on tryhackme platform.

Introduction:

When targetting a network we need an efficient tool to handle repetitive tasks.

This room is first of four in NMAP series.

* NMAP live host discovery
* NMAP basic port scans
* NMAP Advanced port scans
* NMAP post port scans.

Subnetworks:



This figure displays two types of subnet.

/16 subnets


/24 subnets.


From computer 1

To computer 1

Packet type "ARP request"

Data computer 6.

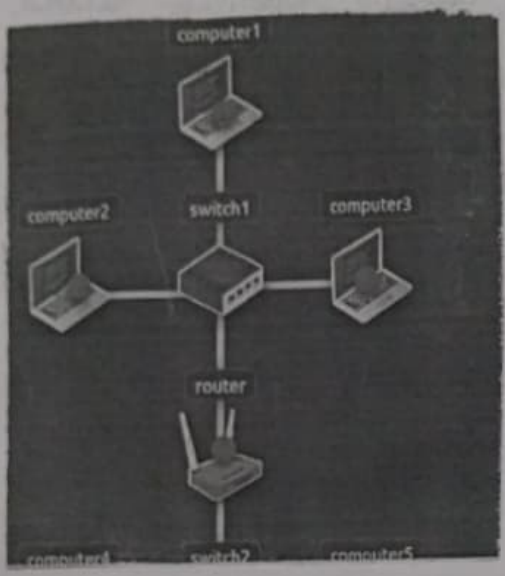

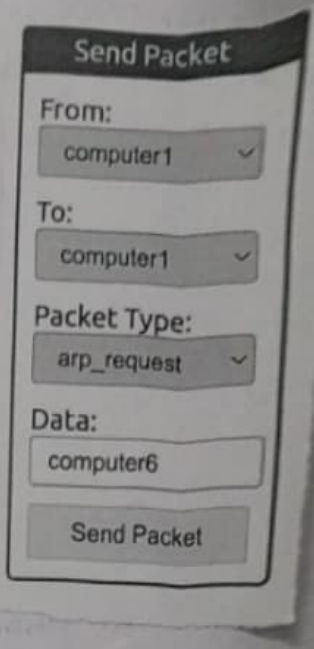



From computer 4

To computer 4

Packet Type: "ARP Request"


Data : computer 6.

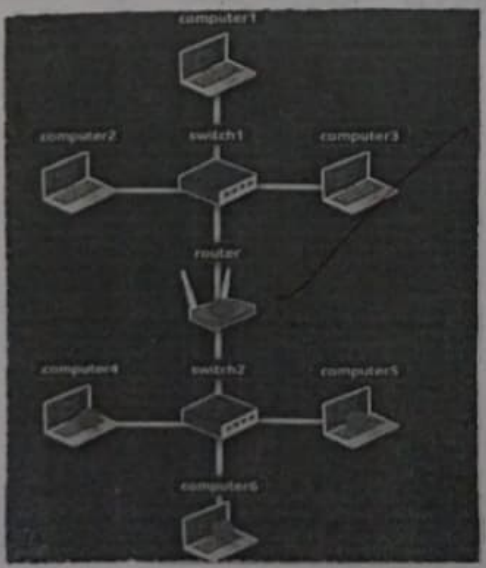

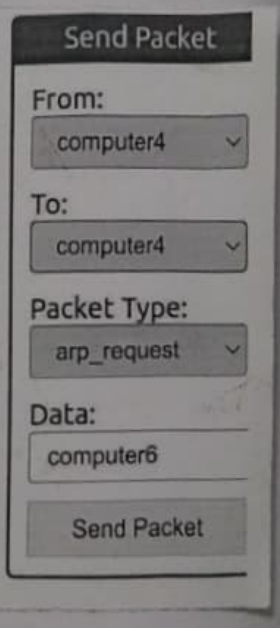


NMAP Host discovery using ARP:

When a privelaged user tries to scan targets on local network, NMAP uses ARP request.

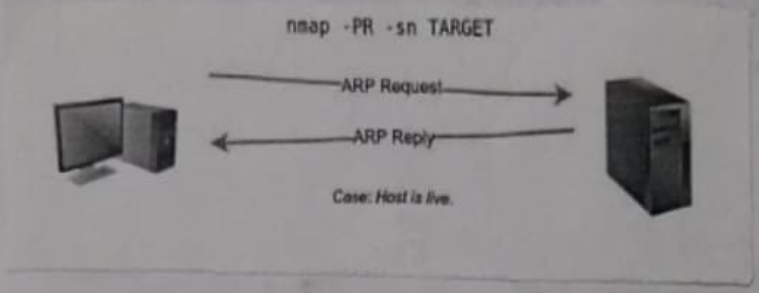

UDP PING:

While receiving UDP packets to open UDP ports may not trigger a response, sending them to closed UDP ports.

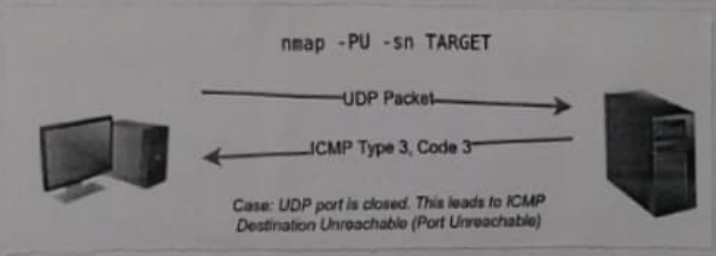

8/11

RESULT:

Thus the requirement has been completed successfully using tryHackme.