


CS 474/574 Machine Learning

3. Decision Trees

Prof. Dr. Forrest Sheng Bao
Dept. of Computer Science
Iowa State University
Ames, IA, USA


September 18, 2020

Decision Trees (DTs)

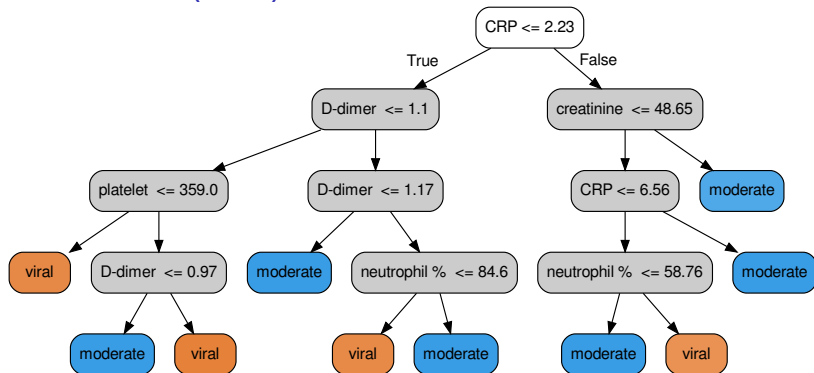


- ▶ A binary tree. Each node is a Boolean comparison on a feature.
- ▶ Each node **split** into two branches. Continues to one of the two.
- ▶ Root node: the beginning. Leaf node: the decision.
- ▶ May not visit all features. May visit a feature more than once.
- ▶ What will be the class for a sample with the following feature values? CPR= 2.7, creatinine = 50

Constructing a DT(-based classifier)

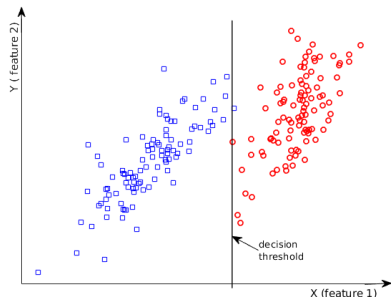


- ▶ Two things need to be determined at each node: feature and threshold.
 - ▶ Thresholds can be values of training samples on a feature.
 - ▶ Exhaustive search.
Complexity: $O(NM)$, N : number of features, M : number of samples.
-
- ▶ Intuition: Each node cuts the plane into two halves. It's better to have less mixture of two classes on each half.
 - ▶ Given a Boolean condition S , Gini impurity is
$$g(S) = \sum_{c=\pm 1} Pr(class = c|S) \cdot (1 - Pr(class = c|S)) = 1 - \sum_{c=\pm 1} Pr^2(class = c|S).$$
 If all samples belong to one class, then $g(S) = 0$ thus least impure and hence most pure.

Constructing a DT(-based classifier) (cond.)



- ▶ Consider impurity on both ends, i.e., $F > T$ and $F \leq T$. Expectation of impurity: $E(F, T) = P(F > T)g(F > T) + P(F \leq T)g(F \leq T)$
 - ▶ Another way to determine impurity is **entropy**.
-
- ▶ When to stop the split? Depends on 3 **hyperparameters**: the maximum height of the tree, the minimum Gini impurity, and the minimum sample pool
 - ▶ A good tutorial by Victor Zhou
 - ▶ How to use it for regression? Sklearn example

Random Forests

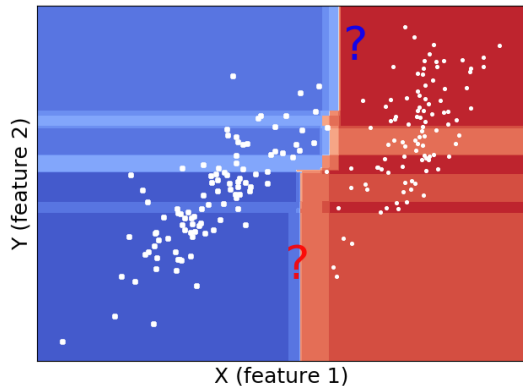

- ▶ a collection (technically an ensemble) of DTs that share the same set of hyperparameters.
- ▶ Member DTs are trained independently using random samples and random features.
- ▶ Final decision is the majority vote of all member DTs.