



# The Unreasonable Effectiveness of Recurrent Neural Networks

May 21, 2015


There's something magical about Recurrent Neural Networks (RNNs). I still remember when I trained my first recurrent network for [Image Captioning](#). Within a few dozen minutes of training my first baby model (with rather arbitrarily-chosen hyperparameters) started to generate very nice looking descriptions of images that were on the edge of making sense. Sometimes the ratio of how simple your model is to the quality of the results you get out of it blows past your expectations, and this was one of those times. What made this result so shocking at the time was that the common wisdom was that RNNs were supposed to be difficult to train (with more experience I've in fact reached the opposite conclusion). Fast forward about a year: I'm training RNNs all the time and I've witnessed their power and robustness many times, and yet their magical outputs still find ways of amusing me. This post is about sharing some of that magic with you.

*We'll train RNNs to generate text character by character and ponder the question "how is that even possible?"*

By the way, together with this post I am also releasing [code on Github](#) that allows you to train character-level language models based on multi-layer LSTMs. You give it a large chunk of text and it will learn to generate text like it one character at a time. You can also use it to reproduce my experiments below. But we're getting ahead of ourselves; What are RNNs anyway?

## Recurrent Neural Networks

**Sequences.** Depending on your background you might be wondering: *What makes Recurrent Networks so special?* A glaring limitation of Vanilla Neural Networks (and also Convolutional Networks) is that their API is too constrained: they accept a fixed-sized vector as input (e.g. an image) and produce a fixed-sized vector as output (e.g. probabilities of different classes). Not only that: These models perform this mapping using a fixed amount of computational steps (e.g. the number of layers in the model). The core reason that recurrent nets are more exciting is that they allow us to operate over *sequences* of vectors: Sequences in the input, the output, or in the most general case both. A few examples may make this more concrete:

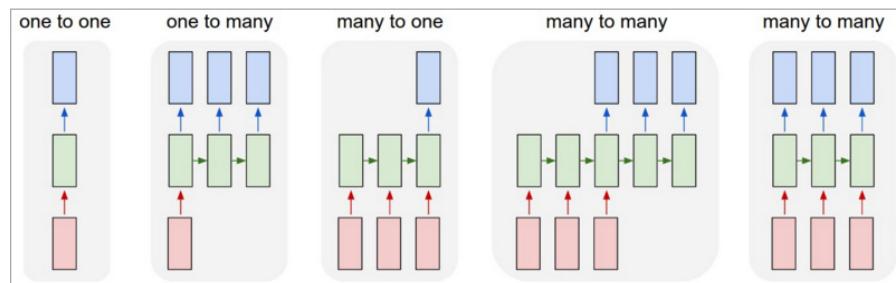


Each rectangle is a vector and arrows represent functions (e.g. matrix multiply). Input vectors are in red, output vectors are in blue and green vectors hold the RNN's state (more on this soon). From left to right: (1) Vanilla mode of processing without RNN, from fixed-sized input to fixed-sized output (e.g. image classification). (2) Sequence output (e.g. image captioning takes an image and outputs a sentence of words). (3) Sequence input (e.g. sentiment analysis where a given sentence is classified as expressing positive or negative sentiment). (4) Sequence input and sequence output (e.g. Machine Translation: an RNN reads a sentence in English and then outputs a sentence in French). (5) Synced sequence input and output (e.g. video classification where we wish to label each frame of the video). Notice that in every case are no pre-specified constraints on the lengths sequences because the recurrent transformation (green) is fixed and can be applied as many times as we like.

As you might expect, the sequence regime of operation is much more powerful compared to fixed networks that are doomed from the get-go by a fixed number of computational steps, and hence also much more appealing for those of us who aspire to build more intelligent systems. Moreover, as we'll see in a bit, RNNs combine the input vector with their state vector with a fixed (but learned) function to produce a new state vector. This can in programming terms be interpreted as running a fixed program with certain inputs and some internal variables. Viewed this way, RNNs essentially describe programs. In fact, it is known that [RNNs are Turing-Complete](#) in the sense that they can to simulate arbitrary programs (with proper weights). But similar to universal approximation theorems for neural nets you shouldn't read too much into this. In fact, forget I said anything.

*If training vanilla neural nets is optimization over functions, training recurrent nets is optimization over programs.*

**Sequential processing in absence of sequences.** You might be thinking that having sequences as inputs or outputs could be relatively rare, but an important point to realize is that even if your inputs/outputs are fixed vectors, it is still possible to use this powerful formalism to process them in a sequential manner. For instance, the figure below shows results from two very nice papers from DeepMind. On the left, an algorithm learns a recurrent network policy that steers its attention around an image; In particular, it learns to read out house numbers from left to right ([Ba et al.](#)). On the right, a recurrent network generates images of digits by learning to sequentially add colors to a canvas ([Mnih et al.](#))

On the right, a recurrent network generates images of digits by learning to sequentially add color to a canvas ([Grigore et al.](#)):

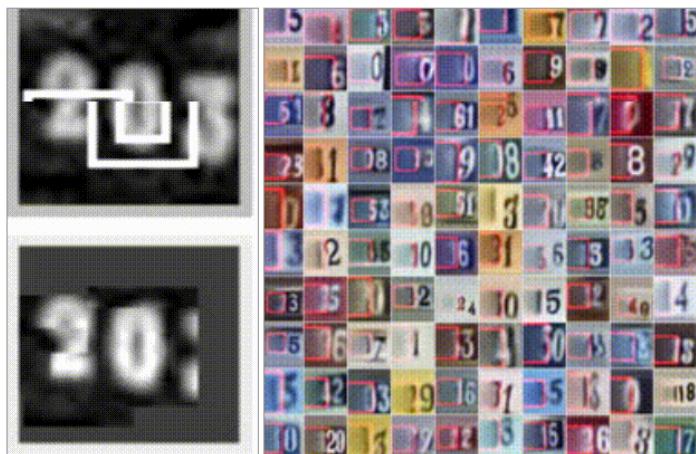

Left: RNN learns to read house numbers. Right: RNN learns to paint house numbers.

The takeaway is that even if your data is not in form of sequences, you can still formulate and train powerful models that learn to process it sequentially. You're learning stateful programs that process your fixed-sized data.

**RNN computation.** So how do these things work? At the core, RNNs have a deceptively simple API: They accept an input vector `x` and give you an output vector `y`. However, crucially this output vector's contents are influenced not only by the input you just fed in, but also on the entire history of inputs you've fed in in the past. Written as a class, the RNN's API consists of a single `step` function:

```
rnn = RNN()
y = rnn.step(x) # x is an input vector, y is the RNN's output vector
```

The RNN class has some internal state that it gets to update every time `step` is called. In the simplest case this state consists of a single *hidden* vector `h`. Here is an implementation of the step function in a Vanilla RNN:

```
class RNN:
    # ...
    def step(self, x):
        # update the hidden state
        self.h = np.tanh(np.dot(self.W_hh, self.h) + np.dot(self.W_xh, x))
        # compute the output vector
        y = np.dot(self.W_hy, self.h)
        return y
```

The above specifies the forward pass of a vanilla RNN. This RNN's parameters are the three matrices `W_hh`, `W_xh`, `W_hy`. The hidden state `self.h` is initialized with the zero vector. The `np.tanh` function implements a non-linearity that squashes the activations to the range  $[-1, 1]$ . Notice briefly how this works: There are two terms inside of the tanh: one is based on the previous hidden state and one is based on the current input. In numpy `np.dot` is matrix multiplication. The two intermediates interact with addition, and then get squashed by the tanh into the new state vector. If you're more comfortable with math notation, we can also write the hidden state update as  $h_t = \tanh(W_{hh}h_{t-1} + W_{xh}x_t)$ , where tanh is applied elementwise.

We initialize the matrices of the RNN with random numbers and the bulk of work during training goes into finding the matrices that give rise to desirable behavior, as measured with some loss function that expresses your preference to what kinds of outputs `y` you'd like to see in response to your input sequences `x`.

**Going deep.** RNNs are neural networks and everything works monotonically better (if done right) if you put on your deep learning hat and start stacking models up like pancakes. For instance, we can form a 2-layer recurrent network as follows:

```
y1 = rnn1.step(x)
y = rnn2.step(y1)
```

In other words we have two separate RNNs: One RNN is receiving the input vectors and the second RNN is receiving the output of the first RNN as its input. Except neither of these RNNs know or care - it's all just vectors coming in and going out, and some gradients flowing through each module during backpropagation.


**Getting fancy.** I'd like to briefly mention that in practice most of us use a slightly different formulation than what I presented above called a *Long Short-Term Memory* (LSTM) network. The LSTM is a particular type of recurrent network that works slightly better in practice, owing to its more powerful update equation and some appealing backpropagation dynamics. I won't go into details, but everything I've said about RNNs stays exactly the same, except the mathematical form for computing the update (the line `self.h = ...`) gets a little more complicated. From here on I will use the terms "RNN/LSTM" interchangeably but all experiments in this post use an LSTM.

# Character-Level Language Models

Okay, so we have an idea about what RNNs are, why they are super exciting, and how they work. We'll now ground this in a fun application: We'll train RNN character-level language models. That is, we'll give the RNN a huge chunk of text and ask it to model the probability distribution of the next character in the sequence given a sequence of previous characters. This will then allow us to generate new text one character at a time.

As a working example, suppose we only had a vocabulary of four possible letters "helo", and wanted to train an RNN on the training sequence "hello". This training sequence is in fact a source of 4 separate training examples: 1. The probability of "e" should be likely given the context of "h", 2. "l" should be likely in the context of "he", 3. "l" should also be likely given the context of "hel", and finally 4. "o" should be likely given the context of "hell".

Concretely, we will encode each character into a vector using 1-of-k encoding (i.e. all zero except for a single one at the index of the character in the vocabulary), and feed them into the RNN one at a time with the `step` function. We will then observe a sequence of 4-dimensional output vectors (one dimension per character), which we interpret as the confidence the RNN currently assigns to each character coming next in the sequence. Here's a diagram:

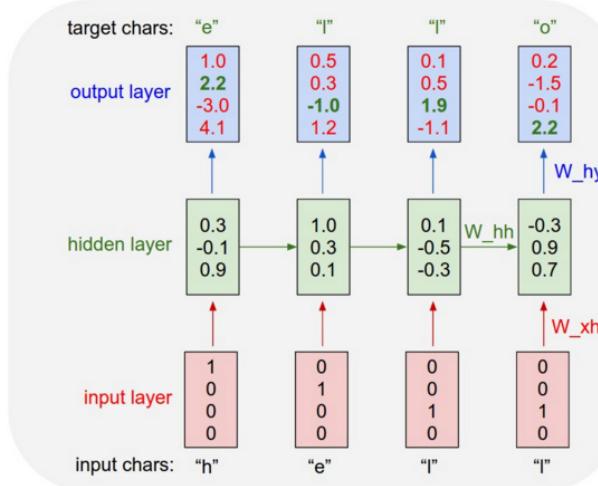

An example RNN with 4-dimensional input and output layers, and a hidden layer of 3 units (neurons). This diagram shows the activations in the forward pass when the RNN is fed the characters "hell" as input. The output layer contains confidences the RNN assigns for the next character (vocabulary is "h,e,l,o"); We want the green numbers to be high and red numbers to be low.

For example, we see that in the first time step when the RNN saw the character "h" it assigned confidence of 1.0 to the next letter being "h", 2.2 to letter "e", -3.0 to "l", and 4.1 to "o". Since in our training data (the string "hello") the next correct character is "e", we would like to increase its confidence (green) and decrease the confidence of all other letters (red). Similarly, we have a desired target character at every one of the 4 time steps that we'd like the network to assign a greater confidence to. Since the RNN consists entirely of differentiable operations we can run the backpropagation algorithm (this is just a recursive application of the chain rule from calculus) to figure out in what direction we should adjust every one of its weights to increase the scores of the correct targets (green bold numbers). We can then perform a *parameter update*, which nudges every weight a tiny amount in this gradient direction. If we were to feed the same inputs to the RNN after the parameter update we would find that the scores of the correct characters (e.g. "e" in the first time step) would be slightly higher (e.g. 2.3 instead of 2.2), and the scores of incorrect characters would be slightly lower. We then repeat this process over and over many times until the network converges and its predictions are eventually consistent with the training data in that correct characters are always predicted next.

A more technical explanation is that we use the standard Softmax classifier (also commonly referred to as the cross-entropy loss) on every output vector simultaneously. The RNN is trained with mini-batch Stochastic Gradient Descent and I like to use `RMSProp` or Adam (per-parameter adaptive learning rate methods) to stabilize the updates.

Notice also that the first time the character "l" is input, the target is "l", but the second time the target is "o". The RNN therefore cannot rely on the input alone and must use its recurrent connection to keep track of the context to achieve this task.

At **test time**, we feed a character into the RNN and get a distribution over what characters are likely to come next. We sample from this distribution, and feed it right back in to get the next letter. Repeat this process and you're sampling text! Lets now train an RNN on different datasets and see what happens.

To further clarify, for educational purposes I also wrote a [minimal character-level RNN language model in Python/numpy](#). It is only about 100 lines long and hopefully it gives a concise, concrete and useful summary of the above if you're better at reading code than text. We'll now dive into example results, produced with the much more efficient Lua/Torch codebase.

## Fun with RNNs

All 5 example character models below were trained with the `code` I'm releasing on Github. The input in each case is a single file with some text, and we're training an RNN to predict the next character in the sequence.

## Paul Graham generator

Lets first try a small dataset of English as a sanity check. My favorite fun dataset is the concatenation of [Paul Graham's essays](#). The basic idea is that there's a lot of wisdom in these essays, but unfortunately Paul Graham is a relatively slow generator. Wouldn't it be great if we could sample startup wisdom on demand? That's where an RNN comes in.

Concatenating all pg essays over the last ~5 years we get approximately 1MB text file, or about 1 million characters (this is considered a very small dataset by the way). *Technical:* Lets train a 2-layer LSTM with 512 hidden nodes (approx. 3.5 million parameters), and with dropout of 0.5 after each layer. We'll train with batches of 100 examples and truncated backpropagation through time of length 100 characters. With these settings one batch on a TITAN Z GPU takes about 0.46 seconds (this can be cut in half with 50 character BPTT at negligible cost in performance). Without further ado, lets see a sample from the RNN:

*"The surprised in investors weren't going to raise money. I'm not the company with the time there are all interesting quickly, don't have to get off the same programmers. There's a super-angel round fundraising, why do you can do. If you have a different physical investment are become in people who reduced in a startup with the way to argument the acquirer could see them just that you're also the founders will part of users' affords that and an alternation to the idea. [2] Don't work at first member to see the way kids will seem in advance of a bad successful startup. And if you have to act the big company too."*

Okay, clearly the above is unfortunately not going to replace Paul Graham anytime soon, but remember that the RNN had to learn English completely from scratch and with a small dataset (including where you put commas, apostrophes and spaces). I also like that it learns to support its own arguments (e.g. [2], above). Sometimes it says something that offers a glimmer of insight, such as "*a company is a meeting to think to investors*". [Here's](#) a link to 50K character sample if you'd like to see more.

**Temperature.** We can also play with the temperature of the Softmax during sampling. Decreasing the temperature from 1 to some lower number (e.g. 0.5) makes the RNN more confident, but also more conservative in its samples. Conversely, higher temperatures will give more diversity but at cost of more mistakes (e.g. spelling mistakes, etc). In particular, setting temperature very near zero will give the most likely thing that Paul Graham might say.

*"is that they were all the same thing that was a startup is that they were all the same thing that was a startup is that they were all the same thing that was a startup is that they were all the same"*

looks like we've reached an infinite loop about startups.

## Shakespeare

It looks like we can learn to spell English words. But how about if there is more structure and style in the data? To examine this I downloaded all the works of Shakespeare and concatenated them into a single (4.4MB) file. We can now afford to train a larger network, in this case lets try a 3-layer RNN with 512 hidden nodes on each layer. After we train the network for a few hours we obtain samples such as:

```
PANDARUS:  
Alas, I think he shall be come approached and the day  
When little strain would be attain'd into being never fed,  
And who is but a chain and subjects of his death,  
I should not sleep.  
  
Second Senator:  
They are away this miseries, produced upon my soul,  
Breaking and strongly should be buried, when I perish  
The earth and thoughts of many states.  
  
DUKE VINCENTIO:  
Well, your wit is in the care of side and that.  
  
Second Lord:  
They would be ruled after this chamber, and  
my fair nues begun out of the fact, to be conveyed,  
Whose noble souls I'll have the heart of the wars.  
  
Clown:  
Come, sir, I will make did behold your worship.  
  
VIOLA:  
I'll drink it.
```

Remember, all the RNN knows are characters, so in particular it samples both speaker's names and the contents. Sometimes we also get relatively extented monologue passages, such as:

```
VIOLA:  
Why, Salisbury must find his flesh and thought  
That which I am not aps, not a man and in fire,
```

```
To show the reining of the raven and the wars  
To grace my hand reproach within, and not a fair are hand,  
That Caesar and my goodly father's world;  
When I was heaven of presence and our fleets,  
We spare with hours, but cut thy council I am great,  
Murdered and by thy master's ready there  
My power to give thee but so much as hell:  
Some service in the noble bondman here,  
Would show him to her wine.
```

```
KING LEAR:  
O, if you were a feeble sight, the courtesy of your law,  
Your sight and several breath, will wear the gods  
With his heads, and my hands are wonder'd at the deeds,  
So drop upon your lordship's head, and your opinion  
Shall be against your honour.
```

I can barely recognize these samples from actual Shakespeare :) If you like Shakespeare, you might appreciate this [100,000 character sample](#). Of course, you can also generate an infinite amount of your own samples at different temperatures with the provided code.

## Wikipedia

We saw that the LSTM can learn to spell words and copy general syntactic structures. Let's further increase the difficulty and train on structured markdown. In particular, let's take the [Hutter Prize](#) 100MB dataset of raw Wikipedia and train an LSTM. Following [Graves et al.](#), I used the first 96MB for training, the rest for validation and ran a few models overnight. We can now sample Wikipedia articles! Below are a few fun excerpts. First, some basic markdown output:

```
Naturalism and decision for the majority of Arab countries' capitalide was grounded  
by the Irish language by [[John Clair]], [[An Imperial Japanese Revolt]], associated  
with Guangzham's sovereignty. His generals were the powerful ruler of the Portugal  
in the [[Protestant Immineners]], which could be said to be directly in Cantonese  
Communication, which followed a ceremony and set inspired prison, training. The  
emperor travelled back to [[Antioch, Perth, October 25|21]] to note, the Kingdom  
of Costa Rica, unsuccessful fashioned the [[Thrales]], [[Cynth's Dajoard]], known  
in western [[Scotland]], near Italy to the conquest of India with the conflict.  
Copyright was the succession of independence in the slop of Syrian influence that  
was a famous German movement based on a more popular servitious, non-doctrinal  
and sexual power post. Many governments recognize the military housing of the  
[[Civil Liberalization and Infantry Resolution 265 National Party in Hungary]],  
that is sympathetic to be to the [[Punjab Resolution]].  
(PJS) [http://www.humah.yahoo.com/guardian.cfm/7754800786d1751963s89.htm Official economics Adjoint for the Nazism, Montgomery  
was swear to advance to the resources for those Socialism's rule,  
was starting to signing a major tripad of aid exile.]
```

In case you were wondering, the yahoo url above doesn't actually exist, the model just hallucinated it. Also, note that the model learns to open and close the parenthesis correctly. There's also quite a lot of structured markdown that the model learns, for example sometimes it creates headings, lists, etc.:

```
{ { cite journal | id=Cerling Nonforest Department|format=Newlymeslated|none } }  
'''www. e-complete''.  
  
'''See also''':: [[List of ethical consent processing]]  
  
== See also ==  
* [[Iender dome of the ED]]  
* [[Anti-autism]]  
  
====[[Religion|Religion]]====  
* [[French Writings]]  
* [[Maria]]  
* [[Revelation]]  
* [[Mount Agamul]]  
  
== External links==  
* [http://www.biblegateway.nih.gov/entrepre/] Website of the World Festival. The labour .  
  
==External links==  
* [http://www.romanology.com/] Constitution of the Netherlands and Hispanic Competition .
```

Sometimes the model snaps into a mode of generating random but valid XML:

```
<page>
```

```

<title>Antichrist</title>
<id>865</id>
<revision>
  <id>15900676</id>
  <timestamp>2002-08-03T18:14:12Z</timestamp>
  <contributor>
    <username>Paris</username>
    <id>23</id>
  </contributor>
  <minor />
  <comment>Automated conversion</comment>
  <text xml:space="preserve">#REDIRECT [[Christianity]]</text>
</revision>
</page>

```

The model completely makes up the timestamp, id, and so on. Also, note that it closes the correct tags appropriately and in the correct nested order. Here are [100,000 characters of sampled wikipedia](#) if you're interested to see more.

## Algebraic Geometry (Latex)

The results above suggest that the model is actually quite good at learning complex syntactic structures. Impressed by these results, my labmate ([Justin Johnson](#)) and I decided to push even further into structured territories and got a hold of [this book](#) on algebraic stacks/geometry. We downloaded the raw Latex source file (a 16MB file) and trained a multilayer LSTM. Amazingly, the resulting sampled Latex *almost* compiles. We had to step in and fix a few issues manually but then you get plausible looking math, it's quite astonishing:

For  $\bigoplus_{m=1,\dots,m} \mathcal{L}_{m,i} = 0$ , hence we can find a closed subset  $\mathcal{H}$  in  $\mathcal{H}$  and any sets  $\mathcal{F}$  on  $X$ ,  $U$  is a closed immersion of  $S$ , then  $U \rightarrow T$  is a separated algebraic space.

*Proof.* Proof of (1). It also start we get

$$S = \text{Spec}(R) = U \times_X U \times_X U$$

and the compatibility in the fibre product covering we have to prove the lemma generated by  $\coprod Z \times_{X'} U \rightarrow V$ . Consider the maps  $M$  along the set of points  $\text{Sch}_{\text{fppf}}$  and  $U \rightarrow U'$  is the fibre category of  $S$  in  $U$  in Section ?? and the fact that any  $U$  affine, see Morphisms, Lemma ?? . Hence we obtain a scheme  $S$  and any open subset  $W \subset U$  in  $\text{Sh}(G)$  such that  $\text{Spec}(R') \rightarrow S$  is smooth or an

$$U = \coprod U_i \times_{S_i} U_i$$

which has a nonzero morphism we may assume that  $f_i$  is of finite presentation over  $S$ . We claim that  $\mathcal{O}_{X,s}$  is a scheme where  $x, x', s' \in S'$  such that  $\mathcal{O}_{X,x} \rightarrow \mathcal{O}'_{X',x'}$  is separated. By Algebra, Lemma ?? we can define a map of complexes  $\text{GL}_{S'}(x'/S')$  and we win.

To prove study we see that  $\mathcal{F}|_U$  is a covering of  $X'$ , and  $T_i$  is an object of  $\mathcal{F}_{X/S}$  for  $i > 0$  and  $\mathcal{F}_i$  exists and let  $\mathcal{F}_i$  be a presheaf of  $\mathcal{O}_X$ -modules on  $C$  as a  $\mathcal{F}$ -module. In particular  $\mathcal{F} = U/\mathcal{F}$  we have that show

$$\tilde{M}^\bullet = \mathcal{I}^\bullet \otimes_{\text{Spec}(k)} \mathcal{O}_{S,s} - i_X^{-1} \mathcal{F}$$

is a unique morphism of algebraic stacks. Note that

$$\text{Arrows} = (\text{Sch}/S)_{\text{fppf}}^{\text{opp}}, (\text{Sch}/S)_{\text{fppf}}$$

and

$$V = \Gamma(S, \mathcal{O}) \longrightarrow (U, \text{Spec}(A))$$

is an open subset of  $X$ . Thus  $U$  is affine. This is a continuous map of  $X$  is the inverse, the groupoid scheme  $S$ .

*Proof.* See discussion of sheaves of sets.  $\square$

The result for prove any open covering follows from the less of Example ?? . It may replace  $S$  by  $X_{\text{spaces},\text{etale}}$  which gives an open subspace of  $X$  and  $T$  equal to  $S_{Z,s}$ , see Descent, Lemma ?? . Namely, by Lemma ?? we see that  $R$  is geometrically regular over  $S$ .

**Lemma 0.1.** Assume (3) and (3) by the construction in the description. Suppose  $X = \lim X_i$  by the formal open covering  $X$  and a single map  $\text{Proj}_X(\mathcal{A}) = \text{Spec}(B)$  over  $U$  compatible with the complex

$$\text{Set}(\mathcal{A}) = \Gamma(X, \mathcal{O}_{X,\mathcal{O}_X})$$

When in this case of to show that  $\mathcal{Q} \rightarrow C_{Z/X}$  is stable under the following result in the second conditions of (1), and (3). This finishes the proof. By Definition ?? (without element is when the closed subschemes are catenary. If  $T$  is surjective we may assume that  $T$  is connected with residue fields of  $S$ . Moreover there exists a closed subspace  $Z \subset X$  of  $X$  where  $U$  in  $X'$  is proper (some defining as a closed subset of the uniqueness it suffices to check the fact that the following theorem

(1)  $f$  is locally of finite type. Since  $S = \text{Spec}(R)$  and  $Y = \text{Spec}(R)$ .

*Proof.* This is form all sheaves of sheaves on  $X$ . But given a scheme  $U$  and a surjective étale morphism  $U \rightarrow X$ . Let  $U/U = \coprod_{i=1,\dots,n} U_i$  be the scheme  $X$  over  $S$  and the schemes  $X_i \rightarrow X$  and  $U = \lim U_i$ .  $\square$

The following lemma surjective restocomposes of this implies that  $\mathcal{F}_{x_0} = \mathcal{F}_{x_0} = \mathcal{F}_{X,\dots,0}$ .

**Lemma 0.2.** Let  $X$  be a locally Noetherian scheme over  $S$ ,  $E = \mathcal{F}_{X/S}$ . Set  $\mathcal{I} = \mathcal{J}_1 \subset \mathcal{T}_n$ . Since  $T^n \subset T^n$  are nonzero over  $i_0 \leq i \leq n$  is a subset of  $\mathcal{J}_{n,0} \circ \mathcal{A}_2$  works.

**Lemma 0.3.** In Situation ?? . Hence we may assume  $\mathfrak{q}' = 0$ .

*Proof.* We will use the property we see that  $\mathfrak{p}$  is the next functor (??). On the other hand, by Lemma ?? we see that

$$\text{D}(\mathcal{O}_X) = \mathcal{O}_X(D)$$

where  $K$  is an  $F$ -algebra where  $\delta_{n+1}$  is a scheme over  $S$ .  $\square$

Sampled (fake) algebraic geometry. [Here's the actual pdf](#).

Here's another sample:

*Proof.* Omitted.  $\square$

**Lemma 0.1.** Let  $C$  be a set of the construction.

Let  $C$  be a gerber covering. Let  $\mathcal{F}$  be a quasi-coherent sheaves of  $\mathcal{O}$ -modules. We have to show that

$$\mathcal{O}_{\mathcal{O}_X} = \mathcal{O}_X(C)$$

.

*Proof.* This is an algebraic space with the composition of sheaves  $\mathcal{F}$  on  $X_{\text{etale}}$  we have

$$\mathcal{O}_X(\mathcal{F}) = \{\text{morph}_1 \times_{\mathcal{O}_X} (\mathcal{G}, \mathcal{F})\}$$

where  $\mathcal{G}$  defines an isomorphism  $\mathcal{F} \rightarrow \mathcal{F}$  of  $\mathcal{O}$ -modules.  $\square$

**Lemma 0.2.** This is an integer  $Z$  is injective.

*Proof.* See Spaces, Lemma ?? .  $\square$

**Lemma 0.3.** Let  $S$  be a scheme. Let  $X$  be a scheme and  $X$  is an affine open covering. Let  $U \subset X$  be a canonical and locally of finite type. Let  $X$  be a scheme. Let  $X$  be a scheme which is equal to the formal complex.

The following to the construction of the lemma follows.

Let  $X$  be a scheme. Let  $X$  be a scheme covering. Let

$$b : X \rightarrow Y' \rightarrow Y \rightarrow Y' \times_X Y \rightarrow X.$$

be a morphism of algebraic spaces over  $S$  and  $Y$ .

*Proof.* Let  $X$  be a nonzero scheme of  $X$ . Let  $X$  be an algebraic space. Let  $\mathcal{F}$  be a quasi-coherent sheaf of  $\mathcal{O}_X$ -modules. The following are equivalent

- (1)  $\mathcal{F}$  is an algebraic space over  $S$ .
- (2) If  $X$  is an affine open covering.

Consider a common structure on  $X$  and  $X$  the functor  $\mathcal{O}_X(U)$  which is locally of finite type.  $\square$

This since  $\mathcal{F} \in \mathcal{F}$  and  $x \in \mathcal{G}$  the diagram

$$\begin{array}{ccc} S & \longrightarrow & \\ \downarrow \zeta & \longrightarrow & \mathcal{O}_{X'} \\ \text{gor}_x & & \\ & \nearrow & \\ & \alpha' & \\ & \downarrow & \\ \text{Spec}(K_\psi) & \longrightarrow & \text{Mor}_{S,\text{etale}} \\ & & \downarrow \text{d}(\mathcal{O}_{X_{/\text{et}}}, \mathcal{G}) \\ & & X \end{array}$$

is a limit. Then  $\mathcal{G}$  is a finite type and assume  $S$  is a flat and  $\mathcal{F}$  and  $\mathcal{G}$  is a finite type  $f$ . This is of finite type diagrams and

- the composition of  $\mathcal{G}$  is a regular sequence,
- $\mathcal{O}_{X'}$  is a sheaf of rings.

*Proof.* We have see that  $X = \text{Spec}(R)$  and  $\mathcal{F}$  is a finite type representable by algebraic space. The property  $\mathcal{F}$  is a finite morphism of algebraic stacks. Then the cohomology of  $X$  is an open neighbourhood of  $U$ .

*Proof.* This is clear that  $\mathcal{G}$  is a finite presentation, see Lemmas ?? . A reduced above we conclude that  $U$  is an open covering of  $C$ . The functor  $\mathcal{F}$  is a field

$$\mathcal{O}_{X,x} \longrightarrow \mathcal{F}_{\mathbb{F}} \dashv \text{Mor}_{S,\text{etale}} \longrightarrow \mathcal{O}_{X,x}^{-1} \mathcal{O}_{X,x}(\mathcal{O}_{X,x}^p)$$

is an isomorphism of covering of  $\mathcal{O}_{X,x}$ . If  $\mathcal{F}$  is the unique element of  $\mathcal{F}$  such that  $X$  is isomorphism.

The property  $\mathcal{F}$  is a disjoint union of Proposition ?? and we can filtered set of presentations of a scheme  $\mathcal{O}_X$ -algebra with  $\mathcal{F}$  are opens of finite type over  $S$ . If  $\mathcal{F}$  is a scheme theoretic image points.  $\square$

If  $\mathcal{F}$  is a finite direct sum  $\mathcal{O}_{X,x}$  is a closed immersion, see Lemma ?? . This is a sequence of  $\mathcal{F}$  is a similar morphism.

More hallucinated algebraic geometry. Nice try on the diagram (right).

As you can see above, sometimes the model tries to generate latex diagrams, but clearly it hasn't really figured them out. I also like the part where it chooses to skip a proof ("Proof omitted.", top left). Of course, keep in mind that latex has a relatively difficult structured syntactic format that I haven't even fully mastered myself. For instance, here is a raw sample from the model (unedited):

```
\begin{proof}
```

```

We may assume that  $\mathcal{I}$  is an abelian sheaf on  $\mathcal{C}$ .
\item Given a morphism  $\Delta : \mathcal{F} \rightarrow \mathcal{I}$ 
is an injective and let  $\mathfrak{q}$  be an abelian sheaf on  $\mathbb{X}$ .
Let  $\mathcal{F}$  be a fibered complex. Let  $\mathcal{C}$  be a category.
\begin{enumerate}
\item \hyperref[setain-construction-phantom]{Lemma}
\label{lemma-characterize-quasi-finite}
Let  $\mathcal{F}$  be an abelian quasi-coherent sheaf on  $\mathcal{C}$ .
Let  $\mathcal{F}$  be a coherent  $\mathcal{O}_X$ -module. Then
 $\mathcal{F}$  is an abelian catenary over  $\mathcal{C}$ .
\item The following are equivalent
\begin{enumerate}
\item  $\mathcal{F}$  is an  $\mathcal{O}_X$ -module.
\end{enumerate}
\end{enumerate}
\end{lemma}

```

This sample from a relatively decent model illustrates a few common mistakes. For example, the model opens a `\begin{proof}` environment but then ends it with a `\end{lemma}`. This is an example of a problem we'd have to fix manually, and is likely due to the fact that the dependency is too long-term: By the time the model is done with the proof it has forgotten whether it was doing a proof or a lemma. Similarly, it opens an `\begin{enumerate}` but then forgets to close it. We observed that these became less common with larger/better models, but nonetheless, these are the kinds of mistakes that come up.

## Linux Source Code

I wanted to push structured data to its limit, so for the final challenge I decided to use code. In particular, I took all the source and header files found in the [Linux repo on Github](#), concatenated all of them in a single giant file (474MB of C code) (I was originally going to train only on the kernel but that by itself is only ~16MB). Then I trained several as-large-as-fits-on-my-GPU 3-layer LSTMs over a period of a few days. These models have about 10 million parameters, which is still on the lower end for RNN models. The results are superfun:

```

/*
 * Increment the size file of the new incorrect UI_FILTER group information
 * of the size generatively.
 */
static int indicate_policy(void)
{
    int error;
    if (fd == MARN_EPT) {
        /*
         * The kernel blank will coeld it to userspace.
         */
        if (ss->segment < mem_total)
            unblock_graph_and_set_blocked();
        else
            ret = 1;
        goto bail;
    }
    segaddr = in_SB(in.addr);
    selector = seg / 16;
    setup_works = true;
    for (i = 0; i < blocks; i++) {
        seq = buf[i++];
        bpf = bd->bd.next + i * search;
        if (fd) {
            current = blocked;
        }
    }
    rw->name = "Getjbbregs";
    bprm_self_clear1(&iv->version);
    regs->new = blocks[(BPF_STATS << info->historidac)] | PFMR_CLOBATHINC_SECONDS << 12;
    return segtable;
}

```

The code looks really quite great overall. Of course, I don't think it compiles but when you scroll through the generate code it feels very much like a giant C code base. Notice that the RNN peppers its code with comments here and there at random. It is also very good at making very few syntactic errors. For example, it uses strings properly, pointer notation, etc. It also opens and closes brackets `{}` correctly and learns to indent its code very well. A common error is that it can't keep track of variable names: It often uses undefined variables (e.g. `rw` above), declares variables it never uses (e.g. `int error`), or returns non-existing variables. Lets see a few more examples. Here's another snippet that shows a wider array of operations that the RNN learns:

```

/*
 * If this error is set, we will need anything right after that BSD.
 */
static void action_new_function(struct s_stat_info *wb)
{
    unsigned long flags;

```

```

        long flags;
    int lel_idx_bit = e->edd, *sys & ~((unsigned long) *FIRST_COMPAT);
    buf[0] = 0xFFFFFFFF & (bit << 4);
    min(inc, slist->bytes);
    printk(KERN_WARNING "Memory allocated %02x/%02x, "
           "original MLL instead\n",
           min(min(multi_run - s->len, max) * num_data_in),
           frame_pos, sz + first_seg);
    div_u64_w(val, inb_p);
    spin_unlock(&disk->queue_lock);
    mutex_unlock(&s->sock->mutex);
    mutex_unlock(&func->mutex);
    return disassemble(info->pending_bh);
}

static void num_serial_settings(struct tty_struct *tty)
{
    if (tty == tty)
        disable_single_st_p(dev);
    pci_disable_spool(port);
    return 0;
}

static void do_command(struct seq_file *m, void *v)
{
    int column = 32 << (cmd[2] & 0x80);
    if (state)
        cmd = (int)(int_state ^ (in_8(&ch->ch_flags) & Cmd) ? 2 : 1);
    else
        seq = 1;
    for (i = 0; i < 16; i++) {
        if (k & (1 << 1))
            pipe = (in_use & UMXTHREAD_UNCCA) +
                ((count & 0x00000000fffff8) & 0x0000000f) << 8;
        if (count == 0)
            sub(pid, ppc_md.kexec_handle, 0x20000000);
        pipe_set_bytes(i, 0);
    }
    /* Free our user pages pointer to place camera if all dash */
    subsystem_info = &f_changes[PAGE_SIZE];
    rek_controls(offset, idx, &soffset);
    /* Now we want to deliberately put it to device */
    control_check_polarity(&context, val, 0);
    for (i = 0; i < COUNTER; i++)
        seq_puts(s, "policy ");
}

```

Notice that in the second function the model compares `tty == tty`, which is vacuously true. On the other hand, at least the variable `tty` exists in the scope this time! In the last function, notice that the code does not return anything, which happens to be correct since the function signature is `void`. However, the first two functions were also declared `void` and did return values. This is again a form of a common mistake due to long-term interactions.

Sometimes the model decides that it's time to sample a new file. This is usually a very amusing part. The model first recites the GNU license character by character, samples a few includes, generates some macros and then dives into the code:

```

/*
 * Copyright (c) 2006-2010, Intel Mobile Communications. All rights reserved.
 *
 * This program is free software; you can redistribute it and/or modify it
 * under the terms of the GNU General Public License version 2 as published by
 * the Free Software Foundation.
 *
 * This program is distributed in the hope that it will be useful,
 * but WITHOUT ANY WARRANTY; without even the implied warranty of
 * MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
 *
 * GNU General Public License for more details.
 *
 * You should have received a copy of the GNU General Public License
 * along with this program; if not, write to the Free Software Foundation,
 * Inc., 675 Mass Ave, Cambridge, MA 02139, USA.
 */

#include <linux/kexec.h>
#include <linux/errno.h>
#include <linux/io.h>
#include <linux/platform_device.h>
#include <linux/multi.h>

```

```

#include <linux/ckevent.h>
#include <asm/io.h>
#include <asm/prom.h>
#include <asm/e820.h>
#include <asm/system_info.h>
#include <asm/setew.h>
#include <asm/pgproto.h>

#define REG_PG      vesa_slot_addr_pack
#define PFM_NOCOMP  AFSR(0, load)
#define STACK_DDR(type)      (func)

#define SWAP_ALLOCATE(nr)      (e)
#define emulate_sigs()  arch_get_unaligned_child()
#define access_rw(TST)  asm volatile("movd %esp, %0, %3" : : "r" (0)); \
if (_type & DO_READ)

static void stat_PC_SEC __read_mostly offsetof(struct seq_argsqueue, \
pC>[1]);

static void
os_prefix(unsigned long sys)
{
#ifdef CONFIG_PREEMPT
    PUT_PARAM_RAID(2, sel) = get_state_state();
    set_pid_sum((unsigned long)state, current_state_str(),
                (unsigned long)-1>lr_full, low);
}

```

There are too many fun parts to cover- I could probably write an entire blog post on just this part. I'll cut it short for now, but here is [1MB of sampled Linux code](#) for your viewing pleasure.

## Generating Baby Names

Lets try one more for fun. Lets feed the RNN a large text file that contains 8000 baby names listed out, one per line (names obtained from [here](#)). We can feed this to the RNN and then generate new names! Here are some example names, only showing the ones that do not occur in the training data (90% don't):

*Rudi Levette Berice Lussa Hany Mareanne Chrestina Carissy Marylen Hammine Janye Marlise Jacacie  
Hendred Romand Charienna Nenotto Elle Dorane Wallen Marly Darine Salina Elvyn Ersia Maralena Minoria  
Ellia Chamin Antley Nerille Chelon Walmor Evena Jerly Stachon Charisa Allisa Anatha Cathanie Geetra  
Alexie Jerin Cassen Herbett Cossie Velen Daurenge Robester Shermond Terisa Licia Roselen Ferine Jayn  
Lusine Charyanne Sales Sanny Resa Wallon Martine Merus Jelen Candica Wallin Tel Rachene Tarine Ozila  
Ketia Shanne Armande Karella Roselina Alessia Chasty Deland Berther Geamar Jackein Mellisand Saggy Nenc  
Lessie Raserry Guen Gavi Milaa Anneda Margoris Janin Rodelin Zeanna Elyne Janah Ferzina Susta Pey  
Castina*

You can see many more [here](#). Some of my favorites include "Baby" (haha), "Killie", "Char", "R", "More", "Mars", "Hi", "Saddie", "With" and "Ahhort". Well that was fun. Of course, you can imagine this being quite useful inspiration when writing a novel, or naming a new startup :)

## Understanding what's going on

We saw that the results at the end of training can be impressive, but how does any of this work? Lets run two quick experiments to briefly peek under the hood.

### The evolution of samples while training

First, it's fun to look at how the sampled text evolves while the model trains. For example, I trained an LSTM of Leo Tolstoy's War and Peace and then generated samples every 100 iterations of training. At iteration 100 the model samples random jumbles:

```

tyntd-iafhatawiaoihrdemot lytdws e ,tfti, astai f ogoh eoase rrranbyne 'nhthnee e
plia tklrgd t o idoe ns,smtt h ne etie h,hregtrs nigtike,aoaenns lng

```

However, notice that at least it is starting to get an idea about words separated by spaces. Except sometimes it inserts two spaces. It also doesn't know that comma is almost always followed by a space. At 300 iterations we see that the model starts to get an idea about quotes and periods:

```

"Thmont thithey" fomescerliund
Keushey. Thom here
sheulke, ammerenith ol sivh I lalterthend Bleipile shuwyl fil on aseterlome
coaniogennc Phe lism thond hon at. MeiDimorotion in ther thize."

```

The words are now also separated with spaces and the model starts to get the idea about periods at the end of a sentence. At iteration 500:

```
we counter. He stutn co des. His stanted out one ofler that concossions and was  
to gearang reay Jotrets and with fre colt oft paitt thin wall. Which das stimm
```

the model has now learned to spell the shortest and most common words such as "we", "He", "His", "Which", "and", etc. At iteration 700 we're starting to see more and more English-like text emerge:

```
Aftair fall unsuch that the hall for Prince Velzonski's that me of  
her hearly, and behs to so arwage fiving were to it beloge, pavu say falling misfort  
how, and Gogition is so overelical and ofter.
```

At iteration 1200 we're now seeing use of quotations and question/exclamation marks. Longer words have now been learned as well:

```
"Kite vouch!" he repeated by her  
door. "But I would be done and quarts, feeling, then, son is people...."
```

Until at last we start to get properly spelled words, quotations, names, and so on by about iteration 2000:


```
"Why do what that day," replied Natasha, and wishing to himself the fact the  
princess, Princess Mary was easier, fed in had oftened him.  
Pierre aking his soul came to the packs and drove up his father-in-law women.
```

The picture that emerges is that the model first discovers the general word-space structure and then rapidly starts to learn the words; First starting with the short words and then eventually the longer ones. Topics and themes that span multiple words (and in general longer-term dependencies) start to emerge only much later.


## Visualizing the predictions and the “neuron” firings in the RNN

Another fun visualization is to look at the predicted distributions over characters. In the visualizations below we feed a Wikipedia RNN model character data from the validation set (shown along the blue/green rows) and under every character we visualize (in red) the top 5 guesses that the model assigns for the next character. The guesses are colored by their probability (so dark red = judged as very likely, white = not very likely). For example, notice that there are stretches of characters where the model is extremely confident about the next letter (e.g., the model is very confident about characters during the <http://www> sequence).

The input character sequence (blue/green) is colored based on the *firing* of a randomly chosen neuron in the hidden representation of the RNN. Think about it as green = very excited and blue = not very excited (for those familiar with details of LSTMs, these are values between [-1,1] in the hidden state vector, which is just the gated and tanh'd LSTM cell state). Intuitively, this is visualizing the firing rate of some neuron in the “brain” of the RNN while it reads the input sequence. Different neurons might be looking for different patterns. Below we'll look at 4 different ones that I found and thought were interesting or interpretable (many also aren't):

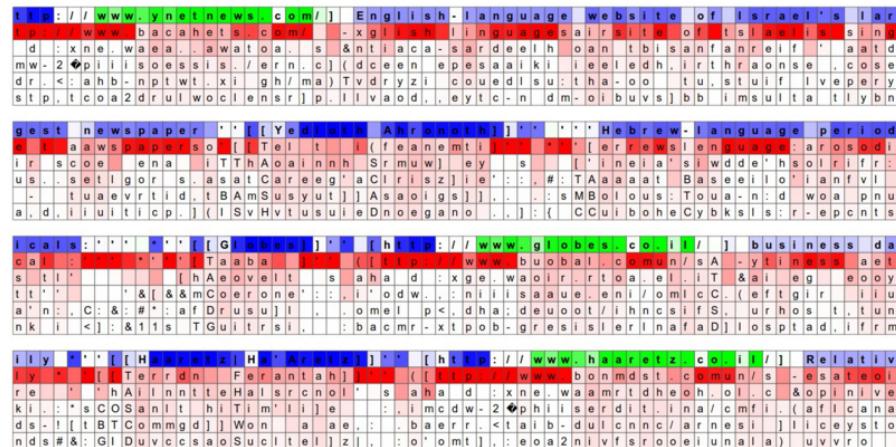

The neuron highlighted in this image seems to get very excited about URLs and turns off outside of the URLs. The LSTM is likely using this neuron to remember if it is inside a URL or not.

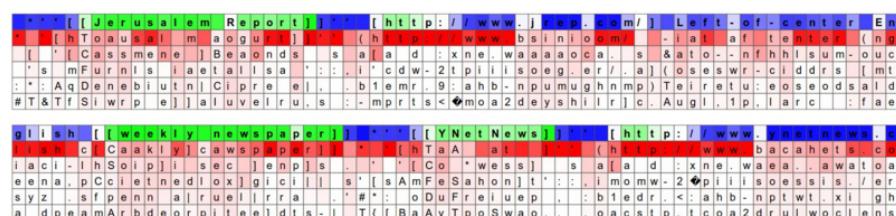

```

[ om/ ] English-language website of Israel's largest newspaper' . [[ Yod
m/ -x-English-languages airsite of israel's singe l, newspaperso [ [ Tel
. s &ntiaca-sandeelh oan t bisan anreif ' aatdir scoe ena i TThAoi
n. c ] (dceen epeasaaki ieledh i hirbraonse coseus setlgors-asatCare
/ ma) Tvdryzi couedisut: tha-oo tu. stufl vevery - tuaevrtid. t BAmSusy
r] p. ilvaod. , eyt-c-n dm-oibuv s bb. imulta lybna, d. ijuiticp. ) (I SvHytu

```

Orth	Ahronoth	Hebrew-language periodicals	[[ Globes ]]
t	i (feane mti )	' [erewslanguage: ar osodical ]	' [ Taaba ]
n	nnh Srmuw] ey s	[ineila'si wde" hsolfr: st ]	[ Haevolt s
e	g'a Cliriszlie : . # : TAAaa Basello'lanfvl tt'	' & [ & mCoer one :	
u	ut] Asaolgs]] . . . s MBolous: Touan: d woapnuan': C & : # : af Drusull .		
s	sueDnoegano . . . : { CCu bohe Cybksis: r-epcnsnk i <]: & 1s T Guitrsi.		

The highlighted neuron here gets very excited when the RNN is inside the [[ ]] markdown environment and turns off outside of it. Interestingly, the neuron can't turn on right after it sees the character "[", it must wait for the second "[" and then activate.

This task of counting whether the model has seen one or two "[" is likely done with a different neuron.

```

' ' [[Jerusalem Report]]' ' [ http://www.j rep. com/ ] Left-of-center En
' ' [[hTouausal_maogur[()]]' ' ( http://www.bsinioom/ ) -ia lat af tene ( n
[ ' [Cassmene] Beaonds sa[a d : xne. waaaoca. s &ato- -nf hisum- ouc
' s mFurnis i aotalis a' . . i ' cdw-2tpilsoeger. / . aloseswr- ciddrs ( ml
: . : AqDeneblin Cipre el. . b1emr: 9: ahb- npumughnmp Teiretu: eoseosald
# T&TSiwrp e] alatuvelru. s - mptis <moa2deyshilr) c Augl. 1p. larc : fae

```

glish	[[ weekly newspaper]]	[[ YNet News]]	[[ http://www.y net news. c jish. caakly] cawspaper]]	[[ hTAA at ]]	[[ http://www.bacahets. ca iaci- lhSoip] j sec ] enpls . ' [ Co - wess ]	sa[a d : xne. waea.. awatoa eena. pCci et ned ox] gicil   s' [ sAmFeSahon] t' : . , i momw 2ppi isessi. / er syz. spfenn alruei rrar . '# : oDufreiuep. : b1edr. < ahb- npwt. xi gh a dpeamAr bdeor pitee] dts - T ([ BaA] tpoSwao. . . oacstp. tcoa2druiwoc] hns
-------	-----------------------	----------------	-------------------------------------------------------	---------------	--------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Here we see a neuron that varies seemingly linearly across the [[ ]] environment. In other words its activation is giving the RNN a time-aligned coordinate system across the [[ ]] scope. The RNN can use this information to make different characters more or less likely depending on how early/late it is in the [[ ]] scope (perhaps?).

```

' ' [[The Guardian]]' ' ' ' [[ Israeli Insider]]' ' [ http://www.israelins
t' ' [[The Soirdan]]' ' ' ' [[ Tnaxz hde ]]' ' [ http://www.bmsacl. ng
alGhAoioMrltrin] ] s. * [ ' hCs if i Datsi ] ] s. ahad : xne. wsnoonsited
hbMsroi Canntjeds. . . # T [ amDmaetjs] tsans' : . i' ot. , : gill: asce. . i. e
smTI GeuyLusinsca. . . : S: CTAoonfe] ccs. . . oecw-xpobigck. rtaado
meDTCaar Geadanol' . . & : 's TOSitull. ceo]] lis' ] bimpd. < tmhd- nelli efssia

```

Here is another neuron that has very local behavior: it is relatively silent but sharply turns off right after the first "w" in the "www" sequence. The RNN might be using this neuron to count up how far in the "www" sequence it is, so that it can know whether it should emit another "w", or if it should start the URL.

Of course, a lot of these conclusions are slightly hand-wavy as the hidden state of the RNN is a huge, high-dimensional and largely distributed representation. These visualizations were produced with custom HTML/CSS/Javascript, you can see a sketch of what's involved [here](#) if you'd like to create something similar.

We can also condense this visualization by excluding the most likely predictions and only visualize the text, colored by activations of a cell. We can see that in addition to a large portion of cells that do not do anything interpretable, about 5% of them turn out to have learned quite interesting and interpretable algorithms:

#### Cell sensitive to position in line:

```

The sole importance of the crossing of the Berezina lies in the fact
that it plainly and indubitably proved the fallacy of all the plans for
cutting off the enemy's retreat and the soundness of the only possible
line of action--the one Kutuzov and the general mass of the army
demanded--namely, simply to follow the enemy up. The French crowd fled
at a continually increasing speed and all its energy was directed to
reaching its goal. It fled like a wounded animal and it was impossible
to block its path. This was shown not so much by the arrangements it
made for crossing as by what took place at the bridges. When the bridges
broke down, unarmed soldiers, people from Moscow and women with children
who were with the French transport, all--carried on by vis inertiae--
pressed forward into boats and into the ice-covered water and did not,
surrender.

```

#### Cell that turns on inside quotes:

```

>You mean to imply that I have nothing to eat out of... on the
contrary, I can supply you with everything even if you want to give
dinner parties," warmly replied Chichagov, who tried by every word he
spoke to prove his own rectitude and therefore imagined Kutuzov to be
animated by the same desire.

```

```

Kutuzov, shrugging his shoulders, replied with his subtle penetrating
smile: "I meant merely to say what I said."

```

#### Cell that robustly activates inside if statements:

```

static int _dequeue_signal(struct sigpending *pending, sigset_t *mask,
                           siginfo_t *info)
{
    int sig = next_signal(pending, mask);
    if (sig) {
        if (current->notifier) {
            if (sigismember(current->notifier_mask, sig)) {
                if (! (current->notifier)(current->notifier_data)) {
                    clear_thread_flag(TIF_SIGPENDING);
                    return 0;
                }
            }
            collect_signal(sig, pending, info);
        }
        return sig;
    }
}

```

A large portion of cells are not easily interpretable. Here is a typical example:

```

/* Unpack a filter field's string representation from user-space
 * buffer. */
char *audit_unpack_string(void **bufp, size_t *remain, size_t len)
{
    char *str;
    if (!bufp || (len == 0) || (len > *remain))
        return ERR_PTR(-EINVAL);
    /* Of the currently implemented string fields, PATH_MAX
     * defines the longest valid length.
    */
}

```

#### Cell that turns on inside comments and quotes:

```

/* Duplicate LSM field information. The lsm_rule is opaque, so
 * re-initialized. */
static inline int audit_dupe_lsm_field(struct audit_field *df,
                                         struct audit_field *sf)
{
    int ret = 0;
    char *lsm_str;
    /* our own copy of lsm_str */
    lsm_str = kstrdup(sf->lsm_str, GFP_KERNEL);
    if (unlikely(!lsm_str))
        return -ENOMEM;
}

```

```

df->lsm_str = lsm_str;
/* our own (refreshed) copy of lsm_rule */
ret = security_audit_rule_init(df->type, df->op, df->lsm_str,
                               (void *)&df->lsm_rule);
/* Keep currently invalid fields around in case they
 * become valid after a policy reload. */
if (ret == -EINVAL) {
    pr_warn("audit rule for LSM \\'%s\\' is invalid\\n",
    df->lsm_str);
    ret = 0;
}
return ret;
}

```

Cell that is sensitive to the depth of an expression:

```

#ifndef CONFIG_AUDITSYSCALL
static inline int audit_match_class_bits(int class, u32 *mask)
{
    int i;
    if (classes[class]) {
        for (i = 0; i < AUDIT_BITMASK_SIZE; i++)
            if (mask[i] & classes[class][i])
                return 0;
    }
    return 1;
}

```

Cell that might be helpful in predicting a new line. Note that it only turns on for some "":

```

char *audit_unpack_string(void **bufp, size_t *remain, si
{
    char *str;
    if (!*bufp || (*len == 0) || (*len > *remain))
        return ERR_PTR(-EINVAL);
    /* Of the currently implemented string fields, PATH_MAX
     * defines the longest valid length.
     */
    if (*len > PATH_MAX)
        return ERR_PTR(-ENAMETOOLONG);
    str = kmalloc(len + 1, GFP_KERNEL);
    if (unlikely(!str))
        return ERR_PTR(-ENOMEM);
    memcpy(str, *bufp, len);
    str[len] = 0;
    *bufp += len;
    *remain -= len;
    return str;
}

```

Again, what is beautiful about this is that we didn't have to hardcode at any point that if you're trying to predict the next character it might, for example, be useful to keep track of whether or not you are currently inside or outside of quote. We just trained the LSTM on raw data and it decided that this is a useful quantity to keep track of. In other words one of its cells gradually tuned itself during training to become a quote detection cell, since this helps it better perform the final task. This is one of the cleanest and most compelling examples of where the power in Deep Learning models (and more generally end-to-end training) is coming from.

## Source Code

I hope I've convinced you that training character-level language models is a very fun exercise. You can train your own models using the [char-rnn code](#) I released on Github (under MIT license). It takes one large text file and trains a character-level model that you can then sample from. Also, it helps if you have a GPU or otherwise training on CPU will be about a factor of 10x slower. In any case, if you end up training on some data and getting fun results let me know! And if you get lost in the Torch/Lua codebase remember that all it is is just a more fancy version of this [100-line gist](#).

*Brief digression.* The code is written in [Torch 7](#), which has recently become my favorite deep learning framework. I've only started working with Torch/LUA over the last few months and it hasn't been easy (I spent a good amount of time digging through the raw Torch code on Github and asking questions on their [gitter](#) to get things done), but once you get a hang of things it offers a lot of flexibility and speed. I've also worked with Caffe and Theano in the past and I believe Torch, while not perfect, gets its levels of abstraction and philosophy right better than others. In my view the desirable features of an effective framework are:

1. CPU/GPU transparent Tensor library with a lot of functionality (slicing, array/matrix operations, etc.)
2. An entirely separate code base in a scripting language (ideally Python) that operates over Tensors and implements all Deep Learning stuff (forward/backward, computation graphs, etc)
3. It should be possible to easily share pretrained models (Caffe does this well, others don't), and crucially
4. NO compilation step (or at least not as currently done in Theano). The trend in Deep Learning is towards larger, more complex networks that are unrolled in complex graphs. It is critical that these do not compile for a long time or development time greatly suffers. Second, by compiling one gives up interpretability and the ability to log/debug effectively. If there is an option to compile the graph once it has been developed for efficiency in prod that's fine.

## Further Reading

Before the end of the post I also wanted to position RNNs in a wider context and provide a sketch of the current research directions. RNNs have recently generated a significant amount of buzz and excitement in the field of Deep Learning. Similar to Convolutional Networks they have been around for decades but their full potential has only recently started to get widely recognized, in large part due to our growing computational resources. Here's a brief sketch of a few recent developments (definitely not complete list, and a lot of this work draws from research back to 1990s, see related work sections):

In the domain of **NLP/Speech**, RNNs [transcribe speech to text](#), perform [machine translation](#), generate [handwritten text](#) and of course, they have been used as [powerful language models](#) ([Sutskever et al](#)) ([Graves](#)) ([Mikolov et al](#))

[text](#), and of course, they have been used as personal language models ([char-rnn](#) or [char-rnn-tutorial](#)). (both on the level of characters and words). Currently it seems that word-level models work better than character-level models, but this is surely a temporary thing.

**Computer Vision.** RNNs are also quickly becoming pervasive in Computer Vision. For example, we're seeing RNNs in frame-level [video classification](#), [image captioning](#) (also including my own work and many others), [video captioning](#) and very recently [visual question answering](#). My personal favorite RNNs in Computer Vision paper is [Recurrent Models of Visual Attention](#), both due to its high-level direction (sequential processing of images with glances) and the low-level modeling (REINFORCE learning rule that is a special case of policy gradient methods in Reinforcement Learning, which allows one to train models that perform non-differentiable computation (taking glances around the image in this case)). I'm confident that this type of hybrid model that consists of a blend of CNN for raw perception coupled with an RNN glance policy on top will become pervasive in perception, especially for more complex tasks that go beyond classifying some objects in plain view.

**Inductive Reasoning, Memories and Attention.** Another extremely exciting direction of research is oriented towards addressing the limitations of vanilla recurrent networks. One problem is that RNNs are not inductive: They memorize sequences extremely well, but they don't necessarily always show convincing signs of generalizing in the *correct way* (I'll provide pointers in a bit that make this more concrete). A second issue is they unnecessarily couple their representation size to the amount of computation per step. For instance, if you double the size of the hidden state vector you'd quadruple the amount of FLOPS at each step due to the matrix multiplication. Ideally, we'd like to maintain a huge representation/memory (e.g. containing all of Wikipedia or many intermediate state variables), while maintaining the ability to keep computation per time step fixed.

The first convincing example of moving towards these directions was developed in DeepMind's [Neural Turing Machines](#) paper. This paper sketched a path towards models that can perform read/write operations between large, external memory arrays and a smaller set of memory registers (think of these as our working memory) where the computation happens. Crucially, the NTM paper also featured very interesting memory addressing mechanisms that were implemented with a (soft, and fully-differentiable) attention model. The concept of **soft attention** has turned out to be a powerful modeling feature and was also featured in [Neural Machine Translation by Jointly Learning to Align and Translate](#) for Machine Translation and [Memory Networks](#) for (toy) Question Answering. In fact, I'd go as far as to say that

*The concept of attention is the most interesting recent architectural innovation in neural networks.*

Now, I don't want to dive into too many details but a soft attention scheme for memory addressing is convenient because it keeps the model fully-differentiable, but unfortunately one sacrifices efficiency because everything that can be attended to is attended to (but softly). Think of this as declaring a pointer in C that doesn't point to a specific address but instead defines an entire distribution over all addresses in the entire memory, and dereferencing the pointer returns a weighted sum of the pointed content (that would be an expensive operation!). This has motivated multiple authors to swap soft attention models for **hard attention** where one samples a particular chunk of memory to attend to (e.g. a read/write action for some memory cell instead of reading/writing from all cells to some degree). This model is significantly more philosophically appealing, scalable and efficient, but unfortunately it is also non-differentiable. This then calls for use of techniques from the Reinforcement Learning literature (e.g. REINFORCE) where people are perfectly used to the concept of non-differentiable interactions. This is very much ongoing work but these hard attention models have been explored, for example, in [Inferring Algorithmic Patterns with Stack-Augmented Recurrent Nets](#), [Reinforcement Learning Neural Turing Machines](#), and [Show Attend and Tell](#).

**People.** If you'd like to read up on RNNs I recommend theses from [Alex Graves](#), [Ilya Sutskever](#) and [Tomas Mikolov](#). For more about REINFORCE and more generally Reinforcement Learning and policy gradient methods (which REINFORCE is a special case of) [David Silver](#)'s class, or one of [Pieter Abbeel](#)'s classes.

**Code.** If you'd like to play with training RNNs I hear good things about [keras](#) or [passage](#) for Theano, the [code](#) released with this post for Torch, or [this gist](#) for raw numpy code I wrote a while ago that implements an efficient, batched LSTM forward and backward pass. You can also have a look at my numpy-based [NeuralTalk](#) which uses an RNN/LSTM to caption images, or maybe this [Caffe](#) implementation by Jeff Donahue.

## Conclusion

We've learned about RNNs, how they work, why they have become a big deal, we've trained an RNN character-level language model on several fun datasets, and we've seen where RNNs are going. You can confidently expect a large amount of innovation in the space of RNNs, and I believe they will become a pervasive and critical component to intelligent systems.

Lastly, to add some **meta** to this post, I trained an RNN on the source file of this blog post. Unfortunately, at about 46K characters I haven't written enough data to properly feed the RNN, but the returned sample (generated with low temperature to get a more typical sample) is:

```
I've the RNN with and works, but the computed with program of the  
RNN with and the computed of the RNN with with and the code
```

Yes, the post was about RNN and how well it works, so clearly this works :). See you next time!

**EDIT (extra links):**

Videns:

- I gave a talk on this work at the [London Deep Learning meetup](#) (video)

#### Discussions:

- HN discussion
  - Reddit discussion on [r/machinelearning](#)
  - Reddit discussion on [r/programming](#)

## Replies:

- Yoav Goldberg compared these RNN results to [n-gram maximum likelihood \(counting\) baseline](#)
  - @nylk trained char-rnn on [cooking recipes](#). They look great!
  - @MrChrisJohnson trained char-rnn on Eminem lyrics and then synthesized a rap song with robotic voice reading it out. Hilarious :)
  - @samirm trained char-rnn on [Obama Speeches](#). They look fun!
  - João Felipe trained char-rnn irish folk music and [sampled music](#)
  - Bob Sturm also trained char-rnn on [music in ABC notation](#)
  - RNN Bible bot by [Maximilien](#)
  - Learning Holiness learning the Bible
  - Terminal.com [snapshot](#) that has char-rnn set up and ready to go in a browser-based virtual machine (thanks @samirm)

## Featured Comment

4w43c<sup>3</sup> • 3 years ago

I used 400 Mb of [NSF Research Awards abstracts 1990-2003](#) for learning this char-RNN with 3 layers and size 1024. The generated abstracts seem almost reasonable and leave you with a feeling that you didn't quite understand the meaning because you're not familiar with nuances of special terms. [Here](#) they are, and here's one example:

```
Title      : Electoral Research on Presynaptic Problems in Subsequent Structures
Type       : Award
NSF Org    : DMS
Latest
Amendment
Date       : July 10, 1993
File       : a9213310

Award Number: 9261720
Award Instr.: Standard Grant
Prgm Manager: Phillip R. Taylor
              OCE DIVISION OF OCEAN SCIENCES
              GEO DIRECTORATE FOR GEOSCIENCES
Start Date : September 1, 1992
Expires     : February 28, 1992 (Estimated)
Expected
Total Amt. : $96200 (Estimated)
Investigator: Mark F. Schwartz (Principal Investigator current)
Sponsor     : U OF Cal Davis
              OVCR/Sponsorthinch Ave AMBEr, Med Ot CTS, IN 426823462 812/471-6424

NSF Program : 1670 CHEMICAL OCEANOGRAPHY
```

**292 Comments** Andrej's Blog Login

Recommend 160 Share Sort by Best

 Join the discussion...

**LOG IN WITH** OR SIGN UP WITH DISQUS (?)

 **RalfD** • 3 years ago  
Maybe it would be fun to feed in musical notation and then hear the output? The Fake-Shakespeare and fake-programming produced here is impressive (even though nonsensical), but I wonder what would Beethoven, Bach or Mozart sound like? Chaotic or actually melodic?  
47 ↗ | ↘ • Reply • Share >

 **James Blaha** ➔ RalfD • 3 years ago  
I fed in famous guitar tabs (about 500mb) worth, in ASCII. It now generates guitar tabs in ASCII well enough for me to import them into GuitarPro, where I recorded it playing back. I took that and imported to FL Studio, added some filters and a drum loop, but the notes and rhythms are otherwise totally unedited. This is what it sounds like:  
<https://soundcloud.com/opto...>  
It is only about 20% done training on the file, and already getting good results!  
33 ↗ | ↘ • Reply • Share >

 **karpathy** Mod ➔ James Blaha • 3 years ago  
Neat, this is fun! What format is the input in?  
2 ↗ | ↘ • Reply • Share >



**James Blaha** → karpathy • 3 years ago

I formatted the input like:

```
%  
E|-----|-----|  
B|-----|-----|  
G|---14---12---12---9---9---7---|---5---5-----|  
D|---14---12---12---9---9---7---|---3---3---5---7---5---7---5---5---|  
A|-----|---3---3---5---5-----7---|  
E|0-----|-----|-----|  
%  
E|-----|-----|-----|  
B|-----|-----|-----|  
G|---5---7---7---5---7---5---|---5---0---7---7---7---|-----|  
D|-----5---7---7---5---7---5---|-----5---0---7---7---7---|-----|  
A|-----7---|---3---5---5---7---5---|-----5---7---7---5---7---|  
E|0-----|-----7---|0-----|  
%
```

[see more](#)

3 ⤵ | ⤴ • Reply • Share >



**karpathy** Mod → James Blaha • 3 years ago

hmm I'm not sure that this is very RNN friendly input form. Wouldn't it be better if you gave it contiguous chunks in time? E.g. instead of

E 1 2 3  
B 4 5 6  
G 7 8 9

you'd pass in something like 123.456.789. In other words, you're passing in groups of 6 things that all happened at the same time, and they are always delimited with a special character such as the dot.

I'd expect that to work significantly better

9 ⤵ | ⤴ • Reply • Share >



**James Blaha** → karpathy • 3 years ago

This input format is significantly better on the formatting, it pretty much never messes up now. The music itself doesn't seem quite as good but maybe I have to let it train longer. I am getting a lower validation loss (from 0.24 on the old one to 0.19 on the new one).

When you say the training loss is MUCH lower, what do you mean by that? I'm currently getting a training loss of ~0.16 with a validation loss of ~0.19, and it is still improving as training goes on a small amount, so I think it isn't overfitting but I'm not sure.

1 ⤵ | ⤴ • Reply • Share >



**theguy126** → James Blaha • 3 years ago

how do you do validation loss on generated stuff?

4 ⤵ | ⤴ • Reply • Share >



**karpathy** Mod → James Blaha • 3 years ago

0.16 < 0.19 so you're overfitting a small bit. I'd suggest you mix in a bit of dropout, maybe 0.1 or 0.25, or so. Make sure to sync your code with the one that's on Github now, I issued several improvements recently that should make things train quite a bit better.

3 ⤵ | ⤴ • Reply • Share >



**Umut Ozertem** → karpathy • 2 years ago

I agree. Also one other problem (maybe not a problem, not sure) with this is that the tablature takes fingering into account and for feeding data to an rnn to produce some music (more specifically chords, phrasing and some basic harmony) that shouldn't matter. There are multiple spots on the guitar to get the same note. 12th fret on E string = 7th fret on A string = 2nd fret on D string etc... (i.e. piano is a 1-d instrument and guitar is a 2-d instrument). Perhaps the network can learn that too but why not remove ambiguity first and then feed the data?

BTW how do you handle the timing of each note? Tablature is rather weak in that sense, no?

⤵ | ⤶ • Reply • Share >



**James Blaha** → karpathy • 3 years ago

I was going to try that as well, but it seems like it can still figure it out this way since none of the lines aren't too long. I'll train one with the same settings on a dataset like that and let you know if it works better.

This way the structure of a single string, for instance for melody, should be better, whereas the other way chords, bars, and tempo should work better.

⤵ | ⤶ • Reply • Share >



**bmilde** → James Blaha • 3 years ago

Hi James!

Really cool idea and something I want to give as an exercise to my student in a seminar. Could you send me your dataset? Thanks!

1 ⤵ | ⤶ • Reply • Share >



**James Blaha** → brmilde • 3 years ago

Hil I'd be happy to! Here is a bunch of stuff from it, including the dataset, trained models, and the files I used to convert the tabs back and forth.

<https://drive.google.com/fi...>

9 ↗ | ↘ • Reply • Share >



**Adrià Garriga** → RalfD • 3 years ago

Try training it on some Lilypond or ABC files. Seeing what the C file looked like I say they will sound chaotic, because the structure of those files do not tie the simultaneous-sounding notes together.

However, if you restructure them to have measures played at the same time together in the source, the result might be better.

This remains as a project to do another day :)

5 ↗ | ↘ • Reply • Share >



**yankov** → RalfD • 3 years ago

I am wondering also what kind of output you get if you feed it visual data, for example paintings of Van Gogh. It will be certainly a mess, but will there be an interesting structure?

6 ↗ | ↘ • Reply • Share >



**Jasper Horrell** → yankov • 3 years ago

Great RNN post with code. Thanks!

Following good results on various pieces of text and python code generation using the github code from the post, a colleague and I gave image generation (computer art) a go over the last couple of days using the same RNN code. We were not expecting success, just curious. We tried with a couple of images (of size 512x512 and 1024x1024) and also a couple of encodings (the last attempt mapped (compressed) the image byte range into the ASCII printable character range and then mapped it back again to view the generated image at the end. We also tried varying the RNN size up and down (1024 and 30) and the seq\_length parameter (up to 512). The approach was deliberately simple i.e. simply reading the image row by row and treating that as one long sequence rather than approaches more suitable to images using convolution and regions etc. We worked with grayscale. One of the test images was the Lena image often used in image processing tests.

Training seemed to converge, but no recognisable features showed up. This could either be due to user error with the new code or (more likely I think since we had it working for other problems) a mismatch between the long term memory of the algorithm and the type of problem we were tackling. Good results in the text area have come from predicting words, phrases, code snippets etc. which are coherent in relatively short sequences. However, to get an image with recognisable features using the overly simplistic approach described above, it would seem one would need to rather worry about long term trends of coherence between rows in the image rather than short term sequence accuracy. So, it would appear that this is not something that the algorithm is really designed to do. One would probably have to do something along the lines of the "painting house numbers" approach as per the post instead to make this work.

Any more views on this? Seems to also tie in with the Chris B "long-timescale tasks" / "long-term planning" comment below.

2 ↗ | ↘ • Reply • Share >



**theguy126** → Jasper Horrell • 3 years ago

Facebook recently came up with a method to generate images using "generative adversarial networks" and "laplacian pyramids" (treating each "frequency" as a different layer to train on) I don't think they used RNN at all

↗ | ↘ • Reply • Share >



**karpathy** Mod → Jasper Horrell • 3 years ago

Wow, this sounds like a terrible idea, I love it :) Too bad it didn't look comprehensible at all. I would have liked to see some (crappy) results. Another terrible idea is to feed in the image with pixels also a space filling curve (<https://www.google.com/sear...> which are more local in 2D space than rows of pixels. Thanks for reporting back though!

↗ | ↘ • Reply • Share >



**Jasper Horrell** → karpathy • 3 years ago

This work had more success with generation of Monet images: <http://gitxiv.com/posts/MXf...>

↗ | ↘ • Reply • Share >



**Jasper Horrell** → karpathy • 3 years ago

Here is a zip file with 4 png images: a) lena\_high\_res.png - view of input 1024x1024 image; b) lena\_rnn30.png - view of output image with RNN size of 30; c) lena\_rnn1024.png - view of output image with RNN of size 1024; d) lena\_seq\_len512.png - view of output image with sequence length 512. Else default params. Mapped to ASCII printable character range for RNN input and back again on output. Original Lena clearly more beautiful :)

<https://drive.google.com/fi...>

↗ | ↘ • Reply • Share >



**Oliver Mattos** → Jasper Horrell • 3 years ago

I think you need to use a space-filling curve instead of simple x-y scanning to get good results.

Or even better, you need to use a 2D LSTM.

↗ | ↘ • Reply • Share >



**yankov** → Jasper Horrell • 3 years ago

Why grayscale though? Perhaps the results could have been more interesting if you used all

3 channels?  
^ | v . Reply . Share >

 **Travis Ames** ↗ yankov • 3 years ago  
[http://www.theguardian.com/...](http://www.theguardian.com/)  
^ | v . Reply . Share >

 **Douglas Bagnall** ↗ RalfD • 3 years ago  
This is actually one of the standard RNN test problems. Google for something like "rnn nottingham piano rolls JSB chorales" and you'll get links to a few papers.  
3 ^ | v . Reply . Share >

 **theguy126** ↗ RalfD • 3 years ago  
No, no, no. NOT notation -- that has been done to death and is clunky and ghetto. We are beyond that. USE THE WAVEFORM and make the neural net DREAM the generated music directly! No need for human performers or interpretation. There were already a group of people that showed a demo of it -- this is truly the future of music generation.  
6 ^ | v . Reply . Share >

 **Shane** ↗ theguy126 • 3 years ago  
Where is this demo or any info on this?  
1 ^ | v . Reply . Share >

 **theguy126** ↗ Shane • 3 years ago  
look up recurrent neural network music. They used Madeon to train it and it's on Youtube. Unfortunately it's overfitting bigtime. A possible improvement might be to use Facebook's technique (mentioned in the paper of their recently successful "realistic photos generation" using neural networks that also generated a lot of media buzz): Instead of training it all at once, have a different neural network for each "level of detail" progressively until it reaches the highest level of detail... or something like that  
^ | v . Reply . Share >

 **Shane** ↗ theguy126 • 3 years ago  
Thanks! They have source as well so something to explore. I think that this type of application if perfected could take off in the electronic music community. Neural remixes, that would be something.  
1 ^ | v . Reply . Share >

 **Gainax** ↗ RalfD • 3 years ago  
That's how modern composers produce music. They listen to lots of music and produce similar but not-copycat. RNN will probably destroy composer job first. ·P  
2 ^ | v . Reply . Share >

 **algorhythm.ai** ↗ RalfD • 2 years ago  
Here is an answer to your q. I have been producing algorithmic music for a while, inspired by code to produce synthetic text, like the one above. My approach produces polyphonic output, in contrast to what Google is doing now (monophonic). <https://soundcloud.com/algo...>  
1 ^ | v . Reply . Share >

 **dtinth** ↗ RalfD • 2 years ago  
I converted some Beethoven, Chopin, Debussy, Liszt, Mozart, Tchaikovsky [MIDI files](#) into a simple 1MB text file, containing 3 types of instructions: Note on (3 bytes), Note off (3 bytes), and wait one tick (1 byte).

This gives us a uniform timestep, which I guess would be easier for the RNN to learn. Then I had char-rnn train the model. Finally, the sampled output is converted back to MIDI.

The model yielded quite a melodic piece. Seems that the model learnt some chords and rhythms (it can generate eighth notes, triplets, sixteenths).

Here's what it sounds like:

[https://soundcloud.com/o\\_oo ...](https://soundcloud.com/o_oo ...)

1 ^ | v . Reply . Share >

 **Angel Avila** → dtinth • 8 months ago

Hey man! I'm trying to do the same thing as you, but I'm having problems converting the midi file to text. I parse it from csv to text but end up with an enormous output. How did you do it? Any chance I could get your parser?

^ | v . Reply . Share >



**Bahadir Onur Güdürti** → RalfD • a year ago

Found out this vid maybe you are interested: <https://www.youtube.com/wat...>

^ | v . Reply . Share >



**James Blaha** → RalfD • 3 years ago

I've been training the data on guitar tabs which is convenient since the format is naturally ASCII. I'm getting pretty melodic stuff out of it, though it is mostly pretty simple.

I'm trying a lot of different stuff out first on smaller datasets (~5mb) but my full data set is GBs large. Are there good resources I could look at to help me get a better model for my case?

^ | v . Reply . Share >



**karpfthy** Mod → James Blaha • 3 years ago

i wrote quite a lot about this in the Readme.

if you have a lot of data, make sure rnn\_size is big (as big as fits), and that num\_layers 3. Then train for long.

^ | v . Reply . Share >



**James Blaha** → karpfthy • 3 years ago

When I tried for 3 layers I get this error when sampling:

```
th sample.lua smallest_good/lm_lstm_epoch30.00_0.1393.t7
using CUDA on GPU 3...
creating an LSTM...
seeding with
/home/ubuntu/torch/install/bin/luajit: /util/OneHot.lua:14: bad argument #1 to 'size' (out of
range)
stack traceback:
[C]: in function 'size'
/util/OneHot.lua:14: in function 'forward'
sample.lua:87: in main chunk
[C]: in function 'dofile'
...untu/torch/install/lib/luarocks/rocks/trepl/scm-1/bin/th:131: in main chunk
[C]: at 0x00406670
```

Not sure if I did something wrong, or maybe the rnn\_size is too large or something? I did 3 layers, 500 rnn\_size. Following your guide on the github it seemed like I was getting good results with the training loss and validation loss, but I just can't get it to sample. Maybe it was because I was training multiple models on the same data (im using an amazon instance with 4 gpus)

^ | v . Reply . Share >



**Graydyn Young** → James Blaha • 3 years ago

Hi James,

I saw that error recently, and for me the problem was that the primetext I was using wasn't in my training vocabulary. The default primetext is a ' ', so if your training tabs don't have any spaces in them I think you would get this error.

1 ^ | v . Reply . Share >



**James Blaha** → Graydyn Young • 3 years ago

Ah, I recently got the error again when inputting a tab that had a slash in it, where my training data doesn't. This makes total sense and I'm glad I finally know the source! Thanks!

^ | v . Reply . Share >



**karpfthy** Mod → James Blaha • 3 years ago

can you get other smaller networks to sample fine?

^ | v . Reply . Share >



**James Blaha** → karpfthy • 3 years ago

I have a 500mb data file of guitar tabs, in ASCII, and it errors when I try to sample any net trained on a smaller version of the file but works fine when I use the full thing. Other input files of 1mb-10mb work fine, but 2mb of the first lines of the big file doesn't work.

^ | v . Reply . Share >



**James Blaha** → karpfthy • 3 years ago

Yeah sampling fine with smaller networks on the same machine. For example a -num\_layers 3 -rnn\_size 300 samples fine, im not 100% sure it is related to size but it definitely could be.

^ | v . Reply . Share >



**4w\*3c\*** • 3 years ago

Featured by Andrej's Blog

I used 400 Mb of NSF Research Awards abstracts 1990-2003 for learning this char-RNN with 3 layers and size 1024. The generated abstracts seem almost reasonable and leave you with a feeling that you didn't quite

understood the meaning because you're not familiar with nuances of special terms. [Here](#) they are, and here's one example:

Title : Electoral Research on Presynaptic Problems in Subsequent Structures  
Type : Award  
Mod/Org : DMS  
Latest  
Amendment  
Date : July 10, 1993  
File : a9213310  
  
Award Number: 9261720  
Award Instr.: Standard Grant  
Prgrm Manager: Phillip R. Taylor  
OCE DIVISION OF OCEAN SCIENCES  
GEO DIRECTORATE FOR GEOSCIENCES  
Start Date : September 1, 1992  
Expires : February 28, 1992 (Estimated)  
Expected  
Total Amt. : \$96200 (Estimated)  
Investigator: Mark F. Schwartz (Principal Investigator current)  
Sponsor : U of Cal Davis  
OVCR/Sponsortinch Ave AMER, Med Of CTS, IN 428823462 812/471-6424  
  
NSF Program : 1670 CHEMICAL OCEANOGRAPHY

[see more](#)

37 ▲ ▼ • Reply • Share >

 **karpatty** Mod → 4ω⁴/3c³ • 3 years ago

Haha this is GOLDEN:D Write it up into a small blog post I'm sure people would love to hear more about some of these :)

5 ▲ | ▼ • Reply • Share >

 **Yifei Teng** → 4ω⁴/3c³ • 8 months ago

Curiously the expiration date is BEFORE the starting date :)

^ | ▼ • Reply • Share >

 **Ankit** → 4ω⁴/3c³ • 3 years ago

Hi,

This is great result. I wanted to replicate it.

At the risk of sounding dumb, how much time did it take to train on this dataset.

I am trying to train on the same dataset (finally around 400Mb) and using a GPU (2 GB Nvidia 630M). Still, the estimated time is 3000 hours.

^ | ▼ • Reply • Share >

 **4ω⁴/3c³** → Ankit • 3 years ago

I trained it overnight (for 10-20 hours, not more). I used one Amazon g2.2xlarge instance for this. I don't know the exact model of GPU it has, Amazon only says that it's "High-performance NVIDIA GPUs, each with 1,536 CUDA cores and 4GB of video memory"

I have no idea whether it would work significantly better if trained for 3000 hours as you estimate. Me being an experimental physicist and having no training in neural networks or machine learning whatsoever, I just waited until the slope or the error vs. time graph (in log-log scale) dropped qualitatively (as in second-order phase transition, so to speak). From my experience with char-rnn, the first "phase transition" usually happens in the first tens of minutes, the second transition in a few hours. I stop after the second transition. I have no idea whether this ad-hoc approach of mine is used by anyone at all in ML/neural-net community or makes any sense in this field at all.

3 ▲ | ▼ • Reply • Share >

 **Ankit** → 4ω⁴/3c³ • 3 years ago

Thank you for replying.

I was trying to train it using my personal laptop without any code modification or early-stop criteria. My laptop has a single GPU which has around 96 CUDA cores and 2 GB memory. That is why it was taking forever (read 3000 hours) to train.

I would have to find and use some dedicated sever for this much amount of data to train. Thanks once again for explaining your approach.

^ | ▼ • Reply • Share >

 **4ω⁴/3c³** → Ankit • 3 years ago

You don't need any modification to stop it at any moment. During training, it makes checkpoints (files with .t7 extension) every 1000 iterations or so (this number is configurable). Just kill the training process whenever you please and use the latest .t7 checkpoint file for sampling with sample.lua

And if you decide to use some rented computing resources, I suggest you use the g2.2xlarge instance as I did. If you get it as "Spot instance" kind, it costs about \$0.07 per hour. That is, seven cents per hour.

22 ▲ | ▼ • Reply • Share >



**Qian Hong** • 2 years ago

Anyone tried using RNN to do base conversion of number systems?

Consider a real world use case: Translate a "Ten-thousand based number system" to a "Thousand based number system". In Chinese, numbers are cut by 4 digits, for example, 12000 is called "one WAN and two thousand" rather than "twelve thousand", here "WAN" is equal to 10000 but it is a standalone number unit. Google Translate does not handle this kind of translation well, it often returns different results even for the same input.

I tried to train a RNN model to convert decimal to hexadecimal, but it doesn't work well. A simplified case is to convert "unary numeral system" (the base-1 numeral system) to binary system, that's equal to a strlen() function which returns a binary value representing the length of input sequence.

I think this is a fundamental research topic we need to solve in order to improve seq2seq translation model. I guess Neural GPU or Neural Turing Machine would be better on this problem compare to RNN seq2seq model.

If anyone know any related research result please share, thank you!  
21 ^ | v . Reply + Share >



**Vincent Zhao** • 2 years ago  
The best RNN blog post ever!  
16 ^ | v . Reply + Share >



**Mihail Sirotenko** • 3 years ago  
Somebody has to combine LSTM learning to code with reinforcement learning, where reward would depend on the number of compiler errors and warnings for the resulting code.  
14 ^ | v . Reply + Share >

[Load more comments](#)

[✉ Subscribe](#)

[>Add Disqus to your site](#)

[🔒 Disqus' Privacy Policy](#)

**DISQUS**

Andrej Karpathy blog

 [karpathy](#)  
 [karpathy](#)

Musings of a Computer Scientist.