



AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification
Capstone Projects

Trainer: Aravindraaj.G- Nminds Academy
AWS Academy Certified Educator

5.Configure Apache Web Server on Linux Instance in X AWS



SHABHARIVAASUN K R
CSE-Artificial Intelligence & Machine Learning,
Sri Eshwar College of Engineering,
Coimbatore.



Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

An EC2 Linux instance is a virtual machine running the Linux operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, Apache, FileServer etc.) in the cloud without having to manage physical hardware.

Use Cases for EC2 Linux Instances:

Web and Application Hosting: Run Apache web servers or other Linux-based web applications in the cloud.

Database Servers: Host SQL Server databases with EC2 Linux instances, using SSH or EC2 for more control.

Remote Desktop Applications: Set up SSH (Remote Desktop Services) for remote access to Linux desktops in the cloud.

Development and Testing: Create development environments with linux OS to test php, MySql or other Linux-based applications.

Used Services in AWS



Amazon EC2

Used Services in Linux Server




Apache Webserver



Topology

How to Configure the Apache web server in Linux Server with AWS EC2

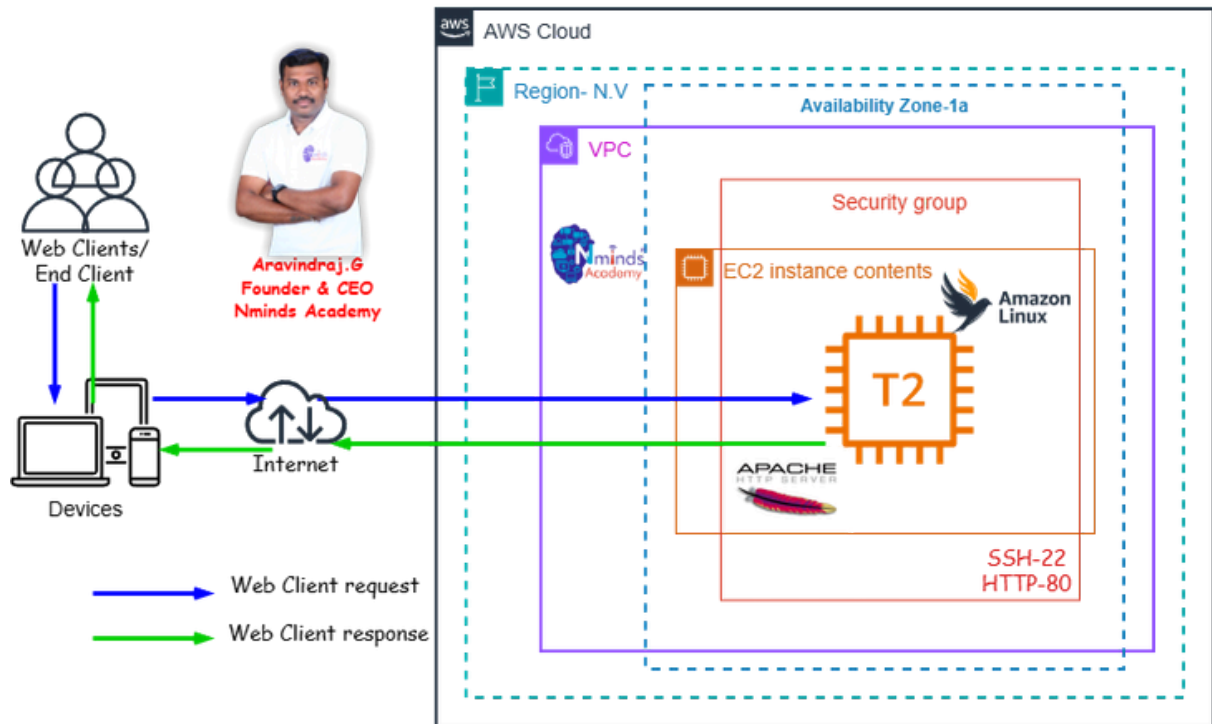

Execution Tasks:

aws

Search

[Alt+S]

United States (N. Virginia)

Shabharivaasun K R (3592-8902-3774)

Shabharivaasun K R

EC2

>

Instances

AWS Global View

Events

Instances

Instances

Instance Types

Launch Templates

Spot Requests

Savings Plans

Reserved Instances

Dedicated Hosts

Capacity Reservations

Capacity Manager

Images

AMIs

AMI Catalog

Elastic Block Store

Volumes

Snapshots

Lifecycle Manager

Network & Security

Instances (1/2)

Info

Last updated less than a minute ago

Connect

Instance state

Actions

Launch instances

Find Instance by attribute or tag (case-sensitive)

All states

	Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Public IPv4 D
☒	Project 1	i-0cb52d1ebb0fad104	Running	t3.micro	3/3 checks passed	...	us-east-1c	ec2-54-242-98
☐	Project 2	i-0813ccc1fc44a9dd0	Running	t3.micro	...	...	us-east-1c	ec2-54-226-61

i-0cb52d1ebb0fad104 (Project 1)

Details

Status and alarms

Monitoring

Security

Networking

Storage

Tags

Instance summary

Instance ID

i-0cb52d1ebb0fad104

IPv6 address

-

Public IPv4 address

54.242.98.204 | open address

Instance state

Running

Private IPv4 addresses

172.31.22.200

Public DNS

ec2-54-242-98-204.compute-1.amazonaws.com | open address

CloudShell

Feedback

Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

[illegible]

Execution Tasks:

```
root@ip-172-31-16-241:~  
Installing      : mod_http2-2.0.27-1.amzn2023.0.3.x86_64      10/13  
Installing      : mod_lua-2.4.66-1.amzn2023.0.1.x86_64      11/13  
Installing      : generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch 12/13  
Installing      : httpd-2.4.66-1.amzn2023.0.1.x86_64        13/13  
Running scriptlet: httpd-2.4.66-1.amzn2023.0.1.x86_64        13/13  
Verifying       : apr-1.7.5-1.amzn2023.0.4.x86_64           1/13  
Verifying       : apr-util-1.6.3-1.amzn2023.0.2.x86_64      2/13  
Verifying       : apr-util-lmdb-1.6.3-1.amzn2023.0.2.x86_64 3/13  
Verifying       : apr-util-openssl-1.6.3-1.amzn2023.0.2.x86_64 4/13  
Verifying       : generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch 5/13  
Verifying       : httpd-2.4.66-1.amzn2023.0.1.x86_64        6/13  
Verifying       : httpd-core-2.4.66-1.amzn2023.0.1.x86_64    7/13  
Verifying       : httpd-filesystem-2.4.66-1.amzn2023.0.1.noarch 8/13  
Verifying       : httpd-tools-2.4.66-1.amzn2023.0.1.x86_64   9/13  
Verifying       : libbrotli-1.0.9-4.amzn2023.0.2.x86_64      10/13  
Verifying       : mailcap-2.1.49-3.amzn2023.0.3.noarch       11/13  
Verifying       : mod_http2-2.0.27-1.amzn2023.0.3.x86_64     12/13  
Verifying       : mod_lua-2.4.66-1.amzn2023.0.1.x86_64       13/13  
  
Installed:  
apr-1.7.5-1.amzn2023.0.4.x86_64      apr-util-1.6.3-1.amzn2023.0.2.x86_64  
apr-util-lmdb-1.6.3-1.amzn2023.0.2.x86_64 apr-util-openssl-1.6.3-1.amzn2023.0.2.x86_64  
generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch httpd-2.4.66-1.amzn2023.0.1.x86_64  
httpd-core-2.4.66-1.amzn2023.0.1.x86_64 httpd-filesystem-2.4.66-1.amzn2023.0.1.noarch  
httpd-tools-2.4.66-1.amzn2023.0.1.x86_64 libbrotli-1.0.9-4.amzn2023.0.2.x86_64  
mailcap-2.1.49-3.amzn2023.0.3.noarch mod_http2-2.0.27-1.amzn2023.0.3.x86_64  
mod_lua-2.4.66-1.amzn2023.0.1.x86_64  
  
complete!  
root@ip-172-31-16-241 ~]# |
```

```
root@ip-172-31-72-105:~  
# Logging  
#SyslogFacility AUTH  
#LogLevel INFO  
  
# Authentication:  
  
#LoginGraceTime 2m  
#PermitRootLogin prohibit-password  
#StrictModes yes  
#MaxAuthTries 6  
#MaxSessions 10  
  
PubkeyAuthentication no  
  
# The default is to check both .ssh/authorized_keys and .ssh/authorized_keys2  
# but this is overridden so installations will only check .ssh/authorized_keys  
AuthorizedKeysFile      .ssh/authorized_keys  
  
#AuthorizedPrincipalsFile none  
  
# For this to work you will also need host keys in /etc/ssh/ssh_known_hosts  
#HostbasedAuthentication no  
# Change to yes if you don't trust ~/.ssh/known_hosts for  
# HostbasedAuthentication  
#IgnoreUserKnownHosts no  
# Don't read the user's ~/.rhosts and ~/.shosts files  
#IgnoreRhosts yes  
  
# Explicitly disable PasswordAuthentication. By presetting it, we  
# avoid the cloud-init set_passwords module modifying sshd_config and  
# restarting sshd in the default instance launch configuration.  
PasswordAuthentication yes  
PermitEmptyPasswords no  
  
# Change to no to disable s/key passwords  
#KbdInteractiveAuthentication yes  
  
# Kerberos options  
#KerberosAuthentication no  
-- INSERT --  
  
65,27 34%
```



Execution Tasks:

