

Agentforce Configuration Document

Prepared by: Shaden Bawazir
Date: August 2026
Project: AI-Powered Appointment Management Assistant

1. Agent Instructions (System Prompt)

The following instructions were provided to the Agentforce Agent to define its persona, responsibilities, and boundaries:

"You are an Appointment Management Assistant. Your primary responsibility is to help customers manage their appointments. You can help customers: Schedule a new appointment, Reschedule an existing appointment, or Cancel an appointment. Always communicate clearly and professionally. Before creating or changing an appointment, confirm the required information with the customer. Required information for a new appointment: Customer Name, Customer Email, Appointment Date, Appointment Time, Service Type. Never invent appointment information. When an appointment is successfully created, changed, or cancelled, clearly confirm the result to the customer. If required information is missing, ask the customer for it."

Why this matters: The instructions act as **guardrails** to ensure the AI doesn't go "off-topic" and always asks for missing information (like email or date) before executing transactions.**2.**
Subagents (Topics)

The Agent was configured with 3 Subagents to handle specific appointment-related requests:

Subagent Name	Purpose	Instruction
Appointment Scheduling	Handles requests for creating new appointments.	Help customers schedule a new appointment. Collect the customer's name, email, appointment date, appointment time, and service type. Confirm the appointment after it is successfully created.
Appointment Rescheduling	Handles requests to modify existing appointment dates and times.	Help customers reschedule an existing appointment. Identify the appointment that needs to be changed and collect the new appointment date and time. Confirm the new appointment details after the update.
Appointment Cancellation	Handles requests to cancel existing appointments after confirmation.	Help customers cancel an existing appointment. Identify the appointment that the customer wants to cancel. Confirm the cancellation after the appointment status is successfully updated.

3. Data Model Configuration

To support the Agentforce agent, the following **Custom Object** was created:

Object Name: Appointment__c

Field	Data Type	Purpose
Customer Name	Text (100)	Stores the customer's full name
Customer Email	Email	Stores the customer's email address
Appointment Date	Date	Stores the date of the appointment
Appointment Time	Text	Stores the time of the appointment
Service Type	Picklist	Defines the type of service (Consultation, Follow-up, etc.)
Status	Picklist	Tracks the appointment lifecycle (Scheduled, Rescheduled, Cancelled)
Notes	Long Text Area	Additional notes or instructions

Relationships:

The Appointment__c object is **independent** (no relationships with other objects) to ensure data privacy and simplify the data model.

4. Integration with Salesforce Flow Builder

The Agentforce Agent was integrated with **3 Salesforce Flows** to execute backend logic:

Action Name	Reference Action Type	Reference Action (Flow)	Function
Schedule Appointment	Flow	Schedule Appointment	Creates a new record in Appointment__c.
Reschedule Appointment	Flow	Reschedule Appointment	Updates Date, Time, and Status of an existing record.
Cancel Appointment	Flow	Cancel Appointment	Updates Status to "Cancelled" for an existing record.

Integration Process:

1. **Actions were created** using the "Create a custom action" method in the Agent Builder.
2. **Inputs/Outputs Mapping:** The following variables were mapped between the Agent and the Flow:
 - varCustomerName → Customer Name
 - varCustomerEmail → Customer Email
 - varAppointmentDate → Appointment Date
 - varAppointmentTime → Appointment Time
 - varServiceType → Service Type
 - varAppointmentId → Record ID
3. **Agent Populated:** All inputs were set to Agent Populated, meaning the AI automatically fills them based on user conversation.

Actions Available For Reasoning ⓘ

▼ Schedule Appointment

- With input: outputAppointmentId = Agent Populated ▾
- With input: varAppointmentDate = Agent Populated ▾
- With input: varAppointmentTime = Agent Populated ▾
- With input: varCustomerEmail = Agent Populated ▾
- With input: varCustomerName = Agent Populated ▾
- With input: varServiceType = Agent Populated ▾
- Set output: Not assigned ▾ = outputAppointmentId
- Set output: Not assigned ▾ = varAppointmentDate
- Set output: Not assigned ▾ = varAppointmentTime
- Set output: Not assigned ▾ = varCustomerEmail
- Set output: Not assigned ▾ = varCustomerName
- Set output: Not assigned ▾ = varServiceType

5. Testing & Debugging Strategy

The Agentforce solution was tested using the following methods:

5.1 Agentforce Preview (Live Test)

- Tested natural language requests for scheduling, rescheduling, and cancellation.
- Verified the agent's **Transition to Subagent** and **Reasoning** (e.g., Appointment Scheduling).
- Verified the **Output Evaluation** (e.g., GROUNDED – successful execution).

5.2 Flow Debugger


- Used the **Debug tool** in Flow Builder to test the flows independently.
- Verified that the flow creates, updates, and cancels records successfully.

5.3 Missing Information Handling

- Tested scenarios where the agent asks for missing details (e.g., email or date) before proceeding.

Results:

The agent successfully understood and executed all tested scenarios. The GROUNDED output evaluation confirms the agent's responses are based on real data.

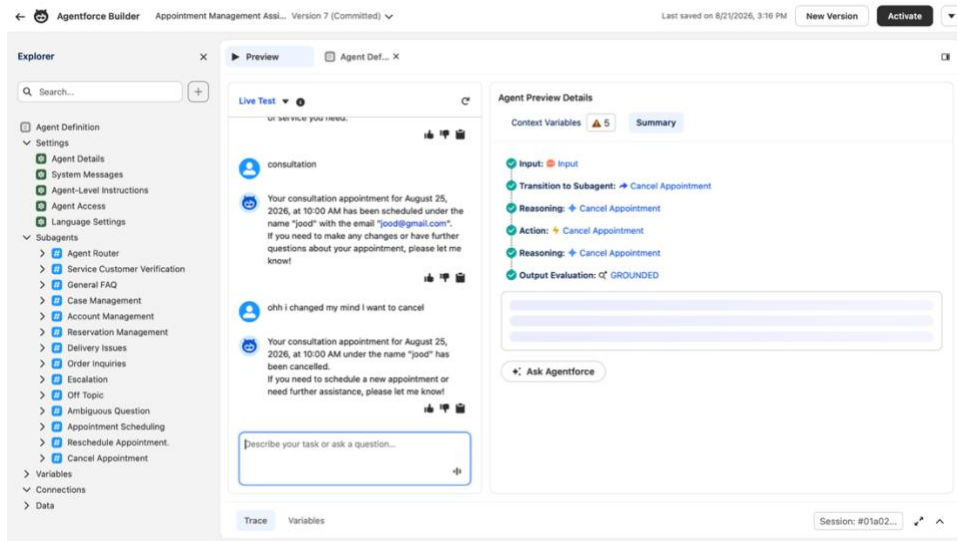

Ahmed's appointment for a Consultation has been successfully booked for 10:00 AM on 2026-08-21. If you need to reschedule or cancel this appointment, or have any questions, please let me know. How else can I assist you?



6. Security & Scalability Considerations

Security

- **Organization-Wide Defaults (OWD):** Set to `Private` on `Appointment__c` to ensure data privacy.
- **Custom Profile:** Created `Appointment Management Profile` with CRUD permissions on `Appointment__c`.
- **Permission Set:** Created `Appointment Access` and assigned it to the `EinsteinServiceAgent` User to allow the AI to execute transactions.

Scalability

- The solution uses **Autolaunched Flows**, ensuring the logic is reusable and scalable for multiple requests.

- The **Subagents** architecture allows easy addition of new topics (e.g., "Availability Check") in the future without disrupting existing functionality.

7. Summary

The Agentforce Configuration demonstrates a **complete, secure, and scalable** implementation of a conversational AI assistant. By integrating **Agentforce** with **Flow Builder**, the solution enables the AI to execute real business transactions autonomously, providing a seamless user experience.