

ELI — Architecture Ascii

ELI v2.1.90

August 2026


Contents


Blueprint — ELI MKXI Full Architecture (ASCII)	1
A. Full system — layered block diagram	1
B. The 15 agents	3
C. Module tree (LOC · key files · role)	3
D. On-disk data layout	5
E. The flow in one line	5

Blueprint — ELI MKXI Full Architecture (ASCII)

The entire system in one drawing, plus the module tree and data layout. Grounded in the real source (see architecture.md for prose, diagrams.md for the pipeline/memory/gating close-ups). Every layer and box maps to a real path.

A. Full system — layered block diagram

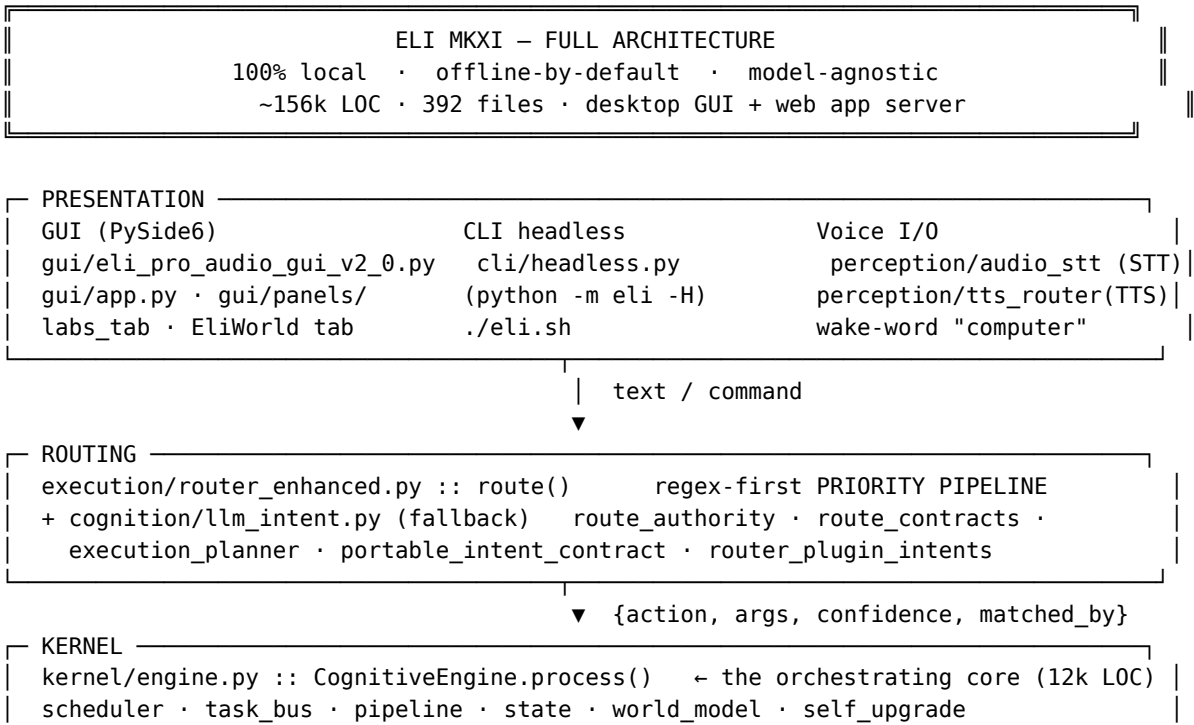

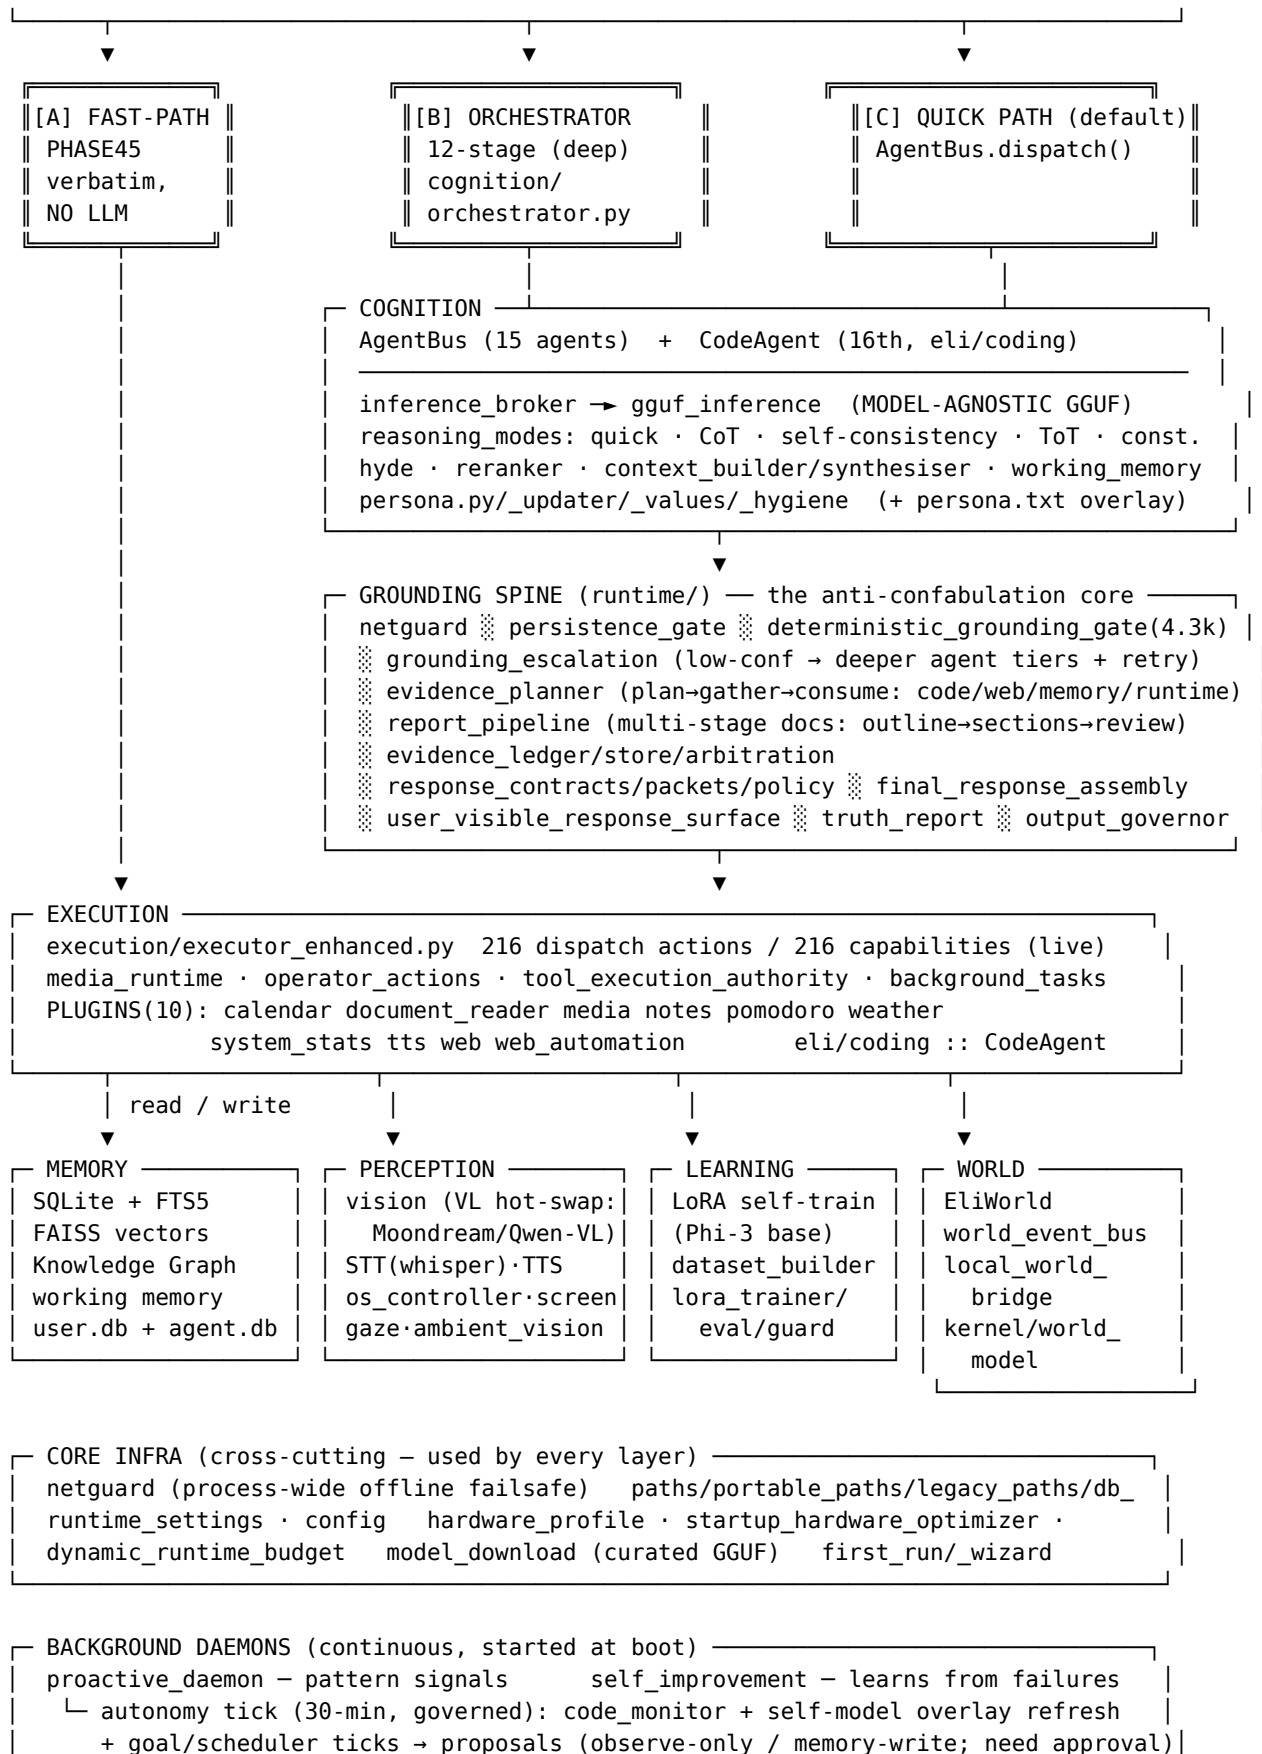

- └─ portable_intent_contract.py · execution_intent_packets.py
- cognition/ 12.3k — think
 - └─ agent_bus.py 2.4k 15 agents + dispatch *
 - └─ orchestrator.py 12-stage deep retrieval
 - └─ gguf_inference.py 2.1k · inference_broker.py model-agnostic inference
 - └─ reasoning_modes.py · hyde.py · reranker.py · llm_intent.py
 - └─ persona.py/_updater/_values/_status/_hygiene (+ persona.txt, persona.auto.txt)
 - └─ context_builder.py · context_synthesiser.py · working_memory.py
 - └─ output_governor.py · response_governance.py · response_sanitizer.py
 - └─ grounded_status.py · introspection_agent.py · tone_analyzer.py · chat_model.py
- runtime/ 18.0k — grounding spine + daemons (68 files)
 - └─ deterministic_grounding_gate.py 4.3k * · grounding_escalation.py
 - └─ evidence_ledger/store/arbitration.py · memory_evidence.py
 - └─ persistence_gate.py · truth_report.py · control_contracts.py
 - └─ response_contracts/packets/policy.py · final_response_assembly/provider.py
 - └─ user_visible_response_surface.py · personal_memory_*.py · reflection.py
 - └─ background_tasks.py · self_improvement.py · code_monitor.py
 - └─ capability_sync.py · pending_proposal.py · runtime_policy.py
- memory/ 6.6k — remember (13 files)
 - └─ memory.py 4.5k Memory · SQLite + FTS5 *god-file
 - └─ vector_store.py FAISS index
- perception/ 5.4k — sense (18 files)
 - └─ vision.py · analyze_image/csv/pdfs/mesh.py · ambient_vision.py
 - └─ audio_stt.py · local_whisper_stt.py · voice_worker(_streaming).py · eli_listen.py
 - └─ tts_router.py · os_controller.py · screen_locator.py · gaze_engine.py
- planning/ 3.1k — proactivity (21 files)
 - └─ proactive_daemon.py · habits_scheduler.py · habits.py · jobqueue_cli.py
- coding/ 1.5k — CodeAgent (plan→search→verify→repair, 9 files)
- learning/ 3.1k — LoRA self-training (11 files)
 - └─ lora_trainer/eval/guard.py · dataset_builder/filters.py
 - └─ bootstrap_phi3_base.py · base_model_resolver.py · training_preflight.py
- plugins/ 1.9k — manager + 10 plugins
 - └─ calendar · document_reader · media · notes · pomodoro · weather · system_stats · tts · web · web_automation
- world/ 1.5k — EliWorld (world_event_bus, local_world_bridge)
- core/ 4.9k — infra
 - └─ netguard.py offline failsafe + allow_network()
 - └─ paths.py · portable_paths.py · legacy_paths.py · db_paths.py
 - └─ runtime_settings.py · config.py · grounding.py
 - └─ hardware_profile.py · startup_hardware_optimizer.py · dynamic_runtime_budget.py
 - └─ model_download.py · first_run.py · first_run_wizard.py
- gui/ 18.7k — PySide6 desktop
 - └─ eli_pro_audio_gui_v2_0.py 11.0k *god-file · app.py · labs_tab.py 5.7k
 - └─ panels/ (startup.py: model picker + FirstBootWizard, HardwareTuningDock)

```

|
├─ tools/          8.1k — image_engine · news · document tools
├─ contracts/ 0.7k · cli/ 0.1k · system/ 0.3k · utils/ 0.9k

```

D. On-disk data layout

```

artifacts/
├─ db/
│   ├── user.sqlite3      memories(+_fts) · conversation_turns · conversations ·
│   │                     kg_entities(+_fts) · kg_relations · recall_log ·
│   │                     runtime_events · news_articles(+_fts) · news_reflections ·
│   │                     habits/habit_events/habit_rules · observations ·
│   │                     learning_replay · working_memory_pins · user_patterns ·
│   │                     session_summaries · corrections · failures
│   └─ agent.sqlite3      agent_dispatches · agent_metrics · improvements ·
│                           failures · code_patches · error_tracking · observations
├─ vectors/index.faiss    semantic index (embedder: nomic-embed-...Q4_K_M.gguf)
├─ conversations/ + archive/
├─ runtime/users/<uuid>/user_profile...    per-user profile
├─ runtime_snapshot.json    live model/runtime truth
├─ world/{snapshots,ledger,journal}/ · proactive/ · incidents/<date>.jsonl
├─ documents/ · scripts/ · analyze_image_*/
|
config/  settings.json (gitignored) · templates/settings.template.json ·
         settings.example.json · plugins_state.json
models/  <your>.gguf · embeddings/ · whisper/ · image/          voices/ *.onnx (Piper)

```

E. The flow in one line

```

INPUT → ROUTER → ENGINE ─┬─ FAST-PATH ───────────────────────────→ OUTPUT (verbatim)
                        │
                        │ ┌─ ORCHESTRATOR → retrieval ─┐
                        │ │ └─ QUICK → AGENT BUS ───┐
                        │ │ └────────────────────────┘
                        │ └─ MEMORY (SQL/FTS5/FAISS/KG/WM) → context ─┐
                        │ └──────────────────────────────────────────┘
GATES: netguard · persistence · grounding · escalation · confidence · governor
INFERENCE (broker → gguf, model-agnostic) → OUTPUT → TTS/GUI
BACKGROUND: proactive · self-improve · habits · learning(LoRA) · world · scheduler

Companion docs: architecture.md (prose, every subsystem) · diagrams.md (pipeline / memory
/ gating close-ups) · tools/eval/README.md (the measurement layer). ““

```