


ELI GUI

Contents

Tab map (current — 12 main tabs)	1
Files	1
Launcher (app.py)	2
Main window (eli_pro_audio_gui_MKI.py)	2
Labs workspace (labs_tab.py)	2
Other surfaces	2
Honest assessment	2

eli/gui/ — 18.3k LOC, 18 files. A full native PySide6/PyQt desktop app (with a Qt-binding compat shim), plus a first-boot launcher and a large scientific “Labs” workspace.

Tab map (current — 12 main tabs)

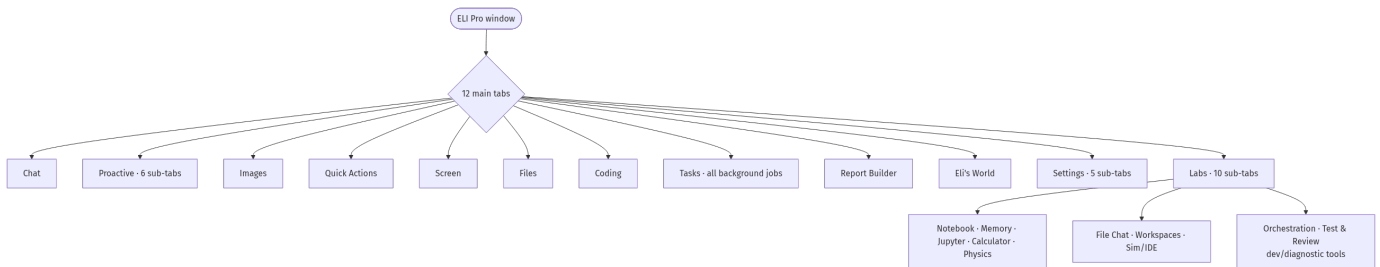

Files

File	LOC	Role
eli_pro_audio_gui_MKI.py	11.0k	the main window + most app logic (god-file)
labs_tab.py	5.7k	
app.py	742	
panels/startup.py	737	operator console dock
panels/settings.py	672	
docks/operator_console_dock.py	803	
widgets/ollama_model_selector.py	258	optional Ollama model picker
tabs/experimental_tab.py,	small	
panels/agent_wizard.py,		
docks/proactive_dock.py,		
tabs/eli_world_tab.py,		
qt_compat.py, panels/_qt.py		tabs/docks/widgets + Qt compat

Launcher (app.py)

The entry path: `_detect_hardware` (queries **free** VRAM — the display server consumes VRAM before ELI launches, so `free` $\neq$ `total`), `_auto_tune(model_path, hw)` (picks `n_ctx/layers/batch`), `_pick_model`, `_confirm_params`, `config load/save`. `main()` either shows the startup model picker (first boot) or delegates to `eli_pro_audio_gui_MKI.main()`. `--setup` forces the wizard.

Main window (eli_pro_audio_gui_MKI.py)

A 11.0k-line module holding the window **and** a stack of embedded classes that are really application logic, not just UI: - `CentralMemoryAdapter` — bridges the GUI to the memory subsystem. - `LocalModelManager` (708) — discover/load/swap local GGUF models. - `OllamaModelManager` (1142) — optional Ollama integration (legacy/optional; ELI's stance is 100% local GGUF, so this is a secondary path). - `ExecutorBridge` (1246) — routes GUI actions into the executor/engine. - `_GUIEngineAdapter` — engine façade for the UI. - UI widgets: `_QABoard` (quick-action card board), `_MiniTelemetryGraph` (live telemetry), `_ZoomableSettingsView`, `_ZoomableImagePreview`, `_FlowLayout`, `_CapabilityList`. - `pyqtSignal/Slot` aliased through `qt_compat.py` so it runs on PyQt **or** PySide.

Labs workspace (labs_tab.py)

A 5.7k-line “scientific workspace” tab with **10 sub-tabs**: Notebook, Memory & Conversations, Jupyter, Calculator, Physics constants, File Chat, Workspaces, Sim/IDE, **Orchestration, Test & Review**. (Report Builder was promoted out of Labs to its own main tab; Orchestration + Test & Review were demoted back INTO Labs in the 2026-06-18 advisory as developer/diagnostic tools.) This is the research-bench surface (reflects whatever technical/research work the active user does, surfaced dynamically from their own data).

Other surfaces

- `panels/startup.py` — guided first-boot: detect hardware → pick/download a GGUF (HuggingFace) → tune params.
- `panels/agent_wizard.py` — author custom agents (writes to the trust-gated custom-agents dir; see `security.md`).
- `docks/operator_console_dock.py`, `docks/proactive_dock.py` — operator console
 - proactive-suggestion dock.
- `widgets/ollama_model_selector.py`, `tabs/experimental_tab.py`, `tabs/eli_world_tab.py` — optional/experimental surfaces.

Honest assessment

- **Strong:** this is a genuine, feature-rich desktop product — dockable panels, quick-action board, live telemetry graph, zoomable settings/image preview, local model management, a first-boot wizard, an agent-authoring wizard, and a full scientific workspace. Cross-binding (PyQt/PySide) compat is handled. Most local-LLM projects ship a chat box; this is an application.
- **Weak / watch:**
 1. **God-file #3** — `eli_pro_audio_gui_MKI.py` (11.0k) mixes UI with core logic (`LocalModelManager`, `ExecutorBridge`, `CentralMemoryAdapter`, `_GUIEngineAdapter`). The model/executor/memory bridges should live outside the window module so the UI isn't coupled to core internals (and so they're testable headless). `labs_tab.py` (5.7k) is a second large file.
 2. **Ollama manager** (1.1k LOC) sits oddly against the “100% local GGUF, don't-care-about-Ollama” stance — it's an optional/legacy path carrying real weight; candidate for removal or clear quarantine.
 3. UI logic instantiating engine/memory directly makes a clean headless mode harder (there *is* `eli --headless`, but the GUI module re-implements bridges rather than sharing one service layer).