

File Integrity: how it is put together

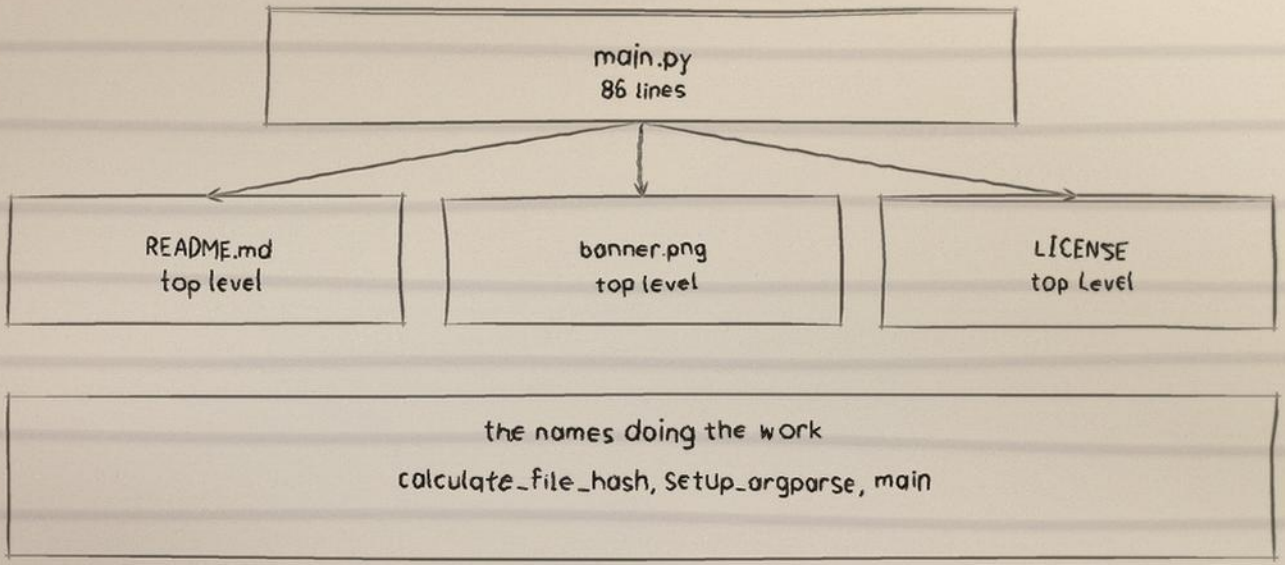

This tool verifies the integrity of a single file by computing its hash and comparing it with an expected hash value you supply. If the hashes match, the file is reported as unmod.

sketched from the files

File Integrity: the run, step by step

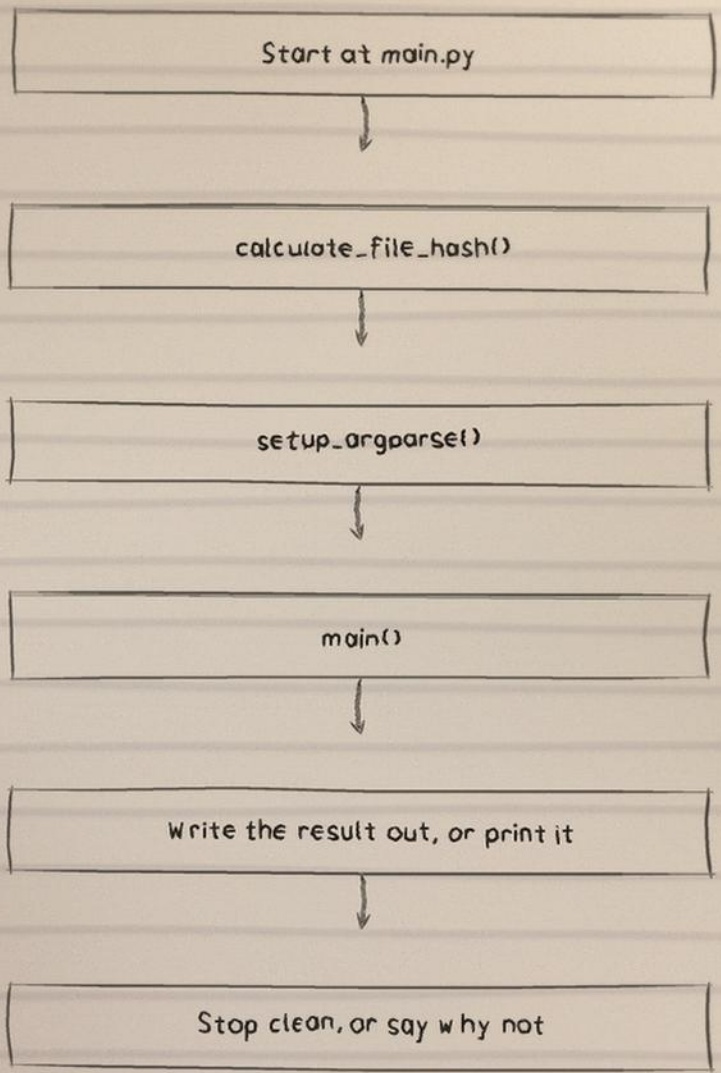

If a step fails, the honest run says so and stops.

traced, not guessed. GK

Product map: what File Integrity is for

WHAT IT IS

This tool verifies the integrity of a single file by computing its hash and comparing it with an expected hash value you supply. If the hashes match, the file is reported as unmod.

WHAT GOES IN

The files at the top of the tree: main.py, README.md, banner.png.

WHAT COMES OUT


What the top files produce when they run or get read. Nothing else is promised.

WHERE IT STOPS

No service behind it, no account, no upload. If a path is untested, VISUAL.md says so.

mapped by hand, GK

File Integrity: data flow, in one direction

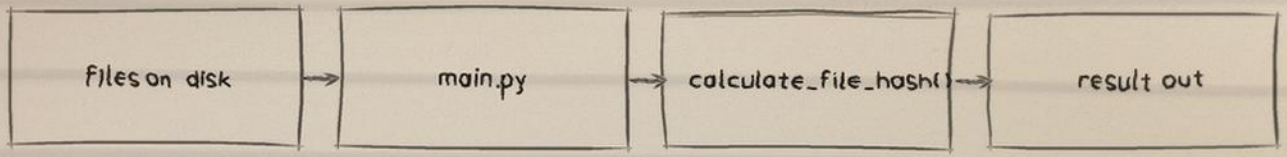


One direction. Anything the code does not do is not drawn.

second sheet,

File Integrity in numbers, counted 2026-10-30

Counted from the local snapshot of this repo. Method for every number: VISUAL.md.

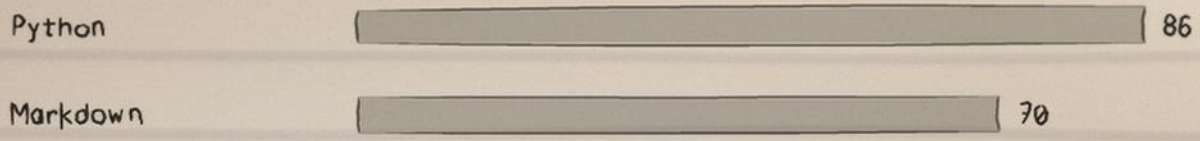

5 files in the tree.

6 commits, first 2025-01-02, last 2026-10-30, from the local git log.

No test files by name in this snapshot.

counted and drawn, GK

File Integrity: schematic of the apparatus


the system as a machine: parts, flow, and measurements

construction lines left in, as drawn

parts list

1. main.py
2. README.md
3. banner.png
4. LICENSE

in flow order, first to last

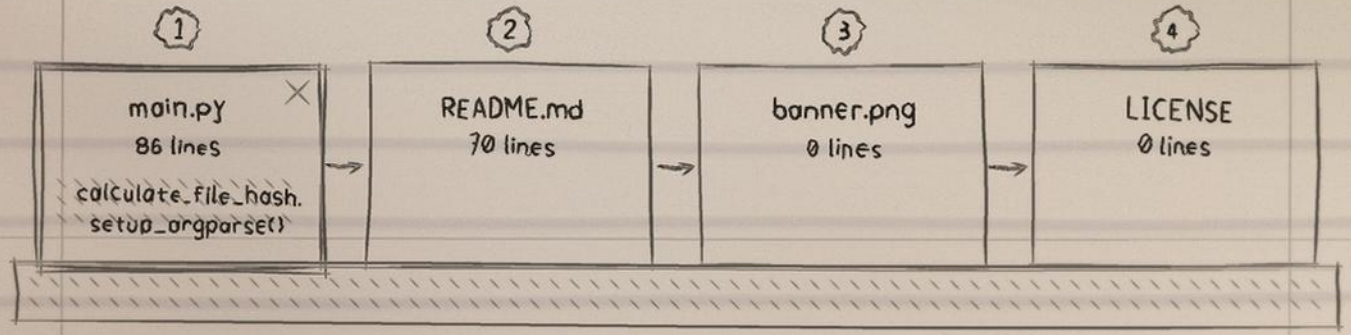

base plate: the repo itself, sectioned

span: 5 files, 156 lines counted

turns of the crank so far: 6 commits, 2025-01-02 to 2026-10-30

measured and sketched, GK