

Misconfig Configdiffanomalydetector: how it is put together

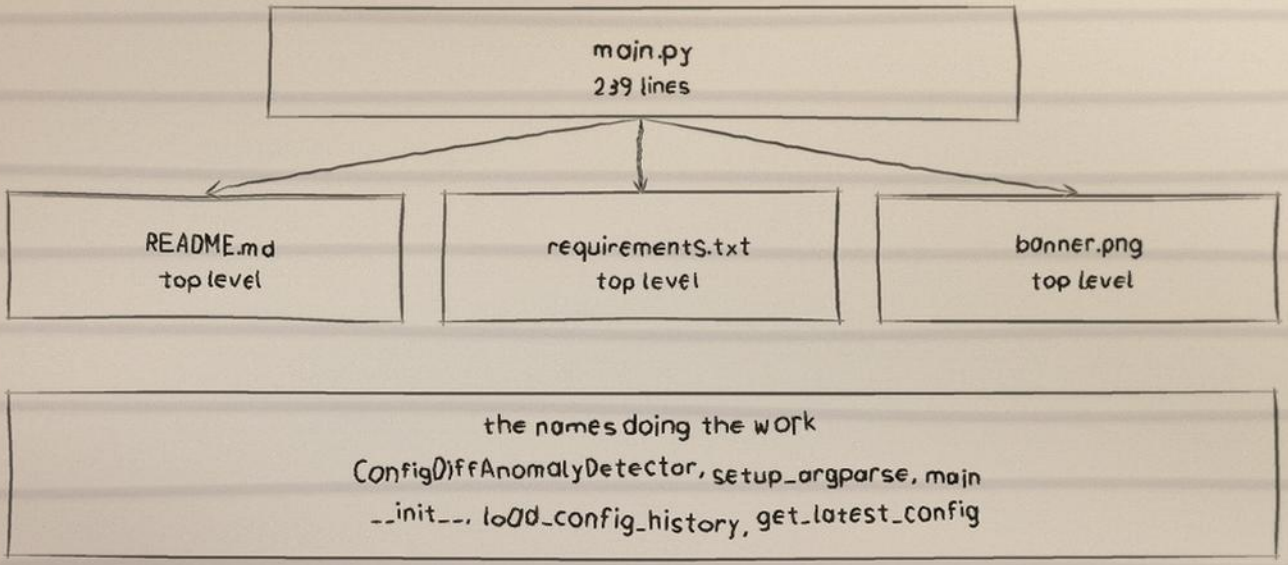

sketched from the files

Misconfig ConfigdiffanomalyDetector: the run, step by s

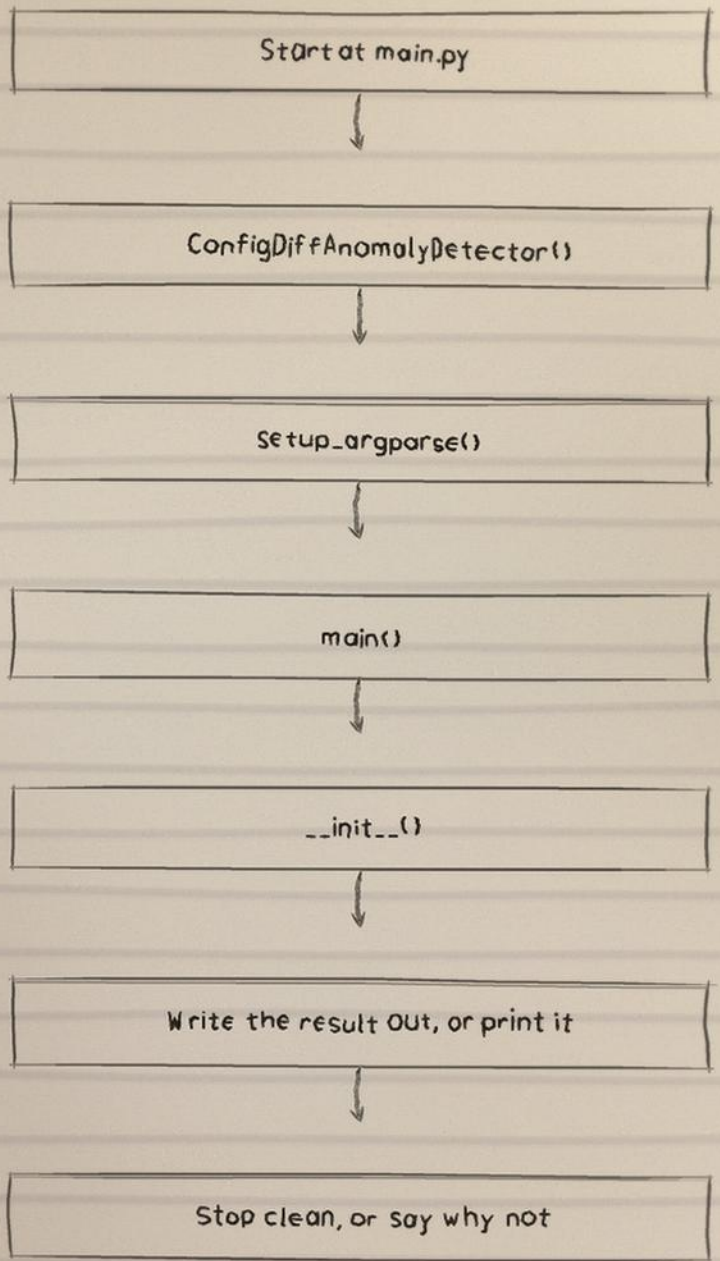

If a step fails, the honest run says so and stops.

traced, not guessed, OK

Product map: what Misconfig Configdiffanomalydetector is for

WHAT IT IS

A small project in Python, Markdown, Text. The README and the files are the whole claim.

WHAT GOES IN

The files at the top of the tree: main.py, README.md, requirements.txt.

WHAT COMES OUT


What the top files produce when they run or get read. Nothing else is promised.

WHERE IT STOPS

No service behind it, no account, no upload. If a path is untested, VISUAL.md says so.

mapped by hand, GK

Misconfig Configdiffanomalydetector: data flow, in one direction

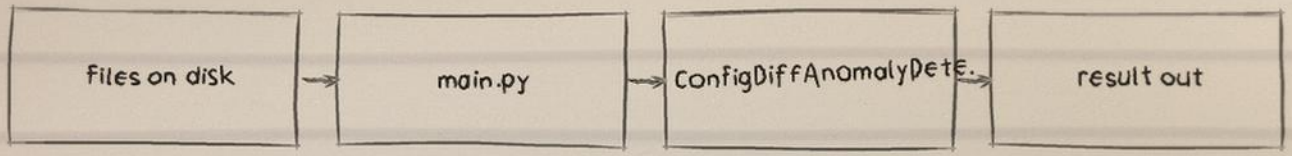


One direction. Anything the code does not do is not drawn.

second sheet, OK

Misconfig Configdiffanomalydetector in numbers, counted 2026-10-30

Counted from the local snapshot of this repo. Method for every number: VISUAL.md.

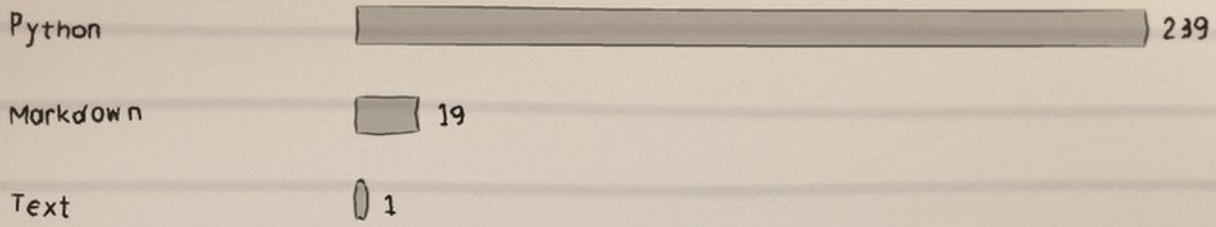

5 files in the tree.
6 commits, first 2025-06-12, last 2026-10-30, from the local git log.
No test files by name in this snapshot.

counted and drawn, CK

Misconfig Configdiffanomalydetector: schematic of the apparatus


the system as a machine: parts, flow, and measurements

construction lines left in, as drawn

parts list

1. main.py
2. README.md
3. requirements.txt
4. banner.png

in flow order, first to last

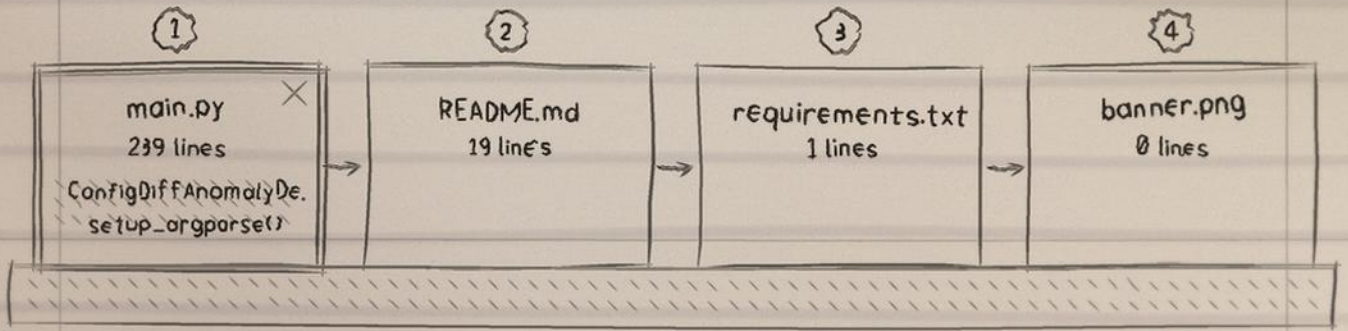

base plate: the repo itself, sectioned

span: 5 files, 259 lines counted

measured in the code: threshold 0.1 (main.py)

turns of the crank so far: 6 commits, 2025-06-12 to 2026-10-30

measured and sketched, GK