

Misconfig Configlegacyfeaturedeprecator: how it is put together

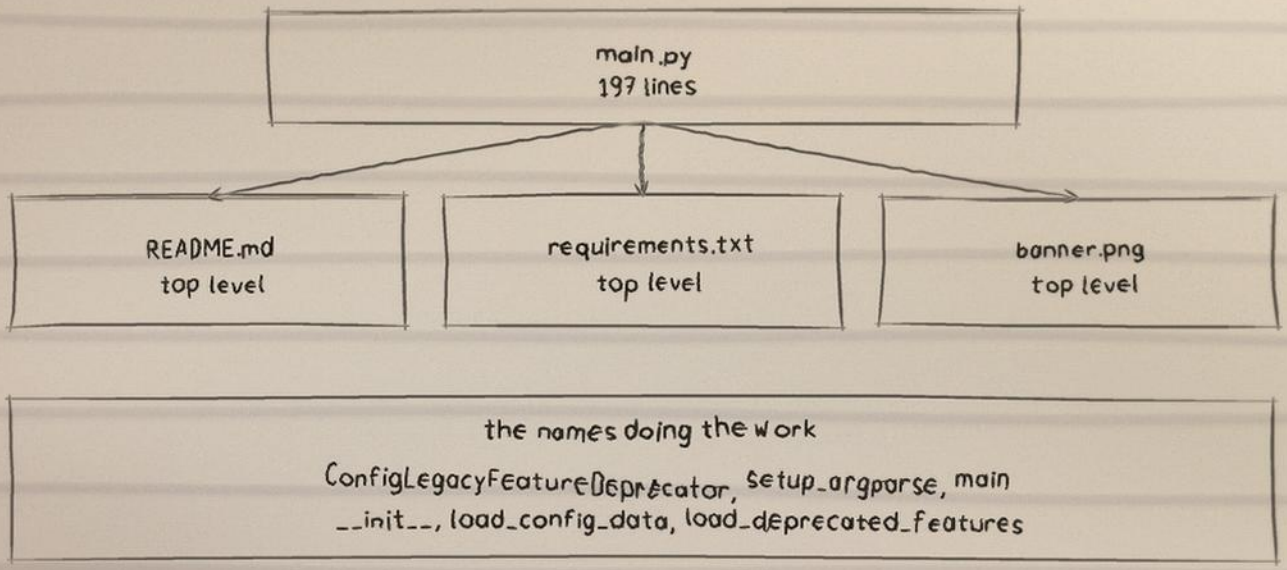

sketched from the fi

Misconfig ConfigLegacyFeatureDeprecator: the run, Step by

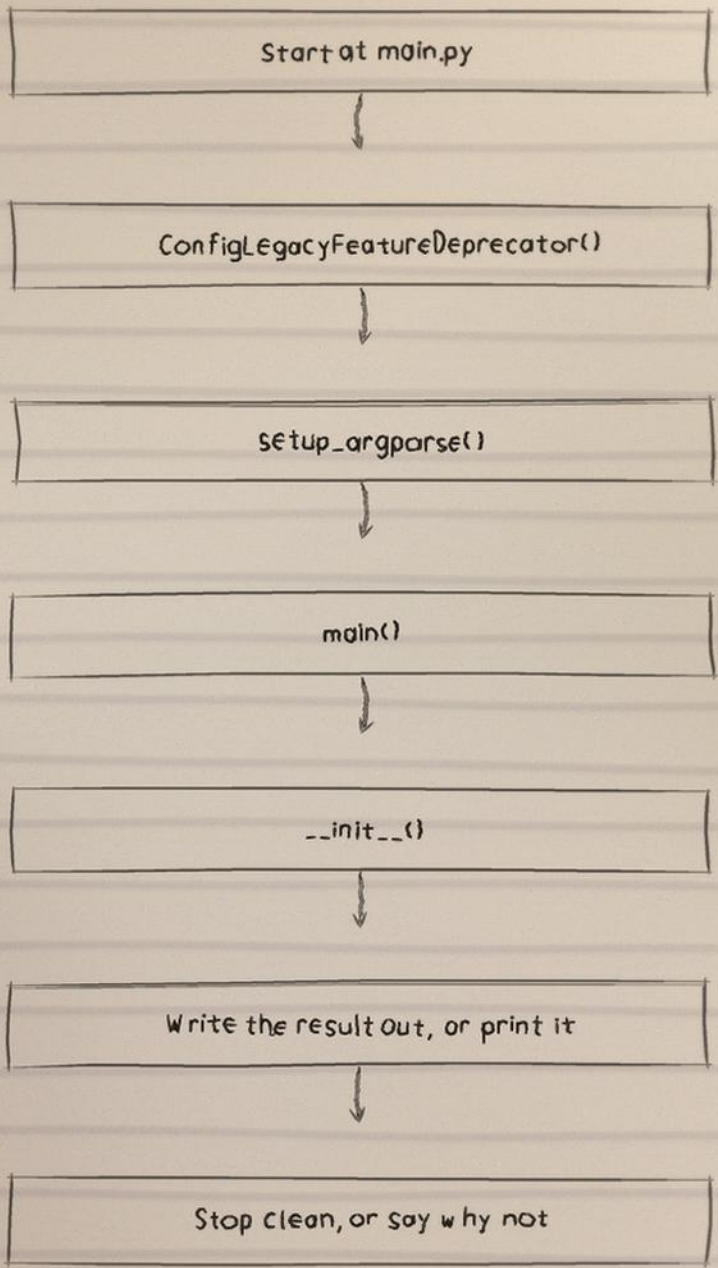

If a step fails, the honest run says so and stops.

traced, not guessed. GK


Product map: what Misconfig Configlegacyfeaturedeprecator is for

WHAT IT IS	WHAT GOES IN
A small project in Python, Markdown, Text. The README and the files are the whole claim.	The files at the top of the tree: main.py, README.md, requirements.txt.

WHAT COMES OUT	WHERE IT STOPS
What the top files produce when they run or get read. Nothing else is promised.	No service behind it, no account, no upload. If a path is untested, VISUAL.md says so.

mapped by hand, 

Misconfig Configlegacyfeaturedeprecator: data flow, in one directio

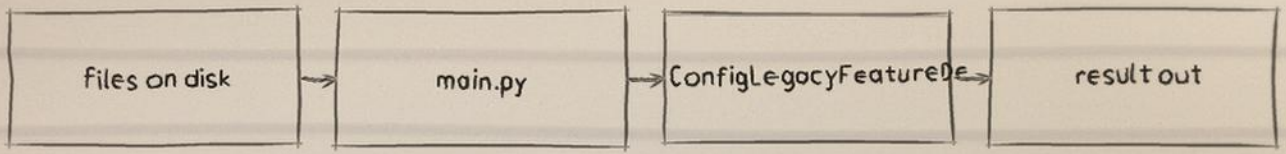


One direction. Anything the code does not do is not drawn.

second sheet, OK

Misconfig Configlegacyfeaturedeprecator in numbers, counted 2026-10-

Counted from the local snapshot of this repo. Method for every number: VISUAL.md.

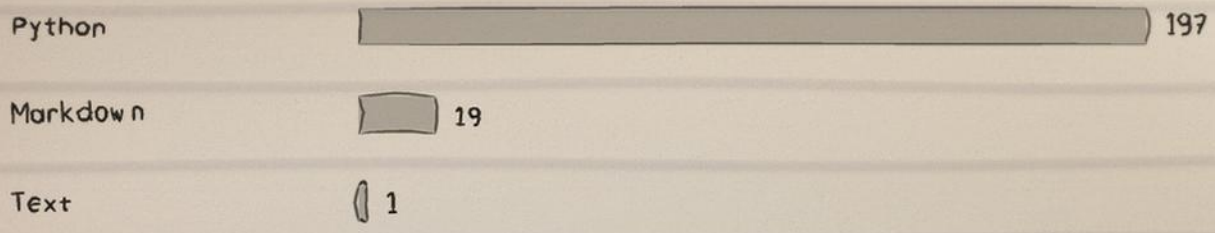

5 files in the tree.
5 commits, first 2025-06-28, last 2026-10-30, from the local git log.
No test files by name in this snapshot.

Counted and drawn, GK

Misconfig Configlegacyfeaturedeprecator: schematic of the apparatu


the system as a machine: parts, flow, and measurements

construction lines left in, as drawn

parts list

1. main.py
2. README.md
3. requirements.txt
4. banner.png

in flow order, first to last

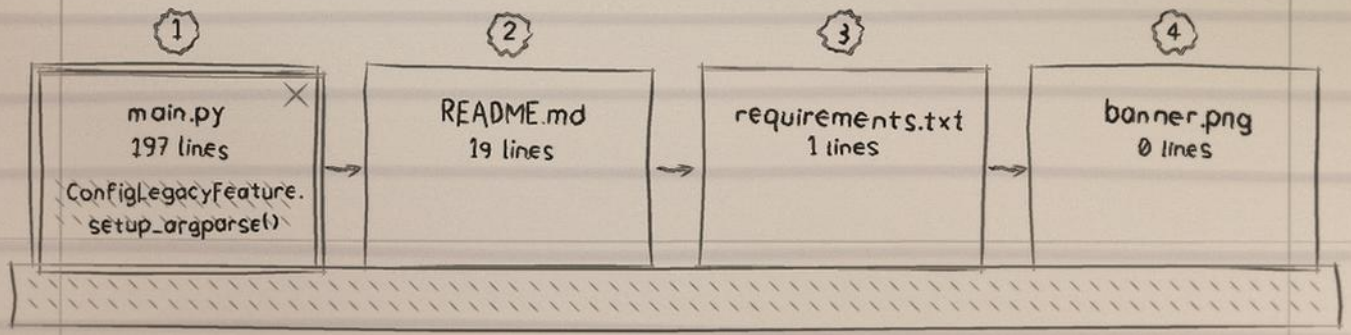

base plate: the repo itself, sectioned

span: 5 files, 217 lines counted

turns of the crank so far: 5 commits, 2025-06-28 to 2026-10-30

measured and sketched, GK