



CSE 232 - Computer Networks

Lec 01 - Introduction

07/08/23

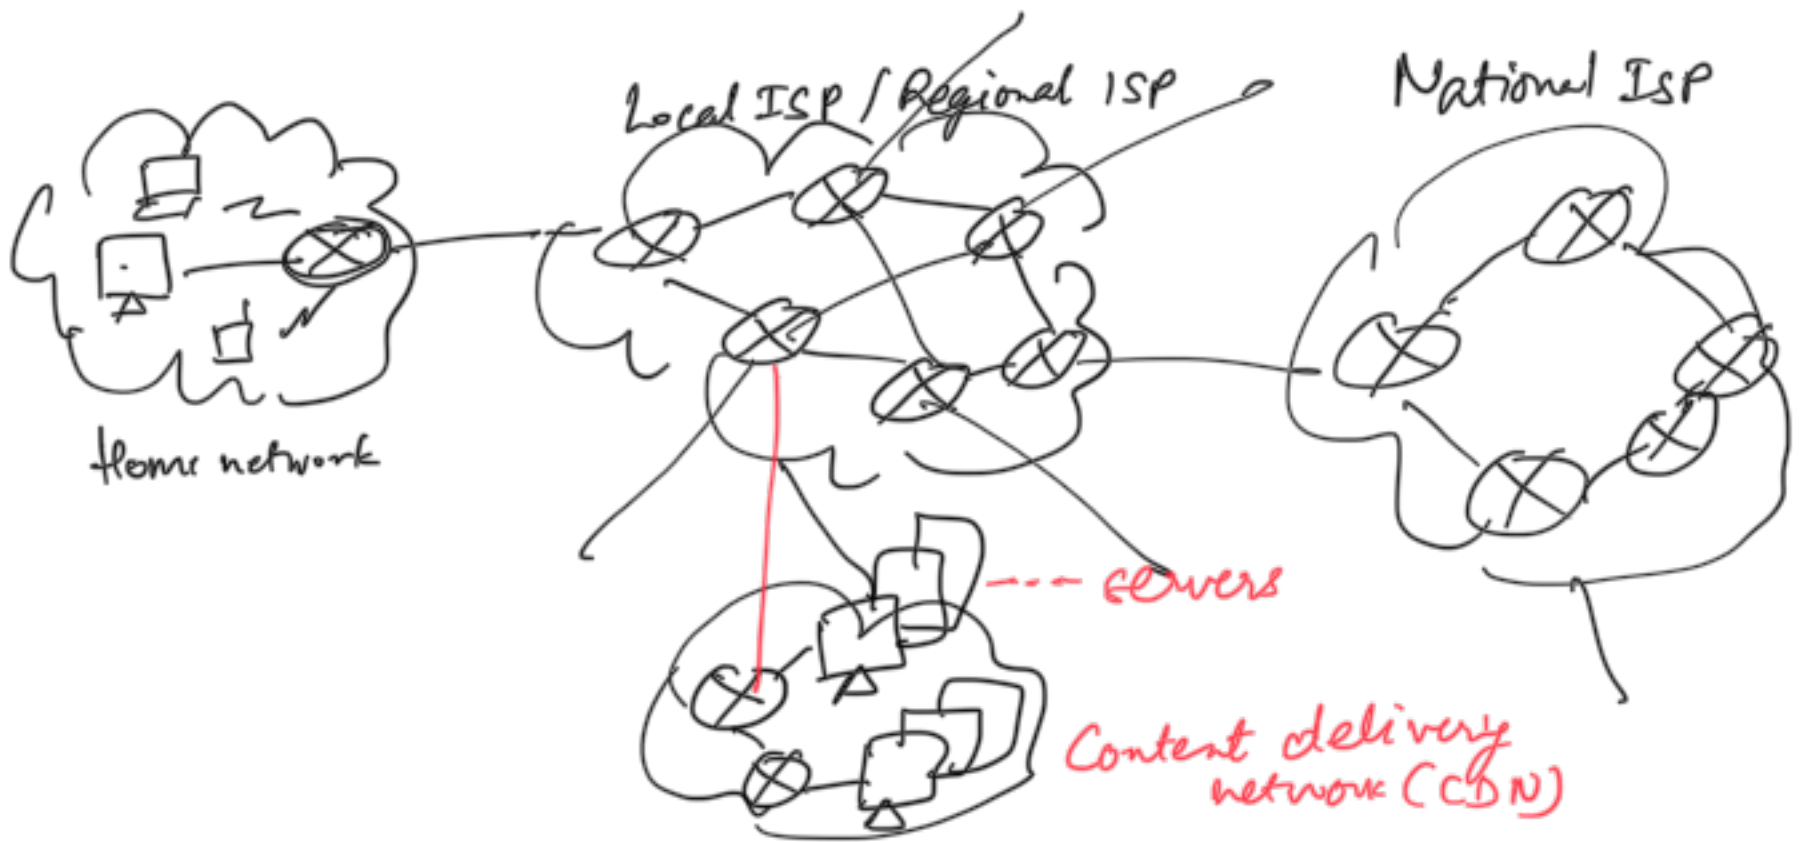


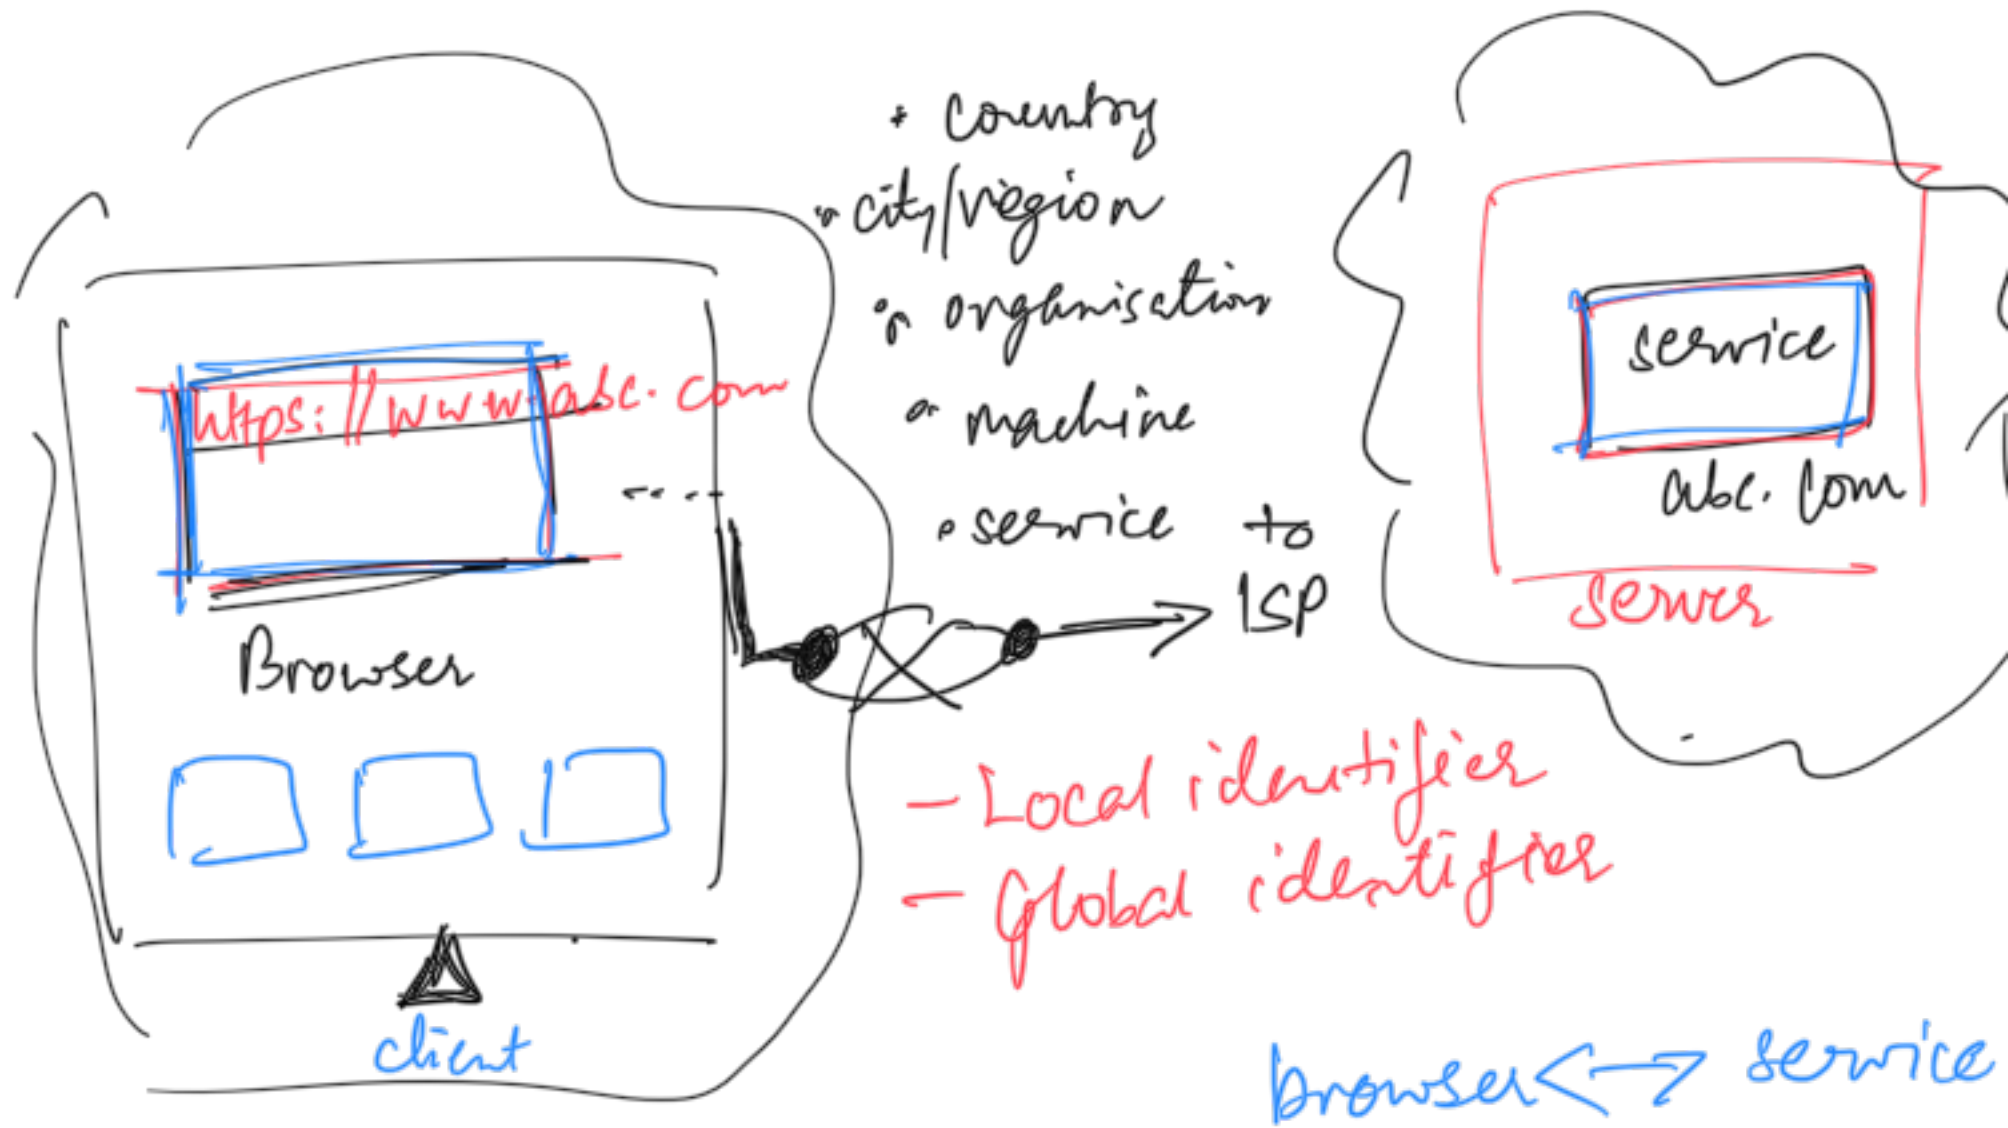

- MAC address ... Local identifier
 48 bit addr : hexadecimal notation
 AE:01:22:33:FE:FF
- global Address ... IP address
 Unique id over Internet

* DNS (Domain name system)
 * map URL to IP address

Abc.com
1. IP addr
2.

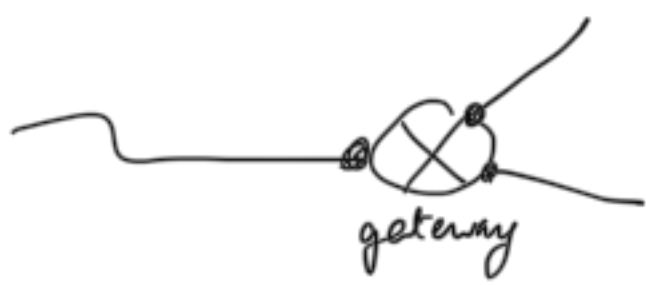

router : find best path to the dest
(routing)

global addr	cost	path



port address : uniquely identify a process
(16bit)
on a machine

0 to 65535

Up to 1024 : std / well-known port -
addr

1025...7 : user-defined port -
addr

HTTP : 80
HTTPS : 443
FTP : 20, 21
... ..

END POINTS

E₁: 'A' global addr + user-defined port addr
browser

E₂: '8' global addr + (80) well-known port addr
abc service

⇒ Connection ⇒ 4 tuple



IPv4: 32bit addr : $0 \rightarrow 2^{32}-1$

