


Request Processing Database ERD

PostgreSQL database: hlrms_requests · reliability state is persisted beside each request.

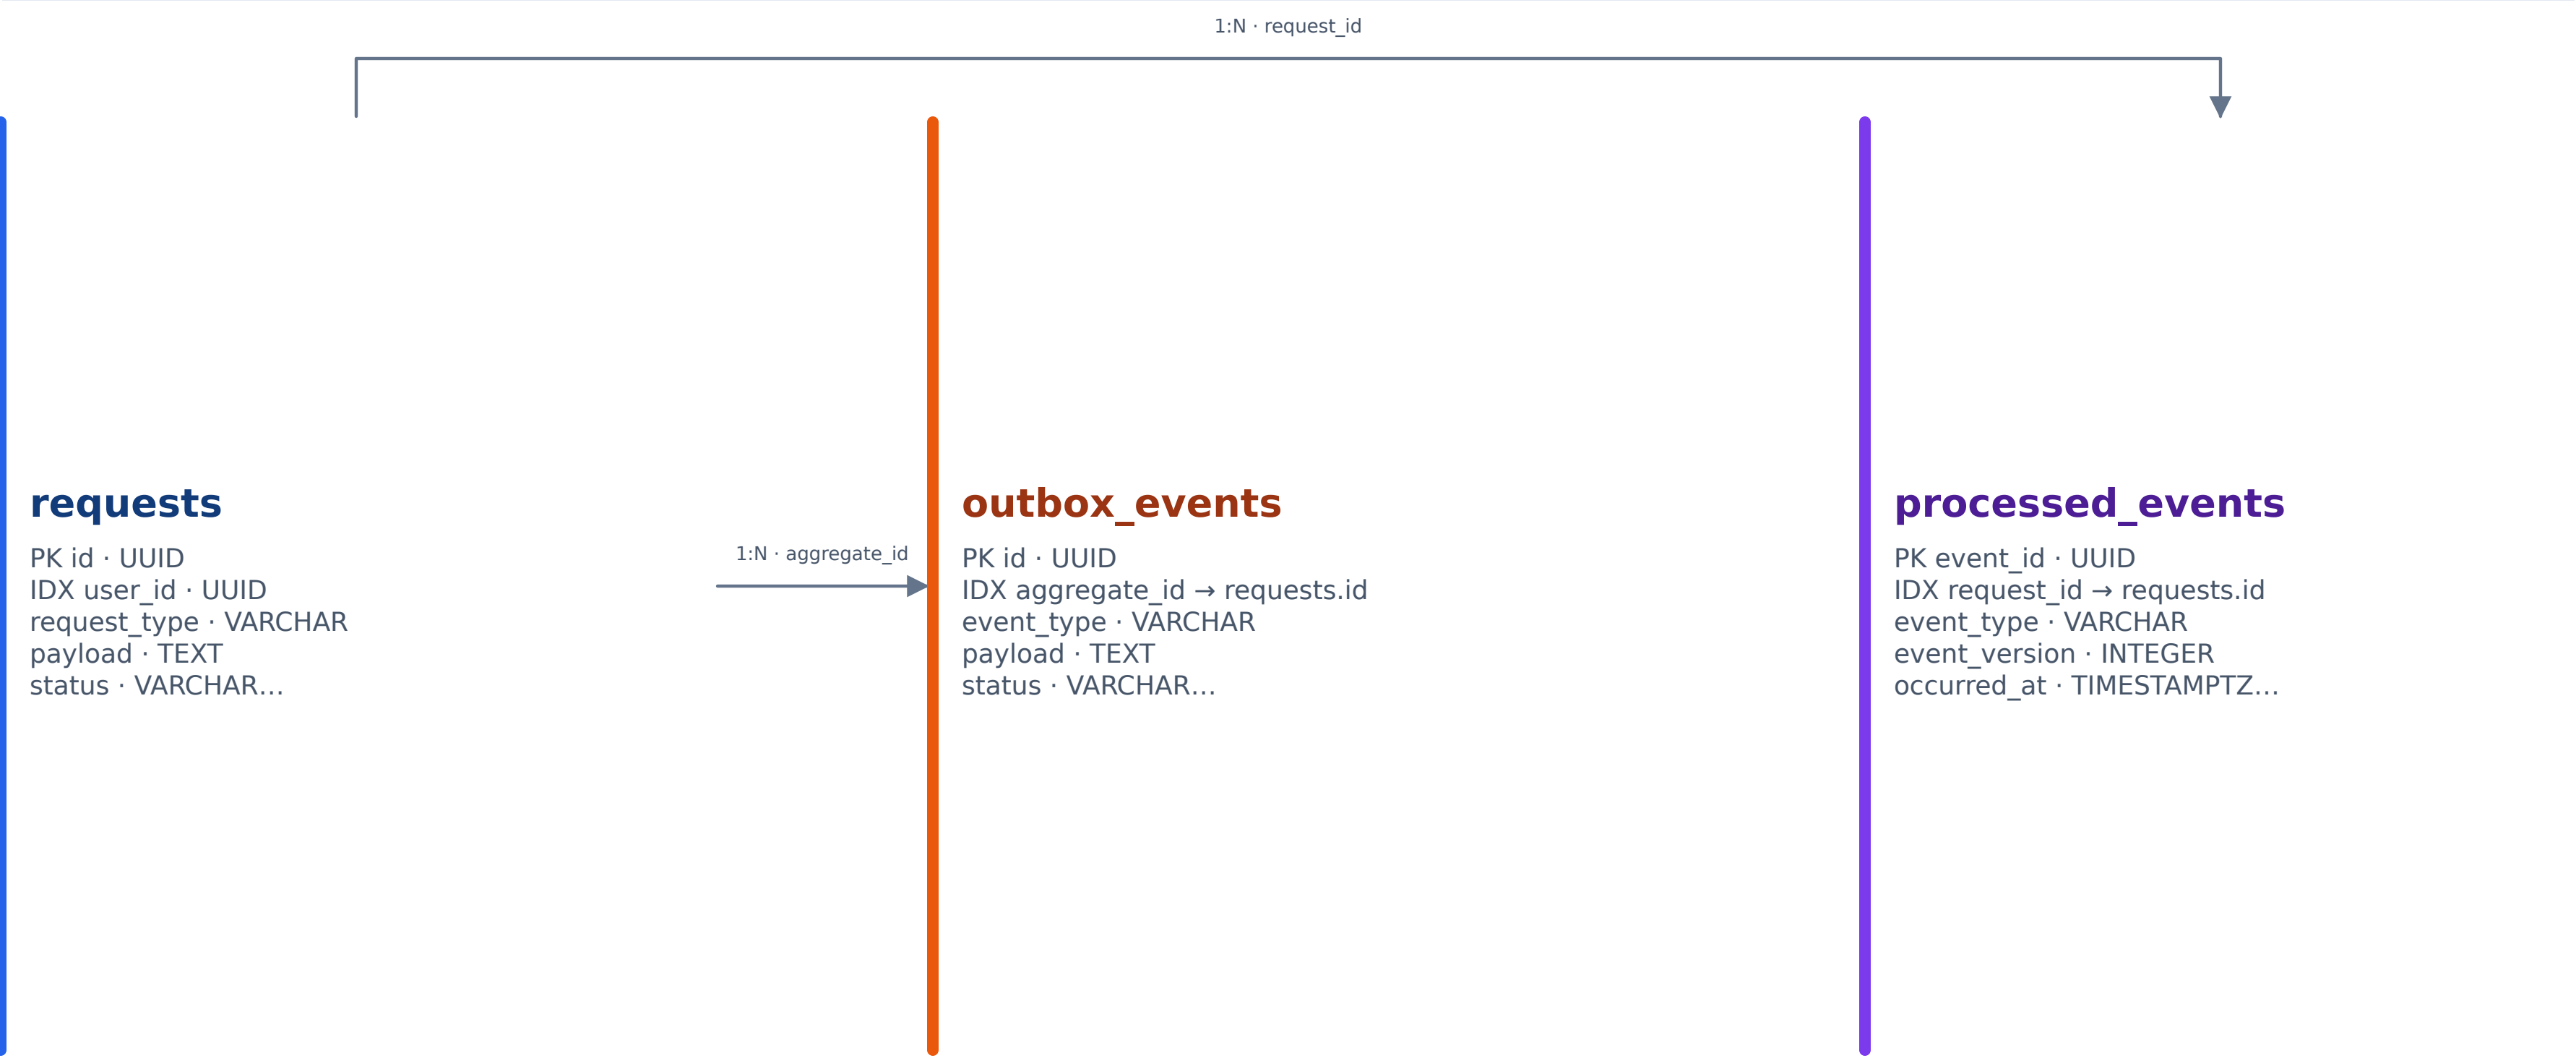

OutboxEvent and ProcessedEvent use unique event identifiers to provide producer and consumer idempotency.