

3. Add a second doctor with **No limit** ticked.

EXPECTED

- The row shows a token letter, 12 as the usual limit and for today, 0 issued.
- **No limit** disables the number box; the second doctor reads "No limit".

Cleanup. None: there is no "remove doctor" yet, so one "Dr Gate ..." doctor remains per run (stated in the spec).

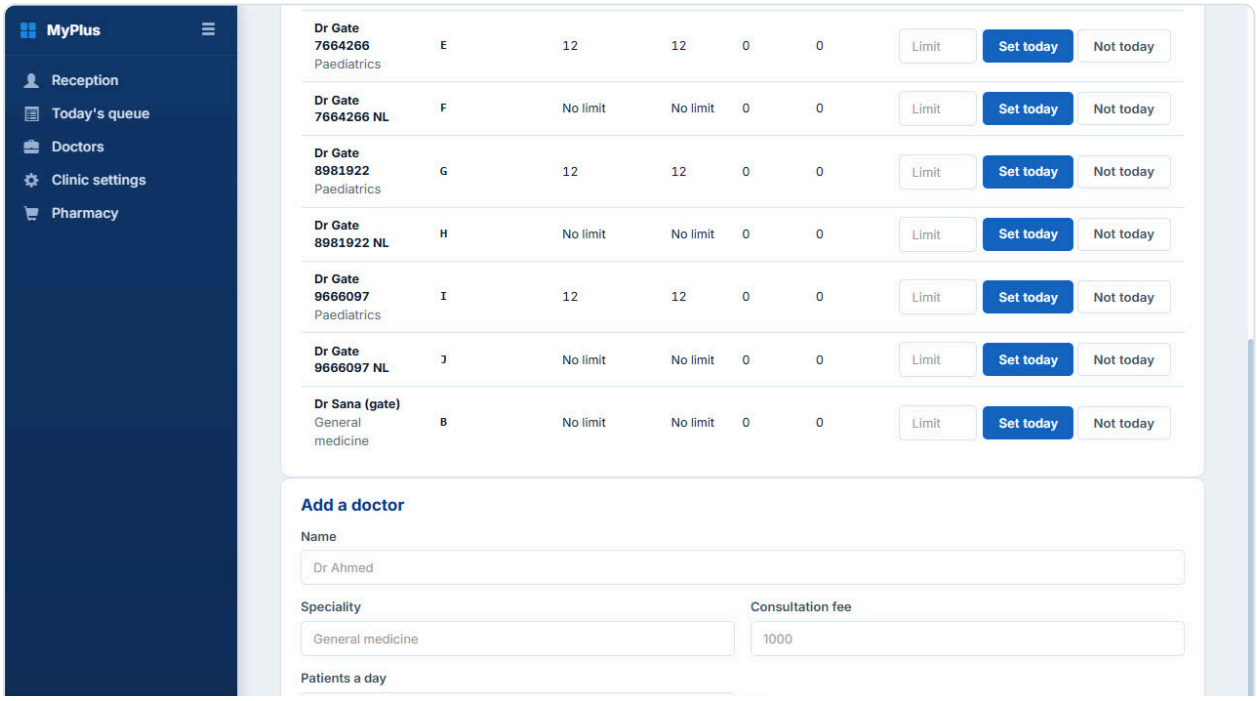



A doctor added with 12 patients a day

S2-02 Reception finds the patient, chooses the doctor, issues a token; the slip shows it

PASSED

02 · real screen Signed in as owner.pharma@myplus.com 8.8 s

Spec `hms/hms-s2-token-queue.cy.js · S2-02`


STEPS

1. Type the patient's phone → the patient opens with the token panel under it.
2. Doctor: **Dr Ahmed (gate)**.
3. **Issue token**.

EXPECTED

- A token in the doctor's letter, e.g. `A-017` , status Waiting.
- The slip: the token in large type, the doctor, "next in line" or "N ahead".

Cleanup. after() cancels this run's live tokens.

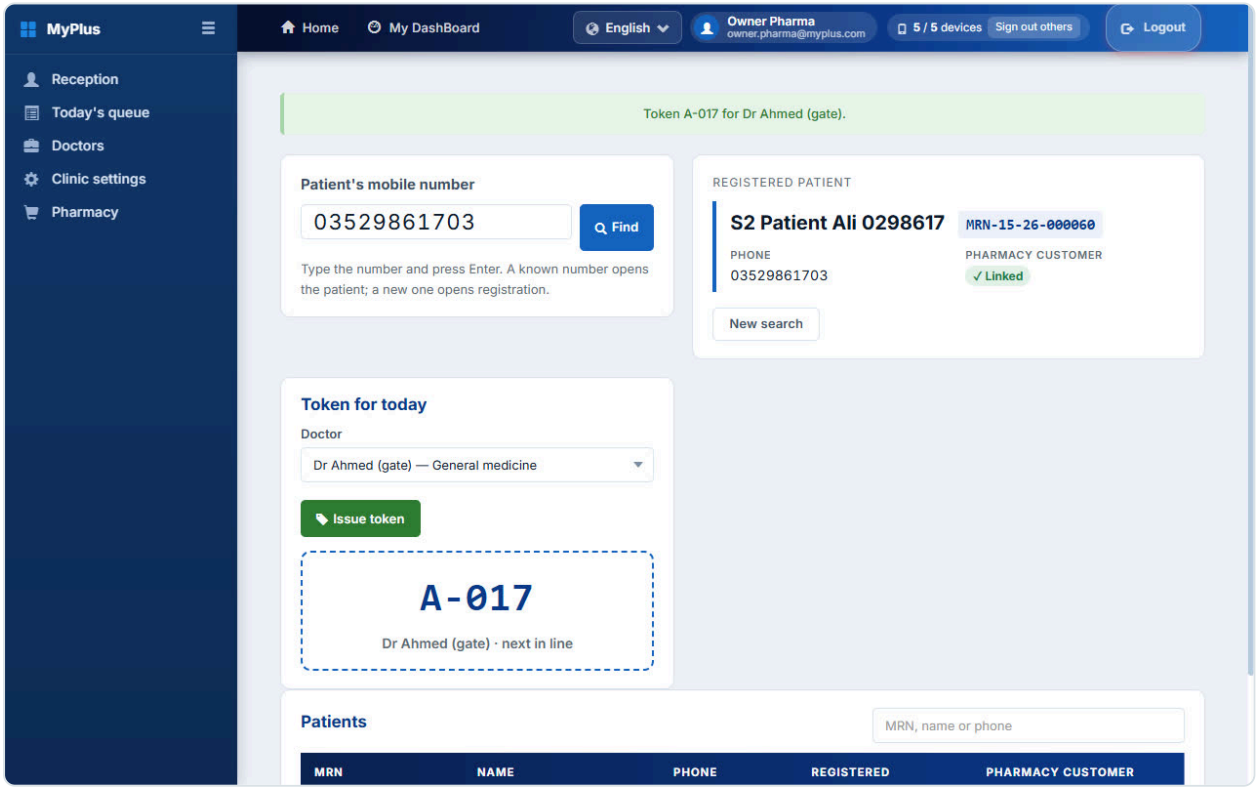

Token issued: the slip

S2-03 A second token with the same doctor the same day is refused, naming the first

PASSED

02b Signed in as owner.pharma@myplus.com 3.9 s

Spec `hms/hms-s2-token-queue.cy.js · S2-03`

STEPS

1. Issue the same patient a token with the same doctor again.

EXPECTED

- Refused: *... already has token A-017 with Dr Ahmed (gate) today.*

Cleanup. Nothing created.

S2-04 On the next visit the patient's last doctor is preselected, and the screen says why

PASSED

02c Signed in as owner.pharma@myplus.com 3.8 s

Spec `hms/hms-s2-token-queue.cy.js · S2-04`


STEPS

1. Type the same phone again.

EXPECTED

- Doctor is already **Dr Ahmed (gate)**; hint: *Last visit was with this doctor.*

Cleanup. The tokens issued are cancelled at the end of the spec. By hand: Today's queue → Cancel each token you issued, with a reason.

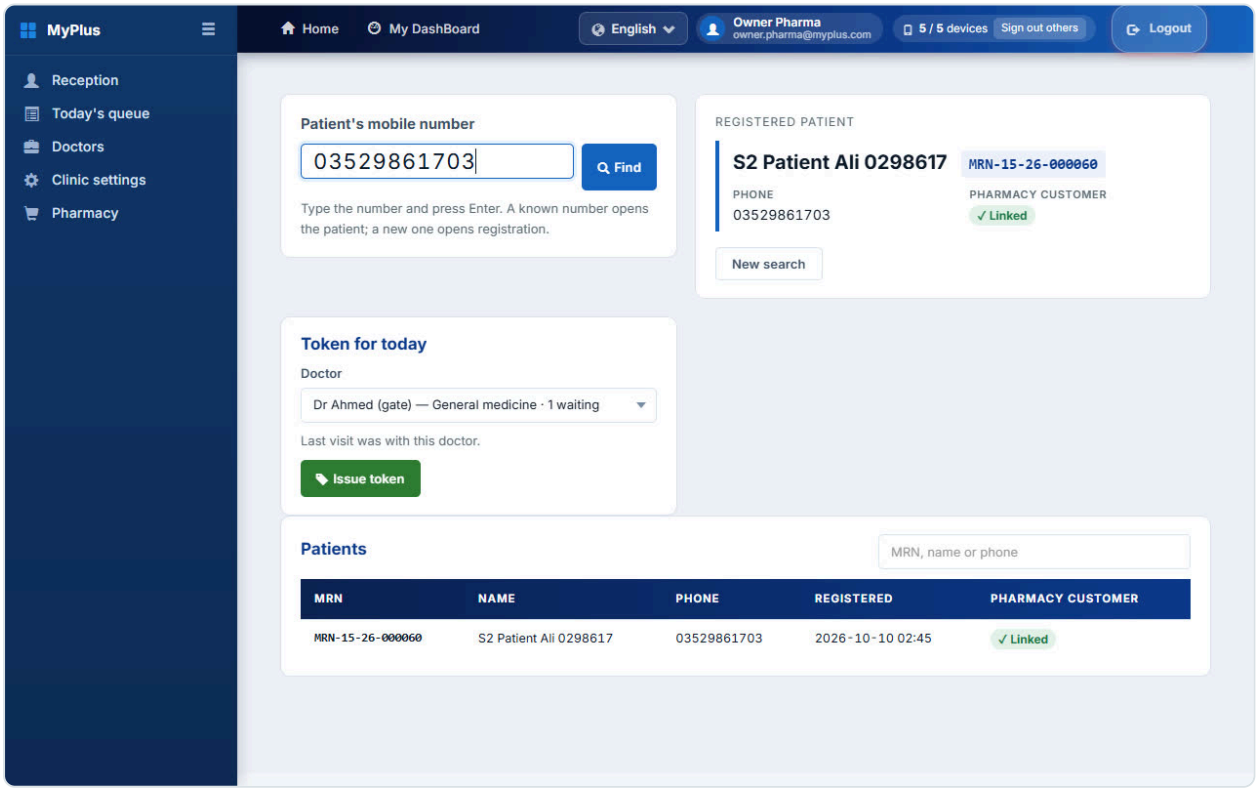

The last doctor preselected

S2-05 The day's limit is enforced; "no limit today" lifts it; "usual" puts it back

PASSED

B-03 Signed in as owner.pharma@myplus.com 8.7 s

Spec `hms/hms-s2-token-queue.cy.js · S2-05`

STEPS

1. Set Dr Sana's limit for today to what she has issued + 1.
2. Issue one token (accepted), then another.
3. Set today's limit to 0 (no limit) and issue again.
4. Press **Usual**.

EXPECTED

- Second token refused: *Dr Sana (gate)'s limit for today (N patients) is reached.*
- With no limit today it is accepted.
- Back to the usual limit.

Cleanup. The one-day change is reset.

S2-06 "Not today" closes the doctor: the picker disables them and the server refuses

PASSED

closed day · real screen Signed in as owner.pharma@myplus.com 12 s

Spec `hms/hms-s2-token-queue.cy.js · S2-06`

STEPS


1. Mark Dr Ahmed **Not today**.
2. Try to issue a token; open the token panel for a patient.
3. On **Doctors**, press **Open again**.

EXPECTED

- Refused: *Dr Ahmed (gate) is not seeing patients today.*
- In the picker the doctor is greyed out, "not today".
- The "Not today" badge disappears.

Found and fixed: First run: the spec checked the row lost the words "Not today", but the button of that name comes back by design. The spec was fixed; the product was right.

Cleanup. Reopened in the case.

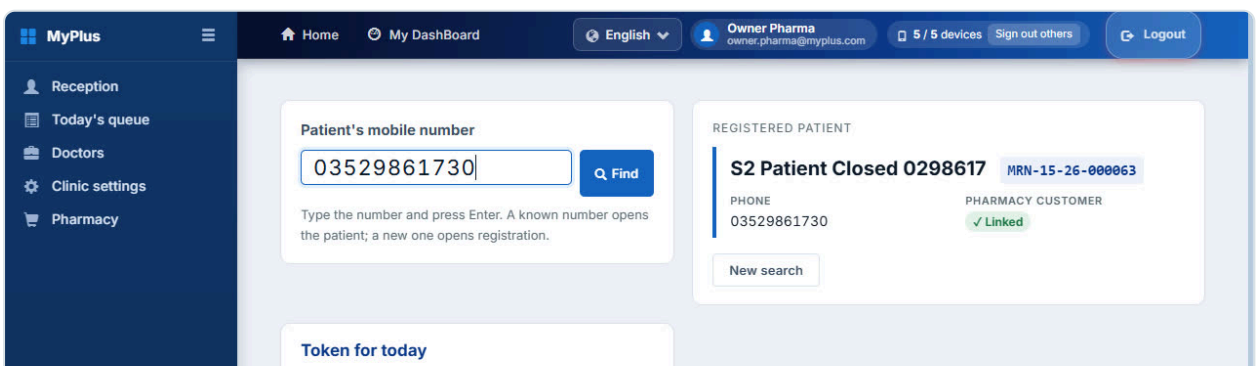



A doctor closed for the day, greyed out in the picker

S2-07 Today's queue lists the tokens; Cancel takes one out and it can be issued again

PASSED

M-04 board · real screen Signed in as owner.pharma@myplus.com 27 s

Spec `hms/hms-s2-token-queue.cy.js · S2-07`


STEPS

1. Clinic → **Today's queue**.
2. Issue a token from elsewhere while the board is open.
3. **Cancel** a token → confirm.
4. Issue the same patient a new token with the same doctor.

EXPECTED


- Rows: token, name, MRN, doctor, status; totals for waiting / with a doctor / done.
- The new token appears within 8 s without a reload.
- The row reads **Cancelled**.
- A new token is issued (a cancelled token frees the place).

Cleanup. after() cancels live tokens.

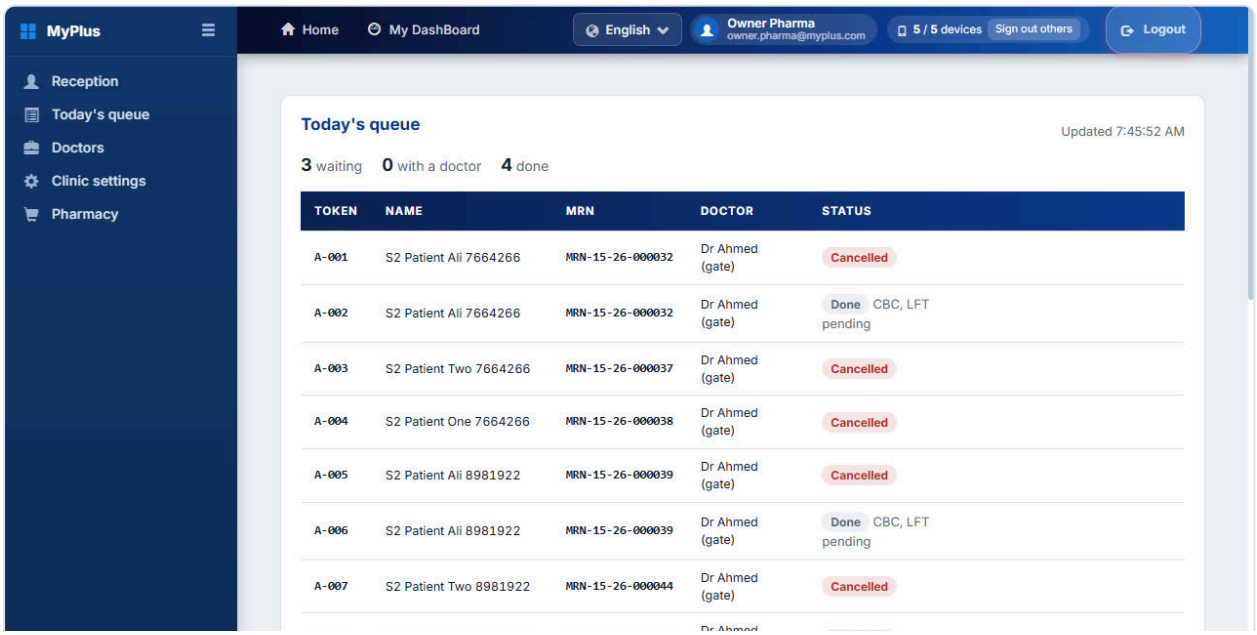



Today's queue

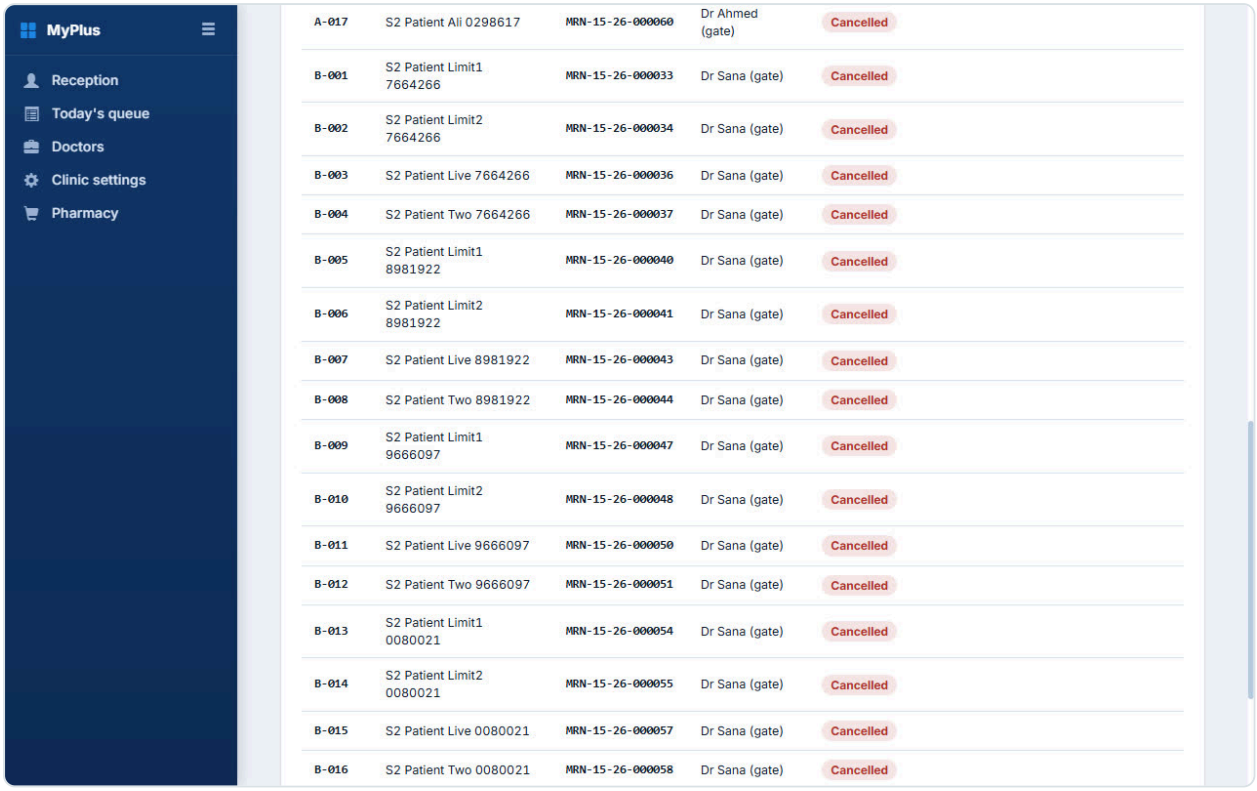

A token cancelled from the board

S2-08 Only the drawn moves are allowed, and a refusal says why PASSED

07b · state machine Signed in as owner.pharma@myplus.com 7.5 s

Spec `hms/hms-s2-token-queue.cy.js · S2-08`

STEPS

1. Call → call again → start → park without a reason → park "CBC, LFT pending" → cancel → resume → complete → call.
2. Open the board.

EXPECTED

- *A-017 is called — it cannot be called.*
- Parking needs a reason.
- *… is parked — it cannot be cancelled.*
- *… is completed — it cannot be called.*
- The finished token reads **Done**, without its old park reason.

Found and fixed: The S2 screenshot showed "Done · CBC, LFT pending" on finished tokens, as if the tests were still out. Fixed in the screen code; the board check was added to this case and passes once the monolith is redeployed.

Cleanup. The token ends completed.

S2-09 A patient may see two doctors a day, one at a time; the setting can forbid the second

PASSED

04c Signed in as owner.pharma@myplus.com 8.3 s

Spec `hms/hms-s2-token-queue.cy.js · S2-09`

STEPS

1. Give one patient tokens with Dr Ahmed and Dr Sana.
2. Dr Ahmed calls; then Dr Sana calls.
3. Turn the setting off; try a second doctor for another patient.

EXPECTED

- Both tokens are allowed.
- Refused: *This patient is with Dr Ahmed (gate) now (A-0xx).*
- Refused: *... one token per patient per day.*

Cleanup. The setting is reset; tokens cancelled in after().

S2-10 Another clinic, with its own clinic switched on, cannot read a token or use this clinic's doctor

PASSED

M-14 Signed in as owner.business@myplus.com 36 s

Spec `hms/hms-s2-token-queue.cy.js · S2-10`

STEPS

1. Switch the clinic on for owner.business.
2. Read this clinic's token by id; read the board; issue a token with this clinic's doctor.

EXPECTED

- *Token not found*; not on its board; the doctor and patient are "not found".

Cleanup. owner.business's switch is reset.

S2-11 A doctor cannot be put in another organisation's venue

PASSED

tenancy Signed in as owner.business → owner.appointment 28 s

Spec `hms/hms-s2-token-queue.cy.js · S2-11`

STEPS

1. owner.appointment (org 18) registers a venue.
2. owner.business (org 13) registers a doctor in it.

3. Read that venue's doctors.

EXPECTED

- Refused: `message: "RegisterFailed"` .
- No such doctor appears.

Found and fixed: This found a real defect: appointment-service saved any venue id it was sent. Fixed, plus an automatic start-up repair (no manual SQL). The case also showed that every older spec checking `error ≠= "RegisterFailed"` tested nothing (`error` is always null); five assertions were corrected.

Cleanup. None needed. A doctor that got through while the defect was live is removed automatically by appointment-service at start (moved to `provider_quarantine`).

S4-lite Pharmacy search and the patient as customer: delivered

Spec `cypress/e2e/hms/hms-s4lite-pharmacy.cy.js` , 5 / 5 on 2026-10-10, twice in a row, Chrome 153 headless. Reception is owner.pharma; the pharmacist is user.pharma, who cannot see reception's customers in the sale form. That is the case that used to create a duplicate customer. Video: `cypress/videos/hms-s4lite-pharmacy.cy.js.mp4` , kept locally.

S4L-L-01 The pharmacist types the clinic token and finds the patient's prescription — PASSED

B-01 · real screen Signed in as user.pharma@myplus.com (the pharmacist)

60 s (includes registering the patient, a token and the slip)

Spec `hms/hms-s4lite-pharmacy.cy.js · L-01`

STEPS


1. Pharmacy → **Prescriptions**.
2. Type the token loosely, e.g. `a-34` for A-034, and press Enter.


EXPECTED

- A line: *Showing S4 Patient … · MRN-15-26-000087 · 0367…*
- Only this patient's prescriptions are listed, PENDING, with Dispense.
- No **Load more**: one person, one page.

Found and fixed: A screenshot showed "Load more" after a one-row search. The cause is app-wide: theme.css forces every .btn to display:inline-flex !important, so a button cannot be hidden. The page now hides a wrapper around it.

Cleanup. after() cancels the prescription if it was not dispensed, cancels the token, retires the patient.



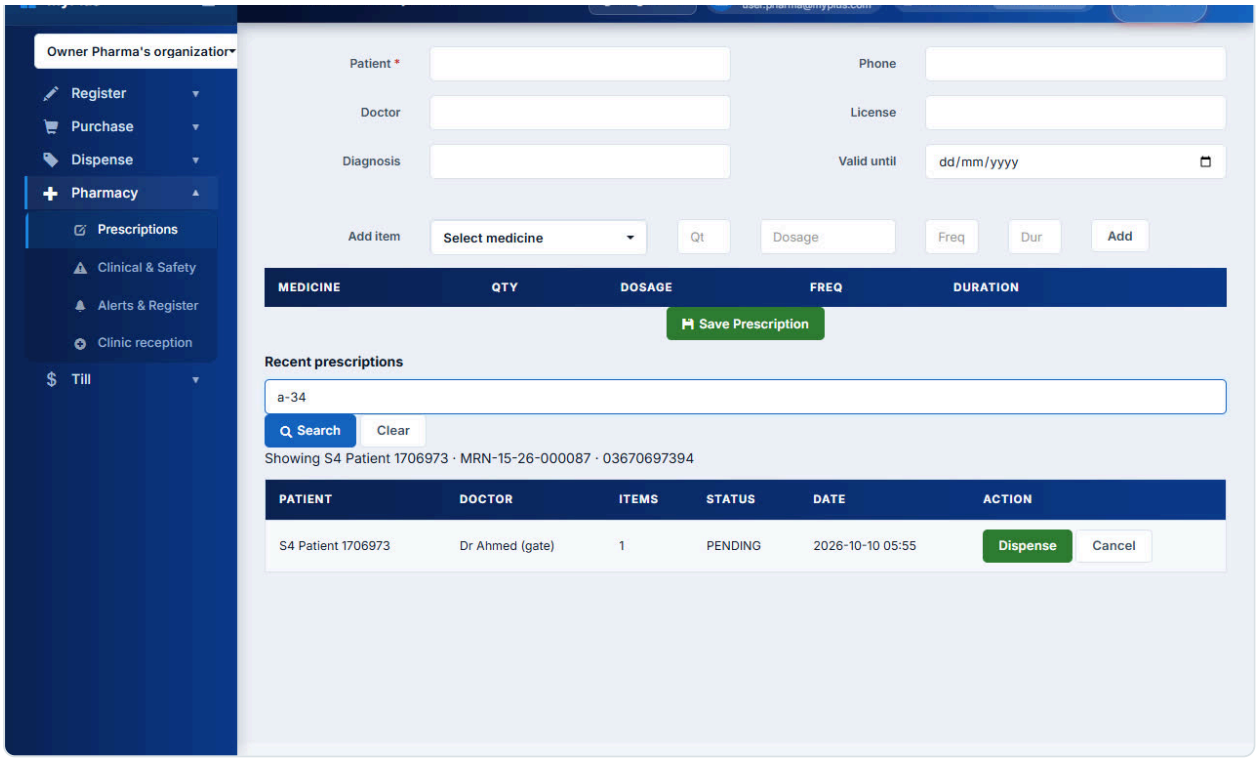

Found by token: who it is, and their prescription

S4L-L-02 The same prescription is found by MRN, by phone and by name; a stranger finds nothing

PASSED

search Signed in as user.pharma@myplus.com (the pharmacist) 2.5 s

Spec `hms/hms-s4lite-pharmacy.cy.js · L-02`

STEPS

1. Search the MRN, the phone as +92..., and the name.
2. Search a name nobody has.

EXPECTED

- Each search lists the prescription.
- The stranger search lists nothing.

Cleanup. Nothing is written: searching only reads.

S4L-L-03 The list is paged: "Load more" brings the next page

PASSED

paging Signed in as user.pharma@myplus.com (the pharmacist) 8 s

Spec `hms/hms-s4lite-pharmacy.cy.js · L-03`

STEPS

1. Open Prescriptions with no search.
2. Press **Load more**.

EXPECTED

- At most 25 rows at first

- At most 25 rows at first.
- More rows appear below.

Cleanup. Nothing is written: paging only reads.

S4L-L-04 Dispense fills the sale and names the patient as the customer, by id: no duplicate

PASSED

07 · real screen Signed in as user.pharma@myplus.com (the pharmacist) 12 s

Spec `hms/hms-s4lite-pharmacy.cy.js · L-04`


STEPS

1. Search the MRN → **Dispense**.
2. Cash, received 1000 → **Complete Sale** → confirm.

EXPECTED

- The sale form: the medicine in the cart, the patient's name and mobile filled; nothing typed.
- The sale carries the customer id made at reception (the pharmacist cannot see that customer in the list).
- The prescription becomes FULLY_DISPENSED.
- One customer for this phone, not two.

Cleanup. The sale is a ledger fact and stays.

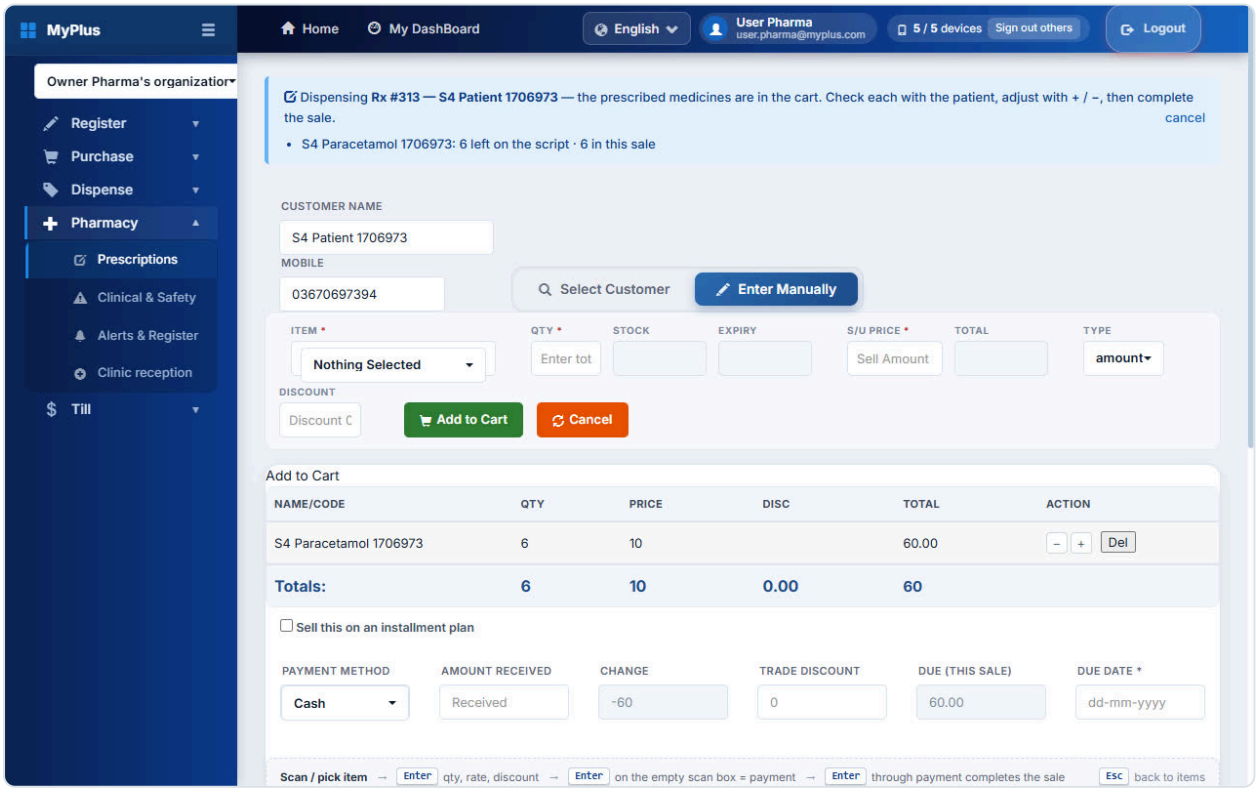

Dispense: the patient is the customer

S4L-L-05 **A sale naming another organisation's customer id is refused, and that customer is untouched** PASSED

tenancy Signed in as owner.business@myplus.com 9 s

Spec `hms/hms-s4lite-pharmacy.cy.js · L-05`

STEPS

1. As another organisation, post a sale naming the pharmacy patient's customer id.

EXPECTED

- Refused: *Customer not found*.
- The customer still belongs to the pharmacy.

Found and fixed: This found a real defect: a sale loaded the customer by id without checking the organisation, then stamped the seller's organisation on it, moving it between businesses. Fixed for every till; the refusal also used to read 'An unexpected error occurred'.

Cleanup. Nothing written.

By hand. Automated only: a sale naming another organisation's customer id cannot be made from a screen.

S3a The doctor's workspace: delivered

Spec `cypress/e2e/hms/hms-s3a-doctor.cy.js` , 5 / 5 on 2026-10-10, Chrome 153 headless. The doctor is a member the owner puts on the new built-in **Doctor** permission set (only `clinic.consult` ; placed on nobody automatically; admins do not get it). Templates, the prescription writer, park/resume on screen and Submit to the pharmacy are S3b.

S3A-D-01 **The doctor calls the patient, sees who it is, records vitals and a note, and completes the visit** PASSED

04 · 07 · real screen Signed in as admin.pharma@myplus.com, on the Doctor permission set

67 s (includes setup: permission set, patient, token) Spec `hms/hms-s3a-doctor.cy.js · D-01`

STEPS


1. Clinic → **My queue** (shown only to a doctor) → choose the doctor.
2. On the waiting token: **Call**, then **Start**.
3. Complaint "Fever 3 days"; BP 120/80, pulse 78, temp 101.2 °F, SpO2 97 → **Save**.
4. Write a note → **Add note**.
5. **Complete visit** → confirm.

EXPECTED


- Before anything clinical: name, MRN, date of birth and age, sex, token.
- Vitals saved, not yet BP 120/80

- Vitals saved as typed; BP 120/80.
- The note listed with its time.
- Status COMPLETED; the form is locked.


Cleanup. after() cancels live tokens, retires the patient and puts admin.pharma back on Administrator. The visit and its notes stay: clinical records are append-only.

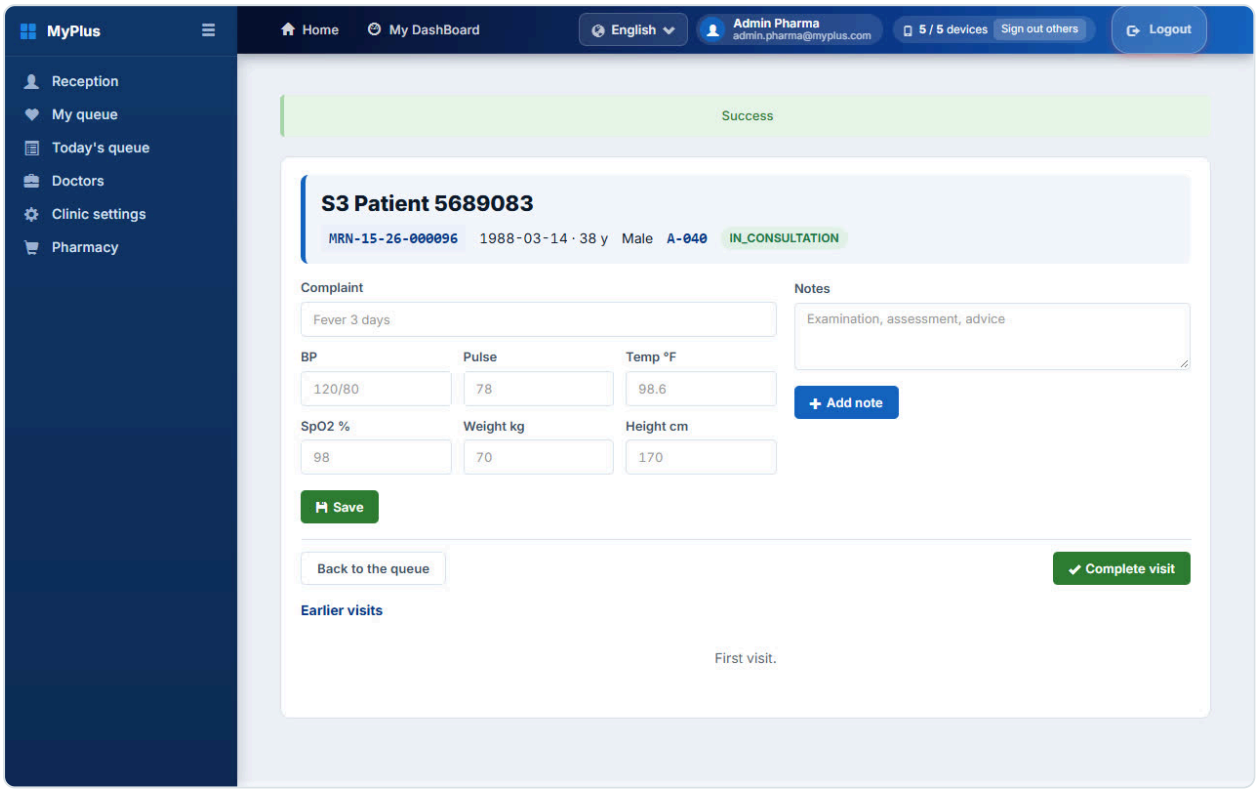


Who it is, before anything clinical

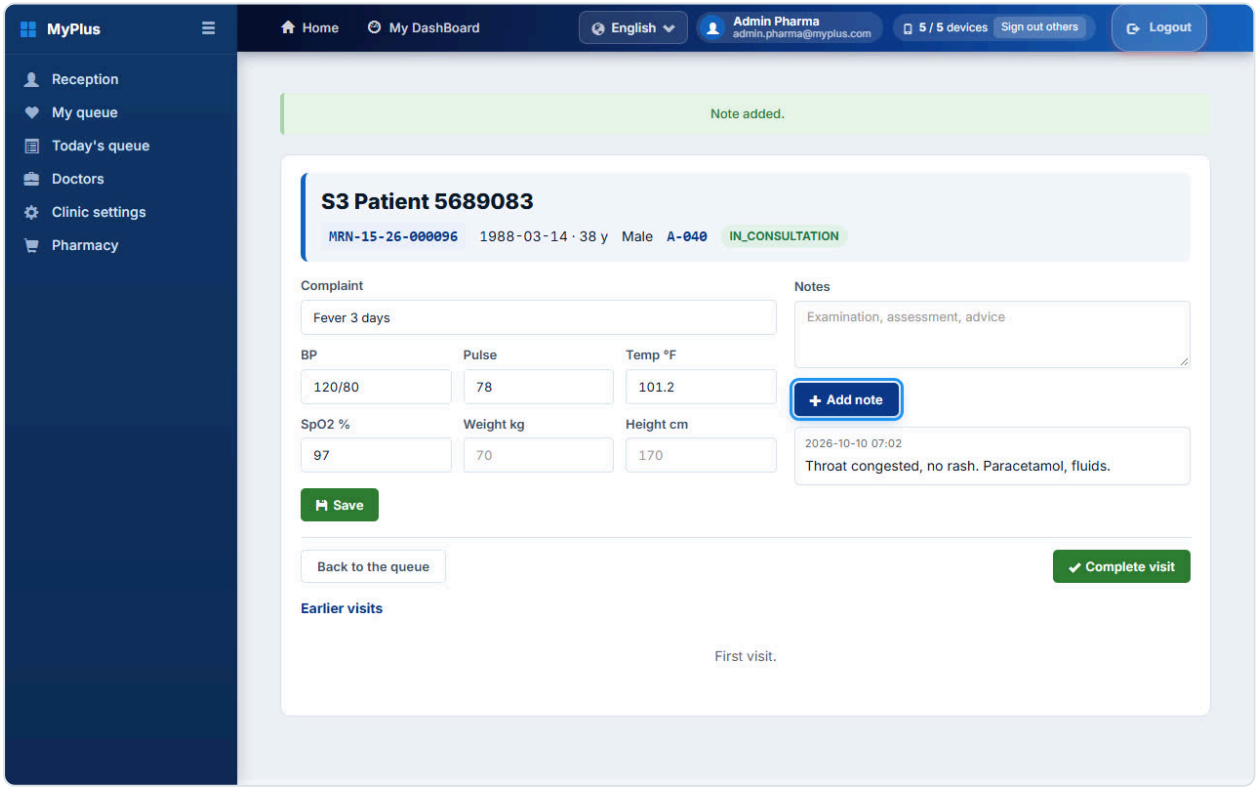

Vitals and a note



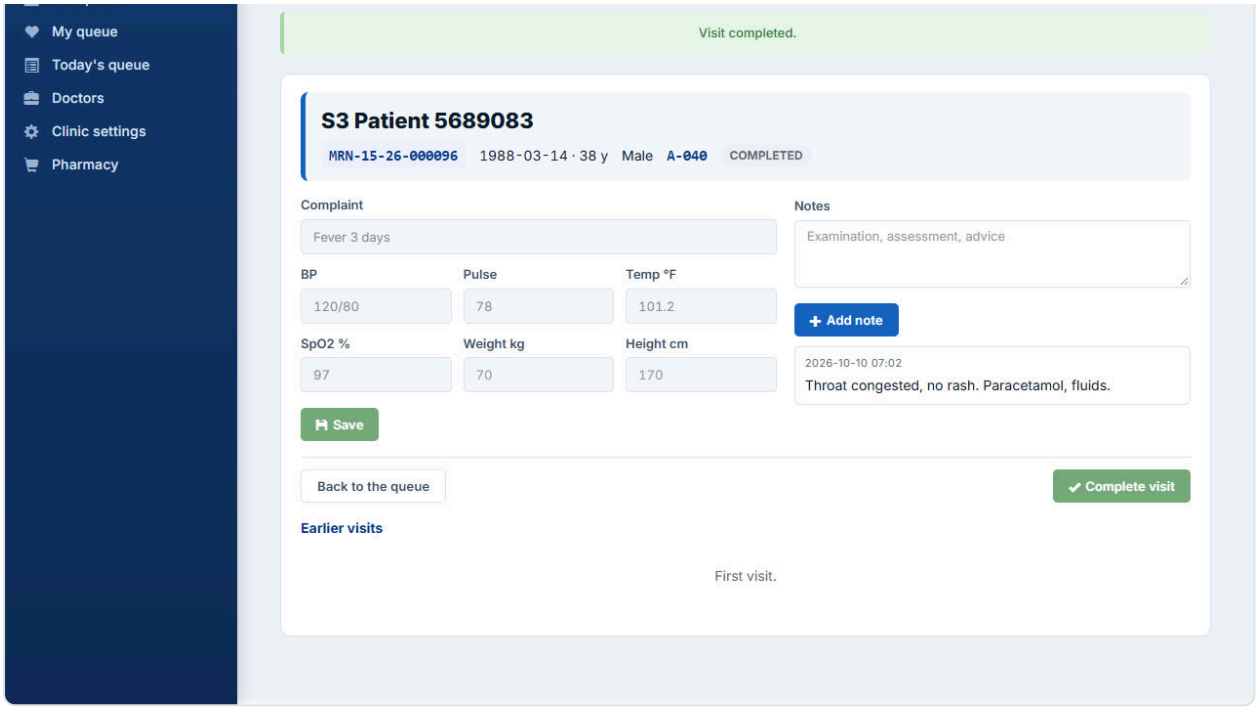

Visit completed

S3A-D-02 Vitals are range-checked; a completed visit is not edited; a note can still correct it

PASSED

04b · 07c Signed in as admin.pharma@myplus.com, on the Doctor permission set 1.6 s

Spec `hms/hms-s3a-doctor.cy.js · D-02`

STEPS

1. Save temperature 986.
2. Edit the completed visit.
3. Add a correction pointing at the first note.

EXPECTED

- Refused: between 90 and 110.
- Refused: *This visit is completed. Add a note to correct it.*
- Both notes kept; the second points at the first.

Found and fixed: The first run found a defect: opening a visit returned a 500 because the read was read-only while it also writes the audit record. Fixed.

Cleanup. The note stays on the visit (a clinical note is never deleted; a later note corrects it). The visit is completed and the test patient retired at the end of the spec.

S3A-D-03 The next visit shows the earlier one: complaint, vitals and notes

PASSED

history Signed in as admin.pharma@myplus.com, on the Doctor permission set 1.9 s

Spec `hms/hms-s3a-doctor.cy.js · D-03`

STEPS

1. Reception gives the same patient a new token with the same doctor.
2. The doctor calls and starts it.
3. Start it again.

EXPECTED

- History: one earlier visit with "Fever 3 days", BP 120/80 and the note.
- The second Start returns the same visit.

Found and fixed: The first run found a defect: a second visit the same day with the same doctor returned a 500, because the database counted a completed token as live. Fixed by V4.

Cleanup. The token is cancelled in after().

S3A-D-04 **The front desk cannot see My Queue, open a visit or call a patient** PASSED

M-15 Signed in as user.pharma@myplus.com 6.7 s Spec `hms/hms-s3a-doctor.cy.js · D-04`

STEPS

1. Sign in as the front desk; open the clinic.
2. Open the visit by its address.
3. Call a patient.

EXPECTED

- No **My queue**.
- 403: *Only a doctor can open clinical records…*; no note text in the reply.
- 403, the same sentence.

Cleanup. Nothing is written: every attempt is refused.

S3A-D-05 **Another organisation's owner, with their own clinic on, cannot open the visit** PASSED

M-14 Signed in as owner.business@myplus.com 15 s Spec `hms/hms-s3a-doctor.cy.js · D-05`

STEPS

1. Switch the clinic on for that organisation.
2. Open the visit by its address.

EXPECTED

- *Visit not found*, exactly like a visit that does not exist; no name and no note in the reply.

Cleanup. That organisation's clinic switch is reset in the case.

S3b-1 The prescription reaches the pharmacy: delivered

Spec `cypress/e2e/hms/hms-s3b1-prescription.cy.js` , 7 / 7 on 2026-10-10, Chrome 153 headless, run with S3a (5 / 5 again). The doctor chooses medicines from the pharmacy's own catalogue; nothing reaches the pharmacy until **Submit**; a repeated Submit is the same prescription. Templates (case 05) are S3b-2; pressing − on a dispensed line (case 08) is S4.

S3B1-R-01 The doctor adds two medicines from the pharmacy's list and submits them — PASSED

B-01 · 07 Signed in as admin.pharma@myplus.com, on the Doctor permission set

38–80 s (includes setup: permission set, patient, two medicines, token)

Spec `hms/hms-s3b1-prescription.cy.js · R-01`

STEPS


1. My queue → the doctor → **Call**, **Start**; complaint "Sore throat, fever" → **Save**.
2. Type a medicine that is not in the list, quantity 5 → **Add**.
3. Type the first medicine, choose it from the suggestions; Qty 10, Dose 1 cap, Frequency TDS, Duration 5 days → **Add**.
4. The second medicine: Qty 6, 1 tab, SOS, 3 days → press **Enter** in Duration.
5. **Submit to pharmacy** → confirm.
6. **Complete visit** → confirm.


EXPECTED

- Refused: *"..." is not in the pharmacy's list. Choose it from the suggestions.*
- Two lines in the prescription table.
- The reply says *Sent to the pharmacy with token A-0xx.*; the badge shows **Sent to the pharmacy · A-0xx · time**.
- Add, Save, Submit and Remove are gone: a sent prescription is locked.
- The status reads **Done**.


Found and fixed: Defect seen on this screen and NOT yet fixed: the time on the badge is the server's UTC clock (08:07 for a run at 13:07 in Pakistan). The pharmacy list's Date has the same fault.

Cleanup. after() cancels a prescription that was not dispensed, retires the patient and puts admin.pharma back on Administrator.

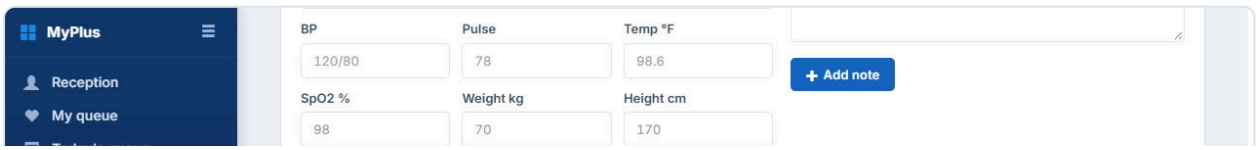

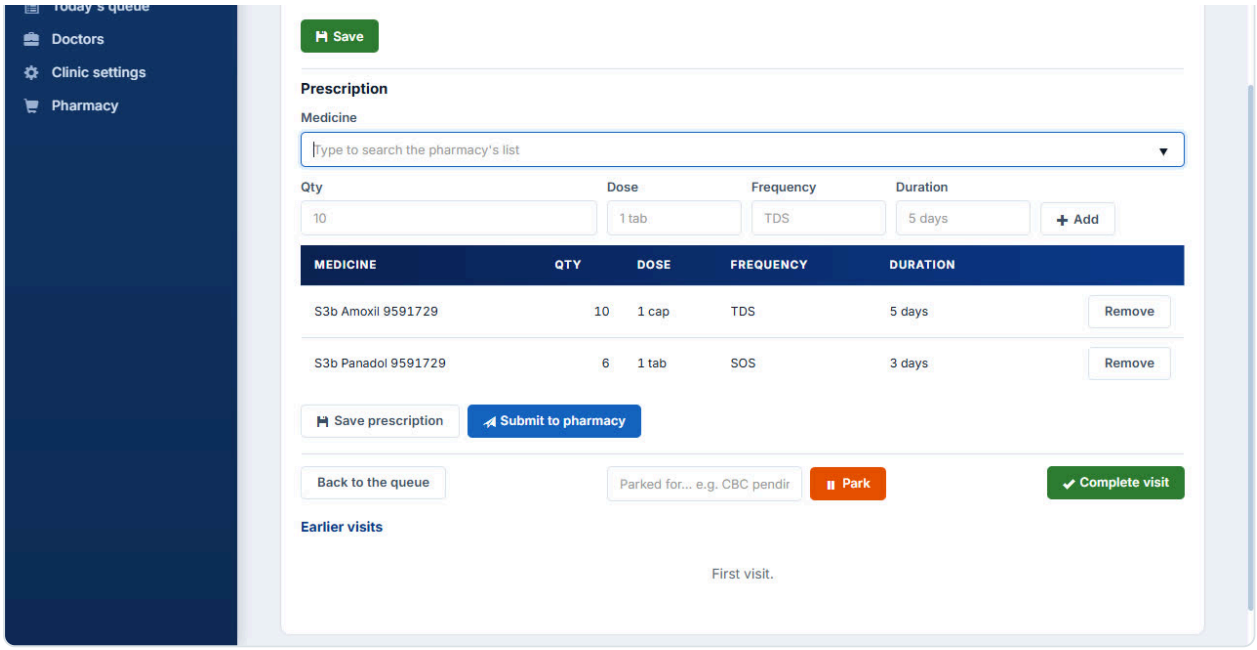

Two medicines written

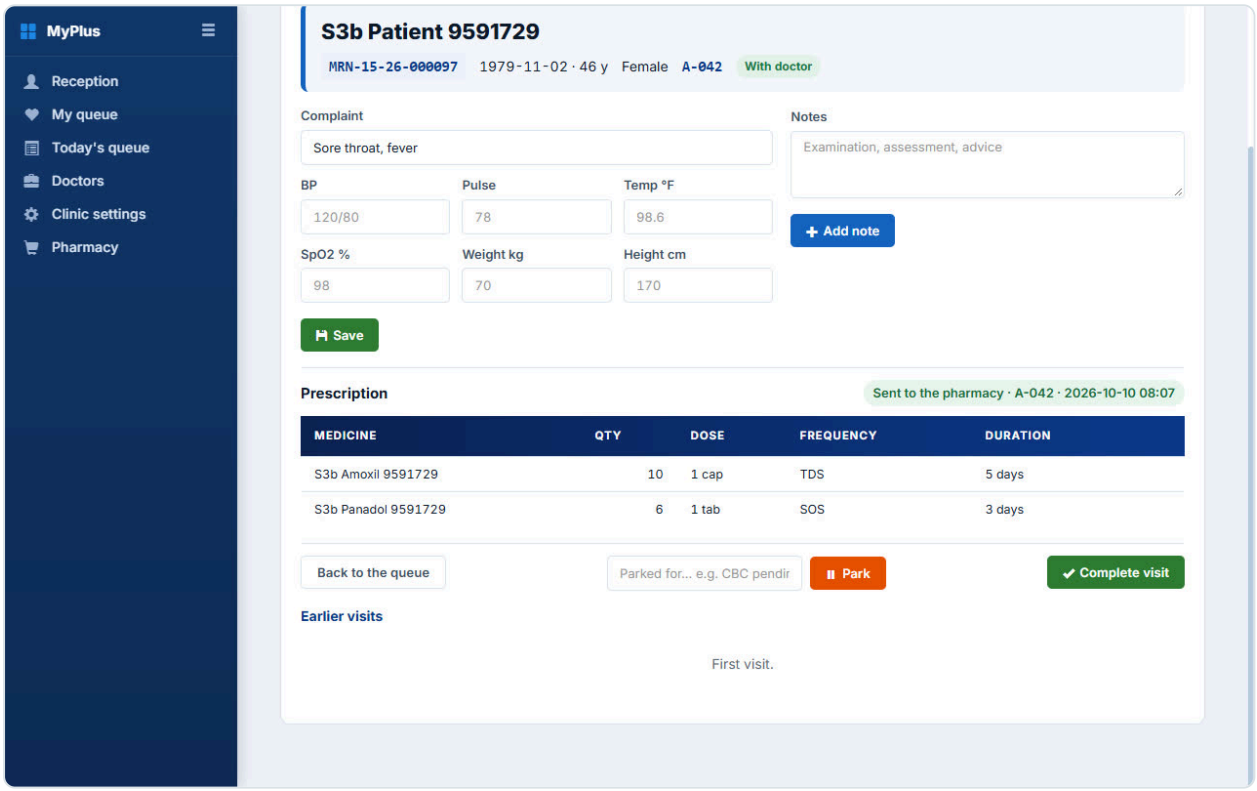

Sent and locked

S3B1-R-02 The pharmacist types the token, sees "From the doctor", and Dispense sells it to the patient

PASSED

B-01 · 07 · 08 Signed in as user.pharma@myplus.com (pharmacist) 11–22 s

Spec `hms/hms-s3b1-prescription.cy.js · R-02`

STEPS


1. Pharmacy → Prescriptions.
2. Type the token (A-0xx) → **Enter**.
3. **Dispense** on the row.

4. Cash 1000 → **Complete Sale** → confirm.


EXPECTED

- Found at once: the patient's name, MRN and phone over the list.
- The row: **Dr Ahmed (gate)** · **FROM THE DOCTOR · A-0xx** · 2 items · PENDING.
- The sale form has both medicines and the patient as the customer; nothing re-typed.
- The sale succeeds with the patient's customer id; the prescription becomes FULLY_DISPENSED.

Cleanup. The sale is a ledger fact and stays (as in B-04 and L-04).

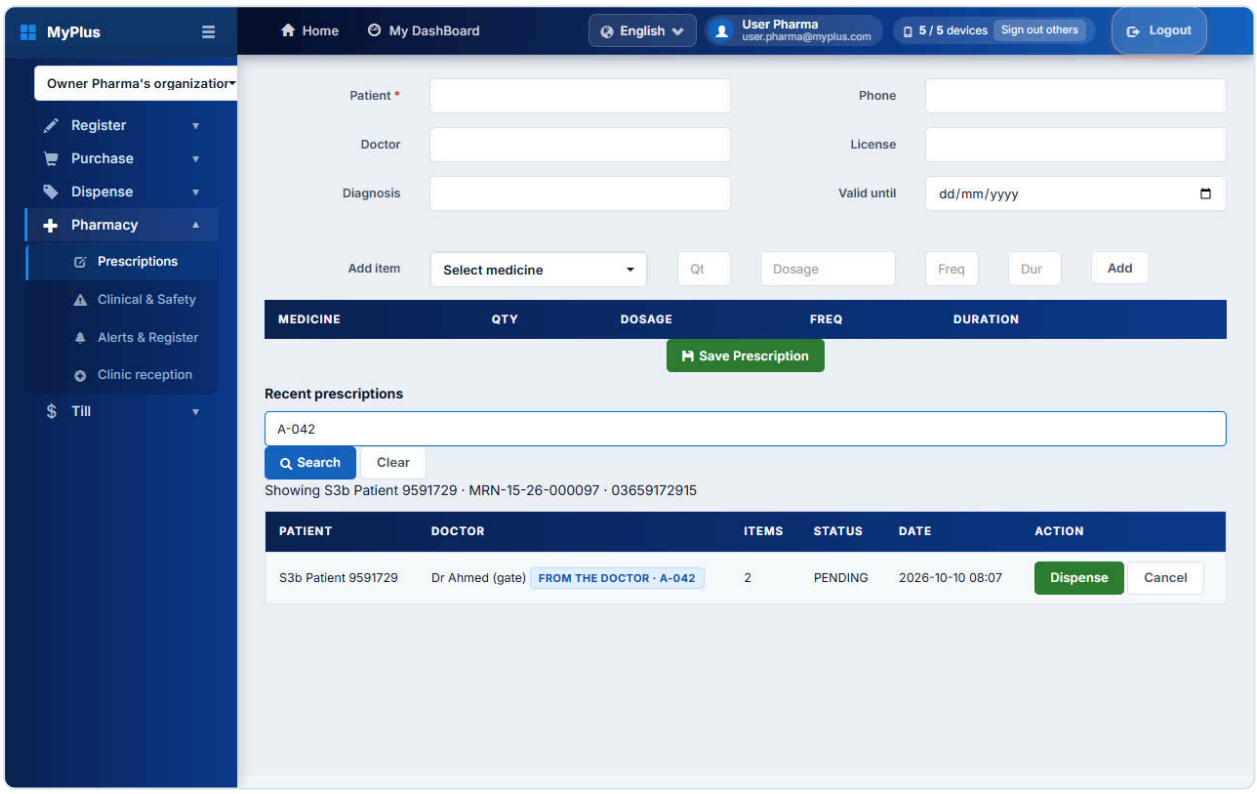

Found by token, from the doctor

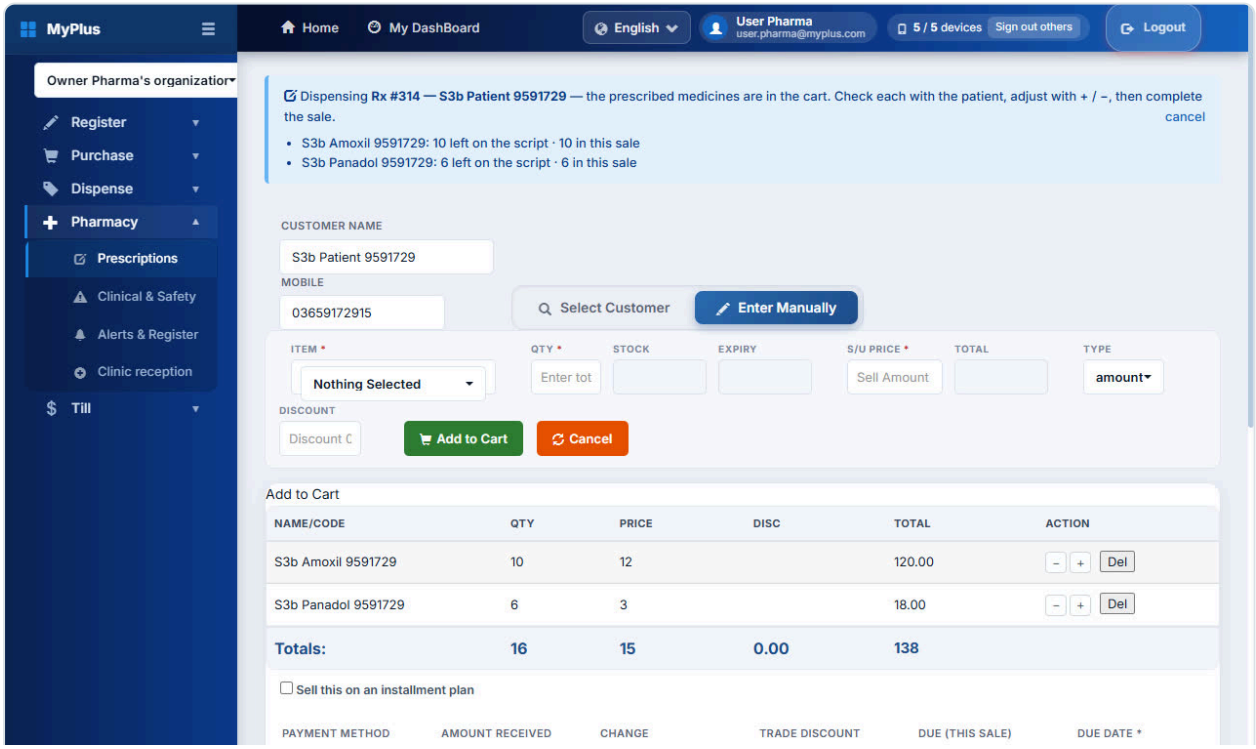



The sale, filled

S3B1-R-03 A second Submit returns the same prescription; the lines cannot change once sent

PASSED

07c Signed in as admin.pharma@myplus.com, on the Doctor permission set 1.5 s

Spec `hms/hms-s3b1-prescription.cy.js · R-03`

STEPS

1. Submit the same visit again.
2. Save a changed list (quantity 99).
3. As the pharmacist, search by the MRN.

EXPECTED

- The same prescription number comes back.
- Refused: *This prescription is with the pharmacy already. It cannot be changed here.*
- Exactly one prescription for the visit.

Cleanup. The prescription is cancelled at the end of the spec unless it was dispensed. By hand: Pharmacy → Prescriptions → Cancel, with a reason.

S3B1-R-04 The doctor parks the visit for a test; the pharmacy sees nothing; Open brings the patient back

PASSED

06 · 06b · 07 Signed in as admin.pharma@myplus.com, on the Doctor permission set 5–25 s

Spec `hms/hms-s3b1-prescription.cy.js · R-04`


STEPS


1. A new visit with one medicine saved (not submitted).
2. Open it from My queue; press **Park** with no reason.
3. Type "CBC pending" → **Park**.
4. As the pharmacist, search by the MRN.
5. As the doctor, My queue → **Open** on the parked token.

EXPECTED

- The reason box is focused; nothing is parked.
- Back on the queue: **Parked · CBC pending**.
- Nothing for this visit at the pharmacy (only Submit sends).
- Status **With doctor**; the saved medicine is still there.

Cleanup. after() completes this visit as the doctor (a visit with the doctor cannot be cancelled).



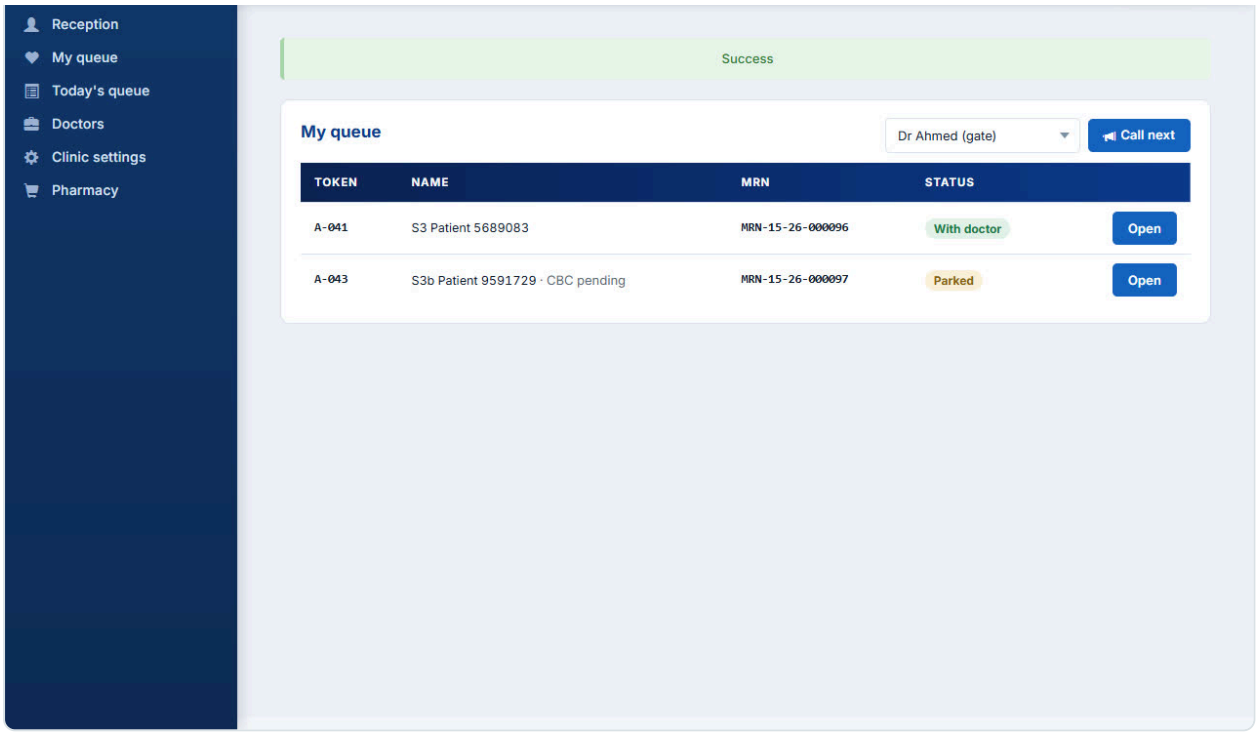

Parked, with the reason

S3B1-R-05 Each line is checked on the server: a medicine outside the list, a zero quantity, the same medicine twice

PASSED

validation Signed in as admin.pharma@myplus.com, on the Doctor permission set 1.8 s

Spec `hms/hms-s3b1-prescription.cy.js · R-05`

STEPS

1. Save a line with no catalogue medicine.
2. Save quantity 0.
3. Save the same medicine twice.
4. Submit.

EXPECTED

- *...is not from the pharmacy's list.*
- *...needs a quantity between 1 and 10000.*
- *...is on the prescription twice.*
- Submit sends the one line saved earlier: a refused save replaced nothing.

Cleanup. The prescription is cancelled in after().

S3B1-R-06 The front desk cannot write or submit a prescription

PASSED

M-15 Signed in as user.pharma@myplus.com (pharmacist) 1.6 s

Spec `hms/hms-s3b1-prescription.cy.js · R-06`

STEPS

1. Save a prescription on the parked visit.
2. Submit it.

EXPECTED

- 403: *Only a doctor can open clinical records...*
- 403, the same sentence.

Cleanup. Nothing is written: every attempt is refused.

S3B1-R-07 **The counter form cannot pass its prescription off as the doctor's** PASSED

security Signed in as user.pharma@myplus.com (pharmacist) 3.4 s

Spec `hms/hms-s3b1-prescription.cy.js · R-07`

STEPS

1. CONTROL: record an ordinary counter prescription.
2. Record the same prescription with a visit reference, a token and the patient's person id.

EXPECTED

- Accepted, marked COUNTER.
- Refused: *Access denied*. The only difference from the control is the claim.

Found and fixed: Found in review before the run: the counter form passes its body to the pharmacy unchanged. The first version of this case only checked "not accepted", and pharma answers every refusal with "Access denied", so the control was added to prove the refusal is this one.

Cleanup. Both prescriptions are cancelled in after().

S3b-2 Prescription templates: delivered

Spec `cypress/e2e/hms/hms-s3b2-templates.cy.js` , 6 / 6 on 2026-10-10, Chrome 153 headless (S3b-1 7 / 7 in the same session). A template is the clinic's, shared by its doctors: **Use** copies its lines onto the screen, where each line stays editable until the prescription is sent.

S3B2-T-01 **The doctor saves "Fever + Flu" as a template; on the next patient Use fills it and a dose is changed to 1+0+1** PASSED

05 · real screen Signed in as admin.pharma@myplus.com, on the Doctor permission set

61 s (includes setup and two visits) Spec `hms/hms-s3b2-templates.cy.js · T-01`

STEPS

1. Visit 1: add two medicines (10 and 15, 1 tab, TDS, 5 days).
2. [illegible]


2. Type the template name "Fever + Flu …" → **Save as template**.
3. **Complete visit**.
4. Visit 2 (a new token): choose the template → **Use**.
5. Change the first dose to `1+0+1` → **Save prescription**.

EXPECTED


- *Saved as the template 'Fever + Flu …'.*; the list shows it, chosen.
- *2 medicine(s) from "Fever + Flu …". Check them, then Save or Submit.*; two editable lines.
- Saved: the first dose is 1+0+1, the second quantity 15.
- The template itself still says 1 tab: Use copies, never edits it.


Found and fixed: The first run found a defect: every read of the template list was a 500 (a query declared on the wrong repository was rewritten into invalid SQL). Mocked unit tests could not see it. Fixed.

Cleanup. after() removes every template made here, completes the visits and puts admin.pharma back on Administrator.

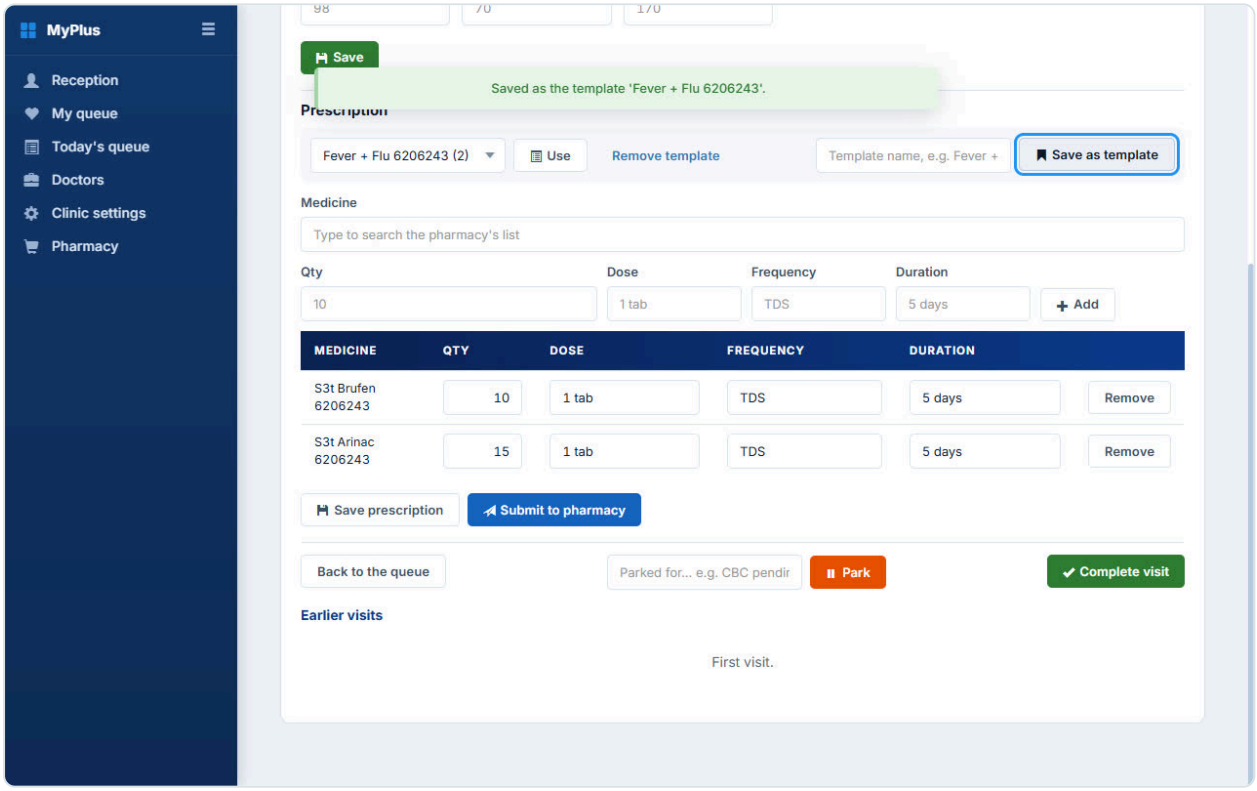

Saved as a template

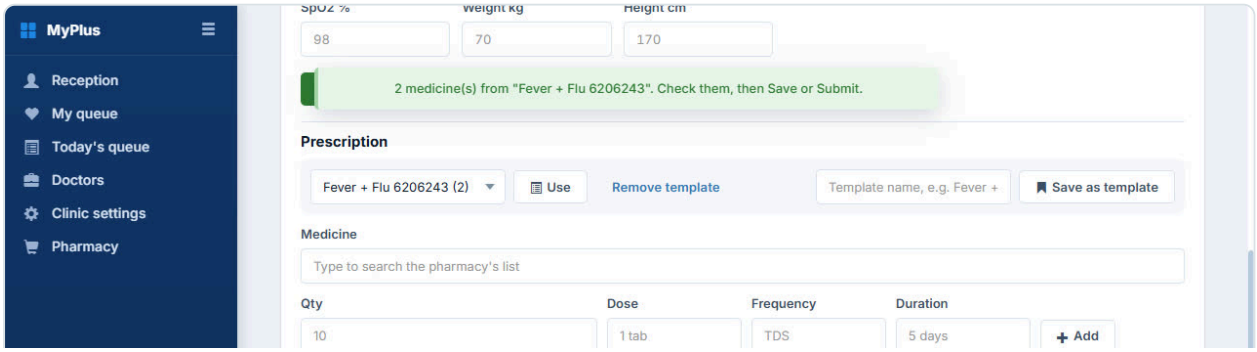

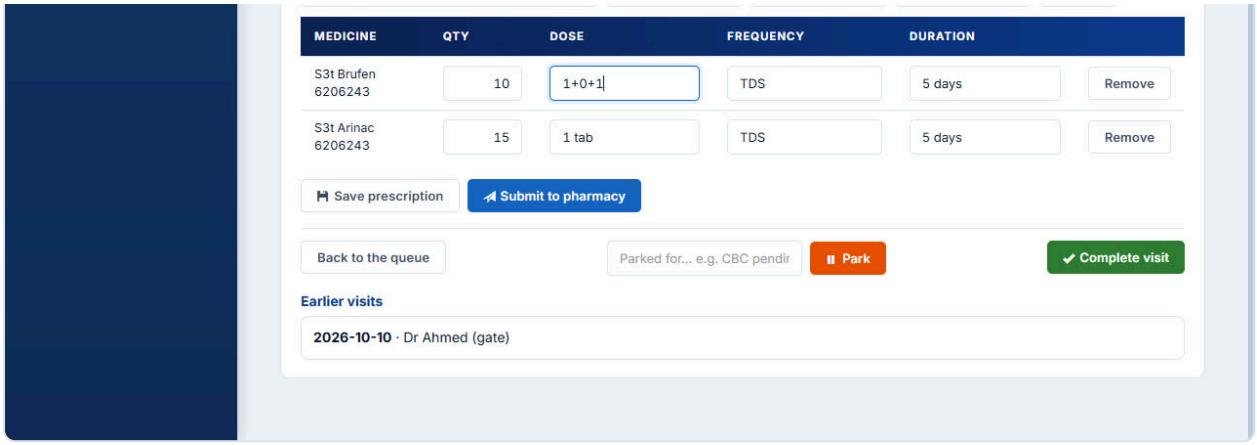

Used, dose changed to 1+0+1

S3B2-T-02 Use twice adds nothing twice

PASSED

05 Signed in as admin.pharma@myplus.com, on the Doctor permission set 2 s

Spec `hms/hms-s3b2-templates.cy.js · T-02`

STEPS

1. On the same visit, Use the same template again.

EXPECTED

- *0 medicine(s) … Already on the list: …* naming both; still two lines.

Cleanup. The visit is completed, its prescription cancelled and the template retired at the end of the spec.

S3B2-T-03 A medicine the pharmacy no longer has is named, not silently dropped

PASSED

05 Signed in as admin.pharma@myplus.com, on the Doctor permission set 3.3 s

Spec `hms/hms-s3b2-templates.cy.js · T-03`

STEPS


1. A template "Old stock" with Brufen and a syrup the pharmacy does not carry.
2. Clear the lines on screen; choose "Old stock" → **Use**.

EXPECTED

- A red message, on screen where the doctor is: *Not in the pharmacy's list any more: Discontinued Syrup.*
- Only Brufen is added.

Found and fixed: FIXED in S4: the message used to render at the top of the page, out of view while the doctor worked lower down . It is now a fixed notice that stays on screen (this screenshot, 14:58, is after the fix: the red notice sits over the form where the doctor is working; a click dismisses it), and the case asserts it is INSIDE the viewport, not only present.

Cleanup. The template is removed in after().

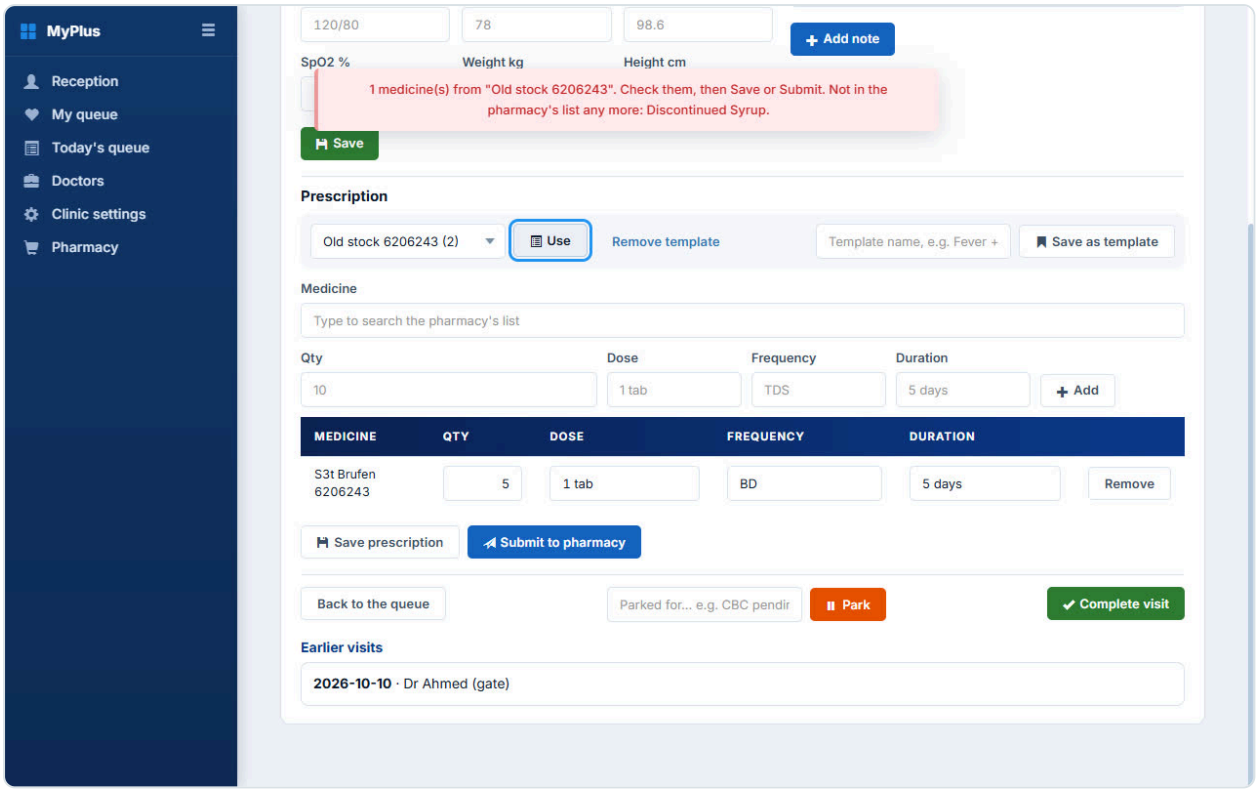

Named, on screen; only Brufen added

S3B2-T-04 A template name is unique in the clinic, in any letter case; Remove frees it

PASSED

05 Signed in as admin.pharma@myplus.com, on the Doctor permission set 2.4 s

Spec `hms/hms-s3b2-templates.cy.js · T-04`

STEPS

1. Save "FEVER + FLU ..." (the same name in capitals).
2. Choose the template → **Remove template** → confirm.
3. Save the original name again.

EXPECTED

- Refused: *...exists already. Choose another name.*
- *Template removed.*; it is gone from the list.
- Accepted: the name is free again.

Cleanup. The new template is removed in after().

S3B2-T-05 The front desk cannot read, save or remove templates

PASSED

M-15 Signed in as user.pharma@myplus.com 3.5 s

Spec `hms/hms-s3b2-templates.cy.js · T-05`

STEPS

1. List the templates.
2. Save one.
3. Remove one.

EXPECTED

- 403 *Only a doctor...*, with no template name in the reply.
- 403.
- 403.

Cleanup. Nothing is written: every attempt is refused.

S3B2-T-06 **Another clinic's owner, clinic on, neither sees nor removes this clinic's templates** PASSED

M-14 Signed in as owner.business@myplus.com 10 s

Spec `hms/hms-s3b2-templates.cy.js · T-06`

STEPS

1. Switch the clinic on for that organisation.
2. List the templates.
3. Remove this clinic's template by its number.

EXPECTED

- A real list (the owner may consult) with none of this clinic's templates.
- *Template not found.*
- Back in this clinic, the template is still there.

Cleanup. That organisation's clinic switch is reset in the case.

S4 Dispense, adjust, the rest another day: delivered

Spec `cypress/e2e/hms/hms-s4-dispense-adjust.cy.js` , 3 / 3 on 2026-10-10, Chrome 153 headless; S3b-1 7 / 7 and S4-lite 5 / 5 re-run on the new confirm step. No dispense code was added: the till's fill, + / − and "left for another day" come from RX-FILL (built 2026-10-09). This slice proves the **doctor's** prescription goes through it, over two days. The clinic's times still show the server's UTC clock; that belongs to the platform time-zone slice (TZ-1 P1/P3), where the clinic's sites are now listed.

S4-D4-01 **Dispense fills the sale from the doctor's prescription; − once; the banner says 1 is left; the script is partly dispensed** PASSED

08 · real screen Signed in as user.pharma@myplus.com (pharmacist)

66–71 s (includes setup: the doctor writes and submits 6 + 4)

Spec `hms/hms-s4-dispense-adjust.cy.js · D4-01`

STEPS


1. Pharmacy → Prescriptions; type the token → **Enter**.
2. **Dispense** on the row.
3. Press **−** once on the first medicine.
4. Cash 1000 → **Complete Sale** → confirm.

EXPECTED

- Both medicines in the cart at 6 and 4; the patient is the customer; the note reads *6 left on the script · 6 in this sale*.
- The note reads *6 left on the script · 5 in this sale — 1 left for another day*.
- The sale succeeds with the patient's customer id; the prescription is **PARTIALLY_DISPENSED** (5 and 4 recorded).


Found and fixed: The first run failed in the SPEC, not the product: "Complete this sale?" appeared a moment after the click, and the one-shot optional confirm had already looked and moved on. A new shared command waits for the dialog OR the sale; S3b-1 and S4-lite now use it too.

Cleanup. The sale is a ledger fact and stays.

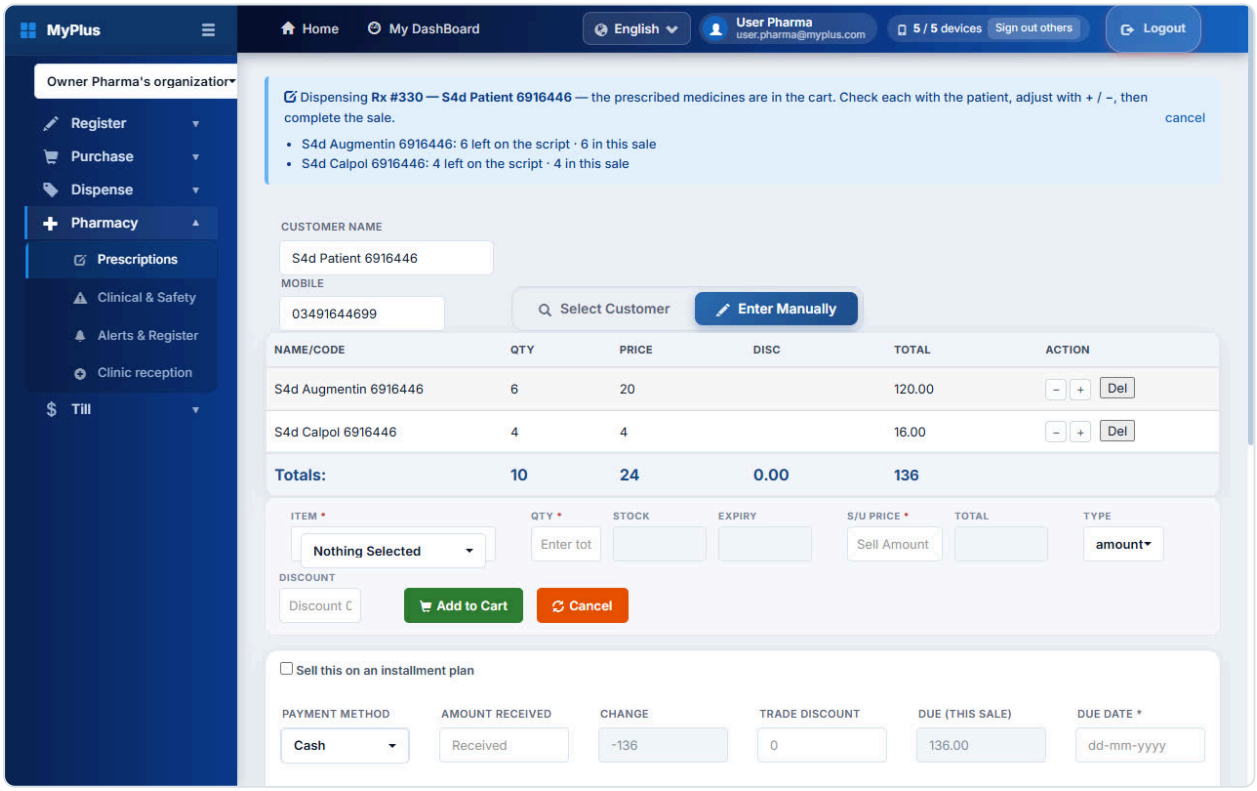

Filled from the doctor



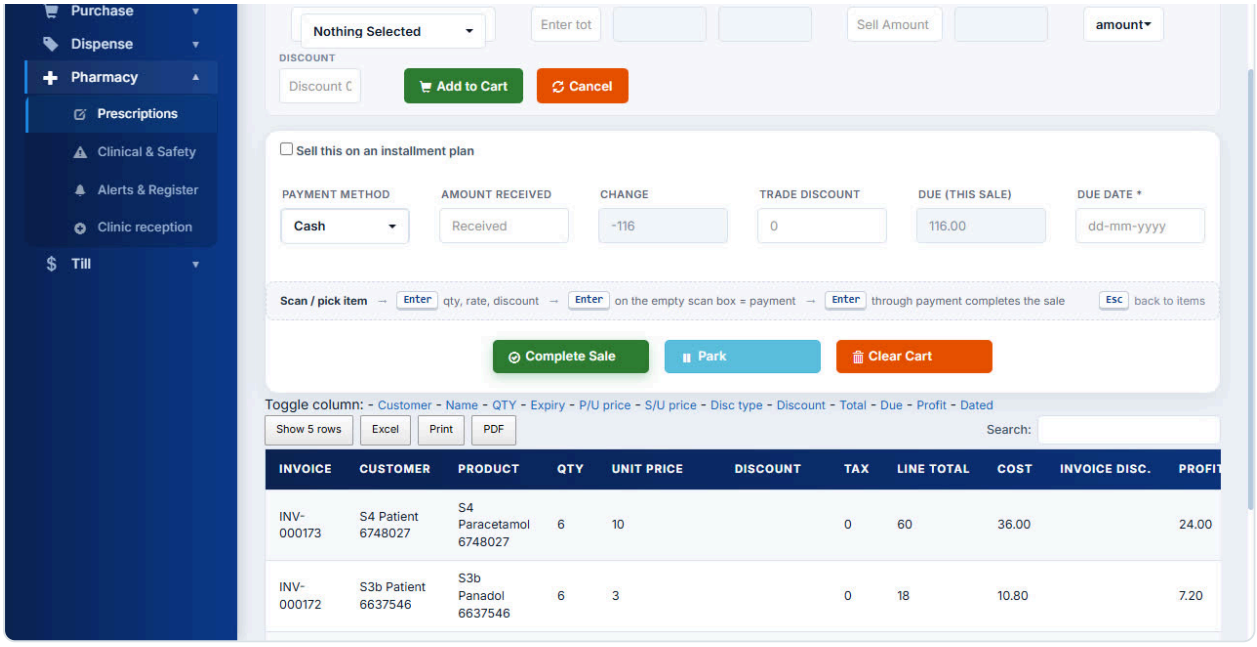

– once: 1 left for another day

S4-D4-02 Another day: Dispense fills ONLY what is still owed, and the sale completes the script

PASSED

08 Signed in as user.pharma@myplus.com (pharmacist) 12 s

Spec `hms/hms-s4-dispense-adjust.cy.js · D4-02`


STEPS


1. Search the token again → **Dispense**.
2. Cash → **Complete Sale** → confirm.

EXPECTED

- One line only: the first medicine, quantity 1; the note reads *1 left on the script · 1 in this sale*.
- The prescription is **FULLY_DISPENSED**.

Cleanup. The sale stays; nothing is left to cancel.

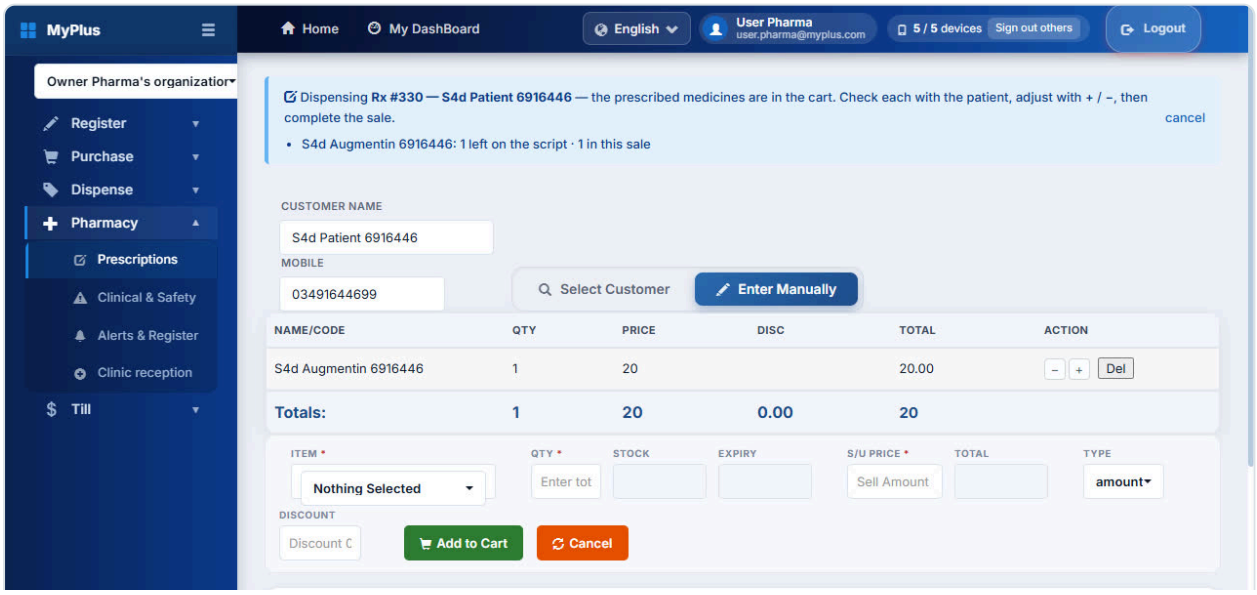

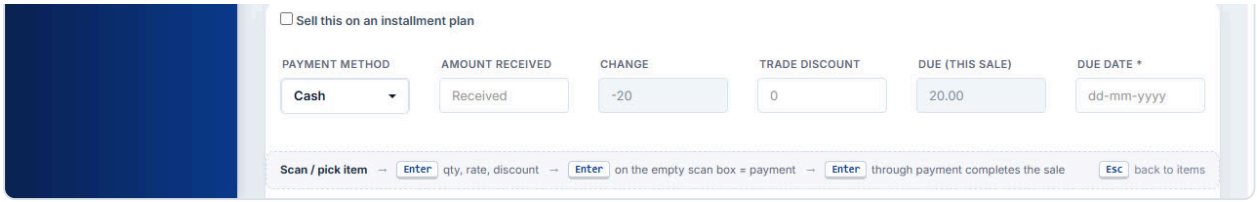

Only the 1 still owed

S4-D4-03 The pharmacist changed the SALE, never the doctor's prescription

PASSED

07c Signed in as admin.pharma@myplus.com (doctor) and the pharmacist 2 s

Spec `hms/hms-s4-dispense-adjust.cy.js · D4-03`

STEPS

1. Open the visit as the doctor.
2. Read the prescription as the pharmacist.

EXPECTED

- The doctor's lines still read 6 and 4.
- Prescribed 6, dispensed 6 over two days; the source is DOCTOR.

Cleanup. after() completes the visit, retires the patient and puts admin.pharma back on Administrator.

H1 Hardening: the doctor's medicines, the public booking: delivered

Spec `cypress/e2e/hms/hms-h1-hardening.cy.js` , 3 / 3 on 2026-10-10, Chrome 153 headless. From the client's rulings of 2026-10-10 (design §4f, L-1) and a gap found in the S2 review. These cases drive the server as a crafted request would; the screens already offer only valid choices.

H1-01 A medicine no product has is refused at Submit, naming it; nothing reaches the pharmacy

PASSED

L-1 product check Signed in as admin.pharma@myplus.com, on the Doctor permission set

43–65 s (includes setup: permission set, patient, token, a medicine)

Spec `hms/hms-h1-hardening.cy.js · H1-01`

STEPS

1. A visit with two lines: the pharmacy's own medicine, and "Discontinued Syrup" (an id no product has) → Save.
2. **Submit**.
3. Open the visit.

EXPECTED

- Saved (the clinic checks the line shape; the pharmacy owns the catalogue).
- Refused: *The pharmacy did not accept the prescription: 'Discontinued Syrup' is not in this pharmacy's list. Choose it again from the list.*
- No prescription number on the visit: nothing was sent.

Found and fixed: Drives the server as a crafted request would: the doctor's screen only ever offers the pharmacy's own list.

Cleanup. after() completes the visit, cancels the prescription made in H1-02, retires the patient and puts admin.pharma back on Administrator.

H1-02 **Another business's real product is refused the same way; with the pharmacy's own medicine alone, Submit goes through** PASSED

L-1 product check Signed in as admin.pharma@myplus.com, on the Doctor permission set 2–7 s

Spec `hms/hms-h1-hardening.cy.js · H1-02`

STEPS

1. Replace the bad line with a real product of owner.business (another business) → Save → **Submit**.
2. CONTROL: only the pharmacy's own medicine → Save → **Submit**.

EXPECTED

- Refused, naming that product: *...is not in this pharmacy's list*. The catalogue read is scoped to this business.
- Accepted: a prescription number comes back — so the refusals were the product check, nothing else.

Cleanup. The prescription is cancelled in after().

H1-03 **A public booking cannot name another business's doctor for this venue** PASSED

S2 gap Signed in as no login (the public booking form) 3.4 s

Spec `hms/hms-h1-hardening.cy.js · H1-03`

STEPS

1. Take a venue of the appointment business.
2. Book anonymously at that venue naming Dr Ahmed (gate), a doctor of the PHARMACY business.

EXPECTED

- *Doctor not found: <id>* — exactly as for an id that does not exist; nothing is booked.

Before H1 this booked another business's doctor into the venue.

Found and fixed: Found while gating: on the Docker deploy the public booking page lists NO hospital to a visitor who is not signed in (the anonymous read goes to localhost:8091 inside the monolith container). This case reads the venue signed in. Fixed in P-BOOK-1 (below).

Cleanup. Nothing is written.

P-BOOK-1 Online booking without a login: delivered

Spec `cypress/e2e/appointment/public-booking-page.cy.js` , 3 / 3 on 2026-10-10, Chrome 153 headless, never signed in. Found while gating H1: on the Docker deploy the public booking page listed no hospital to a visitor (the monolith's anonymous read went to `localhost:8091` , which inside its container is not appointment-service). Public read routes now return public fields only, through the gateway's open route.

PB-01 The public page lists the hospitals, and a hospital lists its doctors with their timings

PASSED

online booking Signed in as a visitor who is NOT signed in 8 s

Spec `appointment/public-booking-page.cy.js · PB-01`

STEPS

1. Open the public booking page (no login).
2. Choose a hospital.
3. Choose a doctor.

EXPECTED

- Hospitals are listed. Before the fix the list was empty on the Docker deploy: only "Select hospital".
- The hospital's doctors are listed (only its own business's doctors).
- The doctor's days, times and speciality show; no email, mobile or fee.

Cleanup. Nothing is written.

Hospitals listed to a visitor

A doctor's timings

PB-02 The visitor books: name, mobile, address → an appointment number

PASSED

online booking Signed in as a visitor who is NOT signed in 8 s

Spec `appointment/public-booking-page.cy.js · PB-02`

STEPS

1. Choose the hospital and doctor.
2. Type a name, mobile and address → **Book appointment**.

EXPECTED

- *Dear ..., your appointment number N is registered. We will contact you on ...*

Cleanup. One booking stays (a booking is a record, like a sale; it uses no clinic token).

Booked, with a number

PB-03 The public routes give nothing private — PASSED

privacy Signed in as a visitor who is NOT signed in 1.9 s

Spec `appointment/public-booking-page.cy.js · PB-03`

STEPS

1. Read the booking page.
2. Read a hospital's doctor list.

EXPECTED

- No email address in the page.
- No email or mobile number in the doctor list.

Found and fixed: The page also stopped pasting tenant-typed names and timings into the HTML raw: they are escaped now (a doctor name containing script would otherwise run in every visitor's browser).

Cleanup. Nothing is written: the public routes only read.

H2 Register doctor, linked to a login: delivered

Spec `cypress/e2e/hms/hms-h2-register-doctor.cy.js` , 6 / 6 on 2026-10-10, Chrome 153 headless; S2 11 / 11, S3a 5 / 5 and S3b-1 7 / 7 re-run with it. From the client's ruling L-2 (design §4g): the owner or an admin registers a doctor with a login; the LINK makes the login that doctor (permission sets stay owner-only); a linked doctor sees only their own patients; the owner is never limited.

H2-01 The owner registers a doctor with a login: the login is created and linked — PASSED

L-2 · real screen Signed in as owner.pharma@myplus.com (owner) 24–32 s (includes setup)

Spec `hms/hms-h2-register-doctor.cy.js · H2-01`

STEPS

1. Clinic → Doctors → **Register a doctor**: name, speciality Paediatrics, 10 a day, the doctor's email; "Create their login" is ticked.
2. **Register a doctor**.
3. Register the same email again.

EXPECTED

- *Dr H2 … registered. A set-password email was sent to their login.*
- The Doctors list shows the doctor with the login email and **Unlink**; the login is a member of the team.
- Refused: *…already has a login. Add the doctor without a login, then use Link login.* No second login.

Found and fixed: UX finding (not fixed yet): with the Login column the Doctors table is wider than a 1280 px screen; the day tools on the right need a sideways scroll. Fixed with the next screen deploy.

Cleanup. ⚠ The login and the doctor stay: the platform has no way to remove a team member or a doctor (recorded as a gap).

Register a doctor, with a login

Registered, login shown

H2-02 The owner links an existing login to a doctor (Link login) PASSED

L-2 · real screen Signed in as owner.pharma@myplus.com (owner) 5–7 s

Spec `hms/hms-h2-register-doctor.cy.js · H2-02`

STEPS

1. Add a doctor without a login.
2. On its row: **Link login** → choose admin.pharma → **Link**.

EXPECTED

- The row shows admin.pharma's email and **Unlink**.

Cleanup. after() unlinks admin.pharma (the other gates use it unlinked).

Login linked

H2-03 The linked login — not on the Doctor set — opens My queue on its own doctor and consults PASSED

L-2 · real screen Signed in as admin.pharma@myplus.com — on Administrator, NOT on the Doctor set

7–10 s Spec `hms/hms-h2-register-doctor.cy.js · H2-03`

STEPS

1. Reception gives a patient a token with that doctor.
2. Sign in as admin.pharma → Clinic.
3. **My queue**.
4. **Call**, **Start**.

EXPECTED

- My queue is offered (the link grants it; the Doctor set is not needed).
- No doctor to choose: the doctor's name instead, and their own patient waiting.
- The consultation opens with the patient's name.

Cleanup. The visit is completed in after().

Own queue, no picker

H2-04 A linked doctor cannot work another doctor's patient PASSED

L-2 Signed in as admin.pharma@myplus.com — on Administrator, NOT on the Doctor set 2.5 s

Spec `hms/hms-h2-register-doctor.cy.js · H2-04`

STEPS

1. Call a token of Dr Ahmed (gate).
2. Call next on Dr Ahmed's line.

EXPECTED

- 403: *This is Dr Ahmed (gate)'s patient. You see your own queue.*
- 403.

Cleanup. The token is cancelled in after().

H2-05 The front desk can no longer add or register doctors PASSED

RULE 0 Signed in as user.pharma@myplus.com (front desk) 5–7 s

Spec `hms/hms-h2-register-doctor.cy.js · H2-05`

STEPS

1. Open Doctors.
2. Add a doctor through the server.
3. Register one with a login.

EXPECTED

- No Register form.
- 403: *Only the owner or an admin can register doctors.* (before H2 this was allowed)

- 403: *Only the owner of an admin can register doctors.* (before H2 this was allowed)
- Refused at the login step; no login is made.

Cleanup. Nothing is written.

H2-06 **An admin cannot link their own login; one login is one doctor** PASSED

L-2 Signed in as admin.pharma, then the owner 2 s

Spec `hms/hms-h2-register-doctor.cy.js · H2-06`

STEPS

1. As the admin, link your own login to Dr Ahmed (gate).
2. As the owner, link admin.pharma (already a doctor) to Dr Ahmed.

EXPECTED

- *You cannot link your own login as a doctor. The owner can.*
- *That login is already linked to another doctor of this clinic.*

Found and fixed: Found by the S2 gate: the owner had linked their own login to a doctor, and the own-queue rule then limited the OWNER. Fixed: the owner is never limited; for an owner the link only chooses which doctor My queue opens on.

Cleanup. Nothing is written: both links are refused.

H3 The pharmacist, the prescription's changes, and what the doctor sees: delivered

Specs `hms-h3a-roles` (3), `hms-h3b-pharmacist` (5), `hms-h3c-doctor-sees` (2) — 10 / 10, twice on 2026-10-11, Chrome 153 headless; S3b-1 7 / 7 and S4 3 / 3 re-run as dispensing regression. Client's rulings (design §4h): a new permission "Dispense, change or cancel prescriptions" in Standard and Administrator (nobody lost access), a "Clinic reception" set without it, registered doctors on the Doctor set; the pharmacist may change the prescription itself, and every change is kept and shown to the doctor.

H3-A-01 **A clinic + pharmacy is offered Clinic reception and Doctor; only Standard and Administrator dispense** PASSED

L-3 · H3a Signed in as owner.pharma@myplus.com (owner) 40 s (includes setup)

Spec `hms/hms-h3a-roles.cy.js · A-01`

STEPS

1. Team → permissions.
2. Look at the sets and what each holds.

EXPECTED

- "Clinic reception" and "Doctor" are offered.
- Standard and Administrator hold "Dispense, change or cancel prescriptions".
- Clinic reception = Standard without it (it still takes payment); Doctor holds only clinical access.

Cleanup. Nothing is changed.

The sets offered

H3-A-02 A shop without the clinic or prescriptions is offered none of them

PASSED

L-3 · H3a Signed in as owner.business@myplus.com (shop) 6 s

Spec `hms/hms-h3a-roles.cy.js · A-02`

STEPS

1. Switch the clinic and prescriptions off for this case.
2. Team → permissions.

EXPECTED

- No clinic code, no pharmacist code, no Doctor or Clinic reception set; no set shows them either.

Cleanup. Both switches reset in the case.

H3-A-03 A doctor registered by the owner lands on the Doctor set — no selling, no dispensing

PASSED

L-3 · H3a Signed in as owner.pharma@myplus.com (owner) 4.5 s

Spec `hms/hms-h3a-roles.cy.js · A-03`

STEPS

1. Register a doctor with a login.

EXPECTED

- The new login is on the Doctor set, not Standard.

Cleanup. ⚠ The login stays (no route removes a team member).

H3-B-01 The pharmacist changes the prescription with a reason; History shows each line before → after

PASSED

L-3 · H3b · real screen Signed in as user.pharma@myplus.com (pharmacist, Standard)

40 s (includes setup: the doctor submits 6 + 4) Spec `hms/hms-h3b-pharmacist.cy.js · B-01`


STEPS

1. Pharmacy → Prescriptions → the token → **Change**.
2. Dose 1+0+1 on the first; quantity 2 on the second; add a third medicine (5).
3. Reason → **Save change**.
4. **History**.


EXPECTED


- *Prescription changed.*; the prescription now holds the changed lines.
- History: **Changed** · time · the reason · each line *before* → *after*, and the added one.

Cleanup. The prescription is cancelled in B-03.

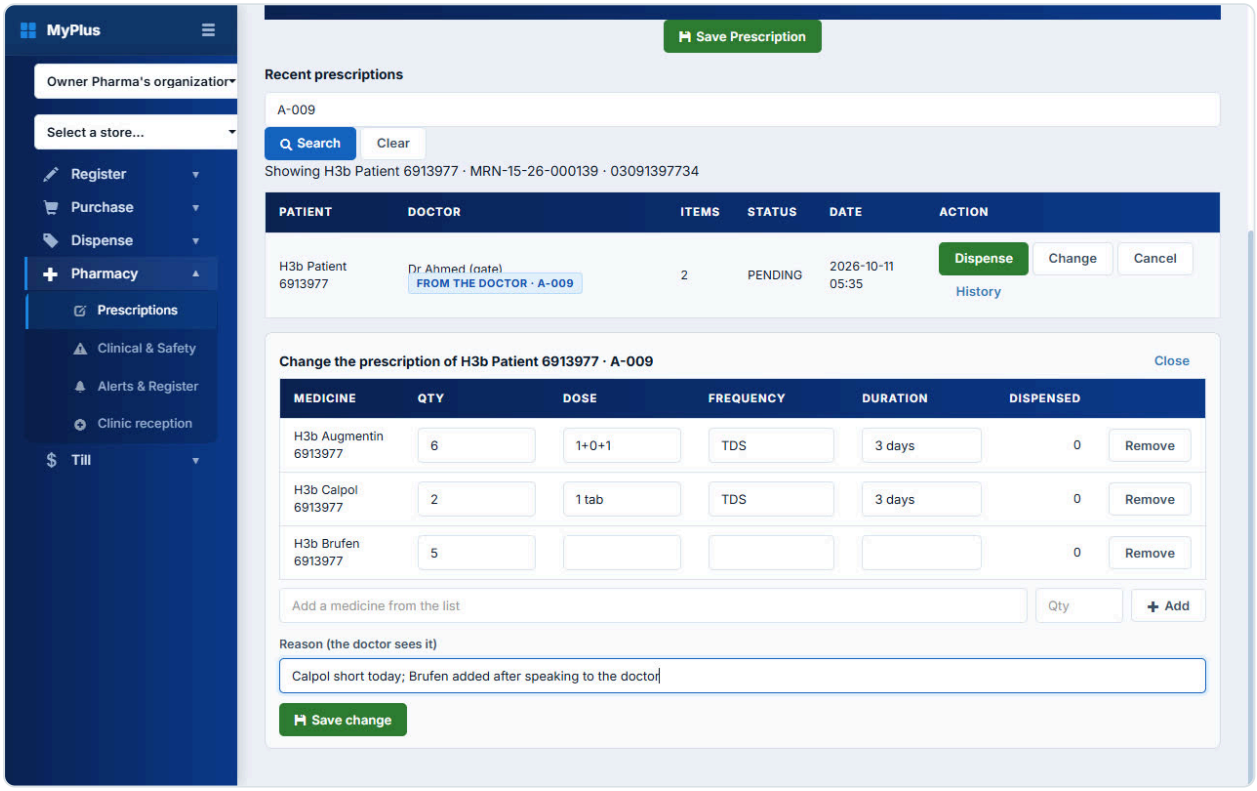

Change, with a reason

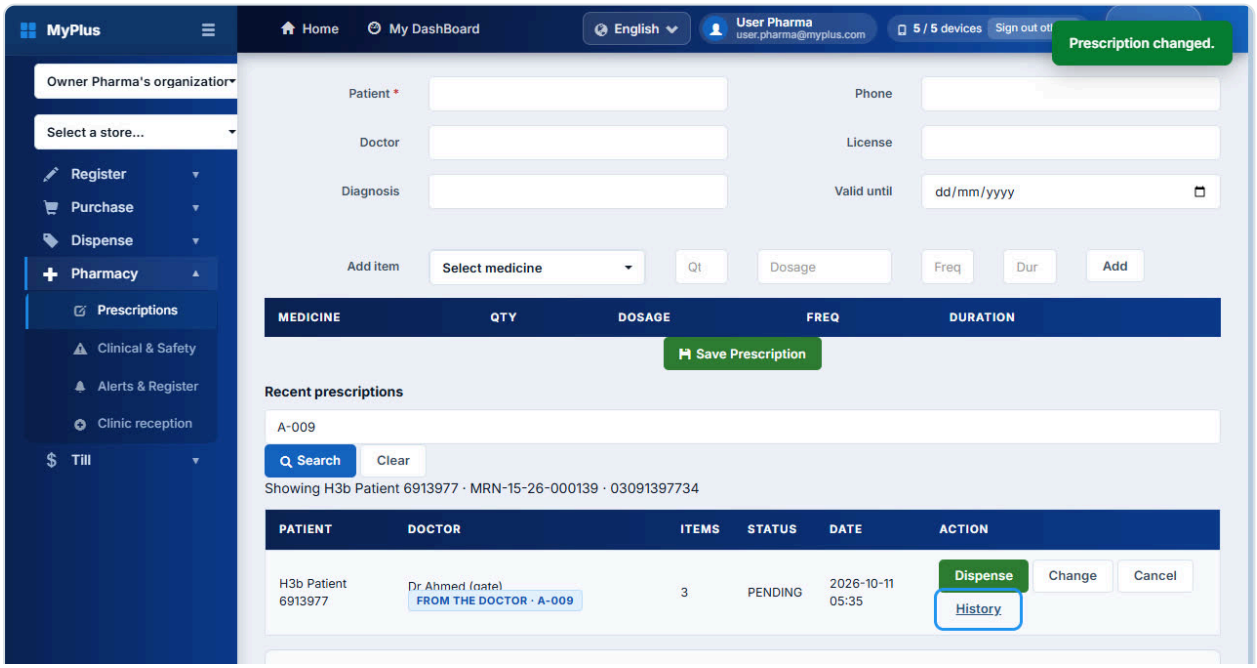

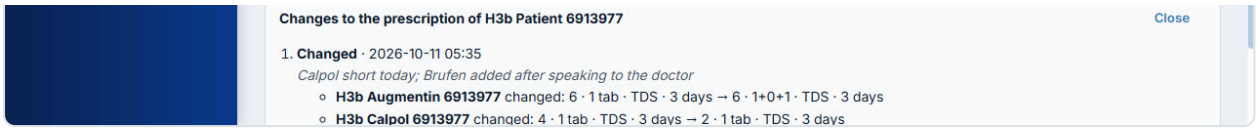

History: before → after

H3-B-02 A reason is required; a medicine outside the catalogue is refused; a stale screen is refused

PASSED

L-3 · H3b Signed in as user.pharma@myplus.com (pharmacist, Standard) 1.3 s

Spec `hms/hms-h3b-pharmacist.cy.js · B-02`

STEPS

1. Save with no reason.
2. Add a medicine the pharmacy does not have.
3. Save from a screen that has not seen the last change.

EXPECTED

- *Say why...*
- *'Ghost Syrup' is not in this pharmacy's list...*
- *...changed on another screen. Reopen it...*

Cleanup. Nothing is written: each change is refused.

H3-B-04 The front desk on Clinic reception sees the list but cannot dispense, change or cancel

PASSED

L-3 · H3b Signed in as user.pharma@myplus.com moved to Clinic reception 9.6 s

Spec `hms/hms-h3b-pharmacist.cy.js · B-04`

STEPS


1. The owner moves the member to Clinic reception; they sign in again.
2. Open the prescription list.
3. Send a VALID change and a valid cancel through the server.

EXPECTED

- "with the pharmacist" and History only — no Dispense, Change or Cancel.
- Both refused; the prescription is unchanged (the proof).

Found and fixed: Observation: the counter form "record a paper prescription" is still offered to the front desk (it needs only the general write permission). The ruling covered the doctor's prescriptions; making the counter form pharmacist-only too is a one-line choice for the client.

Cleanup. Back on Standard in B-03.

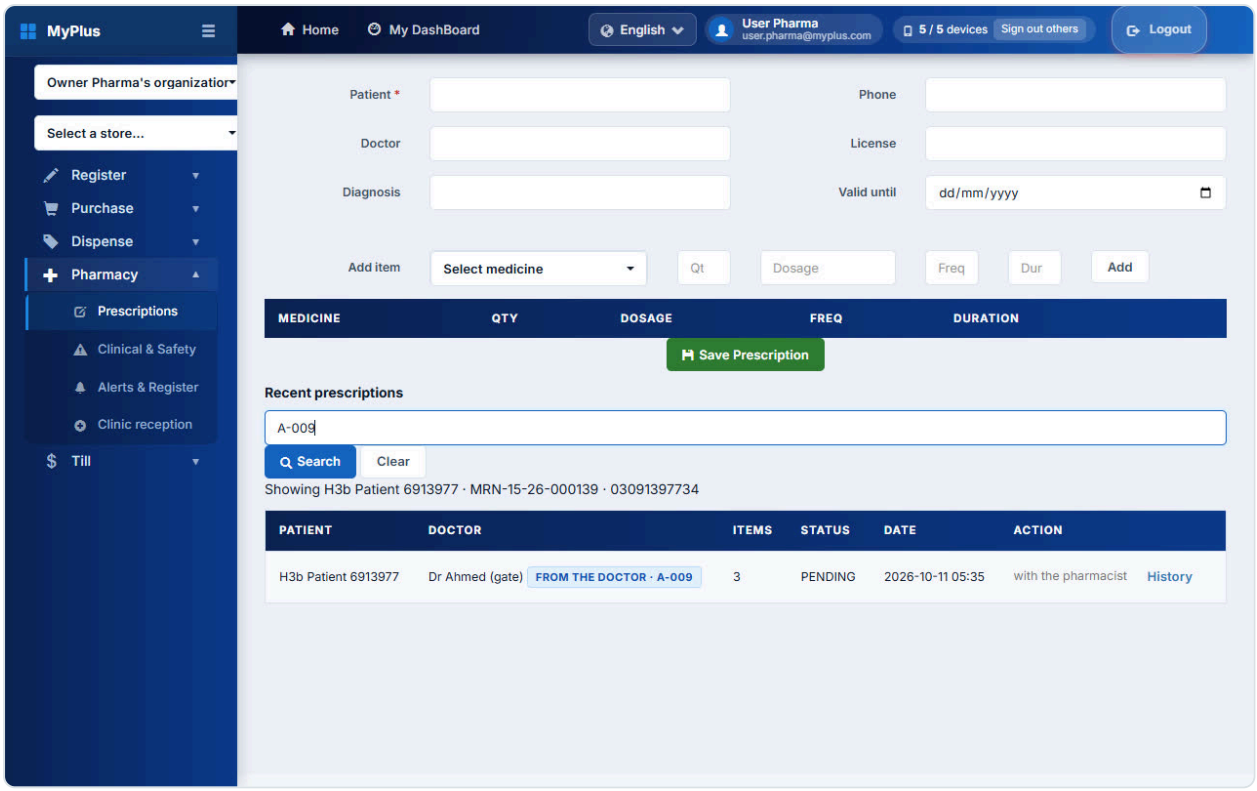

Front desk: read only

H3-B-05 The doctor who submitted it cannot change or cancel it

PASSED

L-3 · H3b Signed in as admin.pharma@myplus.com (doctor, Doctor set) 1.4 s

Spec `hms/hms-h3b-pharmacist.cy.js · B-05`

STEPS

1. Send a valid change and a valid cancel.

EXPECTED

- Both refused; the prescription is unchanged.

Cleanup. Nothing is written: the doctor is refused.

H3-B-03 Cancelling the doctor's prescription needs a reason; History shows it

PASSED

L-3 · H3b · real screen Signed in as user.pharma@myplus.com (pharmacist, Standard) 10 s

Spec `hms/hms-h3b-pharmacist.cy.js · B-03`

STEPS


1. Cancel with no reason (server).
2. On the screen: **Cancel** → reason → **Cancel prescription**.
3. **History**.

EXPECTED

- *…the doctor sees it.*

- CANCELLED.
- **Cancelled** · the reason.

Cleanup. The prescription stays CANCELLED (final, by design). The visit is completed and the test patient retired at the end of the spec.

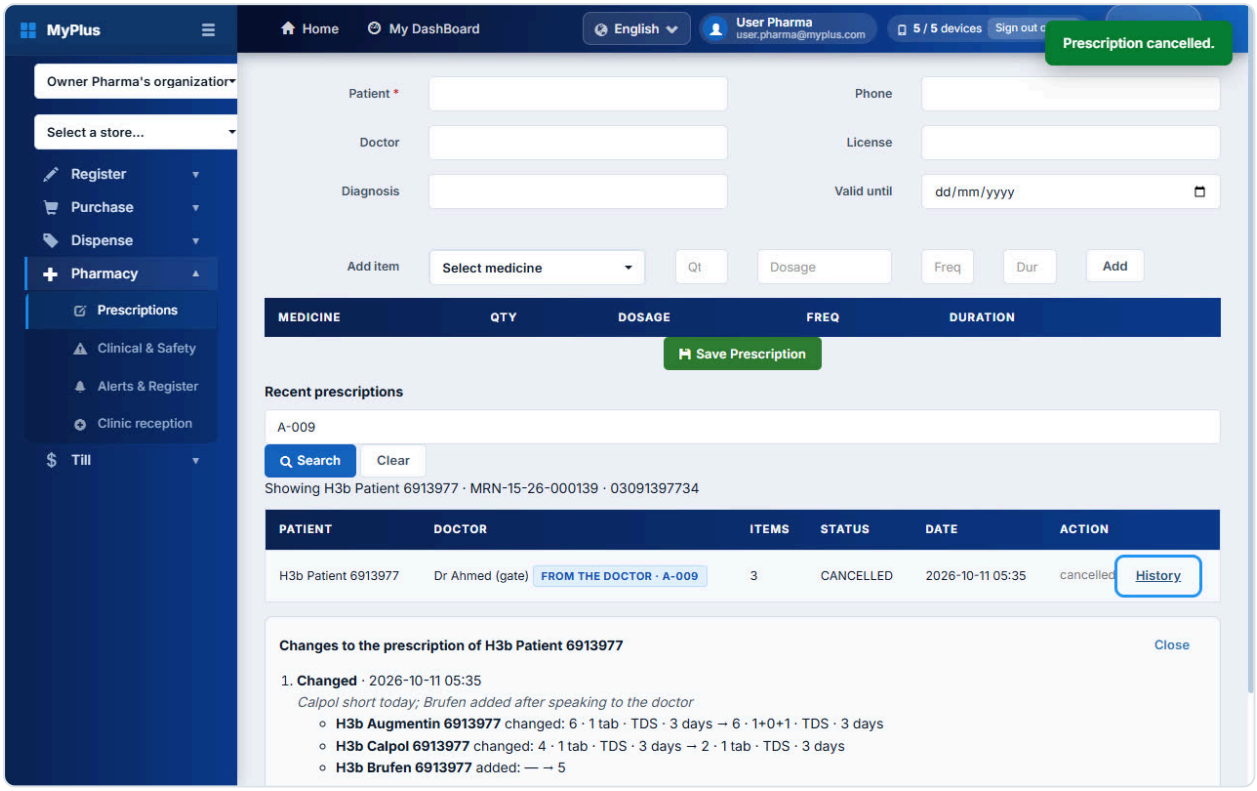

Cancelled, with the reason

H3-C-01 The doctor sees the pharmacy's change, the reason and before → after

PASSED

L-3 · H3c · real screen Signed in as admin.pharma@myplus.com (doctor, Doctor set)

44 s (includes setup) Spec `hms/hms-h3c-doctor-sees.cy.js · C-01`

STEPS


1. The pharmacist changes a dose with a reason.
2. The doctor opens the visit from My queue.

EXPECTED

- **At the pharmacy:** Waiting at the pharmacy · **Changed by the pharmacy** · the reason · the line before → after · a **Now** table (with what was given) beside the doctor's original.

Cleanup. after() completes the visit, retires the patient, puts admin.pharma back on Administrator.



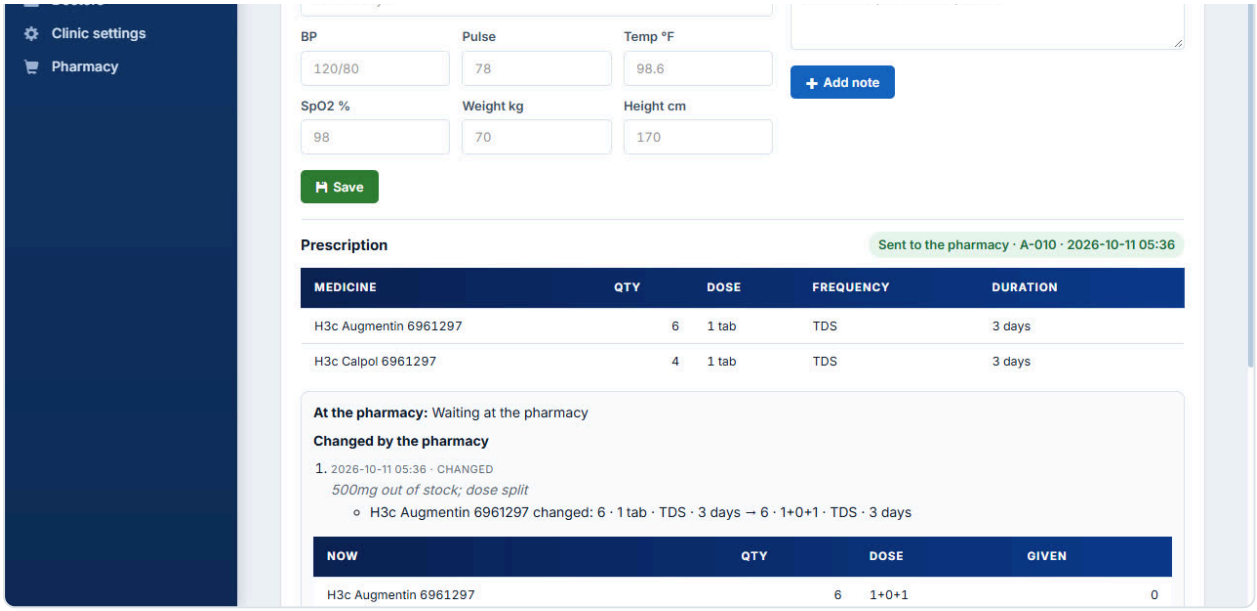

The doctor sees the change

H3-C-02 The doctor sees "Cancelled by the pharmacy" and why PASSED

L-3 · H3c · real screen Signed in as admin.pharma@myplus.com (doctor, Doctor set) 3.7 s

Spec `hms/hms-h3c-doctor-sees.cy.js · C-02`

STEPS

1. The pharmacist cancels with a reason.
2. The doctor opens the visit.

EXPECTED

- **Cancelled by the pharmacy** and the reason.

Cleanup. The prescription stays CANCELLED (final, by design). The visit is completed and the test patient retired at the end of the spec.

