

Does combining measurement blocks improve prediction?


SenseFusion — grouped fusion comparison | Version 0.5.2

Execution completed. Exploratory results; selected uncertainty measures unavailable. Units: days.


Group RMSE	MAE	Bias	Usable pairs
8.909	6.945	-0.1945	240

The selected method, Late fusion: equal, gives group RMSE 8.909, MAE 6.945 and signed bias -0.1945 in response units. On the stated common cohort, equal fusion reduced error relative to the lowest displayed single-block error (8.909 versus 10.34). Preprocessing and tuning use training data only. Missing blocks affect coverage; fusion need not improve performance. Sparse groups support exploratory conclusions only. Primary score and scatter: 240 paired rows (common comparison cohort); 240 pairs are available for this method in the full export. Group RMSE weights physical groups equally; MAE and bias weight rows equally.

This held-out comparison is descriptive. Choosing the displayed winner does not independently validate a selection rule.

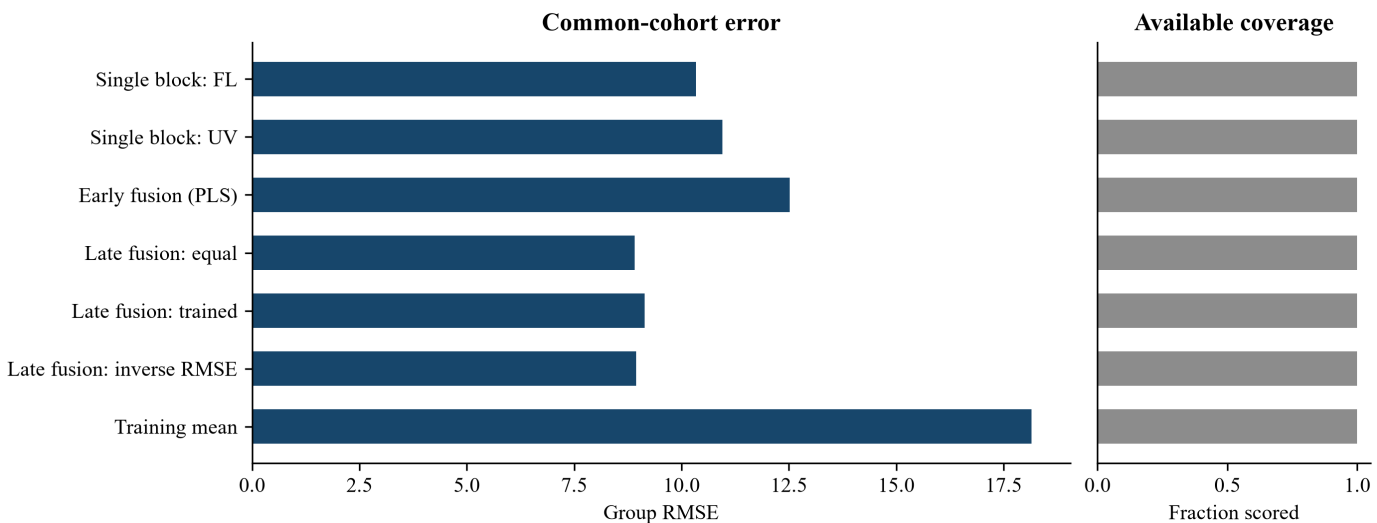

Errors use Accelerated ageing duration at 60 C (days). Error values refer to the same scored cohort; coverage uses each method's available labelled rows. No uncertainty bars are implied.

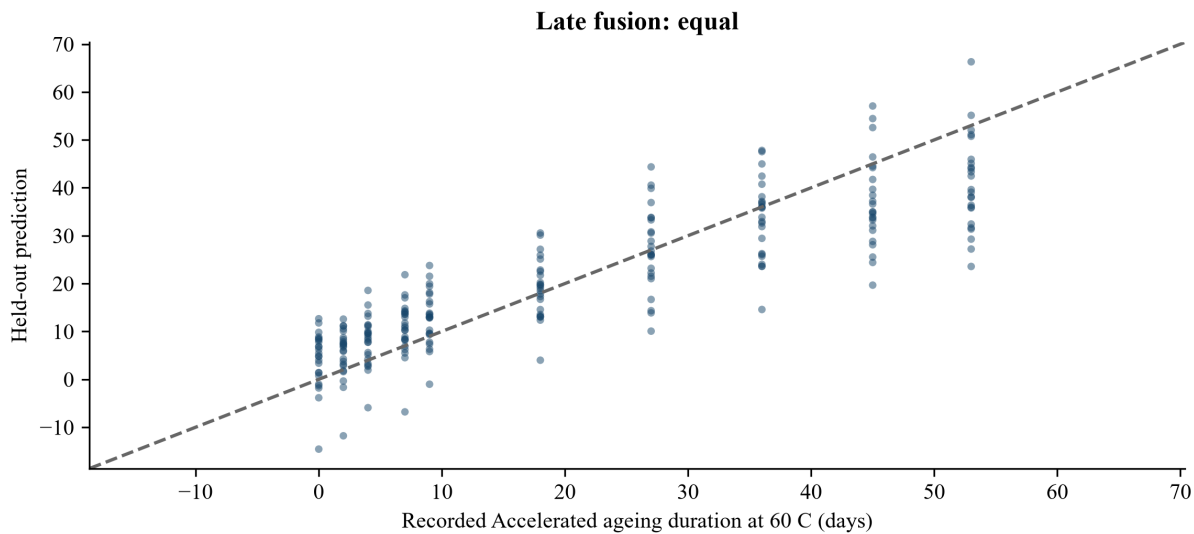

All 240 finite pairs displayed. Dashed line is equality. Accelerated ageing duration at 60 C (days). Scope: common comparison cohort; exactly the 240 headline-score rows. All 240 available pairs remain in extended predictions; summary_cohort.csv records membership.