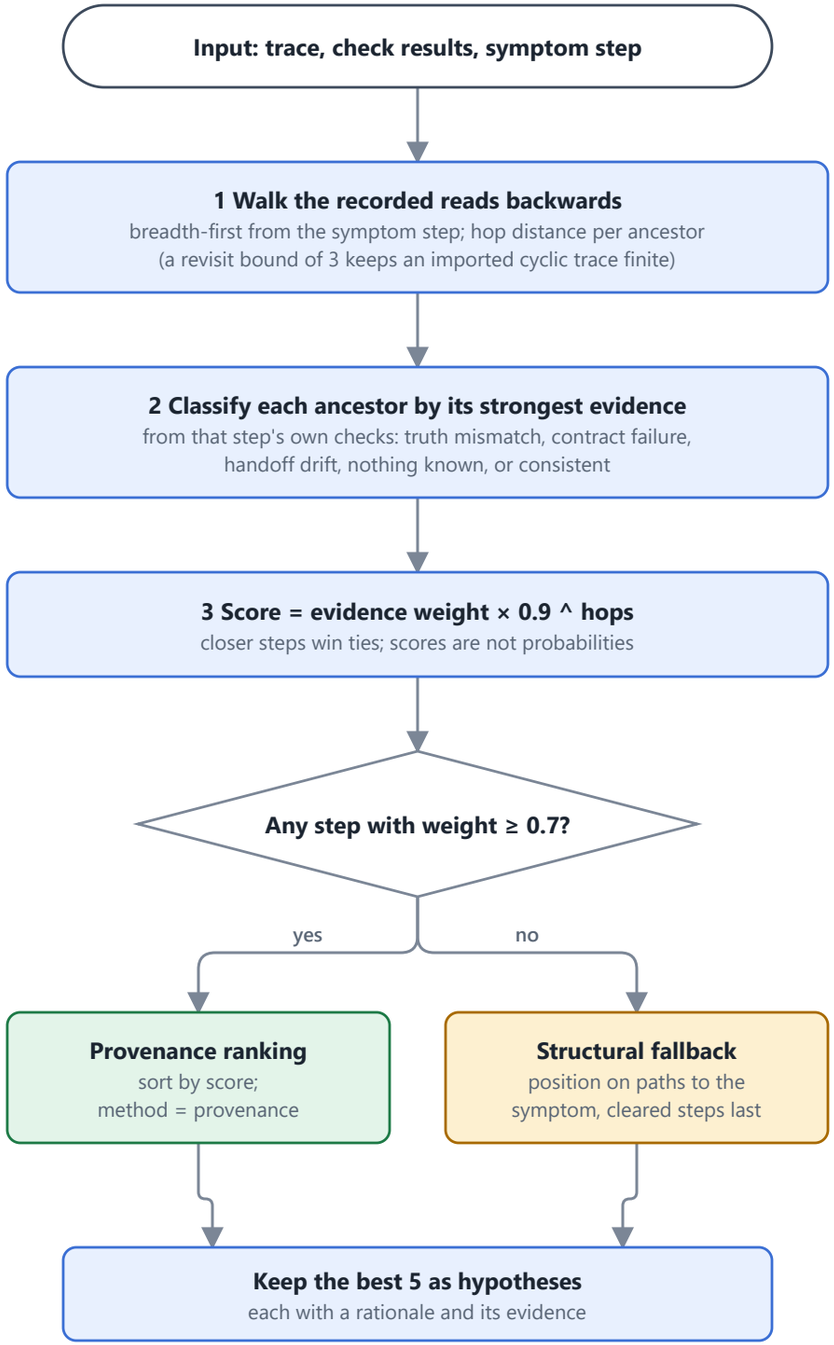


Evidence weights

```
truth_mismatch 1.0 origin evidence
contract_fail 0.8 origin evidence
handoff_drift 0.7 origin evidence
unknown 0.2
consistent 0.1
```

```
origin threshold 0.7 · decay 0.9/hop
at most 5 hypotheses
```

What the evidence kinds mean

truth_mismatch: the step's output contradicts the source of truth
contract_fail: the step broke its own contract
handoff_drift: it received something other than what was produced upstream
unknown: no check covers the step
consistent: its checks passed

Worked example (recorded run)

```
1 Order Lookup truth_mismatch 0.81
2 Refund Calculator contract_fail 0.72
3 Intake consistent 0.08
4 Policy consistent 0.09
5 Writer consistent 0.10
```

```
task #W1023987, fault stale_price
symptom at s5: CHK-OUT-1 failed
```

Limits

A step with no check can only be 'unknown' (0.2). Weights are design choices, fixed before the feasibility run; they were not tuned on its results. Cost: one backward walk, linear in steps plus reads.

Checked against ground truth

The fault was injected at s2 (items[0].price: 452.28 became 452.03). Rank 1 is s2: it matches. attribute() never receives the fault record.