
Example (CHK-OUT-1) `approx(number_in(s5.message), truth.catalog_total(pluck(s3.items_to_refund, 'item_id')))`

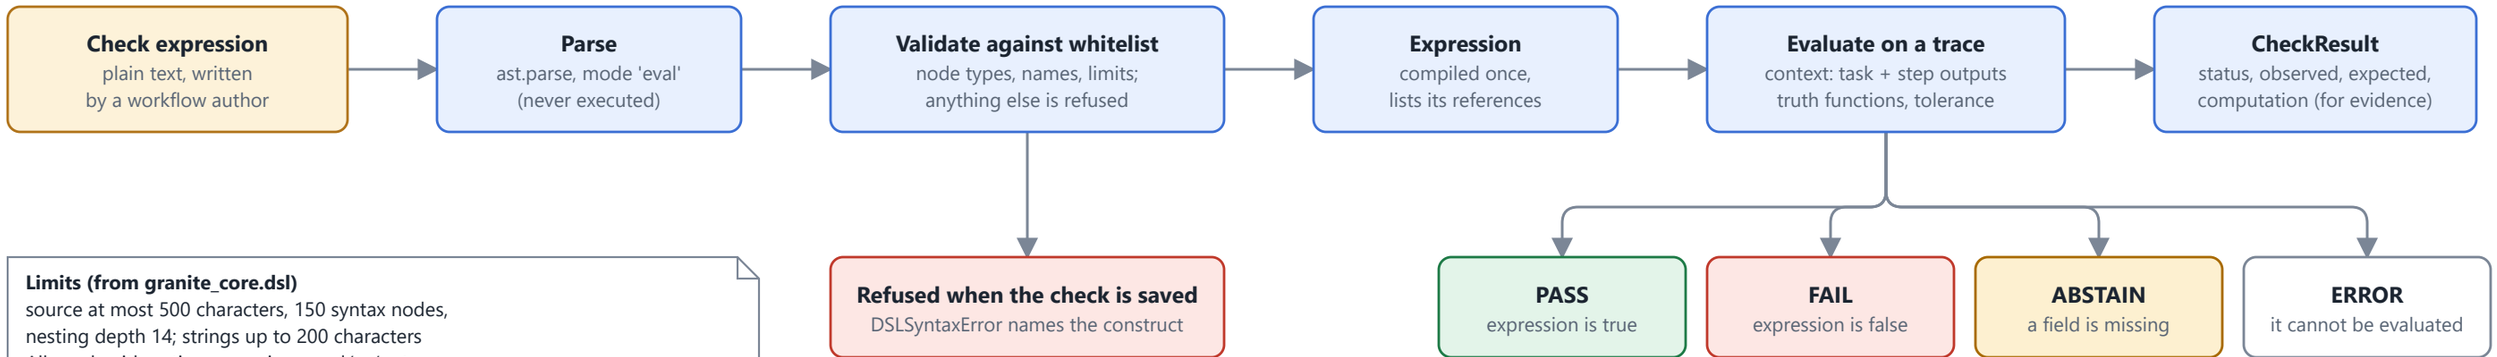

Limits (from granite_core.dsl)
source at most 500 characters, 150 syntax nodes,
nesting depth 14; strings up to 200 characters
Allowed: arithmetic, comparison, and/or/not,
field paths such as s3.items_to_refund, and the functions
abs, all, any, approx, contains, len, max, min, number_in, plu
ck, round, sum, truth.<name>()

Why not eval()
A check is text typed by a user and run on data the system did not write. Python's eval would let it read files or run commands. Here the text is only parsed; a small interpreter walks the tree and understands nothing but the whitelist.
25 hostile expressions (attribute access, imports, lambdas, comprehensions, f-strings, **) are rejected in the tests.

A missing field is not a pass
If a step did not produce the field a check needs, the result is ABSTAIN, so an incomplete run can never look correct (requirement FR-CHK-03).