

Claude Code Routines.

Claude Code can now do your work while your laptop is **closed. Configure a routine once — a prompt, a repo, your connectors — and let it run on a schedule or trigger from Anthropic's web infrastructure.**

Meet Routines


New routines configuration in Claude Code — add trigger, condition, and example calls



Now in research preview: routines in Claude Code.

Configure a routine once (a prompt, a repo, and your connectors), and it can run on a schedule, from an API call, or in response to an event.

Routines run on our web infrastructure, so you don't have to keep your laptop open.

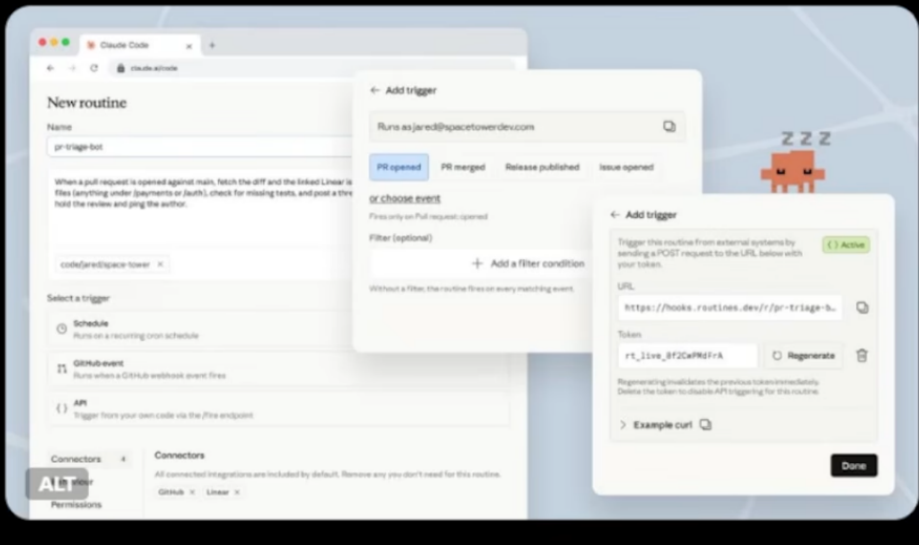


What **Is** a Routine?

— A saved Claude Code configuration: a **prompt**, one or more **repositories**, and a set of **connectors**, packaged once.

— It invokes the model when you want it to — not a static script, not a fully autonomous agent. The middle ground you've been missing.

The **Shape** of a Routine

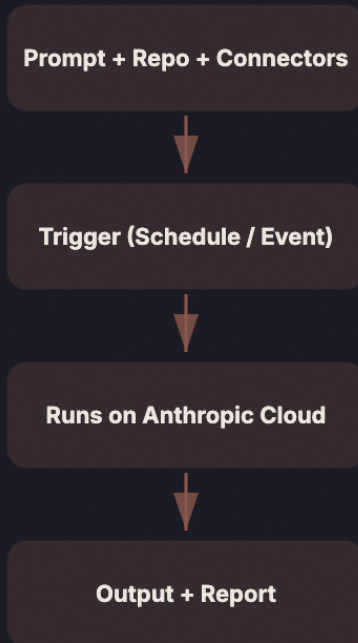

Why This Matters

BEFORE

- ✗ Laptop must stay open
- ✗ Manually kick off every run
- ✗ Cron scripts with no intelligence
- ✗ Agents that drift without supervision



AFTER


- ✓ Runs on Anthropic's web infra
- ✓ Fires on schedule or webhook
- ✓ AI reasoning on every run
- ✓ Bounded scope — one prompt, one job

Trigger Types

- **Scheduled**: cron-style — every morning, every hour, every Monday at 9 AM.
- **Webhook / API call**: fire when an event happens (CI finishes, alert fires, PR opens).
- **Manual**: one-click re-run from the routine itself.

Real Use Cases

- Verify deploys: scan CI/CD output, post a report
- Triage alerts: summarize and route
- Daily standup: read commits, draft the update
- Dependency watch: check for breaking updates

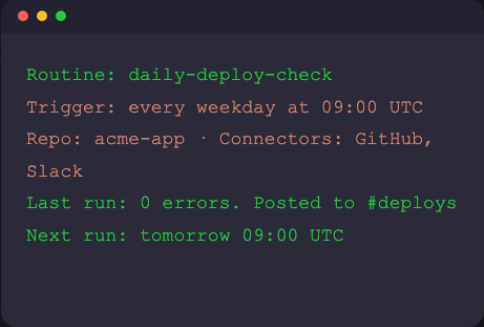

```
Routine: daily-deploy-check
Trigger: every weekday at 09:00 UTC
Repo: acme-app · Connectors: GitHub,
Slack
Last run: 0 errors. Posted to #deploys
Next run: tomorrow 09:00 UTC
```


Daily **Limits** By Plan

- 01** Pro — 5 routines / day
- 02** Max — 15 routines / day
- 03** Team & Enterprise — 25 routines / day
- 04** Overage available on metered usage
- 05** Available in research preview today

Routines vs Cron vs Agents

- **Cron**: runs a fixed script. No context, no reasoning.
- **Agents**: persistent state, open-ended, harder to scope.
- **Routines**: same prompt every time, but the model still reads context, so outputs adapt. **Predictable jobs, intelligent responses.**

Desktop App — Redesigned

Routines shipped with a full Claude Code desktop refresh:

- Integrated terminal
- Faster diff viewer and file editor
- **Parallel sessions** — run many jobs at once without switching windows

Start Today

- 01** Open the redesigned Claude Code app
- 02** Pick one repetitive task you do weekly
- 03** Write the prompt you'd type anyway
- 04** Attach your repo + connectors
- 05** Set a schedule — start small, 1 run / day
- 06** Let it run while you sleep



The best routines aren't fancier agents. They're the boring jobs you finally stop doing by hand.

Follow for More!



Shaïd

GenAI Architect & Builder

AI Products & Automation | Ship AI. Share Insights.

#ClaudeCode #Anthropic #AIAutomation #GenAI #Routines