

## Assignment 8.4 Ai Assisted Coding

Shaik Nishaaj

Htno:2303A51613

Btno:06

### Task 1: Developing a Utility Function Using TDD

#### Scenario

You are working on a small utility library for a larger software system. One of the required functions should calculate the square of a given number, and correctness is critical because other modules depend on it.

#### Task Description

Following the Test Driven Development (TDD) approach:

1. First, write unit test cases to verify that a function correctly returns the square of a number for multiple inputs.
2. After defining the test cases, use GitHub Copilot or Cursor AI to generate the function implementation so that all tests pass.

Ensure that the function is written only after the tests are created.

#### Expected Outcome

- A separate test file and implementation file
- Clearly written test cases executed before implementation
- AI-assisted function implementation that passes all tests •

Demonstration of the TDD cycle: test → fail → implement → pass

Code:

The image displays two sequential screenshots of a Google Colab notebook titled 'Untitled30.ipynb'. The browser tabs at the top include 'word - Search', 'Document 11.docx', 'google colab - Search', and 'Untitled30.ipynb - Colab'. The address bar shows the URL: [https://colab.research.google.com/drive/18FWbvBLJlvCTXqsvYyNt7zYXoSnKhINR#scrollTo=cO1kcN\\_N8cWL](https://colab.research.google.com/drive/18FWbvBLJlvCTXqsvYyNt7zYXoSnKhINR#scrollTo=cO1kcN_N8cWL).

**Top Screenshot:** The notebook contains two code cells. Cell [1] defines a class `TestSquareFunction` with four test methods: `test_positive_number`, `test_negative_number`, `test_zero`, and `test_large_number`. Cell [2] defines the `square` function. The status bar at the bottom indicates '9:40 AM' and 'Python 3'.

```
[1] import unittest

# ---- TEST CASES (written first in TOD) ----
class TestSquareFunction(unittest.TestCase):

    def test_positive_number(self):
        self.assertEqual(square(4), 16)

    def test_negative_number(self):
        self.assertEqual(square(-3), 9)

    def test_zero(self):
        self.assertEqual(square(0), 0)

    def test_large_number(self):
        self.assertEqual(square(100), 10000)

[2] # ---- IMPLEMENTATION (written AFTER tests) ----
def square(n):
    return n * n
```

**Bottom Screenshot:** The notebook has been updated with a third code cell. Cell [3] runs `unittest.main` to execute the tests. The status bar remains at '9:40 AM' and 'Python 3'.

```
[1] def test_positive_number(self):
    self.assertEqual(square(4), 16)

    def test_negative_number(self):
        self.assertEqual(square(-3), 9)


    def test_zero(self):
        self.assertEqual(square(0), 0)

    def test_large_number(self):
        self.assertEqual(square(100), 10000)

[2] # ---- IMPLEMENTATION (written AFTER tests) ----
def square(n):
    return n * n

[3] unittest.main(argv=[''], verbosity=2, exit=False)
```

Output:

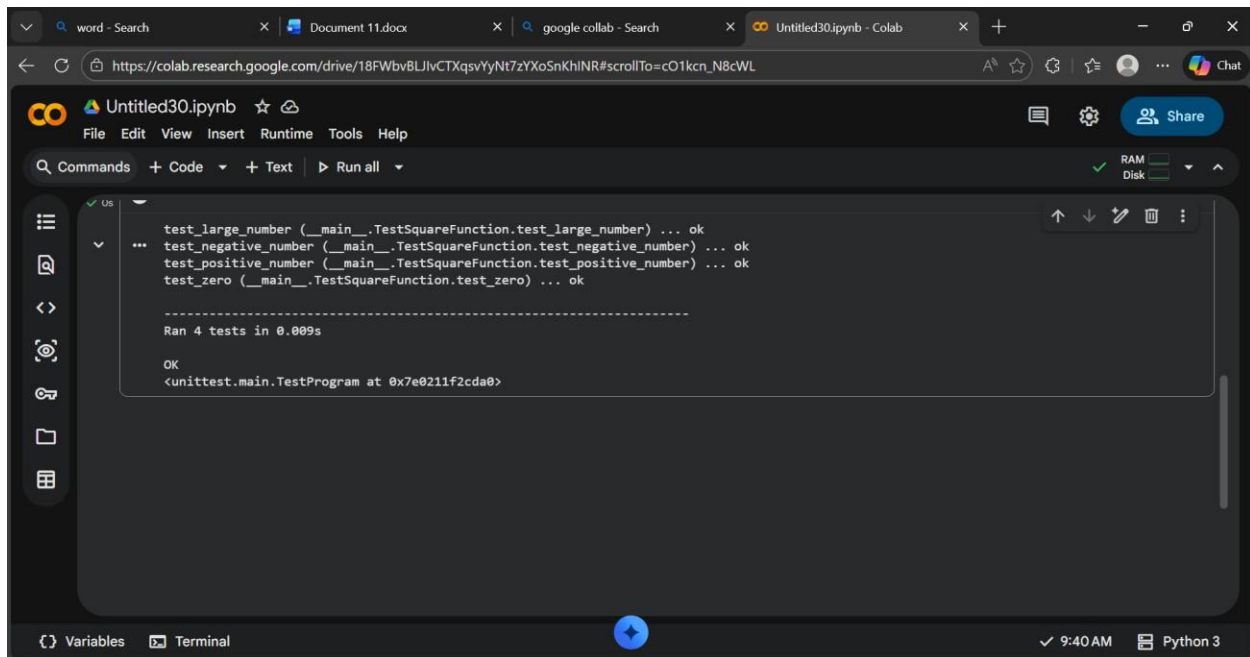A screenshot of a Google Colab notebook interface. The browser tabs at the top include 'word - Search', 'Document 11.docx', 'google colab - Search', and 'Untitled30.ipynb - Colab'. The notebook's address bar shows a URL from 'https://colab.research.google.com'. The notebook title is 'Untitled30.ipynb'. The menu bar includes 'File', 'Edit', 'View', 'Insert', 'Runtime', 'Tools', and 'Help'. Below the menu is a toolbar with 'Commands', '+ Code', '+ Text', and 'Run all'. On the right, there are icons for chat, settings, and a 'Share' button. The main code area shows a Python test suite using unittest. The tests are: 'test\_large\_number', 'test\_negative\_number', 'test\_positive\_number', and 'test\_zero'. All tests passed, indicated by '... ok'. The output shows 'Ran 4 tests in 0.009s' and 'OK'. The bottom status bar shows 'Variables', 'Terminal', a blue circular icon, '9:40 AM', and 'Python 3'.

## Task 2: Email Validation for a User Registration System

### Scenario

You are developing the backend of a user registration system. One requirement is to validate user email addresses before storing them in the database.

### Task Description

Apply Test Driven Development by:

1. Writing unit test cases that define valid and invalid email formats (e.g., missing @, missing domain, incorrect structure).
2. Using AI assistance to implement the `validate_email()` function based strictly on the behavior described by the test cases.

The implementation should be driven entirely by the test expectations.

### Expected Outcome

- Well-defined unit tests using unittest or pytest
- An AI-generated email validation function
- All test cases passing successfully

- Clear alignment between test cases and function behavior Code:

The image shows two screenshots of a Google Colab notebook, illustrating the process of writing tests and then implementing a function to pass them.

**Top Screenshot:** The notebook is titled "Untitled30.ipynb". The code cell [4] contains the following Python code:

```
import unittest

# ----- TEST CASES (WRITTEN BEFORE FUNCTION) -----
class TestEmailValidation(unittest.TestCase):

    def test_valid_email(self):
        self.assertTrue(validate_email("user@example.com"))

    def test_missing_at_symbol(self):
        self.assertFalse(validate_email("userexample.com"))

    def test_missing_domain(self):
        self.assertFalse(validate_email("user@"))

    def test_missing_username(self):
        self.assertFalse(validate_email("@example.com"))

    def test_invalid_structure(self):
        self.assertFalse(validate_email("user@com"))

    def test_email_with_numbers(self):
        self.assertTrue(validate_email("user123@gmail.com"))
```

The bottom status bar shows "9:46 AM" and "Python 3".

**Bottom Screenshot:** The notebook is still titled "Untitled30.ipynb". The code cell [5] contains the following Python code:

```
#AI-Generated Implementation

import re

# ----- IMPLEMENTATION (AFTER TESTS) -----
def validate_email(email):
    pattern = r'^[A-Za-z0-9._%+-]+@[A-Za-z0-9.-]+\.[A-Za-z]{2,}$'
    return re.match(pattern, email) is not None
```


The code cell [6] contains the following Python code:

```
#Run Tests

unittest.main(argv=[''], verbosity=2, exit=False)
```

The bottom status bar shows "9:46 AM" and "Python 3".

Output:

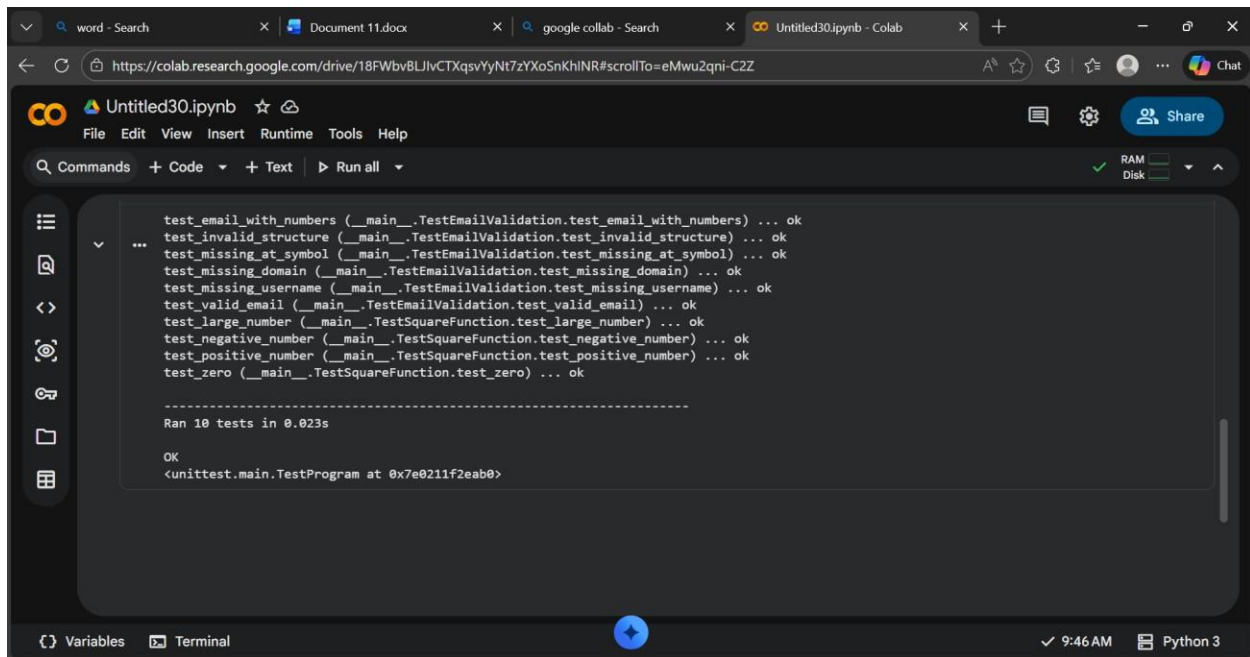

The screenshot shows a Google Colab notebook interface. The top bar includes the Colab logo, the file name 'Untitled30.ipynb', and a 'Share' button. Below the top bar is a menu bar with 'File', 'Edit', 'View', 'Insert', 'Runtime', 'Tools', and 'Help'. A search bar and a 'Run all' button are also present. The main code area displays the following output:

```
test_email_with_numbers (__main__.TestEmailValidation.test_email_with_numbers) ... ok
test_invalid_structure (__main__.TestEmailValidation.test_invalid_structure) ... ok
test_missing_at_symbol (__main__.TestEmailValidation.test_missing_at_symbol) ... ok
test_missing_domain (__main__.TestEmailValidation.test_missing_domain) ... ok
test_missing_username (__main__.TestEmailValidation.test_missing_username) ... ok
test_valid_email (__main__.TestEmailValidation.test_valid_email) ... ok
test_large_number (__main__.TestSquareFunction.test_large_number) ... ok
test_negative_number (__main__.TestSquareFunction.test_negative_number) ... ok
test_positive_number (__main__.TestSquareFunction.test_positive_number) ... ok
test_zero (__main__.TestSquareFunction.test_zero) ... ok

-----
Ran 10 tests in 0.023s

OK
<unittest.main.TestProgram at 0x7e0211f2eab0>
```

At the bottom of the notebook, there are tabs for 'Variables' and 'Terminal', and a status bar showing '9:46 AM' and 'Python 3'.

## Task 3: Decision Logic Development Using TDD

### Scenario

In a grading or evaluation module, a function is required to determine the maximum value among three inputs. Accuracy is essential, as incorrect results could affect downstream decision logic.

### Task Description

Using the TDD methodology:

1. Write test cases that describe the expected output for different combinations of three numbers.
2. Prompt GitHub Copilot or Cursor AI to implement the function logic based on the written tests.

Avoid writing any logic before test cases are completed.

### Expected Outcome

- Comprehensive test cases covering normal and edge cases
- AI-generated function implementation
- Passing test results demonstrating correctness

- Evidence that logic was derived from tests, not assumptions Code:

The image displays two sequential screenshots of a Google Colab notebook, illustrating the Test-Driven Development (TDD) process for a function named `max_of_three`.

**Top Screenshot:** The notebook shows a code cell [7] where the `unittest` module is imported. Below this, a class `TestMaxOfThree` is defined, inheriting from `unittest.TestCase`. Inside this class, six test methods are written, each using `self.assertEqual` to verify the output of `max_of_three` for specific inputs:

- `test_normal_numbers`: `self.assertEqual(max_of_three(2, 8, 5), 8)`
- `test_first_is_largest`: `self.assertEqual(max_of_three(10, 3, 6), 10)`
- `test_negative_numbers`: `self.assertEqual(max_of_three(-1, -5, -3), -1)`
- `test_all_equal`: `self.assertEqual(max_of_three(4, 4, 4), 4)`
- `test_two_equal_largest`: `self.assertEqual(max_of_three(7, 7, 2), 7)`

**Bottom Screenshot:** This screenshot shows the next stage of the TDD process. The test methods from the previous cell are still visible at the top. A new section, `#AI-Generated Implementation`, contains a code cell [8] where the actual function is implemented:


```
# ----- IMPLEMENTATION (AFTER TESTS) -----  
def max_of_three(a, b, c):  
    return max(a, b, c)
```

Below the implementation, a section titled `#Run Tests` contains a code cell [9] that executes the tests:

```
unittest.main(argv=[''], verbosity=2, exit=False)
```

The bottom status bar of the notebook indicates the time as 9:55 AM and the Python version as Python 3.

Output:

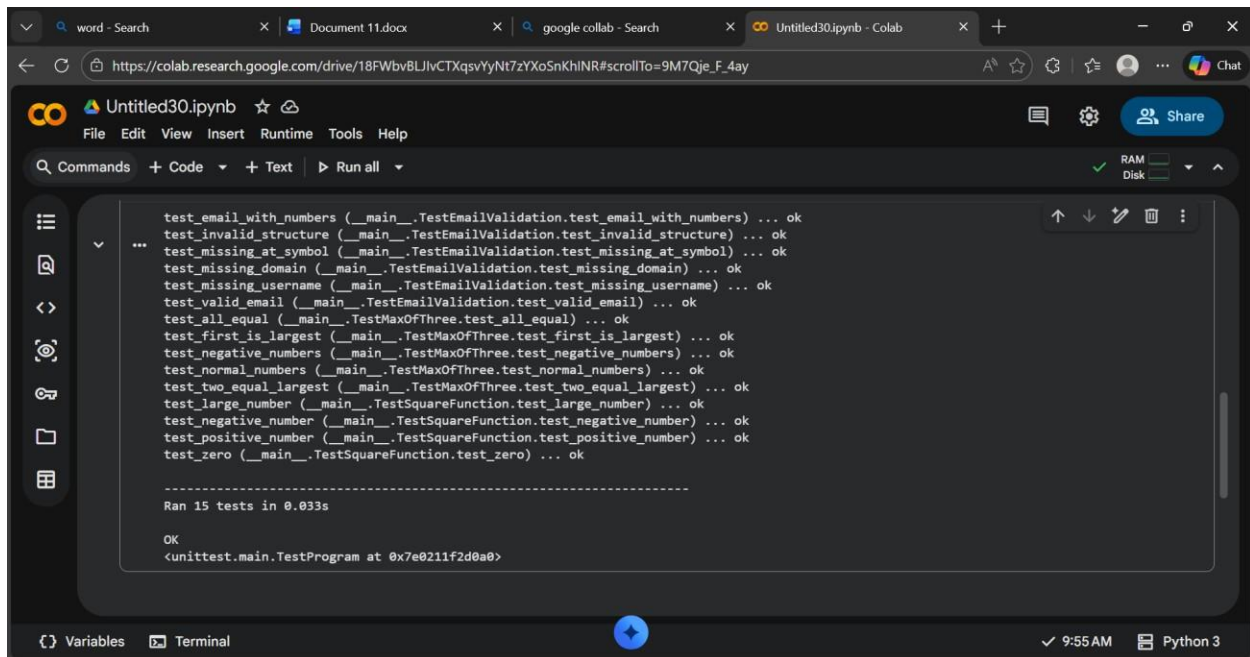

The screenshot shows a Google Colab notebook titled 'Untitled30.ipynb'. The code cell contains 15 unit tests using the unittest module. The tests are organized into two groups: email validation tests and mathematical function tests. All tests passed successfully, as indicated by the '... ok' status for each. The output shows 'Ran 15 tests in 0.033s' and 'OK'.

```
test_email_with_numbers (__main__.TestEmailValidation.test_email_with_numbers) ... ok
test_invalid_structure (__main__.TestEmailValidation.test_invalid_structure) ... ok
test_missing_at_symbol (__main__.TestEmailValidation.test_missing_at_symbol) ... ok
test_missing_domain (__main__.TestEmailValidation.test_missing_domain) ... ok
test_missing_username (__main__.TestEmailValidation.test_missing_username) ... ok
test_valid_email (__main__.TestEmailValidation.test_valid_email) ... ok
test_all_equal (__main__.TestMaxOfThree.test_all_equal) ... ok
test_first_is_largest (__main__.TestMaxOfThree.test_first_is_largest) ... ok
test_negative_numbers (__main__.TestMaxOfThree.test_negative_numbers) ... ok
test_normal_numbers (__main__.TestMaxOfThree.test_normal_numbers) ... ok
test_two_equal_largest (__main__.TestMaxOfThree.test_two_equal_largest) ... ok
test_large_number (__main__.TestSquareFunction.test_large_number) ... ok
test_negative_number (__main__.TestSquareFunction.test_negative_number) ... ok
test_positive_number (__main__.TestSquareFunction.test_positive_number) ... ok
test_zero (__main__.TestSquareFunction.test_zero) ... ok

-----
Ran 15 tests in 0.033s

OK
<unittest.main.TestProgram at 0x7e0211f2d0a0>
```

## Task 4: Shopping Cart Development with AI-Assisted TDD

### Scenario

You are building a simple shopping cart module for an e-commerce application.

The cart must support adding items, removing items, and calculating the total price accurately.

### Task Description

Follow a test-driven approach:

1. Write unit tests for each required behavior:

- o Adding an item
- o Removing an item
- o Calculating the total price

2. After defining all tests, use AI tools to generate the ShoppingCart class and its methods so that the tests pass.

Focus on behavior-driven testing rather than implementation details.

### Expected Outcome

- Unit tests defining expected shopping cart behavior



- AI-generated class implementation
- All tests passing successfully
- Clear demonstration of TDD applied to a class-based design Code:

The image displays two sequential screenshots of a Google Colab notebook titled 'Untitled30.ipynb', illustrating the Test-Driven Development (TDD) process for a class-based design.

**Top Screenshot (Test Cases):**

- The notebook shows a code cell with the following Python code:

```
[10]
import unittest

# ----- TESTS FIRST (TDD RULE) -----
class TestShoppingCart(unittest.TestCase):

    def test_add_item(self):
        cart = ShoppingCart()
        cart.add_item("Book", 100)
        self.assertEqual(cart.calculate_total(), 100)

    def test_add_multiple_items(self):
        cart = ShoppingCart()
        cart.add_item("Book", 100)
        cart.add_item("Pen", 20)
        self.assertEqual(cart.calculate_total(), 120)

    def test_remove_item(self):
        cart = ShoppingCart()
        cart.add_item("Book", 100)
        cart.remove_item("Book")
        self.assertEqual(cart.calculate_total(), 0)
```

The code defines a `TestShoppingCart` class inheriting from `unittest.TestCase`. It contains three test methods: `test_add_item`, `test_add_multiple_items`, and `test_remove_item`. Each test method creates a `ShoppingCart` instance and asserts the `calculate_total()` method's output against expected values.

**Bottom Screenshot (Implementation):**

- The notebook shows a code cell with the following Python code:

```
[11]
# ----- IMPLEMENTATION AFTER TESTS -----
class ShoppingCart:

    def __init__(self):
        self.items = {}


    def add_item(self, name, price):
        self.items[name] = price

    def remove_item(self, name):
        if name in self.items:
            del self.items[name]


    def calculate_total(self):
        return sum(self.items.values())
```

The code defines the `ShoppingCart` class. It includes an `__init__` method to initialize an empty `items` dictionary, and three methods: `add_item` to add items, `remove_item` to remove items, and `calculate_total` to calculate the total price of items in the cart.



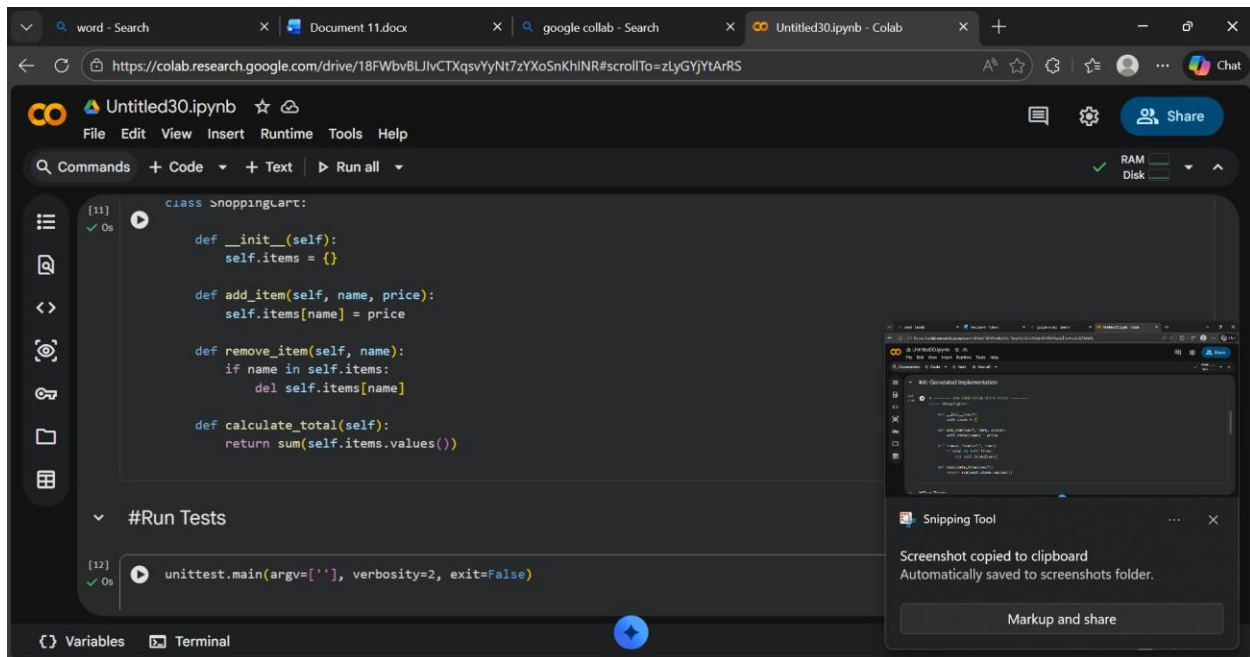

Output:

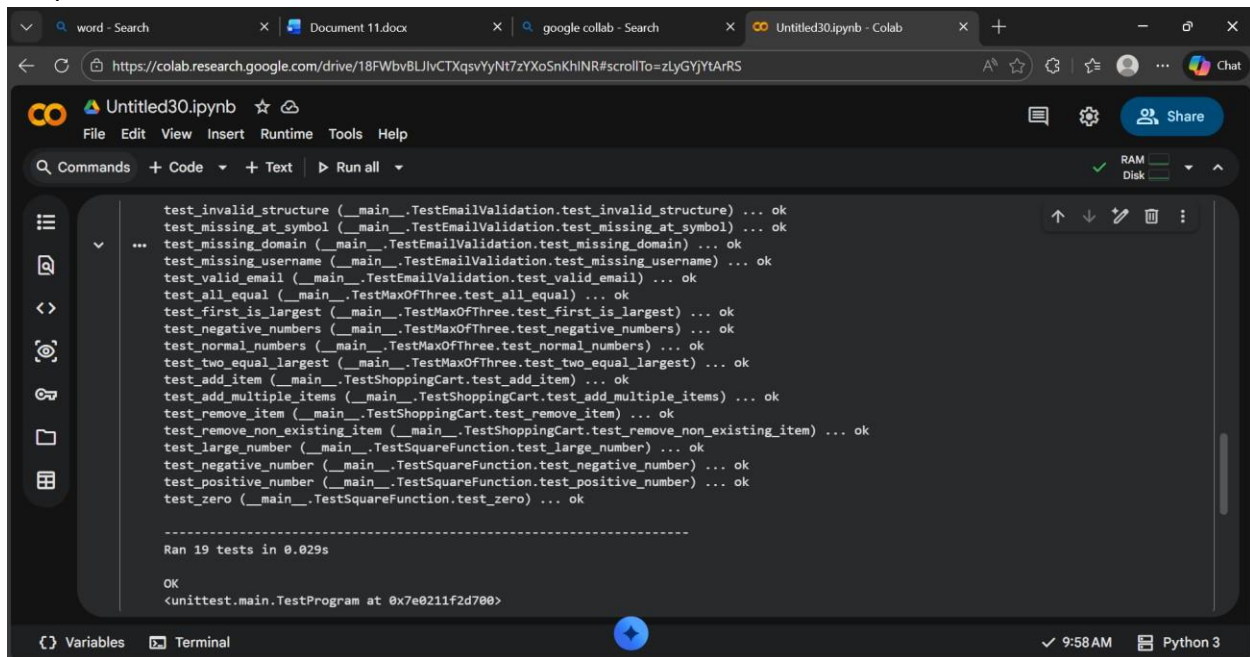

## Task 5: String Validation Module Using TDD

### Scenario

You are working on a text-processing module where a function is required to identify whether a given string is a palindrome. The function must handle different cases and inputs reliably.

## Task Description

Using Test Driven Development:

1. Write test cases for a palindrome checker covering:

- o Simple palindromes

- o Non-palindromes o

Case variations

2. Use GitHub Copilot or Cursor AI to generate the `is_palindrome()` function based on the test case expectations.

The function should be implemented only after tests are written.

Expected Outcome

- Clearly written test cases defining expected behavior
  - AI-assisted implementation of the palindrome checker
  - All test cases passing successfully • Evidence of TDD methodology applied correctly
- Code:

The image displays two sequential screenshots of a Google Colab notebook titled 'Untitled30.ipynb'. The browser tabs at the top include 'word - Search', 'Document 11.docx', 'google colab - Search', and 'Untitled30.ipynb - Colab'. The notebook interface shows a menu bar with 'File', 'Edit', 'View', 'Insert', 'Runtime', 'Tools', and 'Help'. Below the menu is a toolbar with 'Commands', '+ Code', '+ Text', and 'Run all'. The left sidebar contains icons for file management and search. The main code area is divided into cells, each with a status indicator (e.g., '[13] ✓ Os').

**Top Screenshot:** The first cell contains the following code:

```
[13] ✓ Os
import unittest

# ----- TEST CASES FIRST (TDD) -----
class TestPalindrome(unittest.TestCase):

    def test_simple_palindrome(self):
        self.assertTrue(is_palindrome("madam"))

    def test_not_palindrome(self):
        self.assertFalse(is_palindrome("hello"))

    def test_case_insensitive(self):
        self.assertTrue(is_palindrome("Madam"))

    def test_with_spaces(self):
        self.assertTrue(is_palindrome("nurses run"))

    def test_single_character(self):
        self.assertTrue(is_palindrome("a"))
```

**Bottom Screenshot:** The notebook shows the implementation and test execution. The second cell contains the implementation:

```
[14] ✓ Os
#Ai Implemented Code

# ----- IMPLEMENTATION AFTER TESTS -----
def is_palindrome(s):
    s = s.replace(" ", "").lower()
    return s == s[::-1]
```

The third cell contains the test execution command:

```
[15] ✓ Os
unittest.main(argv=[''], verbosity=2, exit=False)
```

The bottom status bar shows '✓ 10:05 AM Python 3'.

Output:

word - Search x Document 11.docx x google colab - Search x Untitled30.ipynb - Colab x +

https://colab.research.google.com/drive/18FWbvBLJlvCTXqsvYyNt7zYXoSnKhINR#scrollTo=LpQRy\_SmCH9E

Untitled30.ipynb ☆ Saving...

File Edit View Insert Runtime Tools Help

Commands + Code + Text ▶ Run all

RAM Disk

```
test_all_equal (__main__.TestMaxOfThree.test_all_equal) ... ok
test_first_is_largest (__main__.TestMaxOfThree.test_first_is_largest) ... ok
test_negative_numbers (__main__.TestMaxOfThree.test_negative_numbers) ... ok
test_normal_numbers (__main__.TestMaxOfThree.test_normal_numbers) ... ok
test_two_equal_largest (__main__.TestMaxOfThree.test_two_equal_largest) ... ok
test_case_insensitive (__main__.TestPalindrome.test_case_insensitive) ... ok
test_not_palindrome (__main__.TestPalindrome.test_not_palindrome) ... ok
test_simple_palindrome (__main__.TestPalindrome.test_simple_palindrome) ... ok
test_single_character (__main__.TestPalindrome.test_single_character) ... ok
test_with_spaces (__main__.TestPalindrome.test_with_spaces) ... ok
test_add_item (__main__.TestShoppingCart.test_add_item) ... ok
test_add_multiple_items (__main__.TestShoppingCart.test_add_multiple_items) ... ok
test_remove_item (__main__.TestShoppingCart.test_remove_item) ... ok
test_remove_non_existing_item (__main__.TestShoppingCart.test_remove_non_existing_item) ... ok
test_large_number (__main__.TestSquareFunction.test_large_number) ... ok
test_negative_number (__main__.TestSquareFunction.test_negative_number) ... ok
test_positive_number (__main__.TestSquareFunction.test_positive_number) ... ok
test_zero (__main__.TestSquareFunction.test_zero) ... ok

-----
Ran 24 tests in 0.032s

OK
<unittest.main.TestProgram at 0x7e0211f3cc80>
```

Variables Terminal

✓ 10:05 AM Python 3