

Cognizant Digital Nurture 4.0 – Java FSE

Week 6 – Hands-On Report

Name: Shaik Sulthan - 6431169

Track: Deep Skilling – Java Full Stack Engineer

Batch: 2025

TOPIC-ReactJS-HOL

Q.1.) Create a new React Application with the name “myfirstreact”, Run the application to print “welcome to the first session of React” as heading of that page.

Solution:

Code:-

Path: src/App.js

```
import React from 'react';  
function App() {  
  return (  
    <div>  
      <h1>Welcome to the first session of React</h1>  
    </div>  
  );  
}  
export default App;
```

OUTPUT:



Welcome to the first session of React

Q.2.) Create a react app for Student Management Portal named StudentApp and create a component named Home which will display the Message “Welcome to the Home page of Student Management Portal”. Create another component named About and display the Message “Welcome to the About page of the Student Management Portal”. Create a third component named Contact and display the Message “Welcome to the Contact page of the Student Management Portal”. Call all the three components.

Solution:

Code:-

Path: src/Components/Home.js

```
import React from 'react';  
function Home() {  
  return (  
    <div>  
      <h2>Welcome to the Home page of Student Management Portal</h2>  
    </div>  
  );  
}  
export default Home;
```


Path: src/Components/About.js

```
import React from 'react';  
function About() {  
  return (  
    <div>  
      <h2>Welcome to the About page of the Student Management Portal</h2>  
    </div>  
  );  
}
```

```
}  
  
export default About;  
  
Path:src/Components/Contact.js  
  
import React from 'react';  
  
function Contact() {  
  return (  
    <div>  
  
    <h2>Welcome to the Contact page of the Student Management Portal</h2>  
  
    </div>  
  
  );  
}  
  
export default Contact;
```

```
Path:src/App.js  
  
import React from 'react';  
import './App.css';  
import Home from './Components/Home';  
import About from './Components/About';  
import Contact from './Components/Contact';  
  
function App() {  
  return (  
    <div className="App">  
  
    <Home />  
  
    <About />  
  
    <Contact />  
  
    </div>  
  
  );  
}  
  
export default App;
```

OUTPUT:-

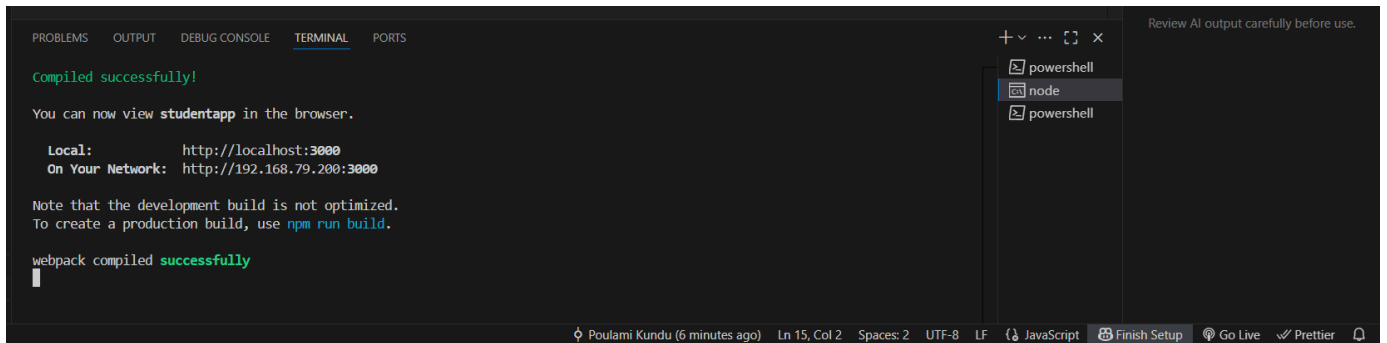

The screenshot shows the VS Code interface with the terminal panel open. The terminal output indicates that the application was compiled successfully. It provides local and network URLs for viewing the application in a browser. A note mentions that the development build is not optimized and suggests using 'npm run build' for a production build. The status bar at the bottom shows the file is named 'Poulami Kundu' and is 6 minutes old, with the current cursor position at line 15, column 2.


```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
Compiled successfully!

You can now view studentapp in the browser.

Local:      http://localhost:3000
On Your Network:  http://192.168.79.200:3000

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
```



Welcome to the Home page of Student Management Portal

Welcome to the About page of the Student Management Portal

Welcome to the Contact page of the Student Management Portal

Q.3.) Create a react app for Student Management Portal named scorecalculatorapp and create a function component named “CalculateScore” which will accept Name, School, Total and goal in order to calculate the average score of a student and display the same.

Solution:

Code:-

Path: src/Components/CalculateScore.js

```
import React from 'react';
import '../Stylesheets/mystyle.css';
const CalculateScore = ({ name, school, total, goal }) => {
  const average = total / goal;
  return (
    <div className="score-card">
      <h2>Student Score Calculator</h2>
      <p><strong>Name:</strong> {name}</p>
      <p><strong>School:</strong> {school}</p>
      <p><strong>Total Marks:</strong> {total}</p>
      <p><strong>Number of Subjects (Goal):</strong> {goal}</p>
      <p><strong>Average Score:</strong> {average.toFixed(2)}</p>
    </div>
  );
};
export default CalculateScore;
```

Path: src/Components/CalculateScore.js

```
.score-card {
  background-color: #f0f8ff;
  border: 2px solid #007acc;
```

```
border-radius: 10px;
padding: 20px;
width: 400px;
margin: 30px auto;
font-family: Arial, sans-serif;
box-shadow: 0 4px 8px rgba(0, 0, 0, 0.2);
}
.score-card h2 {
color: #007acc;
text-align: center;
}
```

Path: src/App.js

```
import React from 'react';
import CalculateScore from './Components/CalculateScore';
function App() {
  return (
    <div className="App">
      <CalculateScore
        name="Aditi Sharma"
        school="Green Valley School"
        total={425}
        goal={5}
      />
    </div>
  );
}
export default App;
```

OUTPUT:



Student Score Calculator


Name: Aditi Sharma

School: Green Valley School

Total Marks: 425

Number of Subjects (Goal): 5

Average Score: 85.00

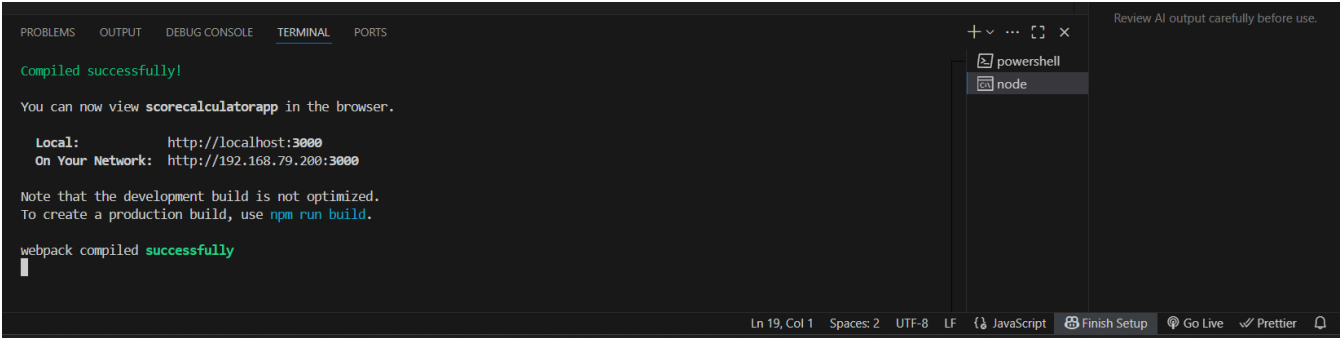

Q.4.) Create a new react application using *create-react-app* tool with the name as “blogapp”.

Solution:

Code:-

Path: src/Post.js

```
import React from 'react';  
class Post extends React.Component {  
  render() {  
    return (  
      <div>  
        <h2>{this.props.title}</h2>  
        <p>{this.props.body}</p>  
      </div>  
    );  
  }  
}  
export default Post;
```

Path: src/Posts.js

```
import React, { Component } from 'react';  
import Post from './Post';  
class Posts extends Component {  
  constructor(props) {  
    super(props);  
    this.state = {  
      posts: [],  
      error: null,  
    };  
  }  
  loadPosts() {  
    fetch('https://jsonplaceholder.typicode.com/posts')
```

```
.then(response => {
    if (!response.ok) throw new Error('Network response was not ok');
    return response.json();
})
.then(data => this.setState({ posts: data }))
.catch(error => this.setState({ error }));
}

componentDidMount() {
    this.loadPosts();
}

componentDidCatch(error, info) {
    alert('An error occurred: ' + error);
}

render() {
    const { posts, error } = this.state;
    if (error) {
        return <div>Error: {error.message}</div>;
    }
    return (
        <div>
            <h1>Blog Posts</h1>
            {posts.slice(0, 10).map(post => (
                <Post key={post.id} title={post.title} body={post.body} />
            ))}
        </div>
    );
}

export default Posts;

Path: src/App.js

import React from 'react';
```

```
import './App.css';

import Posts from './Posts';

function App() {

  return (

    <div className="App">

      <Posts />


    </div>

  );

}

export default App;
```

OUTPUT:

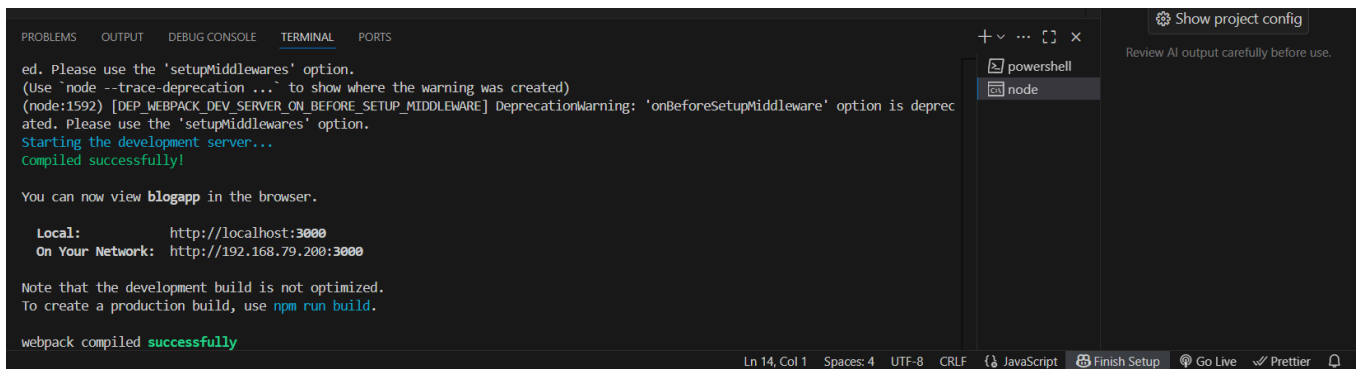

```
PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL  PORTS

ed. Please use the 'setupMiddlewares' option.
(Use 'node --trace-deprecation ...' to show where the warning was created)
(node:1592) [DEP_WEBPACK_DEV_SERVER_ON_BEFORE_SETUP_MIDDLEWARE] DeprecationWarning: 'onBeforeSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
Starting the development server...
compiled successfully!

You can now view blogapp in the browser.

  Local:      http://localhost:3000
  On Your Network: http://192.168.79.200:3000

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
```



dolorem dolore est ipsam

dignissimos aperiam dolorem qui eum facilis quibusdam animi sint suscipit qui sint possimus cum quaerat magni maiores excepturi ipsam ut commodi dolor voluptatum modi aut vitae

nesciunt iure omnis dolorem tempora et accusantium

consectetur animi nesciunt iure dolore enim quia ad veniam autem ut quam aut nobis et est aut quod aut provident voluptas autem voluptas

optio molestias id quia eum

quo et expedita modi cum officia vel magni doloribus qui repudiandae vero nisi sit quos veniam quod sed accusamus veritatis error

Q.5.)My Academy team at Cognizant want to create a dashboard containing the details of ongoing and completed cohorts. A react application is created which displays the detail of the cohorts using react component. You are assigned the task of styling these react components.

Solution:

Code:-

Step 1: Create the CSS Module file

`/* CohortDetails.module.css */`

```
.box {  
  
  width: 300px;  
  
  display: inline-block;  
  
  margin: 10px;  
  
  padding: 10px 20px;  
  
  border: 1px solid black;  
  
  border-radius: 10px;  
  
}  
  
dt {  
  
  font-weight: 500;  
  
}
```

Step 2: Create or Update the React Component

```
import React from 'react';

import styles from './CohortDetails.module.css'; // Importing CSS Module

function CohortDetails(props) {

  const { title, status, startDate, endDate } = props;

  const headingStyle = {

    color: status === 'ongoing' ? 'green' : 'blue',

  };

  return (

    <div className={styles.box}>

      <h3 style={headingStyle}>{title}</h3>

      <dl>

        <dt>Status:</dt>

        <dd>{status}</dd>

        <dt>Start Date:</dt>

        <dd>{startDate}</dd>

        <dt>End Date:</dt>

        <dd>{endDate}</dd>

      </dl>

    </div>

  );

}

export default CohortDetails;
```

Use the Component in App.js to Test

```
import React from 'react';

import CohortDetails from './CohortDetails';

function App() {

  return (

    <div>

      <h1>Cohort Dashboard</h1>

      <CohortDetails

        title="React Basics"

        status="ongoing"

        startDate="2025-07-01"

        endDate="2025-08-15"

      />

      <CohortDetails

        title="Spring Boot Advanced"

        status="completed"

        startDate="2025-05-01"

        endDate="2025-06-30"

      />

    </div>

  );

}

export default App;
```

OUTPUT:

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

modules by path ./node_modules/ 1.35 MiB 99 modules
modules by path ./src/ 17.2 KiB
modules by path ./src/*.js 9.11 KiB
./src/index.js 1.99 KiB [built] [code generated]
./src/App.js 2.3 KiB [built] [code generated]
./src/reportWebVitals.js 1.48 KiB [built] [code generated]
./src/CohortDetails.js 3.33 KiB [built] [code generated]
modules by path ./src/*.css 8.07 KiB
./src/index.css 2.72 KiB [built] [code generated]
./node_modules/css-loader/dist/cjs.js??ruleSet[1].rules[1].oneOf[5].use[1]!/node_modules/postcss-loader/dist/cjs.js??ruleSet[1].rules[1].oneOf[5].use[2]!/node_modules/source-map-loader/dist/cjs.js!/src/index.css 1.37 KiB [built] [code generated]
./src/CohortDetails.module.css 2.77 KiB [built] [code generated]
./node_modules/css-loader/dist/cjs.js??ruleSet[1].rules[1].oneOf[6].use[1]!/node_modules/postcss-loader/dist/cjs.js??ruleSet[1].rules[1].oneOf[6].use[2]!/node_modules/source-map-loader/dist/cjs.js!/src/CohortDetails.module.css 1.21 KiB [built] [code generated]
webpack 5.68.0 compiled successfully in 31497 ms

Ln 14, Col 1 Spaces: 4 UTF-8 CRLF CSS Finish Setup Go Live Prettier

localhost:3000

Cohort Dashboard

React Basics	Spring Boot Advanced
Status: ongoing	Status: completed
Start Date: 2025-07-01	Start Date: 2025-05-01
End Date: 2025-08-15	End Date: 2025-06-30