

WEEK 7 - ReactJS

Name: Shaik Sulthan

Superset ID: 6431169

9. Cricket App

Steps:

1. Create a new React app using the command:

```
npx create-react-app cricketapp
```

2. Navigate to the app folder:

```
cd cricketapp
```

3. Modify App.js with the following content:

Objective:

To display cricket player details using React components and props.

Steps:

1.Initialize App:

```
npx create-react-app cricketapp
```

```
cd cricketapp
```

2.Create Player Details Components File:

```
import React from 'react';
```

```
function PlayerDetails(props) {
```

```
  return (
```

```
    <div>
```

```
      <h2>{props.name}</h2>
```

```
      <p>Runs: {props.runs}</p>
```

```
    <p>Country: {props.country}</p>
  </div>

);
}
```

```
export default PlayerDetails;
```

3. Modify App.js

```
import React from 'react';
import PlayerDetails from './PlayerDetails';

function App() {
  return (
    <div>
      <PlayerDetails name="Virat Kohli" runs={12000} country="India" />
    </div>
  );
}

export default App;
```

4. Run App:

```
npm start
```

5. Output : Flag= True

Flag = False

Cricket App - All Sections

All Players & Top Performers

All Players

- Virat - 90
- Rohit - 85
- Dhoni - 45
- Hardik - 30
- Bumrah - 50
- Rahul - 95
- Pant - 25
- Ashwin - 60
- Jadeja - 70
- Shami - 40
- Gill - 80

Top Performers (Score $\geq$ 70)

- Virat - 90
- Rohit - 85
- Rahul - 95
- Jadeja - 70
- Gill - 80

Indian Players (Odd/Even Split)

Odd Team Players

- Virat
- Rahul
- Iyer

Even Team Players

- Rohit
- Shaw
- Samson

Merged Team Players

- Virat
- Rohit
- Rahul
- Shaw
- Iyer
- Samson

10. Office Space Rental App

Objective:

To display available office space details using a component.

Steps:

1. Initialize App:

```
npx create-react-app officespacerentalapp
```

```
cd officespacerentalapp
```

2. Create SpaceDetails Components File:

```
import React from 'react';
```

```
function SpaceDetails({ name, location, price }) {
```

```
  return (
```

```
    <div>
```

```
      <h2>{name}</h2>
```

```
      <p>Location: {location}</p>
```

```
      <p>Price: ₹{price}/month</p>
```

```
    </div>
```

```
  );
```

```
}
```

```
export default SpaceDetails;
```

3. Modify App.js:

```
import React from 'react';
```

```
import SpaceDetails from './SpaceDetails';
```

```
function App() {
```

```
  return (
```

```
    <div>
```

```
      <SpaceDetails name="Tech Park" location="Chennai" price={50000} />
```

```
    </div>
```

```
  );
```


```
}
```

```
export default App;
```

4. Run App:

npm start

5. Output:

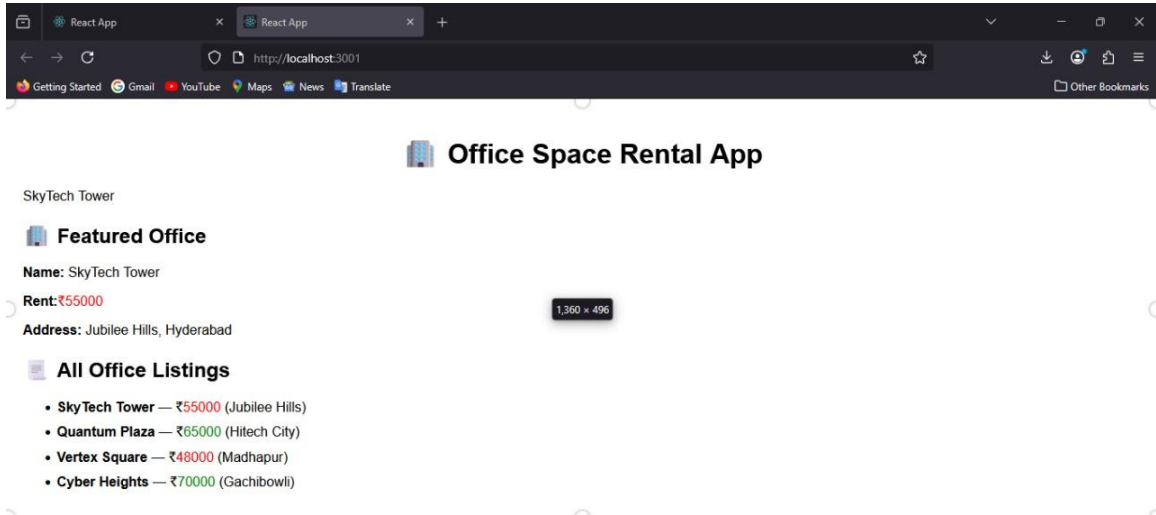

11. Event Examples App

Objective:

To demonstrate event handling in React.

Steps:

1. Initialize App:

```
npx create-react-app eventexamplesapp
```

```
cd eventexamplesapp
```

2. Create EventButton Component File:

```
import React from 'react';
```

```
function EventButton() {  
  
  const handleClick = () => {  
  
    alert('Button was clicked!');  
  
  };  
  
  return <button onClick={handleClick}>Click Me</button>;  
  
}  
  
export default EventButton;
```

3. Modify App.js :

```
import React from 'react';  
  
import EventButton from './EventButton';
```

```
function App() {  
  
  return (  
  
    <div>  
  
      <EventButton />  
  
    </div>  
  
  );  
  
}
```


```
export default App;
```

4. Run App:


npm start

5. Output:


Currency Convertor:

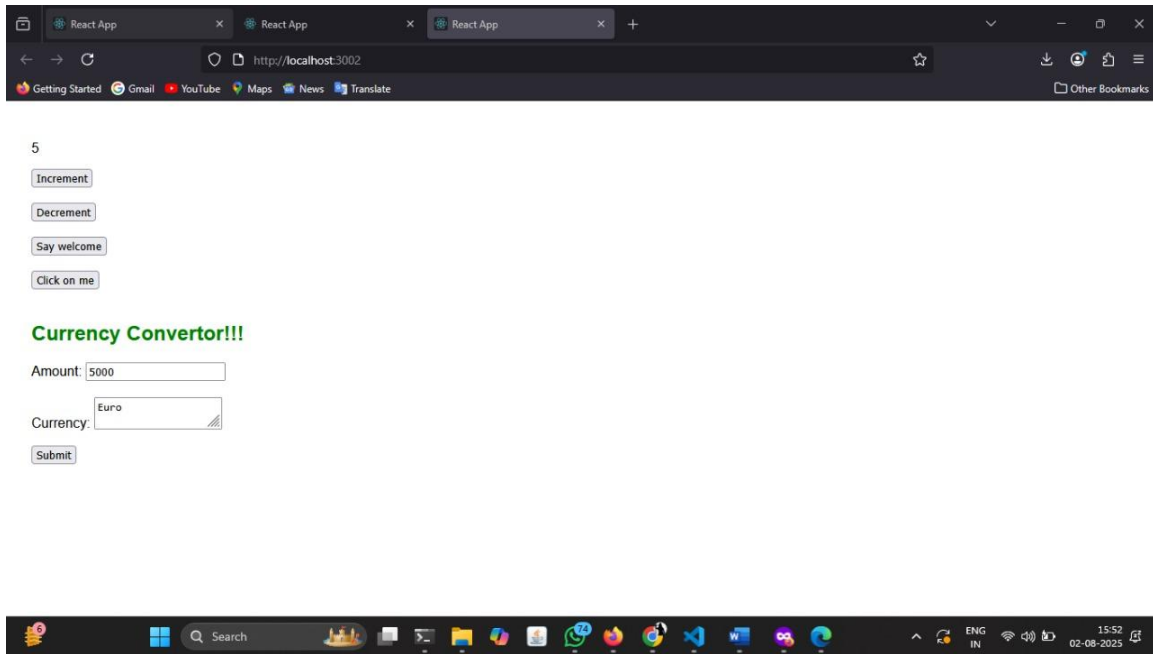

Hello Incrementer

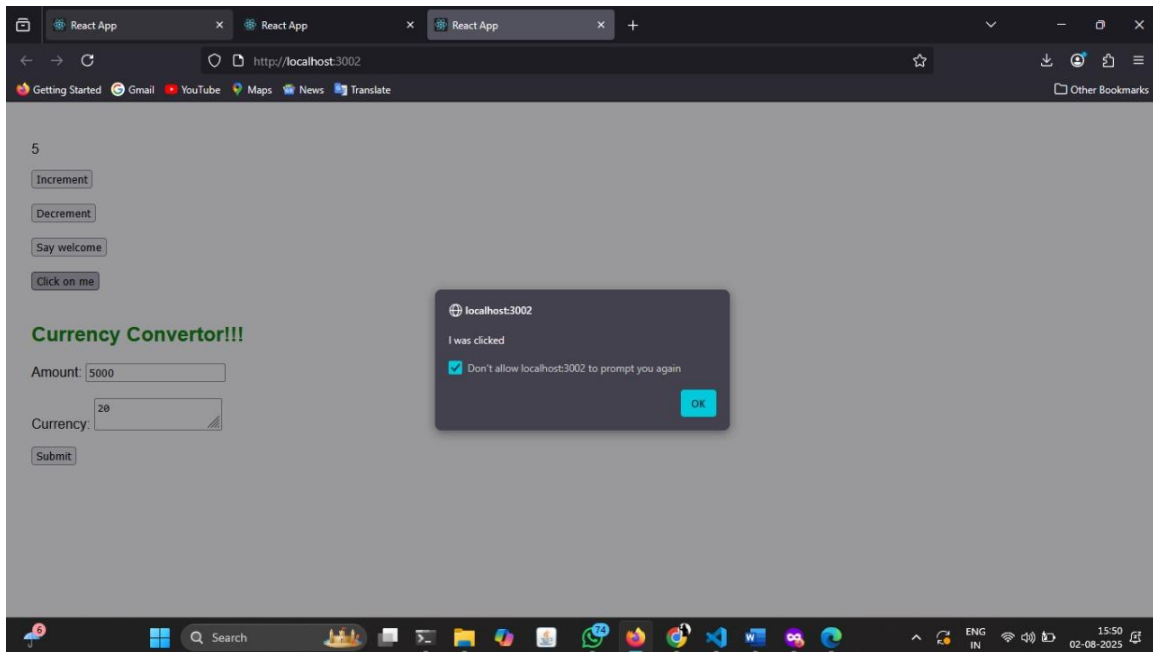

I was clicked output

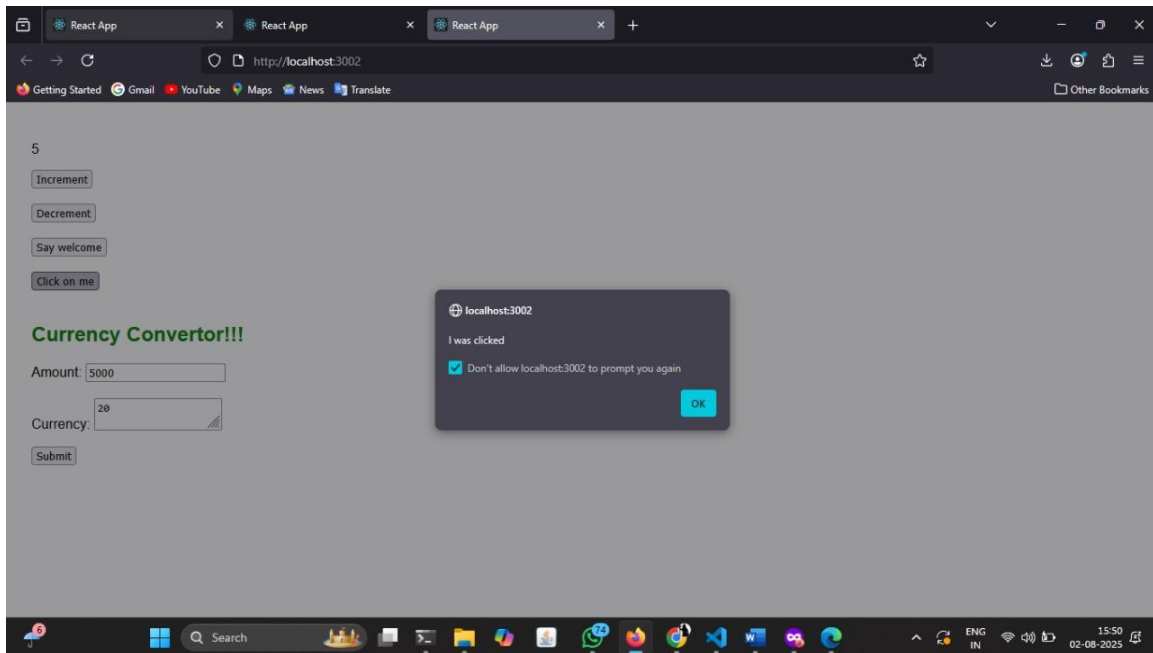

12. Ticket Booking App

Objective:

To simulate a basic login and booking interface using conditional rendering.

Steps:

1. Initialize App:

```
npx create-react-app ticketbookingapp
```

```
cd ticketbookingapp
```

2. Create Components:

Login.js

```
import React from 'react';
```

```
function Login({ onLogin }) {
```

```
  return <button onClick={onLogin}>Login</button>;
```

```
}
```



```
export default Login;
```

Booking.js

```
import React from 'react';
```

```
function Booking() {  
  return <h2>Welcome to Ticket Booking</h2>;  
}
```

```
export default Booking;
```

3. Modify App.js:

```
import React, { useState } from 'react';
```

```
import Login from './Login';
```

```
import Booking from './Booking';
```


```
function App() {  
  const [loggedIn, setLoggedIn] = useState(false);  
  
  return (  
    <div>  
      {loggedIn ? <Booking /> : <Login onLogin={() => setLoggedIn(true)} />}  
    </div>  
  );  
}  
  
export default App;
```

4. Run App:


npm start

5. Output:

Booking page

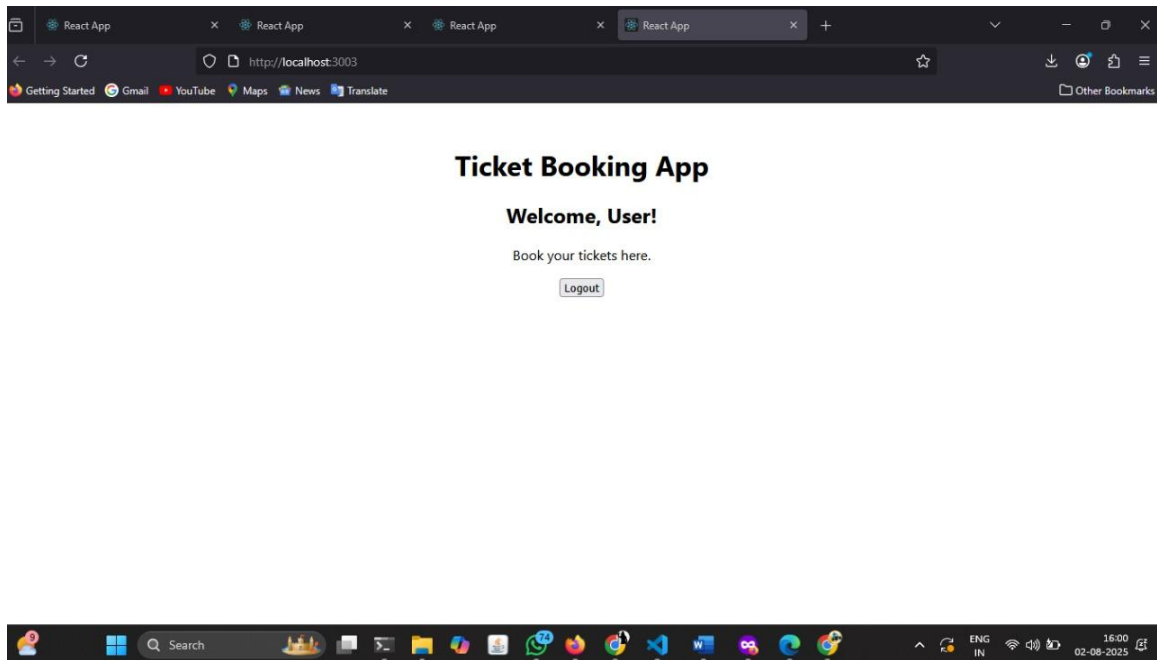

Login Page

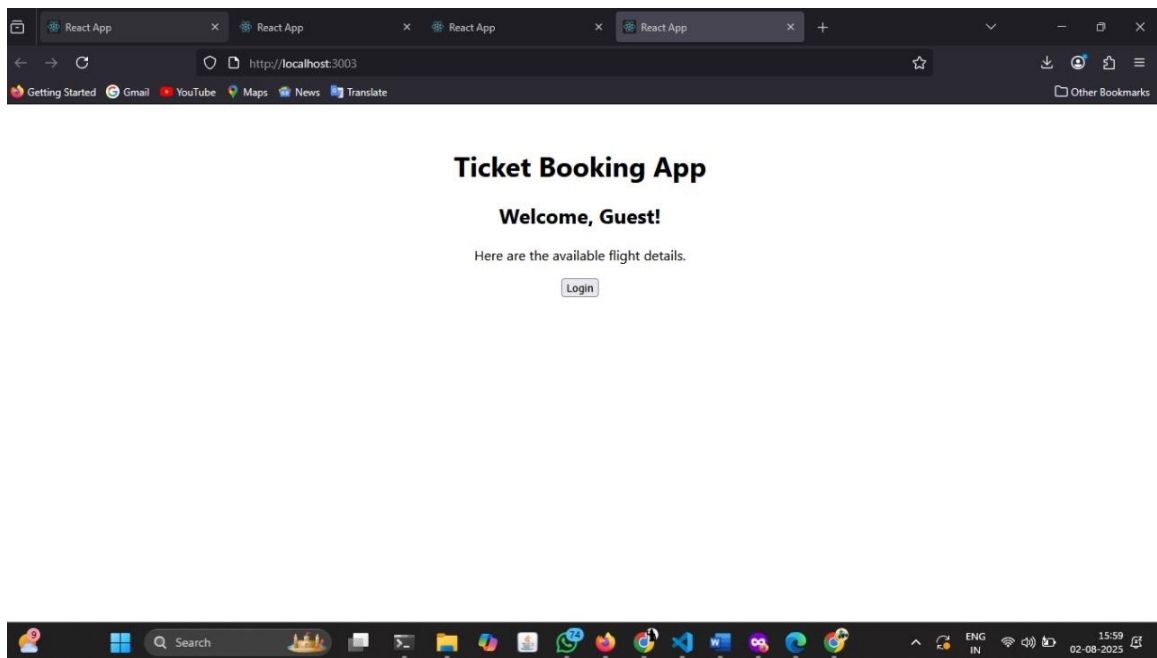

13. Blogger App

Objective:

To create a blogging page using lists and props.

Steps:

Initialize App:

```
npx create-react-app bloggerapp
```

```
cd bloggerapp
```

Create Components:

```
import React from 'react';
```

```
function BlogList({ blogs }) {
```

```
  return (
```

```
    <div>
```

```
      <h2>Blogs</h2>
```

```
      <ul>
```

```
        {blogs.map((blog, index) => (
```

```
          <li key={index}>{blog.title} by {blog.author}</li>
```

```
        )}}
```

```
      </ul>
```

```
    </div>
```

```
  );
```

```
}
```

```
export default BlogList;
```

Modify App.js:

```
import React from 'react';
```

```
import BlogList from './BlogList';

function App() {

  const blogs = [

    { title: "React Basics", author: "Teja" },

    { title: "Props & State", author: "Teja" }

  ];

  return <BlogList blogs={blogs} />;

}

export default App;
```

Run App:

npm start

Output:

