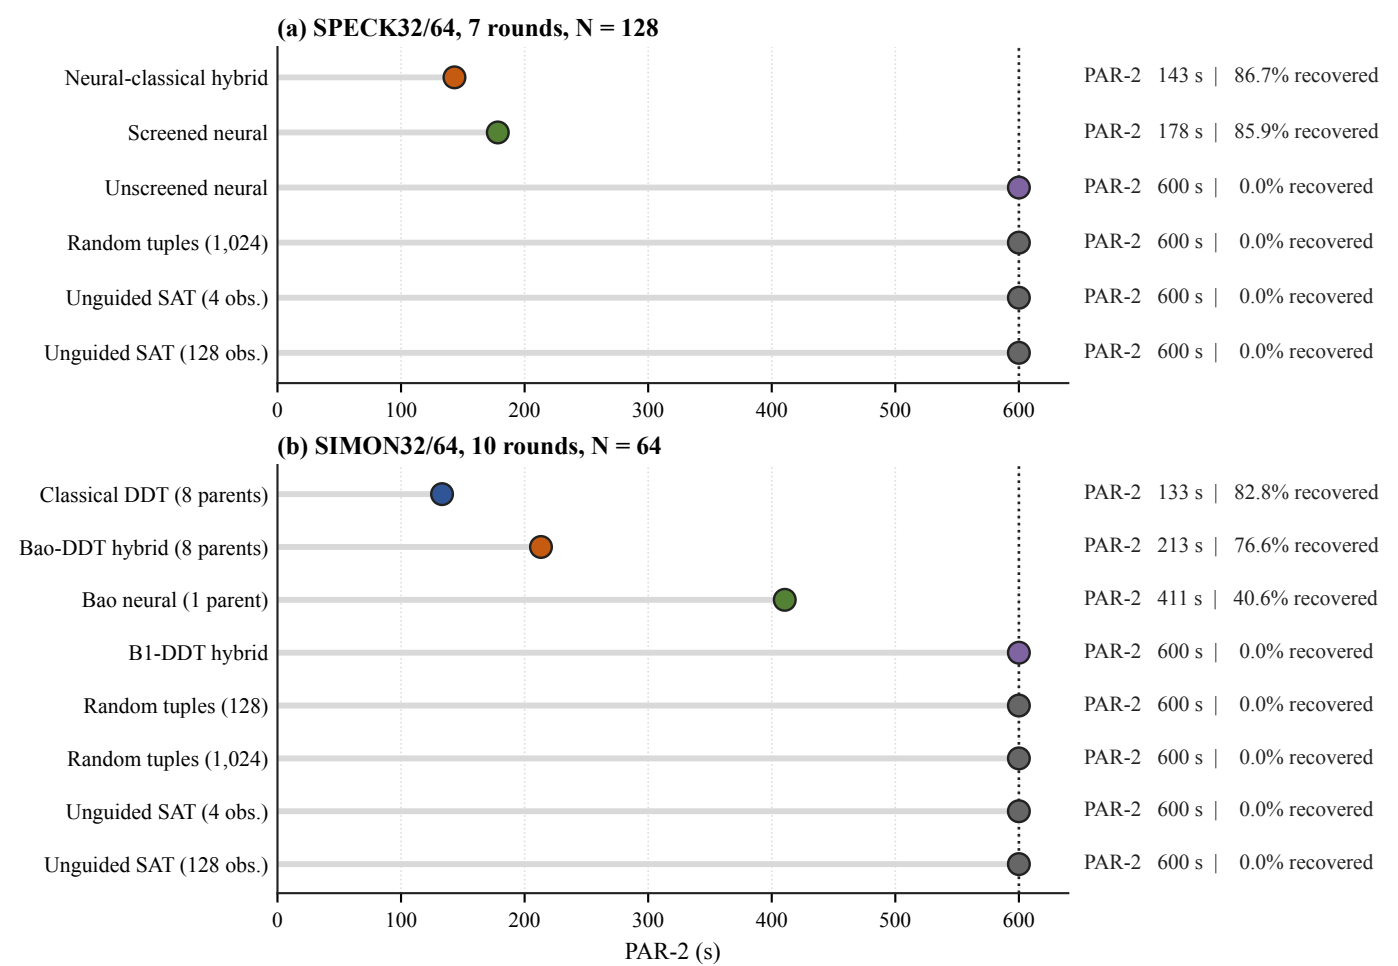
(a) SPECK32/64, 7 rounds, N = 128
Neural-classical hybrid
Screened neural
Unscreened neural
Random tuples (1,024)
Unguided SAT (4 obs.)
Unguided SAT (128 obs.)
PAR-2 143 s | 86.7% recovered
PAR-2 178 s | 85.9% recovered
PAR-2 600 s | 0.0% recovered
PAR-2 600 s | 0.0% recovered
PAR-2 600 s | 0.0% recovered
PAR-2 600 s | 0.0% recovered
0
100
200
300
400
500
600
(b) SIMON32/64, 10 rounds, N = 64
Classical DDT (8 parents)
Bao-DDT hybrid (8 parents)
Bao neural (1 parent)
B1-DDT hybrid
Random tuples (128)
Random tuples (1,024)
Unguided SAT (4 obs.)
Unguided SAT (128 obs.)
PAR-2 133 s | 82.8% recovered
PAR-2 213 s | 76.6% recovered
PAR-2 411 s | 40.6% recovered
PAR-2 600 s | 0.0% recovered
PAR-2 600 s | 0.0% recovered
PAR-2 600 s | 0.0% recovered
PAR-2 600 s | 0.0% recovered
PAR-2 600 s | 0.0% recovered
0
100
200
300
400
500
600
PAR-2 (s)