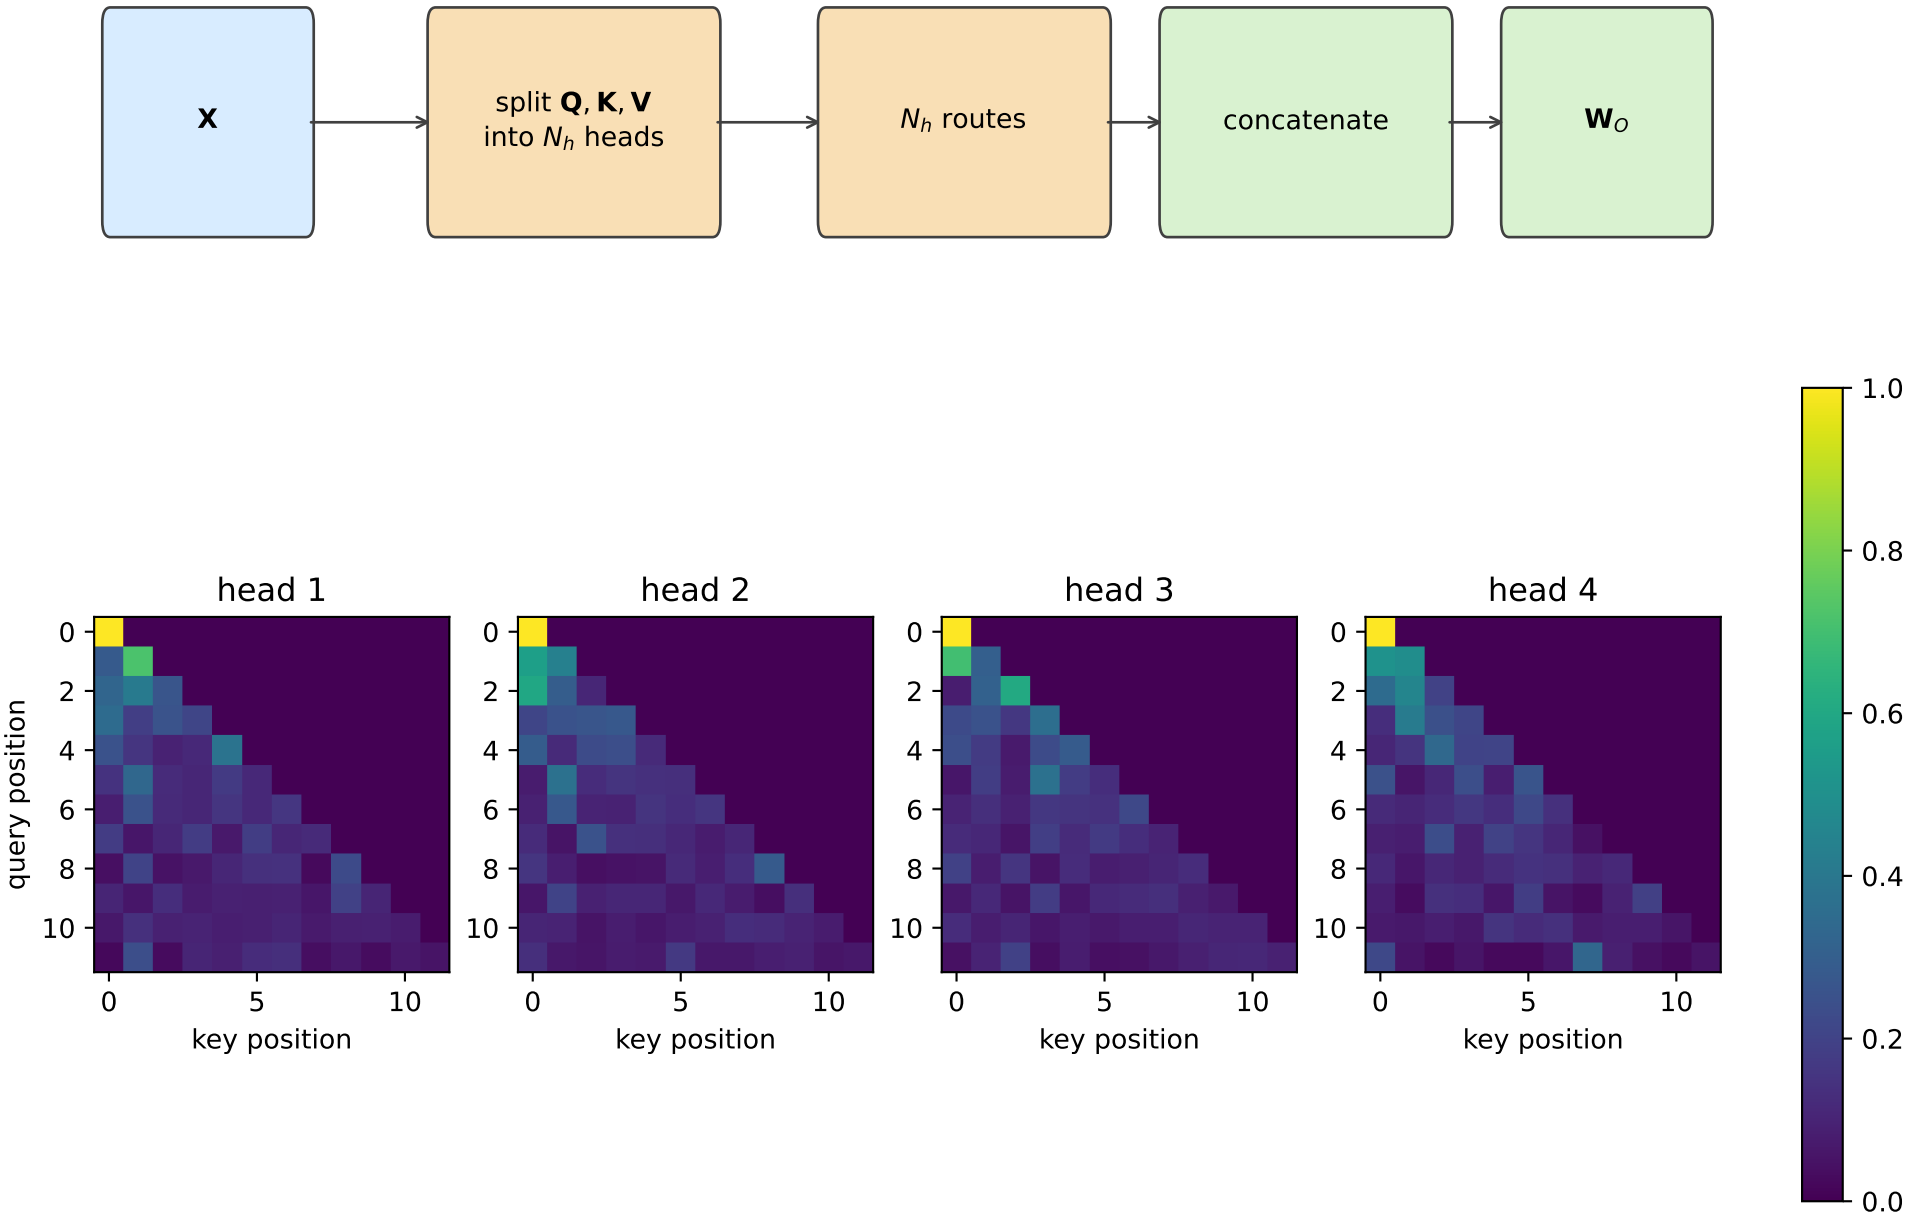
X
split Q, K, V into N_h heads
N_h routes
concatenate
W_O
head 1
head 2
head 3
head 4
query position
key position
0
2
4
6
8
10
0
5
10
1.0
0.8
0.6
0.4
0.2
0.0