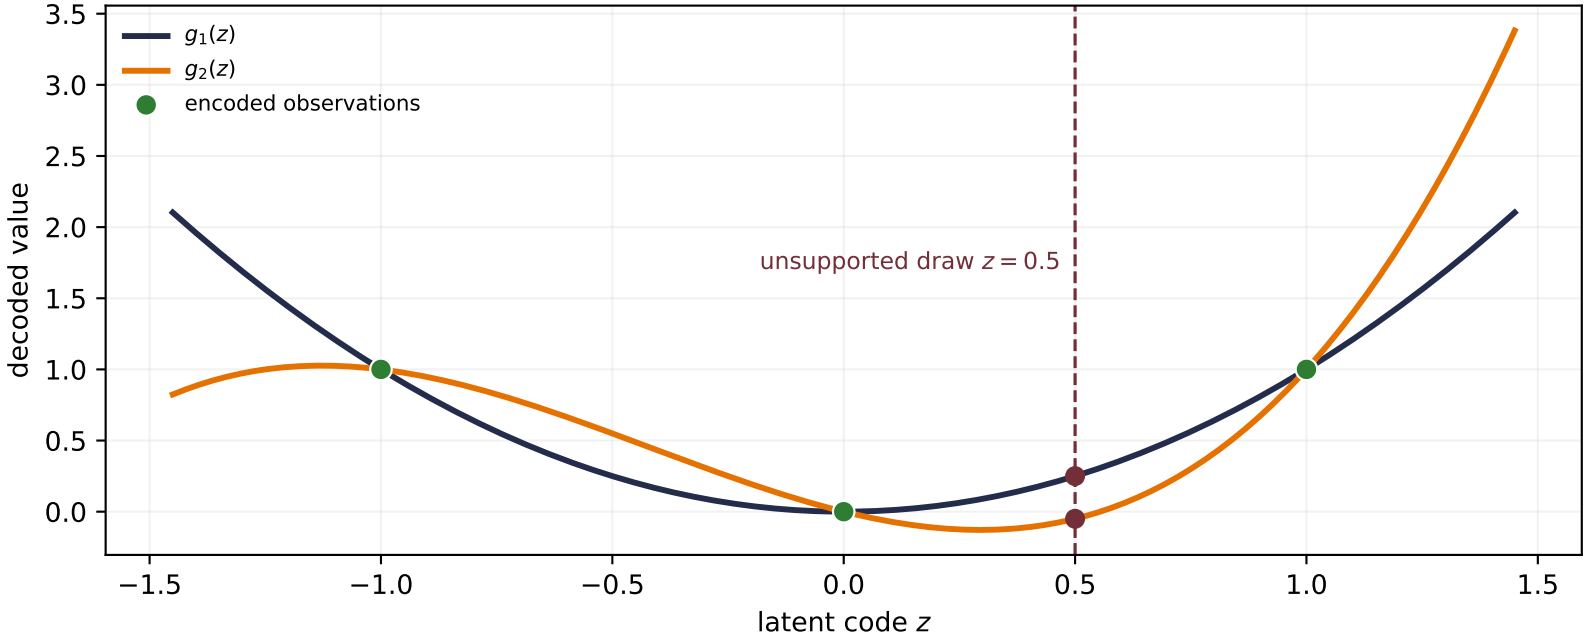
equal reconstruction does not fix behavior between codes
$g_1(z)$
$g_2(z)$
encoded observations
unsupported draw $z = 0.5$
decoded value
latent code z
3.5
3.0
2.5
2.0
1.5
1.0
0.5
0.0
−1.5
−1.0
−0.5
0.0
0.5
1.0
1.5