

BUILDING THE WEB
STARTS WITH

<HTML>

BASIC STRUCTURE

One tag at a time,
you build the future.

Every website begins with a simple
yet powerful foundation.

01



<!DOCTYPE html>

Defines the document type
and version of HTML.

02

<html>

<html>

The root element that
wraps all content.

03

<head>

<head>

Contains metadata,
title, and links to
resources.

04

<body>

<body>

Contains all the visible
content of the webpage.

```
index.html
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport"
6     content="width=device-width,
7     initial-scale=1.0">
8   <title>My Website</title>
9 </head>
10 <body>
11   <h1>Welcome to My Website!</h1>
12   <p>Learning HTML is the
13     first step to build
13     amazing websites.</p>
14 </body>
16 </html>
```

Simple
Structured
Powerful

YOUR JOURNEY STARTS HERE 🚀



HTML
Structure



CSS
Style



JavaScript
Functionality



Web
Comes to Life



Strong foundation.
Clear structure.
Limitless possibilities.

#HTML

#WebDevelopment

#LearnToCode

#FrontendDevelopment

#CodingJourney

#100DaysOfCode

Basic HTML Structure Tags

- `<!DOCTYPE html>` - Defines the document type
- `<html>` - Root element of an HTML page
- `<head>` - Container for metadata and page title
- `<title>` - Specifies a title for the HTML page (shown in the browser's title bar)
- `<body>` - Defines the document's body which contains all the contents of an HTML document, such as text, images, links, etc.

Text Formatting Tags

- `<h1>` to `<h6>` - Headings from level 1 (largest) to 6 (smallest)
- `<p>` - Defines a paragraph
- `<br>` - Inserts a single line break
- `<hr>` - Horizontal rule (creates a thematic break in the content)
- `<pre>` - Preformatted text (preserves both spaces and line breaks)
- `<blockquote>` - Defines a section that is quoted from another source
- `<q>` - Defines a short inline quotation

List Tags

- `<ul>` - Unordered list
- `<ol>` - Ordered list
- `<li>` - List item
- `<dl>` - Description list
- `<dt>` - Description term
- `<dd>` - Description details

Text Styling Tags

- `<b>` - Bold text
- `<strong>` - Important text (semantically strong emphasis)
- `<i>` - Italic text
- `<em>` - Emphasized text
- `<mark>` - Text highlighted with a marker
- `<small>` - Smaller text
- `<del>` - Text that has been deleted from the document
- `<ins>` - Text that has been inserted into the document
- `<sub>` - Subscript text
- `<sup>` - Superscript text



UNDERSTANDING HEADING TAGS IN HTML



Heading tags are used to define headings and subheadings on a web page.



SIX LEVELS OF HEADINGS

<h1>

Main Heading
Most important heading



<h2>

Section Heading
Used for main sections.



<h3>

Subsection Heading
Used for subsections.



<h4>

Minor Heading
Less important heading.



<h5>

Smaller Heading
Used for smaller topics.



<h6>

Least Important
Least level of heading



BEST PRACTICES



- ✓ Use only one <h1> per page.
- ✓ Follow a logical order: <h1> → <h2> → <h3> ...
- ✓ Don't skip heading levels.
- ✓ Use headings to organize content, not for styling.
- ✓ Keep headings short and meaningful.

Good structure
today,
better websites
tomorrow! 🚀

EXAMPLE



HTML CODE

```
1 <!DOCTYPE html>
2 <html>
3 <head>
4   <title>Heading Tags</title>
5 </head>
6 <body>
7   <h1>This is H1 Headings</h1>
8   <h2>This is H2 Headings</h2>
9   <h3>This is H3 Headings</h3>
10  <h4>This is H4 Headings</h4>
11  <h5>This is H5 Headings</h5>
12  <h6>This is H6 Headings</h6>
13 </body>
14 </html>
```



BROWSER PREVIEW

This is H1 Heading

This is H2 Heading

Most
Important

This is H3 Heading

This is H4 Heading

This is H5 heading

This is H6 heading

Least
Important




Headings help structure your content, improve readability, accessibility and help search engines understand your page.



QUICK SUMMARY

HTML provides 6 levels of headings from <h1> to <h6>. They define the structure and hierarchy of your content.

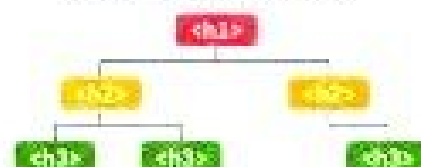

Clean Code. Clear Structure. Strong Foundation.

Keep Learning. Keep Building. 💡

5



HTML TAGS

ALMOST NOBODY USES...

BUT EVERY DEVELOPER SHOULD!

1

<details>

Create collapsible sections without JavaScript.

► What is HTML?

HTML is the standard markup language for creating web pages.

2

<mark>

Highlight important text or search results.

This is an **important** keyword.

3

<kbd>

Display keyboard shortcuts in a clean way.

Ctrl

+

S

4

<dialog>

Build native popup modals with built-in backdrop.

Hello!

This is a native dialog.

OK

5

<meter>


Show values within a range with a visual gauge.

Storage Used

75%



POWERFUL.
NATIVE.
SIMPLE.
EFFECTIVE.

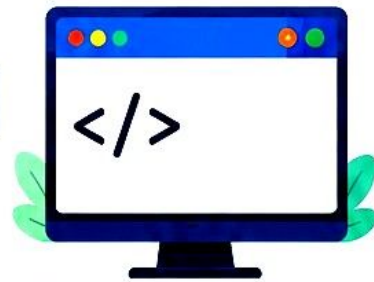

1. WHAT IS HTML?

HTML (**H**yper**T**ext **M**arkup **L**anguage) is the standard markup language used to create web pages and web applications.



HTML describes the structure and content of a web page using different tags.



2. KEY FEATURES



Easy to Learn



Platform Independent



Uses Tags



Supports Multimedia



Works with CSS & JavaScript



3. BASIC HTML STRUCTURE

```
1 <!DOCTYPE html>
2 <html>
3   <head>
4     <title>My Page</title>
5   </head>
6   <body>
7     <h1>Hello World</h1>
8   </body>
9 </html>
```

<!DOCTYPE html> : Declares the document type

<html> : Root element of the HTML page

<head> : Contains meta information like title, links, etc.

<title> : Sets the title of the web page

<body> : Contains the visible content of the web page

<h1> : Heading tag (Example)



4. COMMON HTML ELEMENTS

HEADING



<h1>Heading</h1>

Defines headings

PARAGRAPH



<p>Paragraph</p>

Defines a paragraph

IMAGE



Embeds an image

LINK



Link

Creates a hyperlink

TABLE



<table>...</table>

Creates a table

LIST



...

Creates a list

FORM



<form>...</form>

Creates a form



5. ADVANTAGES OF HTML

- ✓ Simple and easy to learn
- ✓ Free and open standard
- ✓ SEO friendly
- ✓ Supported by all modern browsers
- ✓ Foundation of all web technologies (CSS, JavaScript, Frameworks)

HTML



Learn HTML Today,
Build the Web Tomorrow!



6. SUPPORTED BY ALL BROWSERS



HTML works seamlessly across all major browsers and devices.



HTML is the first step towards becoming a Web Developer.

</> Keep Coding!



HTML Tags

p, pre, h1 to h6, hr, br

Meaning and Example

```
<html>
<body>
  <h1>Hello World</h1>
  <p>This is a paragraph.</p>
</body>
</html>
```



TAG	MEANING	EXAMPLE
<p> Paragraph Tag 	- Defines a paragraph. - Automatically adds space before and after the paragraph.	<pre><p>This is a paragraph. It defines a block of text.</p></pre> This is a paragraph. It defines a block of text.
<pre> Preformatted Text Tag 	- Defines preformatted text. - Text is displayed in fixed width font and preserves spaces, line breaks and indentation.	<pre><pre> Line 1 Line 2 Line 3 Line 4 </pre></pre> Line 1 Line 2 Line 3 Line 4
<h1> to <h6> Heading Tags Aa	- Defines HTML headings. <h1> is the highest and largest heading. <h6> is the lowest and smallest heading.	<pre><h1>This is Heading 1</h1> <h2>This is Heading 2</h2> <h3>This is Heading 3</h3> <h4>This is Heading 4</h4> <h5>This is Heading 5</h5> <h6>This is Heading 6</h6></pre> This is Heading 1 This is Heading 2 This is Heading 3 This is Heading 4 This is Heading 5 This is Heading 6
<hr> Horizontal Rule Tag 	- Creates a horizontal line. - Used to separate content or sections.	<pre><p>Top Content</p> <hr> <p>Bottom Content</p></pre> Top Content Bottom Content

 Line Break Tag 	- Inserts a single line break. - Moves the text to the next line.	<pre><p>First Line
 Second Line
 Third Line</p></pre> First Line Second Line Third Line

QUICK SUMMARY

Tag	Meaning	Key Point
<p>	Defines a paragraph.	Adds space before and after the paragraph.
<pre>	Defines preformatted text.	Preserves spaces, line breaks and indentation.
<h1> to <h6>	Defines headings.	<h1> largest, <h6> smallest.
<hr>	Creates a horizontal line.	Used to separate content.

	Inserts a line break.	Moves text to the next line.



TIP: Use headings for titles and sections, paragraphs for text, <hr> for separation and
 for line breaks.





HTML – image, audio, video Tag

Meaning and Example



1 IMAGE TAG



The **** tag is used to embed an image in an HTML page.

SYNTAX

```

```

Attributes:

- **src** – Specifies the path to the image.
- **alt** – Provides alternative text if the image cannot be displayed.
- **width** – Sets the width of the image.
- **height** – Sets the height of the image.

EXAMPLE

```
<h3> My School</h3>

```



2 AUDIO TAG



The **<audio>** tag is used to embed sound content in an HTML page.

SYNTAX

```
<audio controls>
  <source src="audio.mp3" type="audio/mpeg">
  <source src="audio.ogg" type="audio/ogg">
  Your browser does not support
  the audio element.
</audio>
```

Attributes:

- **controls** – Displays audio controls (play, pause, etc.)
- **src** – Path to the audio file (inside source tag).
- **type** – Specifies the audio file type.

EXAMPLE

```
<p>Listen to our school song:</p>
<audio controls>
  <source src="song.mp3" type="audio/mpeg">
  <source src="song.ogg" type="audio/ogg">
  Your browser does not support
  the audio element.
</audio>
```



3 VIDEO TAG



The **<video>** tag is used to embed video content in an HTML page.

SYNTAX

```
<video width="640" height="360" controls>
  <source src="video.mp4" type="video/mp4">
  <source src="video.webm" type="video/webm">
  Your browser does not support
  the video tag.
</video>
```

Attributes:

- **controls** – Displays video controls (play, pause, etc.)
- **width** – Sets the width of the video.
- **height** – Sets the height of the video.
- **src** – Path to the video file (inside source tag).
- **type** – Specifies the video file type.

EXAMPLE

```
<p>Watch our school video:</p>
<video width="640" height="360" controls>
  <source src="school.mp4" type="video/mp4">
  <source src="school.webm" type="video/webm">
  Your browser does not support
  the video tag.
</video>
```



QUICK SUMMARY

Tag	Purpose	Key Attributes	Use For
	Embeds an image in the page.	src, alt, width, height	Photos, logos, illustrations, icons, etc.
<audio>	Embeds audio in the page.	controls, src, type	Music, songs, sound clips, podcasts, etc.
<video>	Embeds video in the page.	controls, src, type, width, height	Movies, tutorials, ads, presentations, etc.



TIP:

Always provide alternative text (alt) for images and multiple formats for audio/video to ensure better accessibility and browser compatibility.





HTML – HYPER LINK TAG

(<a> Tag)

The **<a>** tag is used to create hyperlinks to other web pages, files, locations in the same page, email addresses or anything on the web.



1 SYNTAX

```
<a href="URL">Link Text</a>
```

- **<a>** – Anchor tag (defines a hyperlink)
- **href** – Specifies the destination URL
- **Link Text** – The clickable text

2 EXAMPLES

TYPE	CODE	OUTPUT
 1. Link to Another Website	<pre>Visit Google</pre>	Visit Google (Opens in new tab)
 2. Link to Another Page in Website	<pre>About Us</pre>	About Us
 3. Link to an Image	<pre>View Image</pre>	View Image
 4. Link to an Email Address	<pre>Send Email</pre>	Send Email
 5. Link to a Phone Number	<pre>Call Us</pre>	Call Us
 6. Link to a Section in Same Page	<pre>Go to Contact Section</pre>	Go to Contact Section
 7. Link with Title (Attribute)	<pre>Learn HTML</pre>	Learn HTML
 8. Open Link in New Tab	<pre>Wikipedia</pre>	Wikipedia (Opens in new tab)


3 COMMON ATTRIBUTES

ATTRIBUTE	VALUE	DESCRIPTION	EXAMPLE
href	URL	Specifies the destination of the link.	<pre>Link</pre>
target	_blank, _self, _parent, _top	Specifies where to open the linked document.	<pre>Link</pre>
title	text	Provides extra information about the link (tooltip).	<pre>Link</pre>
download	filename	Forces the browser to download the linked file.	<pre>Download PDF</pre>

4 BEST PRACTICES


- ✓ Use meaningful link text (avoid "click here").
- ✓ Use target="_blank" for external links.
- ✓ Always provide title for better user experience.
- ✓ Ensure links are working and up to date.

5 QUICK SUMMARY

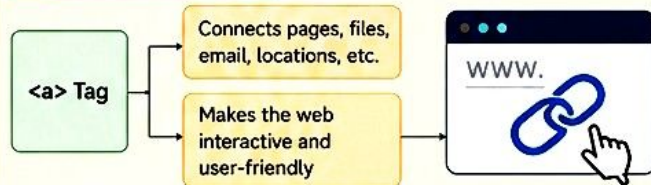

TIP:

The **<a>** tag is one of the most important tags in HTML. It helps users navigate from one page to another easily.



5. Restaurant Menu Card

Objective: Design a restaurant menu using only HTML.

Features:

- Restaurant Name
- Breakfast Menu
- Lunch Menu
- Dinner Menu
- Beverages
- Desserts
- Prices
- Contact Details

HTML Tags Covered:

Tables, Lists, Images, Headings



HTML

(HYPERTEXT MARKUP LANGUAGE)

The standard markup language for creating Web pages.

```
<!DOCTYPE html>
<html>
  <head>
    <title>My Page</title>
  </head>
  <body>
    <h1>Hello World!</h1>
  </body>
</html>
```

1. DEFINITION OF HTML

HTML (HyperText Markup Language) is the standard markup language used to create and design Web pages.

It describes the structure of a Web page using markup.

HTML elements are the building blocks of all websites.



2. WHAT IS HTML USED FOR?

- ✓ To create the structure of Web pages
- ✓ To add content like text, images, links, videos, and more
- ✓ To design Web pages with the help of CSS
- ✓ To create forms for user input
- ✓ To build the foundation of every website



3. HTML TAGS

Tag	Description	Tag	Description	Tag	Description
<html>	Defines the root of an HTML document		Defines important text (Bold)	<table>	Defines a table
<head>	Defines the head section		Defines emphasized text (Italic)	<tr>	Defines a table row
<title>	Defines the title of the page	<u>	Defines underlined text	<th>	Defines a table header
<body>	Defines the body section	<mark>	Defines highlighted text	<td>	Defines a table data cell
<h1> to <h6>	Defines HTML headings	<small>	Defines smaller text	<form>	Defines an HTML form
<p>	Defines a paragraph		Defines deleted text (Strike)	<input>	Defines an input field
<a>	Defines a hyperlink	<ins>	Defines inserted text (Underline)	<label>	Defines a label for input
	Embeds an image		Defines an unordered list	<button>	Defines a button

	Inserts a line break		Defines an ordered list	<div>	Defines a division/section
<hr>	Inserts a horizontal line		Defines a list item		Defines an inline container

4. MAIN PURPOSE OF HTML



The main purpose of HTML is to create the structure of Web pages.

It provides the content and structure that browsers interpret and display to users.

It acts as the skeleton of a website.

5. ADVANTAGES OF HTML

- ✓ Easy to learn and use
- ✓ Supported by all Web browsers
- ✓ Open source and free
- ✓ Fast loading pages
- ✓ SEO friendly
- ✓ Works well with other technologies (CSS, JavaScript)



6. DISADVANTAGES OF HTML

- ✗ HTML is a markup language, not a programming language
- ✗ Limited functionality (static pages only)
- ✗ Requires CSS for styling
- ✗ Does not support dynamic functionality (needs JavaScript)
- ✗ Browser support differences may cause display inconsistencies



SUMMARY

HTML is the backbone of every website. It defines the structure of Web pages using various elements and tags. It works together with CSS for styling and JavaScript for functionality to build complete Web applications.



HTML → Structure | CSS → Style | JavaScript → Functionality

CSS - TYPES

CSS (Cascading Style Sheets) is used to style HTML elements.

1. INLINE CSS

Meaning:

Inline CSS is used to apply styles to a single HTML element using the **style** attribute.

Example:

HTML Code

```
<!DOCTYPE html>
<html>
<body>
  <h1 style="color: blue; font-size: 28px;">
    Hello, Inline CSS!
  </h1>
  <p style="color: green;">This is a paragraph
    with inline CSS.</p>
</body>
</html>
```

Output (Browser)

Hello, Inline CSS!

This is a paragraph with inline CSS.

2. INTERNAL CSS

Meaning:

Internal CSS is used to style elements within a single HTML page using the **<style>** tag inside the **<head>** section.

Example:

HTML Code

```
<!DOCTYPE html>
<html>
<head>
  <style>
    h1 { color: darkblue; font-size: 28px; }
    p { color: green; }
  </style>
</head>
<body>
  <h1>Hello, Internal CSS!</h1>
  <p>This is a paragraph with internal CSS.</p>
</body>
</html>
```

Output (Browser)

Hello, Internal CSS!

This is a paragraph with internal CSS.

3. EXTERNAL CSS

Meaning:

External CSS is used to style multiple HTML pages using a separate .css file. The CSS file is linked using the **<link>** tag.

Example:

HTML File (index.html)

```
<!DOCTYPE html>
<html>
<head>
  <link rel="stylesheet"
    href="style.css">
</head>
<body>
  <h1>Hello, External CSS!</h1>
  <p>This is a paragraph
    with external CSS.</p>
</body>
</html>
```

CSS File (style.css)

```
h1 {
  color: purple;
  font-size: 28px;
}

p {
  color: green;
}
```

Output (Browser)

Hello, External CSS!

This is a paragraph with external CSS.



Key Points:

- **Inline CSS** – Used for a single element.
- **Internal CSS** – Used for a single page.
- **External CSS** – Used for multiple pages, easier to maintain.



Tip: External CSS is the best practice for large projects because it keeps the code clean and easy to manage.

CSS COLORS - HEX, HEXA

In CSS, colors can be defined using hexadecimal (hex) values: **hex (#RRGGBB)** and **hexa (#RRGGBBAA)**.

1. HEX

Meaning:

The **hex** color value represents colors using a 6-digit hexadecimal code: **#RRGGBB**.

RR (Red), **GG** (Green), **BB** (Blue) values range from 00 to FF (0 to 255 in decimal).

#RRGGBB



RR GG BB

Syntax:

#RRGGBB

Example:

HTML

```
<div class="box hex">
  HEX Color Example
</div>
```

CSS

```
.box.hex {
  background-color: #3498db;
  color: white;
  padding: 15px;
  font-weight: bold;
  border-radius: 6px;
}
```

Output (Browser)

HEX Color Example

Some HEX Color Examples



#FF0000

Red



#00FF00

Lime



#0000FF

Blue



#000000

Black



#FFA500

Orange



#800080

Purple

2. HEXA

Meaning:

The **hexa** color value is similar to **hex**, but it includes an **Alpha** (opacity) value.

It uses 8-digit hexadecimal code: **#RRGGBBAA**.

AA (Alpha) range: 00 (fully transparent) to FF (fully opaque).

#RRGGBBAA



RR GG BB AA
(Alpha)

Syntax:

#RRGGBBAA

Example:

HTML

```
<div class="box hexa">
  HEXA Color Example
</div>
```

CSS

```
.box.hexa {
  background-color: #3498db80;
  color: #333;
  padding: 15px;
  font-weight: bold;
  border-radius: 6px;
}
```

Output (Browser)

HEXA Color Example

Alpha (Opacity) Examples with #3498db




#3498db00

(0% - Transparent)




#3498db40

(25%)



#3498db80

(50%)



#3498dbBF

(75%)



#3498dbFF

(100% - Opaque)



Key Points

- HEX uses 6 digits (**#RRGGBB**) to define colors.
- HEXA uses 8 digits (**#RRGGBBAA**) including **Alpha** (opacity).
- **AA** = **00** (0% transparent) to **FF** (100% opaque)
- HEXA is useful for transparent backgrounds, overlays, effects.

CSS

INTRODUCTION

CSS (Cascading Style Sheets) is used to style and layout web pages.



What is CSS?

CSS is a stylesheet language used to describe the presentation of a document written in HTML. It controls the colors, fonts, spacing, layout and overall look and feel of a website.

Why Use CSS?

- ✓ Separates content (HTML) from design
- ✓ Improves website appearance
- ✓ Ensures consistency across pages
- ✓ Saves time and increases productivity
- ✓ Enhances user experience

HOW CSS WORKS

CSS works by selecting HTML elements and applying styles to them.



Structure



Style



Beautiful Web Page

CSS Syntax

```
h1 {  
  color: blue;  
  font-size: 24px;  
}
```

Selector
Property
Value

Selector selects the HTML element.
Property is the style you want to change.
Value is the setting you give to the property.

WAYS TO ADD CSS

1. Inline CSS

Used to style a single HTML element using the `style` attribute.

Example:

```
<p style="color: red; font-size: 16px;">  
  This is a paragraph.  
</p>
```

👍 Used for quick and specific styling.

2. Internal CSS

Used within the `<style>` tag in the `<head>` section of an HTML page.

Example:

```
<head>  
  <style>  
    p {  
      color: green;  
      font-size: 16px;  
    }  
  </style>  
</head>
```

👍 Used for a single page.

3. External CSS

Used in a separate `.css` file and linked to the HTML page.

Example:

```
<!-- HTML file -->  
<link rel="stylesheet" href="styles.css">  
  
/* styles.css file */  
p {  
  color: navy;  
  font-size: 16px;  
}
```

👍 Best for multiple pages (recommended).

CSS Selectors (Examples)

Element Selector

```
p { color: blue; }
```

Class Selector

```
.class { color: red; }
```

ID Selector

```
#id { color: green; }
```

Universal Selector

```
* { margin: 0; padding: 0; }
```

Common CSS Properties



color

Sets the text color



background-color

Sets the background color



font-size

Sets the text size



text-align

Sets the text alignment



margin

Sets the outer space



padding

Sets the inner space



In Short:

CSS makes HTML pages look beautiful and responsive. It is an essential part of web development.



CSS SELECTORS – UNIVERSAL, GROUPING, ELEMENT SELECTOR

CSS Selectors are used to select HTML elements and apply styles to them.

1. UNIVERSAL SELECTOR

Meaning:

The universal selector (*) selects **all HTML elements** on the page.

Syntax:

```
* { property: value; }
```

Example:

HTML

```
<h1>Welcome</h1>
<p>This is a paragraph.</p>
<div>This is a div.</div>
```

CSS

```
* {
  color: blue;
  font-family: Arial;
}
```

Output (Browser)

Welcome

This is a paragraph.

This is a div.

2. GROUPING SELECTOR

Meaning:

The grouping selector selects multiple selectors and applies the **same style** to all of them.

Syntax:

```
selector1, selector2, selectorN {
  property: value;
}
```

Example:

HTML

```
<h1>Welcome</h1>
<p>This is a paragraph.</p>
<h2>Hi There</h2>
```

CSS

```
h1, h2, p {
  color: darkgreen;
  font-size: 20px;
}
```

Output (Browser)

Welcome

This is a paragraph.

Hi There

3. ELEMENT SELECTOR

Meaning:

The element selector selects all elements of a **specific type**.

Syntax:

```
element { property: value; }
```

Example:

HTML

```
<h1>Welcome</h1>
<p>This is a paragraph.</p>
<p>Another paragraph.</p>
```

CSS

```
p {
  color: purple;
  line-height: 1.6;
}
```

Output (Browser)

Welcome

This is a paragraph.

Another paragraph.



Key Points:

- **Universal Selector (*)** – Selects all elements in the document.
- **Grouping Selector (,)** – Selects multiple selectors and applies the same style.
- **Element Selector** – Selects all elements of a specific type or element.

CSS COLORS – RGB, RGBA

In CSS, colors can be defined using the `rgb()` and `rgba()` values.

1. RGB

Meaning:

The `rgb()` color value represents colors using **Red**, **Green**, and **Blue** components. Each value is an integer between 0 and 255.



Syntax:

```
rgb( red, green, blue )
```

Example:

HTML

```
<div class="box rgb">  
  RGB Color Example  
</div>
```

CSS

```
.box.rgb {  
  background-color: rgb(30, 144, 255);  
  color: white;  
  padding: 15px;  
  font-weight: bold;  
}
```

Output (Browser)

RGB Color Example

Some RGB Color Examples



`rgb(255, 0, 0)`
Red



`rgb(0, 128, 0)`
Green



`rgb(0, 0, 255)`
Blue



`rgb(128, 0, 128)`
Purple




`rgb(255, 165, 0)`
Orange

2. RGBA

Meaning:

The `rgba()` color value is similar to `rgb()`, but it includes an **Alpha** (opacity) value. Alpha is a number between 0.0 (fully transparent) and 1.0 (fully opaque).



Syntax:

```
rgba( red, green, blue, alpha )
```

Example:

HTML

```
<div class="box rgba">  
  RGBA Color Example  
</div>
```


CSS

```
.box.rgba {  
  background-color: rgba(30, 144, 255, 0.5);  
  color: black;  
  padding: 15px;  
  font-weight: bold;  
}
```

Output (Browser)

RGBA Color Example

Alpha (Opacity) Examples



0.0
(Transparent)



0.25



0.50



0.75



1.0
(Opaque)



Key Points

- `rgb()` uses **Red**, **Green**, **Blue** values (0 to 255) to create a color.
- `rgba()` is same as `rgb()` but with **Alpha** (opacity) value (0.0 to 1.0).
- Alpha value **0.0** = fully transparent
- Alpha value **1.0** = fully opaque

CSS COLORS – HSL, HSLA


In CSS, colors can be defined using `hsl()` and `hsla()` values.

1. HSL

Meaning:

The `hsl()` color value represents colors using **Hue**, **Saturation**, and **Lightness**.

- **Hue (H)** : 0 to 360 (color wheel)
- **Saturation (S)** : 0% to 100%
- **Lightness (L)** : 0% (black) to 100% (white)



Syntax:

```
hsl( hue, saturation%, lightness% )
```

Example:

HTML

```
<div class="box hsl">
  HSL Color Example
</div>
```


CSS

```
.box.hsl {
  background-color: hsl(200, 70%, 50%);
  color: white;
  padding: 15px;
  font-weight: bold;
  border-radius: 6px;
}
```

Output (Browser)

HSL Color Example

Some HSL Color Examples

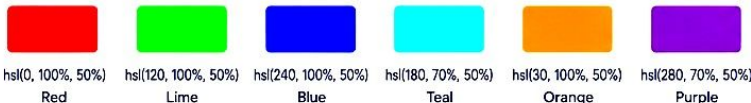

Key Points

- `hsl()` uses Hue (0–360), Saturation (0%–100%), Lightness (0%–100%).
- `hsla()` is the same as `hsl()` but with **Alpha** (0.0–1.0).

2. HSLA

Meaning:

The `hsla()` color value is similar to `hsl()`, but it includes an **Alpha** (opacity) value.

Alpha (A) : 0.0 (fully transparent) to 1.0 (fully opaque).



Alpha controls transparency

Syntax:

```
hsla( hue, saturation%, lightness%, alpha )
```

Example:

HTML

```
<div class="box hsla">
  HSLA Color Example
</div>
```


CSS

```
.box.hsla {
  background-color: hsla(200, 70%, 50%, 0.5);
  color: black;
  padding: 15px;
  font-weight: bold;
  border-radius: 6px;
}
```

Output (Browser)

HSLA Color Example

Alpha (Opacity) Examples with hsla(200, 70%, 50%, A)

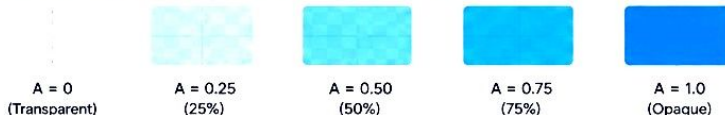

- Alpha 0 = fully transparent
- Alpha 1 = fully opaque
- HSLA is useful for transparency, overlays, and effects.



HTML – First 20 Tags (With Description & Example)

A quick and clear guide to the most commonly used HTML tags. Learn the basics, build your web page!

No.	Tag Name	Description	Example Code	Output / Result		
1	<code><!DOCTYPE html></code>	Declares the document type and version of HTML.	<code><!DOCTYPE html></code>	(No visible output)		
2	<code><html></code>	Root element of an HTML page.	<code><html> ... </html></code>	(Wraps entire page)		
3	<code><head></code>	Contains meta information about the document.	<code><head> ... </head></code>	(No visible output)		
4	<code><title></code>	Sets the title of the webpage (shown in browser tab).	<code><title>My Webpage</title></code>	My Webpage		
5	<code><body></code>	Contains the visible content of the webpage.	<code><body> ... </body></code>	(Holds all visible content)		
6	<code><h1></code>	Defines a large heading.	<code><h1>This is a Heading</h1></code>	This is a Heading		
7	<code><p></code>	Defines a paragraph.	<code><p>This is a paragraph.</p></code>	This is a paragraph.		
8	<code><a></code>	Defines a hyperlink.	<code>Visit Google</code>	Visit Google		
9	<code></code>	Embeds an image.	<code></code>			
10	<code>
</code>	Inserts a line break.	Line 1 <code>
</code> Line 2	Line 1 Line 2		
11	<code><hr></code>	Inserts a horizontal rule (line).	<code><hr></code>			
12	<code><div></code>	A container for grouping elements.	<code><div>This is a div.</div></code>	This is a div.		
13	<code></code>	An inline container for small text.	<code>This is a span.</code>	This is a span.		
14	<code></code>	Defines an unordered list (bullets).	<code> Item 1 Item 2 </code>	- Item 1 - Item 2		
15	<code></code>	Defines an ordered list (numbers).	<code> First Second </code>	- First - Second		
16	<code></code>	Defines a list item (used inside ul or ol).	<code>List Item</code>	List Item		
17	<code><table></code>	Creates a table.	<code><table> ... </table></code>	<table><tr><td>Cell 1</td><td>Cell 2</td></tr></table>	Cell 1	Cell 2
Cell 1	Cell 2					
18	<code><tr></code>	Defines a table row (used inside table).	<code><tr> ... </tr></code>	(Used inside table)		
19	<code><th></code>	Defines a table header cell.	<code><th>Header</th></code>	<table><tr><th>Header</th></tr></table>	Header	
Header						
20	<code><td></code>	Defines a table data cell.	<code><td>Data</td></code>	<table><tr><td>Data</td></tr></table>	Data	
Data						



These are the first 20 most commonly used HTML tags. Practice them, understand how they work, and you'll be ready to build simple and beautiful web pages!



HTML – Next 20 Tags (21 to 40) With Description & Example



No.	Tag Name	Description	Example Code	Output / Result
21	<code><form></code>	Defines an HTML form for user input.	<code><form> <input type="text" placeholder="Name"> </form></code>	Name
22	<code><input></code>	Defines an input control (text field, checkbox, etc.)	<code><input type="text" placeholder="Enter text"></code>	Enter text
23	<code><button></code>	Defines a clickable button.	<code><button>Click Me</button></code>	Click Me
24	<code><textarea></code>	Defines a multi-line text input control.	<code><textarea rows="3" cols="20">Type here...</textarea></code>	Type here...
25	<code><select></code>	Creates a drop-down list.	<code><select> <option>Option 1</option> <option>Option 2</option> </select></code>	Option 1
26	<code><option></code>	Defines an option in a drop-down list.	<code><option value="1">Option 1</option></code>	Option 1
27	<code><label></code>	Defines a label for an input element.	<code><label for="name">Name:</label></code>	Name:
28	<code><fieldset></code>	Groups related elements in a form.	<code><fieldset> <legend>Personal Info</legend> </fieldset></code>	Personal Info
29	<code><legend></code>	Defines a caption for a fieldset.	<code><legend>Personal Info</legend></code>	Personal Info
30	<code></code>	Makes text bold.	<code>This text is bold</code>	This text is bold
31	<code><i></code>	Makes text italic.	<code><i>This text is italic</i></code>	<i>This text is italic</i>
32	<code><u></code>	Underlines text.	<code><u>This text is underlined</u></code>	<u>This text is underlined</u>
33	<code></code>	Important text (bold + semantic).	<code>Important Text</code>	Important Text
34	<code></code>	Emphasized text (italic + semantic).	<code>Emphasized Text</code>	<i>Emphasized Text</i>
35	<code><small></code>	Makes text smaller.	<code><small>Small Text</small></code>	Small Text
36	<code><mark></code>	Highlights text.	<code><mark>Highlighted Text</mark></code>	Highlighted Text
37	<code><sub></code>	Subscript text.	<code>H<sub>2</sub></sub>0</code>	H ₂ O
38	<code><sup></code>	Superscript text.	<code>x<sup>2</sup></sup></code>	x ²
39	<code><pre></code>	Preformatted text (preserves spaces and line breaks).	<code><pre> Hello World Line 2 </pre></code>	Hello World Line 2
40	<code><code></code>	Displays code or computer text.	<code><code>console.log("Hello");</code></code>	<code>console.log("Hello");</code>



These tags help you build forms, format text, and structure your HTML content effectively.



HTML – Next 20 Tags (41 to 60) With Description & Example



No.	Tag Name	Description	Example Code	Output / Result
41	<code><blockquote></code>	Defines a section that is quoted from another source.	<pre><blockquote> This is a quoted text from another source. </blockquote></pre>	This is a quoted text from another source.
42	<code><q></code>	Defines a short inline quotation.	<pre><q>To be or not to be.</q></pre>	"To be or not to be."
43	<code><abbr></code>	Defines an abbreviation or acronym.	<pre><abbr title="Hyper Text Markup Language">HTML</abbr></pre>	HTML
44	<code><cite></code>	Defines the title of a work (book, movie, etc.).	<pre><cite>The Great Gatsby</cite></pre>	<i>The Great Gatsby</i>
45	<code><dfn></code>	Defines a term that is being defined.	<pre><dfn>HTML</dfn> is the standard markup language.</pre>	HTML is the standard markup language.
46	<code><address></code>	Defines contact information for the author/owner.	<pre><address> 123 Main Street, Chennai, India </address></pre>	123 Main Street, Chennai, India
47	<code><time></code>	Defines a date or time.	<pre><time datetime="2025-05-26">May 26, 2025</time></pre>	May 26, 2025
48	<code><bdo></code>	Overrides the current text direction.	<pre><bdo dir="rtl">This text will go right to left.</bdo></pre>	.tfel ot thgir og lliw txet sihT
49	<code><progress></code>	Represents the progress of a task.	<pre><progress value="70" max="100"></progress></pre>	70%
50	<code><meter></code>	Represents a scalar measurement within a known range.	<pre><meter value="6" min="0" max="10">6 out of 10</meter></pre>	6 out of 10
51	<code><details></code>	Creates a disclosure widget.	<pre><details> <summary>Click to view more</summary> <p>Here is some additional information.</p> </details></pre>	▶ Click to view more
52	<code><summary></code>	Defines a visible heading for <details>.	<pre><summary>More Info</summary></pre>	More Info
53	<code><figure></code>	Specifies self-contained content.	<pre><figure> <figcaption>Sunset View</figcaption> </figure></pre>	 Sunset View
54	<code><figcaption></code>	Defines a caption for a <figure>.	<pre><figcaption>A beautiful sunset.</figcaption></pre>	A beautiful sunset.
55	<code><audio></code>	Embeds audio content.	<pre><audio controls> <source src="song.mp3" type="audio/mpeg"> Your browser does not support audio. </audio></pre>	▶ 0:00 / 3:45 
56	<code><video></code>	Embeds video content.	<pre><video width="200" controls> <source src="video.mp4" type="video/mp4"> Your browser does not support video. </video></pre>	▶ 0:00 / 0:10 
57	<code><source></code>	Defines multiple media resources for media elements.	<pre><source src="movie.mp4" type="video/mp4"></pre>	(Used inside audio/video)
58	<code><track></code>	Defines text tracks for media.	<pre><track src="subtitles.en.vtt" kind="subtitles" srclang="en" label="English"></pre>	(Used inside audio/video)
59	<code><canvas></code>	Used to draw graphics via scripting.	<pre><canvas id="myCanvas" width="200" height="100"></canvas></pre>	(Graphics drawn here)
60	<code><svg></code>	Defines a container for SVG graphics.	<pre><svg width="100" height="100"> <circle cx="50" cy="50" r="40" fill="skyblue" /> </svg></pre>	



These tags help you add advanced content, media, interactivity, and semantic meaning to your HTML pages.

HTML - Next 20 Tags (61 to 80) With Description & Example

No.	Tag Name	Description	Example Code	Output / Result
61	<code><section></code>	Defines a section in a document.	<pre><section> <h3>About Us</h3> <p>This is a section.</p> </section></pre>	About Us This is a section.
62	<code><article></code>	Defines independent, self-contained content.	<pre><article> <h3>Blog Post</h3> <p>This is a blog article.</p> </article></pre>	Blog Post This is a blog article.
63	<code><aside></code>	Defines content aside from the main content.	<pre><aside> <p>Related Links</p> </aside></pre>	Related Links
64	<code><header></code>	Defines a header for a document or section.	<pre><header> <h2>Website Header</h2> </header></pre>	Website Header
65	<code><footer></code>	Defines a footer for a document or section.	<pre><footer> <p>© 2025 My Website. All rights reserved.</p> </footer></pre>	© 2025 My Website. All rights reserved.
66	<code><nav></code>	Defines a set of navigation links.	<pre><nav> Home About Contact </nav></pre>	Home About Contact
67	<code><main></code>	Specifies the main content of a document.	<pre><main> <h2>Main Content</h2> <p>This is the main content.</p> </main></pre>	Main Content This is the main content.
68	<code><figure></code>	Encapsulates media content with a caption.	<pre><figure> <figcaption>Image Caption</figcaption> </figure></pre>	 Image Caption
69	<code><picture></code>	Provides multiple image resources for different devices.	<pre><picture> <source srcset="img-small.jpg" media="(max-width: 600px)"> </picture></pre>	
70	<code><source></code>	Specifies multiple media resources for media elements.	<pre><source src="video.mp4" type="video/mp4"></pre>	(Used inside audio/video/picture)
71	<code><datalist></code>	Specifies a list of pre-defined options for input.	<pre><input list="browsers" name="browser"> <datalist id="browsers"> <option value="Chrome"> <option value="Firefox"> <option value="Edge"> </datalist></pre>	Chrome ▾

HTML - Next 20 Tags (81 to 100) With Description & Example

No.	Tag Name	Description	Example Code	Output / Result
81	<code><i></code>	Displays text in italic style.	<code><i>This text is italic.</i></code>	<i>This text is italic.</i>
82	<code><u></code>	Underlines text.	<code><u>This text is underlined.</u></code>	<u>This text is underlined.</u>
83	<code><s></code>	Shows text with a strikethrough.	<code><s>This text is struck through.</s></code>	This text is struck through.
84	<code><blockquote></code>	Defines a large section quoted from another source.	<code><blockquote> This is a long quote from another source. </blockquote></code>	This is a long quote from another source.
85	<code><q></code>	Defines a short inline quotation.	<code><q>Knowledge is power.</q></code>	"Knowledge is power."
86	<code></code>	Defines text that has been deleted.	<code>This text is deleted.</code>	This text is deleted.
87	<code><ins></code>	Defines inserted text.	<code><ins>This text is inserted.</ins></code>	<u>This text is inserted.</u>
88	<code><bdi></code>	Isolates a part of text that might be formatted in a different direction.	<code><bdi>مرحبا</bdi> Hello</code>	مرحبا Hello
89	<code><bdo></code>	Overrides the current text direction.	<code><bdo dir="rtl">This text will go right to left.</bdo></code>	العلى على ثقلت.
90	<code><mark></code>	Highlights text.	<code><mark>Highlighted text</mark></code>	Highlighted text
91	<code><progress></code>	Represents the progress of a task.	<code><progress value="50" max="100"></progress></code>	50%
92	<code><meter></code>	Represents a scalar measurement.	<code><meter value="0.7" min="0" max="1"></meter></code>	0.7 out of 1
93	<code><details></code>	Creates a disclosure widget.	<code><details> <summary>More details</summary> Here is some hidden content. </details></code>	▶ More details
94	<code><summary></code>	Defines a visible heading for <details>.	<code><summary>Click to expand</summary></code>	Click to expand
95	<code><ruby></code>	Defines ruby annotation (East Asian typography).	<code><ruby>漢<rt>かん</rt></ruby></code>	かん 漢
96	<code><rt></code>	Defines the pronunciation in ruby.	<code><ruby>日<rt>にち</rt></ruby></code>	にち 日
97	<code><kbd></code>	Defines keyboard input.	Press <code><kbd>Ctrl</kbd> + <code><kbd>S</kbd> to save.</code></code>	Press Ctrl + S to save.
98	<code><samp></code>	Defines sample output from a computer program.	<code><samp>Error: File not found!</samp></code>	Error: File not found!
99	<code><var></code>	Defines a variable.	<code><p>The area of circle is: <code><var>πr²</var></p></code></code>	The area of circle is: πr^2
100	<code><time></code>	Defines a specific time or date.	<code><time datetimes="2025-05-26">May 26, 2025</time></code>	May 26, 2025



These tags help you format text, show data, handle user input, and build semantic, accessible, and user-friendly web pages.



HTML – Next 20 Tags (101 to 120) With Description & Example



No.	Tag Name	Description	Example Code	Output / Result			
101	<col>	Specifies column properties in a <colgroup>.	<col style="background-color: lightblue;">	<table><tr><td></td><td>Data</td><td>Data</td></tr></table>		Data	Data
	Data	Data					
102	<colgroup>	Defines a group of one or more columns in a table.	<colgroup> <col span="2" style="background-color: lightyellow;"> <col style="background-color: lightgreen;"> </colgroup>	<table><tr><td>Col 1</td><td>Col 2</td><td>Col 3</td></tr></table>	Col 1	Col 2	Col 3
Col 1	Col 2	Col 3					
103	<thead>	Groups header content in a table.	<thead> <tr><th>Name</th><th>Age</th></tr> </thead>	<table><tr><td>Name</td><td>Age</td></tr></table>	Name	Age	
Name	Age						
104	<tbody>	Groups the body content in a table.	<tbody> <tr><td>Ram</td><td>20</td></tr> </tbody>	<table><tr><td>Ram</td><td>20</td></tr></table>	Ram	20	
Ram	20						
105	<tfoot>	Groups footer content in a table.	<tfoot> <tr><td colspan="2">Total: 1</td></tr> </tfoot>	<table><tr><td>Total: 1</td></tr></table>	Total: 1		
Total: 1							
106	<caption>	Adds a caption to a table.	<caption>Student Details</caption>	Student Details			
107	<tr>	Defines a row in a table.	<tr><td>Data 1</td><td>Data 2</td></tr>	<table><tr><td>Data 1</td><td>Data 2</td></tr></table>	Data 1	Data 2	
Data 1	Data 2						
108	<th>	Defines a header cell in a table.	<th scope="col">Header</th>	Header			
109	<td>	Defines a cell in a table.	<td>Cell Data</td>	Cell Data			
110	<dl>	Defines a description list.	<dl> <dt>HTML</dt> <dd>Hyper Text Markup Language</dd> </dl>	HTML Hyper Text Markup Language			
111	<dt>	Defines a term/name in a list.	<dt>Term</dt>	Term			
112	<dd>	Provides the description of a term.	<dd>This is the description.</dd>	This is the description.			
113		Defines an unordered (bulleted) list.	 - Apple - Banana 	• Apple • Banana			
114		Defines an ordered (numbered) list.	 - First - Second 	1. First 2. Second			
115		Defines a list item.	List item	• List item			
116	<menu>	Defines a list/menu of commands.	<menu> - Save - Exit </menu>	• Save • Exit			
117	<dialog>	Defines a dialog box or window.	<dialog open> This is a dialog box. </dialog>	This is a dialog box. Close			
118	<summary>	Provides a visible heading for <details>.	<details> <summary>More Info</summary> Hidden details here. </details>	► More Info			
119	<template>	Holds HTML content not rendered when the page loads.	<template id="temp"> Hidden Content </template>	(Nothing is shown)			
120	<slot>	Defines a slot in a Web Component.	<slot name="content"></slot>	(Content will be inserted here)			



These tags help you create advanced tables, lists, user interfaces, and reusable components in HTML.

HTML – Next 20 Tags (121 to 140) With Description & Example

No.	Tag Name	Description	Example Code	Output / Result
121	<code><style></code>	Defines internal CSS styles for a document.	<pre><style> h1 { color: blue; } </style> <h1>Hello World</h1></pre>	Hello World
122	<code><script></code>	Defines client-side JavaScript.	<pre><script> document.write("Hello JavaScript"); </script></pre>	Hello JavaScript
123	<code><noscript></code>	Defines content to be shown when scripts are not supported.	<pre><script>document.write("Hi");</script> <noscript>Your browser does not support JavaScript.</noscript></pre>	Your browser does not support JavaScript.
124	<code><base></code>	Specifies the base URL/target for all relative links.	<pre><base href="https://www.example.com/" target="_blank"> Open Page</pre>	Open Page (opens in new tab)
125	<code><link></code>	Defines the relationship between the current document and an external resource.	<pre><link rel="stylesheet" href="style.css"></pre>	(Links external CSS file)
126	<code><meta></code>	Defines metadata about an HTML document.	<pre><meta charset="UTF-8"> <meta name="description" content="This is a webpage"></pre>	(Metadata not visible on page)
127	<code><title></code>	Defines the title of the document (shown in browser tab).	<pre><title>My Web Page</title></pre>	 My Web Page X
128	<code><body></code>	Defines the body content of an HTML document.	<pre><body> <p>Welcome to my website.</p> </body></pre>	Welcome to my website.
129	<code><html></code>	Defines the root of an HTML document.	<pre><html> <head></head> <body></body> </html></pre>	(Root element of the page)
130	<code><head></code>	Contains meta-information about the document.	<pre><head> <title>Title</title> </head></pre>	(Information for browser)
131	<code><iframe></code>	Embeds another HTML page inside the current page.	<pre><iframe src="page.html" width="300" height="150"></iframe></pre>	Embedded Page content here
132	<code><embed></code>	Embeds external content such as PDF, video, etc.	<pre><embed src="file.pdf" type="application/pdf" width="300" height="200"></pre>	 file.pdf
133	<code><object></code>	Embeds external resources like images, PDFs, etc.	<pre><object data="file.pdf" type="application/pdf" width="300" height="200"></object></pre>	 file.pdf
134	<code><param></code>	Defines parameters for <object>.	<pre><object data="movie.swf" width="300" height="200"> <param name="autoplay" value="true"> </object></pre>	(Parameter used for object)
135	<code><source></code>	Defines multiple media resources for <video> or <audio>.	<pre><video controls> <source src="video.mp4" type="video/mp4"> <source src="video.ogv" type="video/ogg"> </video></pre>	
136	<code><track></code>	Defines text tracks for media elements.	<pre><video controls> <source src="movie.mp4" type="video/mp4"> <track kind="subtitles" src="sub.en.vtt" srclang="en" label="English"> </video></pre>	Subtitles will appear here
137	<code><map></code>	Defines an image map (client-side image map).	<pre> <map name="map1"> <area shape="rect" coords="0,0,100,100" href="#"> </map></pre>	
138	<code><area></code>	Defines clickable areas inside an image map.	<pre><area shape="circle" coords="50,50,40" href="link.html" alt="Click"></pre>	
139	<code><form></code>	Defines an HTML form for user input.	<pre><form action="submit.html" method="post"> <input type="text" name="name"> <input type="submit" value="Submit"> </form></pre>	Submit
140	<code><fieldset></code>	Groups related elements in a form.	<pre><fieldset> <legend>Contact Info</legend> Name: <input type="text">
 Email: <input type="email"> </fieldset></pre>	Contact Info Name: Email:



These tags are essential for linking resources, embedding content, creating forms, and structuring documents in HTML.



HTML – Next 20 Tags (141 to 160) With Description & Example



No.	Tag Name	Description	Example Code	Output / Result
141	<legend>	Defines a caption for a <fieldset> element.	<fieldset> <legend>Personal Info</legend> </fieldset>	Personal Info
142	<label>	Defines a label for an input element.	<label for="name">Name:</label>	Name:
143	<input>	Defines an input control.	<input type="text" id="name" placeholder="Enter name">	Enter name
144	<textarea>	Defines a multi-line input control.	<textarea rows="3" cols="30">Type your message...</textarea>	Type your message...
145	<select>	Defines a drop-down list.	<select> <option>Choose a color</option> </select>	Choose a color v
146	<option>	Defines an option in a drop-down list.	<select> <option value="red">Red</option> <option value="blue">Blue</option> </select>	Red v
147	<button>	Defines a clickable button.	<button type="button">Click Me</button>	Click Me
148	<datalist>	Specifies a list of pre-defined options for an input element.	<input list="browsers"> <datalist id="browsers"> <option value="Chrome"> <option value="Firefox"> <option value="Edge"> </datalist> </input>	 Chrome Firefox Edge Edge
149	<keygen>	Defines a key-pair generator field (for authentication).	<keygen name="security">	Security Key: v
150	<output>	Defines the result of a calculation.	<form oninput="res.value=parseInt(a.value)+parseInt(b.value)"> <input type="number" id="a" value="5"> + <input type="number" id="b" value="7"> = <output name="res" for="a b"></output> </form>	5 + 7 = 12
151	<progress>	Represents the progress of a task.	<progress value="70" max="100"></progress>	70%
152	<meter>	Represents a scalar measurement within a known range.	<meter value="6" min="0" max="10">6 out of 10</meter>	6 out of 10
153	<fieldset>	Groups related elements in a form.	<fieldset> <legend>Login</legend> <input type="text" placeholder="User"> <input type="password" placeholder="Pass"> </fieldset>	Login User Pass
154	<optgroup>	Groups options in a <select> list.	<select> <optgroup label="Fruits"> <option>Apple</option> <option>Banana</option> </optgroup> <optgroup label="Vegetables"> <option>Carrot</option> <option>Potato</option> </optgroup> </select> <iframe src="page.html" width="300" height="150"></iframe>	Apple v Embedded page content  Sunset view from the hill.
155	<iframe>	Embeds another HTML page.	<figure> </figure>	
156	<figure>	Specifies self-contained content (like image, diagram, etc.).	<figcaption>Sunset view from the hill.</figcaption>	Sunset view from the hill.
157	<figcaption>	Defines a caption for a <figure>.	<blockquote cite="https://example.com"> Learning is the key to success. </blockquote>	“ Learning is the key to success. ”
158	<blockquote>	Defines a section quoted from another source.	<address> 123, Green Street, Chennai, India Email: info@example.com </address>	123, Green Street, Chennai, India Email: info@example.com
159	<address>	Defines contact information for the author/owner.	<pre> Line 1 Line 2 Line 3 </pre>	Line 1 Line 2 Line 3 (spaces are preserved)
160	<pre>	Defines preformatted text.	</pre>	Line 1 Line 2 Line 3 (spaces are preserved)



These tags help in creating forms, embedding content, displaying data, and improving user interaction in HTML.