TASK 11

```html
<!DOCTYPE html>
<html lang="en">
 <head>
 <meta charset="UTF-8">
 <meta name="viewport" content="width=device-width,initial-scale=1">    <title>document</title>
 </head>
 <body>
 <script>
 // no use strict
 e=10; //without declare
 console.log(e);
 </script>
 </body>
</html>
```
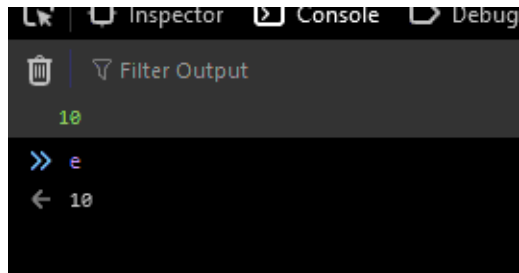
OUTPUT:

TASK 12:

```html
<!DOCTYPE html>
<html lang="en">
 <head>
 <meta charset="UTF-8">
 <meta name="viewport" content="width=device-width,initial-scale=1">    <title>document</title>
 </head>
 <body>
 <script>
 // no use strict
 "use strict";
 e=10; //without declare
 console.log(e);
 </script>
 </body>
</html>
```
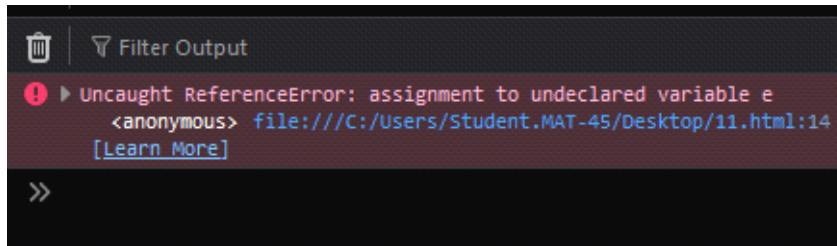
OUTPUT:

TASK 13:

```html
<!DOCTYPE html>
<html lang="en">
 <head>
 <meta charset="UTF-8">
 <meta name="viewport" content="width=device-width,initial-scale=1">    <title>document</title>
 </head>
 <body>
 <script>
 //  use strict
 "use strict";
 var e=10; //variable
 delete e;
 console.log(e);
 function func(){ }
 delete func;
 function para(s){
 delete s;
 }
 para(3);
 </script>
 </body>
</html>
```

OUTPUT:

TASK 14:

```html
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width,initial-scale=1">
<title>document</title>
 </head>
 <body>
    <script>
        x=10;
        console.log(x);
```
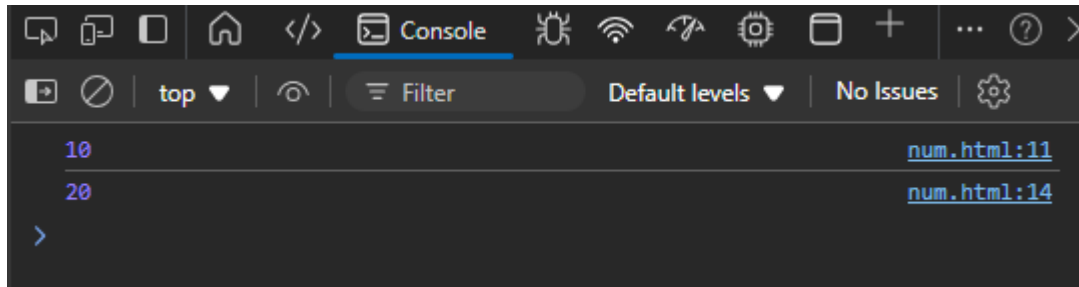
```
        "use strict";
        y=20;
        console.log(y);
</script>
 </body>
 </html>
```

OUTPUT:

TASK 15:

```
<!DOCTYPE html>
<html lang="en">
 <head>
 <meta charset="UTF-8">
 <meta name="viewport" content="width=device-width,initial-scale=1">    <title>document</title>
 </head>
 <body>
 <script>
 // no use strict
 "use strict";
 let for=10; // USING RESERVED KEYWORD     console.log(for);
 </script>
 </body>
</html>
```

OUTPUT: