Hindsight is 20/20: Making Regret Meaningful in Decision-Focused Learning

Shammas Ahmed
Advisors: Dr. Vishal Gupta & Dr. Kabir Verchand

DSO Summer Scholars Program

shammasahmed@rice.edu

Aug 7th, 2026

The Contextual Optimization Setting

Large-scale OR problems increasingly require **both** ML and optimization.

The Contextual Optimization Setting

Large-scale OR problems increasingly require **both** ML and optimization.

- We must solve a decision problem whose parameters are **not yet known**.

The Contextual Optimization Setting

Large-scale OR problems increasingly require **both** ML and optimization.

- We must solve a decision problem whose parameters are **not yet known**.
- We observe a **context** X before deciding; the **response** Y (the true parameter) is revealed afterwards.

The Contextual Optimization Setting

Large-scale OR problems increasingly require **both** ML and optimization.

- We must solve a decision problem whose parameters are **not yet known**.
- We observe a **context** X before deciding; the **response** Y (the true parameter) is revealed afterwards.
- Historical data gives us context–response pairs $(X_1, Y_1), \ldots, (X_n, Y_n)$.

The Contextual Optimization Setting

Large-scale OR problems increasingly require **both** ML and optimization.

- We must solve a decision problem whose parameters are **not yet known**.
- We observe a **context** X before deciding; the **response** Y (the true parameter) is revealed afterwards.
- Historical data gives us context–response pairs $(X_1, Y_1), \ldots, (X_n, Y_n)$.

The pipeline

1. **Predict:** fit a function f on the training data; observe today's context X and form prediction $f(X)$.

The Contextual Optimization Setting

Large-scale OR problems increasingly require **both** ML and optimization.

- We must solve a decision problem whose parameters are **not yet known**.
- We observe a **context** X before deciding; the **response** Y (the true parameter) is revealed afterwards.
- Historical data gives us context–response pairs $(X_1, Y_1), \ldots, (X_n, Y_n)$.

The pipeline

1. **Predict:** fit a function f on the training data; observe today's context X and form prediction $f(X)$.
2. **Optimize:** plug in and solve $z^*(f(X)) \in \arg\min_{z \in P} \langle f(X), z \rangle$.

The Contextual Optimization Setting

Large-scale OR problems increasingly require **both** ML and optimization.

- We must solve a decision problem whose parameters are **not yet known**.
- We observe a **context** X before deciding; the **response** Y (the true parameter) is revealed afterwards.
- Historical data gives us context–response pairs $(X_1, Y_1), \ldots, (X_n, Y_n)$.

The pipeline

1. **Predict:** fit a function f on the training data; observe today's context X and form prediction $f(X)$.
2. **Optimize:** plug in and solve $z^*(f(X)) \in \arg\min_{z \in P} \langle f(X), z \rangle$.
3. **Evaluate:** the decision is evaluated at the *true* parameter, $\langle Y, z^*(f(X)) \rangle$.

Throughout, the downstream problem is **linear in** Y and $P \subseteq \mathbb{R}^d$ is the feasible set.

Decision-Focused Learning

A key observation

A predictor that is accurate under a standard loss (e.g. MSE) may not induce good *decisions*. Prediction error and decision loss are different objectives.

Decision-Focused Learning

A key observation

A predictor that is accurate under a standard loss (e.g. MSE) may not induce good *decisions*. Prediction error and decision loss are different objectives.

Decision-Focused Learning (DFL) trains the model end-to-end against the downstream decision loss rather than a generic prediction loss. Techniques include:

- surrogate loss functions – SPO+ [Elmachtoub & Grigas, 2022], Fenchel–Young losses [Berthet et al., 2020];
- differentiation of a perturbed optimizer [Berthet et al., 2020];
- differentiation of a linear interpolation of the optimization mapping [Vlastelica et al., 2020].

A thorough survey is given in [Mandi et al., 2024].

Decision-Focused Learning

A key observation

A predictor that is accurate under a standard loss (e.g. MSE) may not induce good *decisions*. Prediction error and decision loss are different objectives.

Decision-Focused Learning (DFL) trains the model end-to-end against the downstream decision loss rather than a generic prediction loss. Techniques include:

- surrogate loss functions – SPO+ [Elmachtoub & Grigas, 2022], Fenchel–Young losses [Berthet et al., 2020];
- differentiation of a perturbed optimizer [Berthet et al., 2020];
- differentiation of a linear interpolation of the optimization mapping [Vlastelica et al., 2020].

A thorough survey is given in [Mandi et al., 2024].

Any procedure to learn f that does not require the feasible region P is **Decision-Blind Learning (DBL)**.

Regret Metrics

Q: Given a fitted function $f \in \mathcal{F}$, how do we **evaluate** how good it is?

Regret Metrics

Q: Given a fitted function $f \in \mathcal{F}$, how do we **evaluate** how good it is?

A: Decision regret – compare the decision loss of f against some ideal benchmark.

Regret Metrics

Q: Given a fitted function $f \in \mathcal{F}$, how do we **evaluate** how good it is?

A: Decision regret – compare the decision loss of f against some ideal benchmark.

True Regret (against $f^*(X) = \mathbb{E}[Y \mid X]$)

$$\text{Regret}(f, f^*) = \mathbb{E}\left[\left\langle f^*(X), z^*(f(X))\right\rangle\right] - \mathbb{E}\left[\left\langle f^*(X), z^*(f^*(X))\right\rangle\right]$$

$\text{Regret}(f, f^*) = 0$ *for infinite compute, infinite data.*

Regret Metrics

Q: Given a fitted function $f \in \mathcal{F}$, how do we **evaluate** how good it is?

A: Decision regret – compare the decision loss of f against some ideal benchmark.

True Regret (against $f^*(X) = \mathbb{E}[Y \mid X]$)

$$\text{Regret}(f, f^*) = \mathbb{E}\left[\left\langle f^*(X), z^*(f(X))\right\rangle\right] - \mathbb{E}\left[\left\langle f^*(X), z^*(f^*(X))\right\rangle\right]$$

$\text{Regret}(f, f^*) = 0$ *for infinite compute, infinite data.*

Look-Ahead Regret (against Y)

$$\text{Regret}(f, Y) = \mathbb{E}\left[\left\langle Y, z^*(f(X))\right\rangle\right] - \mathbb{E}\left[\left\langle Y, z^*(Y)\right\rangle\right]$$

$\text{Regret}(f, Y) = 0$ *for infinite compute, perfect foresight.*

Regret Metrics

Q: Given a fitted function $f \in \mathcal{F}$, how do we **evaluate** how good it is?

A: Decision regret – compare the decision loss of f against some ideal benchmark.

True Regret (against $f^*(X) = \mathbb{E}[Y \mid X]$)

$$\text{Regret}(f, f^*) = \mathbb{E}\left[\left\langle f^*(X), z^*(f(X))\right\rangle\right] - \mathbb{E}\left[\left\langle f^*(X), z^*(f^*(X))\right\rangle\right]$$

$\text{Regret}(f, f^*) = 0$ *for infinite compute, infinite data.*

Look-Ahead Regret (against Y)

$$\text{Regret}(f, Y) = \mathbb{E}\left[\left\langle Y, z^*(f(X))\right\rangle\right] - \mathbb{E}\left[\left\langle Y, z^*(Y)\right\rangle\right]$$

$\text{Regret}(f, Y) = 0$ *for infinite compute, perfect foresight.*

- On synthetic data, both are computable. On real data, only Look-Ahead Regret is.
- **Literature largely reports Look-Ahead Regret.**

The Regret Curves

A cartoon reconstruction of Elmachtoub & Grigas' shortest path problem (SPP) experimental results – de facto DFL benchmark:



Figure 1.1: True Regret & Look-Ahead Regret for SPP

The Regret Curves

A cartoon reconstruction of Elmachtoub & Grigas' shortest path problem (SPP) experimental results – de facto DFL benchmark:



Figure 1.1: True Regret & Look-Ahead Regret for SPP

- Increased linear misspecification $\rightarrow$ harder problem

The Regret Curves

A cartoon reconstruction of Elmachtoub & Grigas' shortest path problem (SPP) experimental results – de facto DFL benchmark:

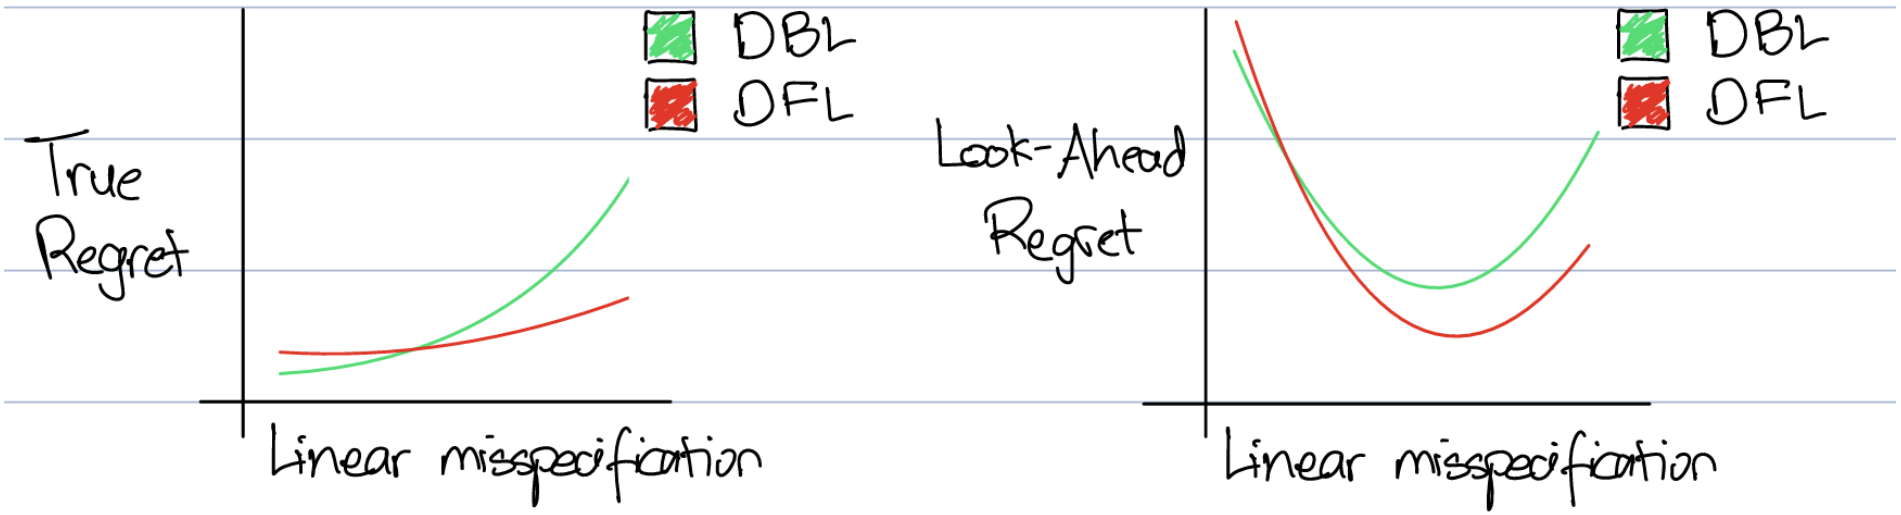


Figure 1.1: True Regret & Look-Ahead Regret for SPP

- Increased linear misspecification $\rightarrow$ harder problem
- Relative ranking of models across regrets is the same

Our Contributions

1. Look-Ahead Regret $=$ True Regret $+ \overbrace{\mathbb{E}\left[\langle f^*(X), z^*(f^*(X))\rangle - \langle Y, z^*(Y)\rangle\right]}^{\text{Look-Ahead Premium (LAP)}}$, where LAP is model-independent and benchmark-specific

Our Contributions

1. Look-Ahead Regret $=$ True Regret $+ \overbrace{\mathbb{E}\left[\langle f^*(X), z^*(f^*(X))\rangle - \langle Y, z^*(Y)\rangle\right]}^{\text{Look-Ahead Premium (LAP)}}$, where LAP is model-independent and benchmark-specific
2. $\mathbb{E}\left[\text{LAP}\right]$ is convex, monotone and non-decreasing in the half-width of a bounded, mean-zero noise.

Our Contributions

1. Look-Ahead Regret $=$ True Regret $+ \overbrace{\mathbb{E}\left[\langle f^*(X), z^*(f^*(X))\rangle - \langle Y, z^*(Y)\rangle\right]}^{\text{Look-Ahead Premium (LAP)}}$, where LAP is model-independent and benchmark-specific
2. $\mathbb{E}\left[\text{LAP}\right]$ is convex, monotone and non-decreasing in the half-width of a bounded, mean-zero noise.
3. $\mathbb{E}\left[\text{LAP}\right]$ can behave non-monotonically w.r.t. linear misspecification in the data distribution.

Outline

1. Problem + Motivation
   - Regret Metrics in Decision-Focused Learning
   - Our Contributions
2. What is the Look-Ahead Premium?
3. Characterizing LAP
   - Case Study: The Shortest Path Problem
   - How LAP Responds to the Noise Half-Width and Degree
4. Numerical Experiments
   - Shortest Path Problem
   - Traveling Salesman Problem
   - Portfolio Optimization
5. Conclusions

True Regret vs. Look-Ahead Regret

Well-known result in literature:

Lemma 2.1 (The Perfect Regressor)

For a decision problem linear in the parameter Y, the ideal fitting function that minimizes expected decision loss is $f^*(X) = \mathbb{E}[Y \mid X]$

No DFL method f can perform better than f^* in expectation.

True Regret vs. Look-Ahead Regret

Well-known result in literature:

Lemma 2.1 (The Perfect Regressor)

For a decision problem linear in the parameter Y, the ideal fitting function that minimizes expected decision loss is $f^*(X) = \mathbb{E}[Y \mid X]$

No DFL method f can perform better than f^* in expectation.

Q: How do True Regret and Look-Ahead Regret relate?

True Regret vs. Look-Ahead Regret

Well-known result in literature:

Lemma 2.1 (The Perfect Regressor)

For a decision problem linear in the parameter Y, the ideal fitting function that minimizes expected decision loss is $f^*(X) = \mathbb{E}[Y \mid X]$

No DFL method f can perform better than f^* in expectation.

Q: How do True Regret and Look-Ahead Regret relate?

Lemma 2.2 (Look-Ahead Regret Upper Bounds True Regret)

$\mathbb{E}[\langle Y, z^*(Y)\rangle] \leq \mathbb{E}\left[\left\langle f^*(X), z^*(f^*(X))\right\rangle\right]$, *and hence for* **any** f,

$$\text{Regret}(f, f^*) \leq \text{Regret}(f, Y).$$

Proof Outline: $\langle Y, z^*(Y)\rangle \leq \langle Y, z^*(f^*(X))\rangle$ by optimality, then apply expectation for claim 1. Rearrange and add $\mathbb{E}[f^*(X), z^*(f(X))]$ for claim 2.

Look-Ahead Premium

Q: How far does Look-Ahead Regret depart from True Regret?

Look-Ahead Premium

Q: How far does Look-Ahead Regret depart from True Regret?

$$\begin{aligned}\text{Regret}(f, Y) - \text{Regret}(f, f^*) &= \mathbb{E}\left[\langle f^*(X), z^*(f^*(X))\rangle\right] - \mathbb{E}\left[\langle Y, z^*(Y)\rangle\right] \\ &= \underbrace{\mathbb{E}\left[\left\langle Y,\ z^*(f^*(X)) - z^*(Y)\right\rangle\right]}_{\mathbb{E}[\text{LAP}]} \ \geq\ 0.\end{aligned}$$

Look-Ahead Premium

Q: How far does Look-Ahead Regret depart from True Regret?

$$\begin{aligned}\text{Regret}(f, Y) - \text{Regret}(f, f^*) &= \mathbb{E}\left[\langle f^*(X), z^*(f^*(X))\rangle\right] - \mathbb{E}\left[\langle Y, z^*(Y)\rangle\right] \\ &= \underbrace{\mathbb{E}\left[\left\langle Y,\ z^*(f^*(X)) - z^*(Y)\right\rangle\right]}_{\mathbb{E}[\text{LAP}]} \ \geq\ 0.\end{aligned}$$

Expected Look-Ahead Premium, $\mathbb{E}\left[\text{LAP}\right]$

The advantage of an oracle that observes Y before making a decision, relative to the **best possible model** f^*.

Look-Ahead Premium

Q: How far does Look-Ahead Regret depart from True Regret?

$$\begin{aligned}\text{Regret}(f, Y) - \text{Regret}(f, f^*) &= \mathbb{E}\left[\langle f^*(X), z^*(f^*(X))\rangle\right] - \mathbb{E}\left[\langle Y, z^*(Y)\rangle\right] \\ &= \underbrace{\mathbb{E}\left[\left\langle Y,\ z^*(f^*(X)) - z^*(Y)\right\rangle\right]}_{\mathbb{E}[\text{LAP}]} \ \geq\ 0.\end{aligned}$$

Expected Look-Ahead Premium, $\mathbb{E}\left[\text{LAP}\right]$

The advantage of an oracle that observes Y before making a decision, relative to the **best possible model** f^*.

Key property: $\mathbb{E}\left[\text{LAP}\right]$ depends only on the **problem setup**, not on f.

- Every model's Look-Ahead Regret curve is its True Regret curve **shifted upward by the same amount**.
- Therefore, differences in $\mathbb{E}\left[\text{LAP}\right]$ across instances can be mistaken for differences in **model performance** or **benchmark difficulty**.

Outline

1. Problem + Motivation
   - Regret Metrics in Decision-Focused Learning
   - Our Contributions
2. What is the Look-Ahead Premium?
3. Characterizing LAP
   - Case Study: The Shortest Path Problem
   - How LAP Responds to the Noise Half-Width and Degree
4. Numerical Experiments
   - Shortest Path Problem
   - Traveling Salesman Problem
   - Portfolio Optimization
5. Conclusions

The Shortest Path Benchmark [Elmachtoub & Grigas, 2022]

Find the shortest path on a 5×5 grid.

- $p = 5$ features per context, $d = 40$ edges in the response vector.
- Fixed random $B \in \mathbb{R}^{d \times p}$ with i.i.d. $\text{Bernoulli}(0.5)$ entries.
- Contexts $x \sim N(0, I_p)$.

Cost generation (as in PyEPO [Tang & Khalil, 2024])

$$Y_j = \left[\frac{1}{3.5^{\text{deg}}} \left(\frac{1}{\sqrt{p}} (Bx)_j + 3 \right)^{\text{deg}} + 1 \right] \cdot \epsilon_j, \qquad \epsilon_j \sim \text{Unif}[1-h, 1+h]$$

The Shortest Path Benchmark [Elmachtoub & Grigas, 2022]

Find the shortest path on a 5×5 grid.

- $p = 5$ features per context, $d = 40$ edges in the response vector.
- Fixed random $B \in \mathbb{R}^{d \times p}$ with i.i.d. $\text{Bernoulli}(0.5)$ entries.
- Contexts $x \sim N(0, I_p)$.

Cost generation (as in PyEPO [Tang & Khalil, 2024])

$$Y_j = \left[\frac{1}{3.5^{\text{deg}}} \left(\frac{1}{\sqrt{p}} (Bx)_j + 3 \right)^{\text{deg}} + 1 \right] \cdot \epsilon_j, \qquad \epsilon_j \sim \text{Unif}[1-h, 1+h]$$

- deg $\in \{1, 2, 4, 6, 8\}$ controls *linear misspecification*, with larger deg meant to be "harder."

The Shortest Path Benchmark [Elmachtoub & Grigas, 2022]

Find the shortest path on a 5×5 grid.

- $p = 5$ features per context, $d = 40$ edges in the response vector.
- Fixed random $B \in \mathbb{R}^{d \times p}$ with i.i.d. $\text{Bernoulli}(0.5)$ entries.
- Contexts $x \sim N(0, I_p)$.

Cost generation (as in PyEPO [Tang & Khalil, 2024])

$$Y_j = \left[\frac{1}{3.5^{\text{deg}}} \left(\frac{1}{\sqrt{p}} (Bx)_j + 3 \right)^{\text{deg}} + 1 \right] \cdot \epsilon_j, \qquad \epsilon_j \sim \text{Unif}[1-h, 1+h]$$

- $\text{deg} \in \{1, 2, 4, 6, 8\}$ controls *linear misspecification*, with larger deg meant to be "harder."
- $h \in [0, 1]$ is the multiplicative noise half-width.

This design is now a standard benchmark: [Berthet et al., 2020], [Vlastelica et al., 2020], [Tang & Khalil, 2024], [Mandi et al., 2024], among others.

Our Shortest Path Experiment

Identical experiment to [Elmachtoub & Grigas, 2022] with SPO+ and Least Squares (LASSO) models. Training set size $N = 1000$. Noise half-width $h = 0.5$.

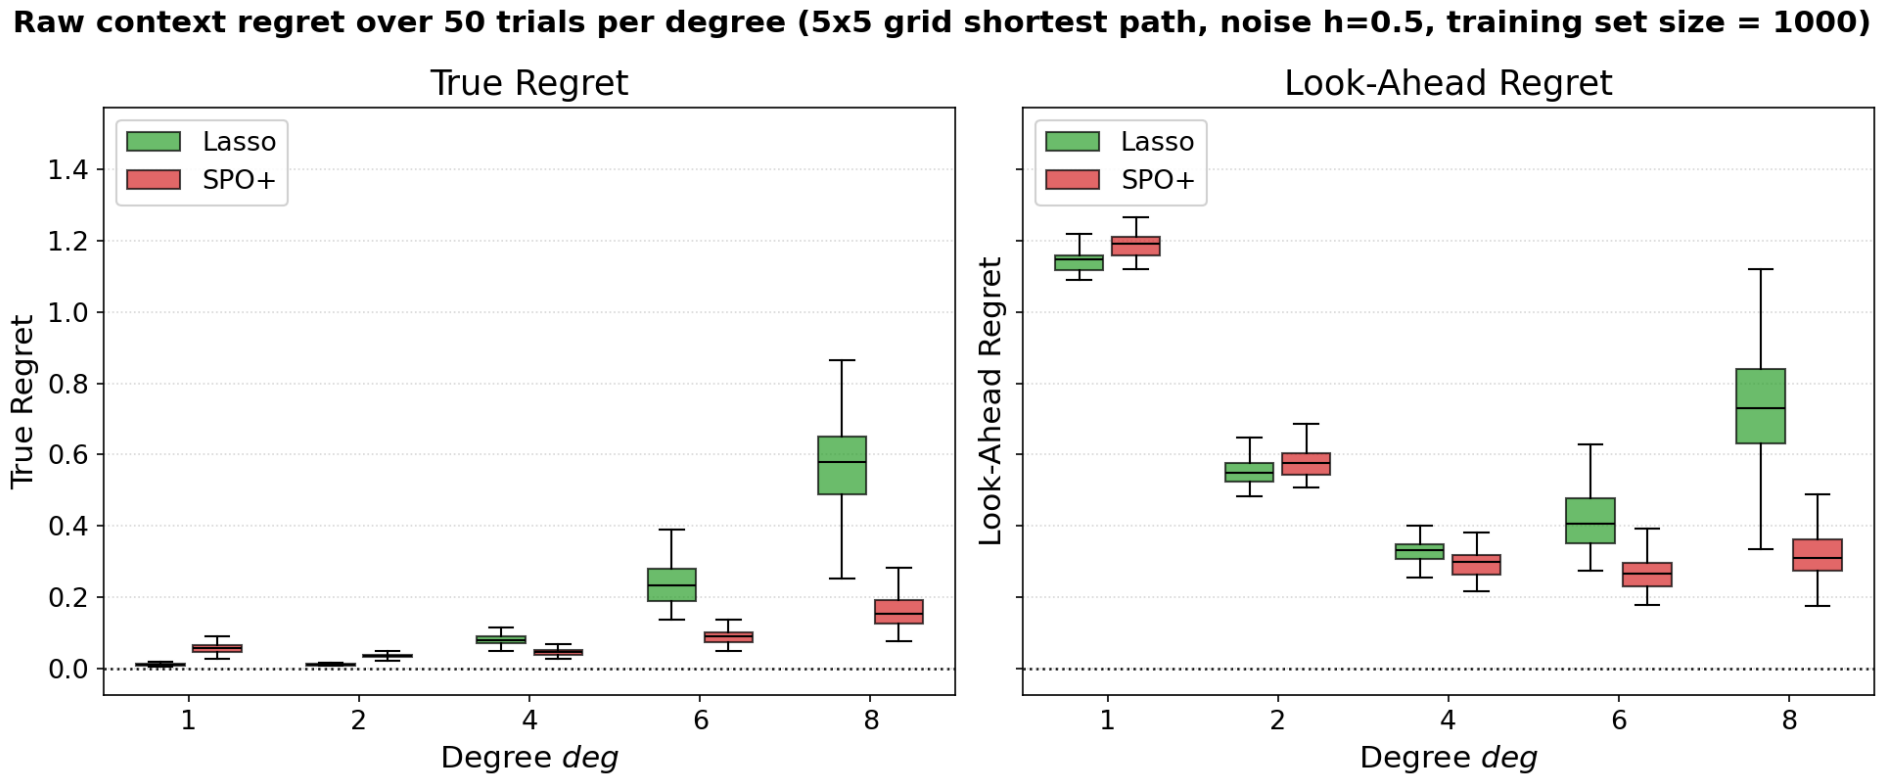


Figure 3.1: True Regret and Look-Ahead Regret for SPP

The original paper reports normalized versions of exactly our two metrics: "noiseless regret" $\propto$ Regret(f, f^*) and "noisy regret" $\propto$ Regret(f, Y).

LAP Distorts Interpretation of Regret

Look-Ahead Regret doesn't just upper bound True Regret:

Regret(f, f^*) — as expected

True Regret **increases** monotonically in deg. More linear misspecification $\Rightarrow$ the models are worse at predicting the parameter.

LAP Distorts Interpretation of Regret

Look-Ahead Regret doesn't just upper bound True Regret:

Regret(f, f^*) — as expected

True Regret **increases** monotonically in deg. More linear misspecification $\Rightarrow$ the models are worse at predicting the parameter.

Regret(f, Y) — surprising

All three models **decrease** up to deg $= 4$, then increase again. A parabola.

LAP Distorts Interpretation of Regret

Look-Ahead Regret doesn't just upper bound True Regret:

Regret(f, f^*) — as expected

True Regret **increases** monotonically in deg. More linear misspecification $\Rightarrow$ the models are worse at predicting the parameter.

Regret(f, Y) — surprising

All three models **decrease** up to deg $= 4$, then increase again. A parabola.

Regret(f, Y) seems to imply:

- deg $= 1$ is the most difficult instance
- deg $= 4$ is the easiest instance

LAP Distorts Interpretation of Regret

Look-Ahead Regret doesn't just upper bound True Regret:

Regret(f, f^*) — as expected

True Regret **increases** monotonically in deg. More linear misspecification $\Rightarrow$ the models are worse at predicting the parameter.

Regret(f, Y) — surprising

All three models **decrease** up to deg $= 4$, then increase again. A parabola.

Regret(f, Y) seems to imply:

- deg $= 1$ is the most difficult instance
- deg $= 4$ is the easiest instance

This distortion is because of the **Look-Ahead Premium,** since:

$$\text{Regret}(f, Y) = \text{Regret}(f, f^*) + \mathbb{E}\left[\text{LAP}\right]$$

Expanding LAP

Write

$$\epsilon = \mathbf{1} + h\gamma, \qquad \gamma \sim \mathrm{Unif}[-1, 1]^d,$$

so that

$$Y = \underbrace{f^*(X)}_{\text{mean}} + \underbrace{h f^*(X) \odot \gamma}_{\text{noise}}.$$

Expanding LAP

Write

$$\epsilon = \mathbf{1} + h\gamma, \qquad \gamma \sim \mathrm{Unif}[-1,1]^d,$$

so that

$$Y = \underbrace{f^*(X)}_{\text{mean}} + \underbrace{hf^*(X) \odot \gamma}_{\text{noise}}.$$

For a fixed realization of (X, γ),

$$\begin{aligned} \mathrm{LAP} &= \left\langle Y,\, z^*(f^*(X)) - z^*(Y) \right\rangle \\ &= \max_{z \in P} \left\langle f^*(X) + hf^*(X) \odot \gamma,\, z^*(f^*(X)) - z \right\rangle. \end{aligned}$$

LAP vs. the noise half-width h

Theorem 3.1

Fix a degree deg. *For every realization of* (X, γ), $\mathsf{LAP}(h)$ *is convex and non-decreasing on* $h \in [0, 1]$. *Consequently* $\mathbb{E}\left[\mathsf{LAP}(h)\right]$ *is convex and non-decreasing on* $[0, 1]$.

LAP vs. the noise half-width h

Theorem 3.1

Fix a degree deg*. For every realization of* (X, γ), $\mathsf{LAP}(h)$ *is convex and non-decreasing on* $h \in [0, 1]$*. Consequently* $\mathbb{E}\left[\mathsf{LAP}(h)\right]$ *is convex and non-decreasing on* $[0, 1]$*.*

Convexity:

LAP vs. the noise half-width h

Theorem 3.1

Fix a degree deg. *For every realization of* (X, γ), $\mathrm{LAP}(h)$ *is convex and non-decreasing on* $h \in [0, 1]$. *Consequently* $\mathbb{E}[\mathrm{LAP}(h)]$ *is convex and non-decreasing on* $[0, 1]$.

Convexity:

1. Let $g(t) := -\langle t, z^*(t) \rangle$. Negative of min of linear functions, hence **convex**.

LAP vs. the noise half-width h

Theorem 3.1

Fix a degree deg. *For every realization of* (X, γ), $\mathrm{LAP}(h)$ *is convex and non-decreasing on* $h \in [0, 1]$. *Consequently* $\mathbb{E}[\mathrm{LAP}(h)]$ *is convex and non-decreasing on* $[0, 1]$.

Convexity:

1. Let $g(t) := -\langle t, z^*(t) \rangle$. Negative of min of linear functions, hence **convex**.
2. Notice $\mathrm{LAP} = \left\langle f^*(X), z^*(f^*(X)) \right\rangle - \mathbb{E}[\langle Y, z^*(Y) \rangle \mid X] = \mathbb{E}[g(Y) \mid X] - g\big(\mathbb{E}[Y \mid X]\big)$, so $\mathbb{E}[\mathrm{LAP}] \geq 0$ by Jensen's inequality.

LAP vs. the noise half-width h

Theorem 3.1

Fix a degree deg. *For every realization of* (X, γ), $\mathrm{LAP}(h)$ *is convex and non-decreasing on* $h \in [0, 1]$. *Consequently* $\mathbb{E}[\mathrm{LAP}(h)]$ *is convex and non-decreasing on* $[0, 1]$.

Convexity:

1. Let $g(t) := -\langle t, z^*(t) \rangle$. Negative of min of linear functions, hence **convex**.
2. Notice $\mathrm{LAP} = \langle f^*(X), z^*(f^*(X)) \rangle - \mathbb{E}[\langle Y, z^*(Y) \rangle \mid X] = \mathbb{E}[g(Y) \mid X] - g\big(\mathbb{E}[Y \mid X]\big)$, so $\mathbb{E}[\mathrm{LAP}] \geq 0$ by Jensen's inequality.
3. $Y = f^*(X) + h\, f^*(X) \odot \gamma$ is affine in h, so $h \mapsto \mathbb{E}[g(Y) \mid X]$ **is convex**

LAP vs. the noise half-width h

Theorem 3.1

Fix a degree deg. *For every realization of* (X, γ), $\mathrm{LAP}(h)$ *is convex and non-decreasing on* $h \in [0, 1]$. *Consequently* $\mathbb{E}[\mathrm{LAP}(h)]$ *is convex and non-decreasing on* $[0, 1]$.

Convexity:

1. Let $g(t) := -\langle t, z^*(t) \rangle$. Negative of min of linear functions, hence **convex**.
2. Notice $\mathrm{LAP} = \left\langle f^*(X), z^*(f^*(X)) \right\rangle - \mathbb{E}[\langle Y, z^*(Y) \rangle \mid X] = \mathbb{E}[g(Y) \mid X] - g\big(\mathbb{E}[Y \mid X]\big)$, so $\mathbb{E}[\mathrm{LAP}] \geq 0$ by Jensen's inequality.
3. $Y = f^*(X) + h\, f^*(X) \odot \gamma$ is affine in h, so $h \mapsto \mathbb{E}[g(Y) \mid X]$ **is convex**

Non-decreasing:

1. Let $0 < h_1 \leq h_2 \leq 1$ and $\lambda = \frac{h_1}{h_2} \leq 1$.
2. $\mathrm{LAP}(h_1) = \mathrm{LAP}\left((1 - \lambda) \cdot 0 + \lambda h_2\right) \leq \lambda \mathrm{LAP}(h_2) \leq \mathrm{LAP}(h_2)$

LAP vs. the noise half-width h

Theorem 3.1

Fix a degree deg. *For every realization of* (X, γ), $\mathrm{LAP}(h)$ *is convex and non-decreasing on* $h \in [0, 1]$. *Consequently* $\mathbb{E}[\mathrm{LAP}(h)]$ *is convex and non-decreasing on* $[0, 1]$.

Convexity:

1. Let $g(t) := -\langle t, z^*(t) \rangle$. Negative of min of linear functions, hence **convex**.
2. Notice $\mathrm{LAP} = \langle f^*(X), z^*(f^*(X)) \rangle - \mathbb{E}[\langle Y, z^*(Y) \rangle \mid X] = \mathbb{E}[g(Y) \mid X] - g(\mathbb{E}[Y \mid X])$, so $\mathbb{E}[\mathrm{LAP}] \geq 0$ by Jensen's inequality.
3. $Y = f^*(X) + h\, f^*(X) \odot \gamma$ is affine in h, so $h \mapsto \mathbb{E}[g(Y) \mid X]$ **is convex**

Non-decreasing:

1. Let $0 < h_1 \leq h_2 \leq 1$ and $\lambda = \frac{h_1}{h_2} \leq 1$.
2. $\mathrm{LAP}(h_1) = \mathrm{LAP}((1 - \lambda) \cdot 0 + \lambda h_2) \leq \lambda \mathrm{LAP}(h_2) \leq \mathrm{LAP}(h_2)$

Since both hold for any draw of (X, γ), they hold in expectation.

LAP vs. the polynomial degree deg

Observe:

$$Y = f^*(X) \odot (1 + h\gamma) = \underbrace{f^*(X)}_{\text{mean}} + \underbrace{hf^*(X) \odot \gamma}_{\text{noise, mean } 0 \text{ given } X}$$

LAP vs. the polynomial degree deg

Observe:

$$Y = f^*(X) \odot (1 + h\gamma) = \underbrace{f^*(X)}_{\text{mean}} + \underbrace{hf^*(X) \odot \gamma}_{\text{noise, mean } 0 \text{ given } X}$$

Changing deg does **two things at once**:

1. it **displaces** the conditional mean $f^*(X)$; and
2. it **rescales** the conditional noise $hf^*(X) \odot \gamma$.

LAP vs. the polynomial degree deg

Observe:

$$Y = f^*(X) \odot (1 + h\gamma) = \underbrace{f^*(X)}_{\text{mean}} + \underbrace{hf^*(X) \odot \gamma}_{\text{noise, mean } 0 \text{ given } X}$$

Changing deg does **two things at once**:

1. it **displaces** the conditional mean $f^*(X)$; and
2. it **rescales** the conditional noise $hf^*(X) \odot \gamma$.

Separating

Introduce two independent degrees:

$$Y_{d_1,d_2} \;=\; f^*(X; d_1) \;+\; h\, f^*(X; d_2) \odot \gamma, \qquad \mathbb{E}\left[Y_{d_1,d_2} \mid X\right] = f^*(X; d_1).$$

Setting $d_1 = d_2$ recovers the original benchmark.

LAP vs. the polynomial degree deg

Observe:

$$Y = f^*(X) \odot (1 + h\gamma) = \underbrace{f^*(X)}_{\text{mean}} + \underbrace{hf^*(X) \odot \gamma}_{\text{noise, mean } 0 \text{ given } X}$$

Changing deg does **two things at once**:

1. it **displaces** the conditional mean $f^*(X)$; and
2. it **rescales** the conditional noise $hf^*(X) \odot \gamma$.

Separating

Introduce two independent degrees:

$$Y_{d_1,d_2} \;=\; f^*(X; d_1) \;+\; h\, f^*(X; d_2) \odot \gamma, \qquad \mathbb{E}\left[Y_{d_1,d_2} \mid X\right] = f^*(X; d_1).$$

Setting $d_1 = d_2$ recovers the original benchmark.

h argument does not extend to deg. *We leave this analysis for future work!*

Outline

1. Problem + Motivation
   - Regret Metrics in Decision-Focused Learning
   - Our Contributions
2. What is the Look-Ahead Premium?
3. Characterizing LAP
   - Case Study: The Shortest Path Problem
   - How LAP Responds to the Noise Half-Width and Degree
4. Numerical Experiments
   - Shortest Path Problem
   - Traveling Salesman Problem
   - Portfolio Optimization
5. Conclusions

Experimental Protocol

For each problem instance we isolate LAP from any model entirely:

- Draw N fresh test contexts X and responses Y.
- Solve the decision problem **exactly** under both $f^*(X)$ and Y.
- Average $\left\langle f^*(X), z^*(f^*(X)) \right\rangle - \left\langle Y, z^*(Y) \right\rangle$ over the test set.

No training is involved — the quantity is model-free.

Experimental Protocol

For each problem instance we isolate LAP from any model entirely:

- Draw N fresh test contexts X and responses Y.
- Solve the decision problem **exactly** under both $f^*(X)$ and Y.
- Average $\left\langle f^*(X), z^*(f^*(X)) \right\rangle - \left\langle Y, z^*(Y) \right\rangle$ over the test set.

No training is involved — the quantity is model-free.

Three classical DFL benchmarks:

1. **Shortest Path** [Elmachtoub & Grigas, 2022] — de facto DFL benchmark
2. **Traveling Salesman** [Tang & Khalil, 2024] — similar polynomial to SPP, part of PyEPO benchmark suite.
3. **Portfolio Optimization** [Elmachtoub & Grigas, 2022, Sec. 6.2] — continuous, convex QCQP + other experiment in SPO+ paper.

Shortest Path Problem (SPP)

Setup as in Section 3: $p = 5$, $d = 40$, fixed B with i.i.d. $\mathrm{Bernoulli}(0.5)$ entries. Sweep deg $\in \{1, 2, 4, 6, 8\}$ and $h \in \{0.01, 0.25, 0.5, 0.75, 0.99\}$ with $N = 1000$ test contexts per pair.

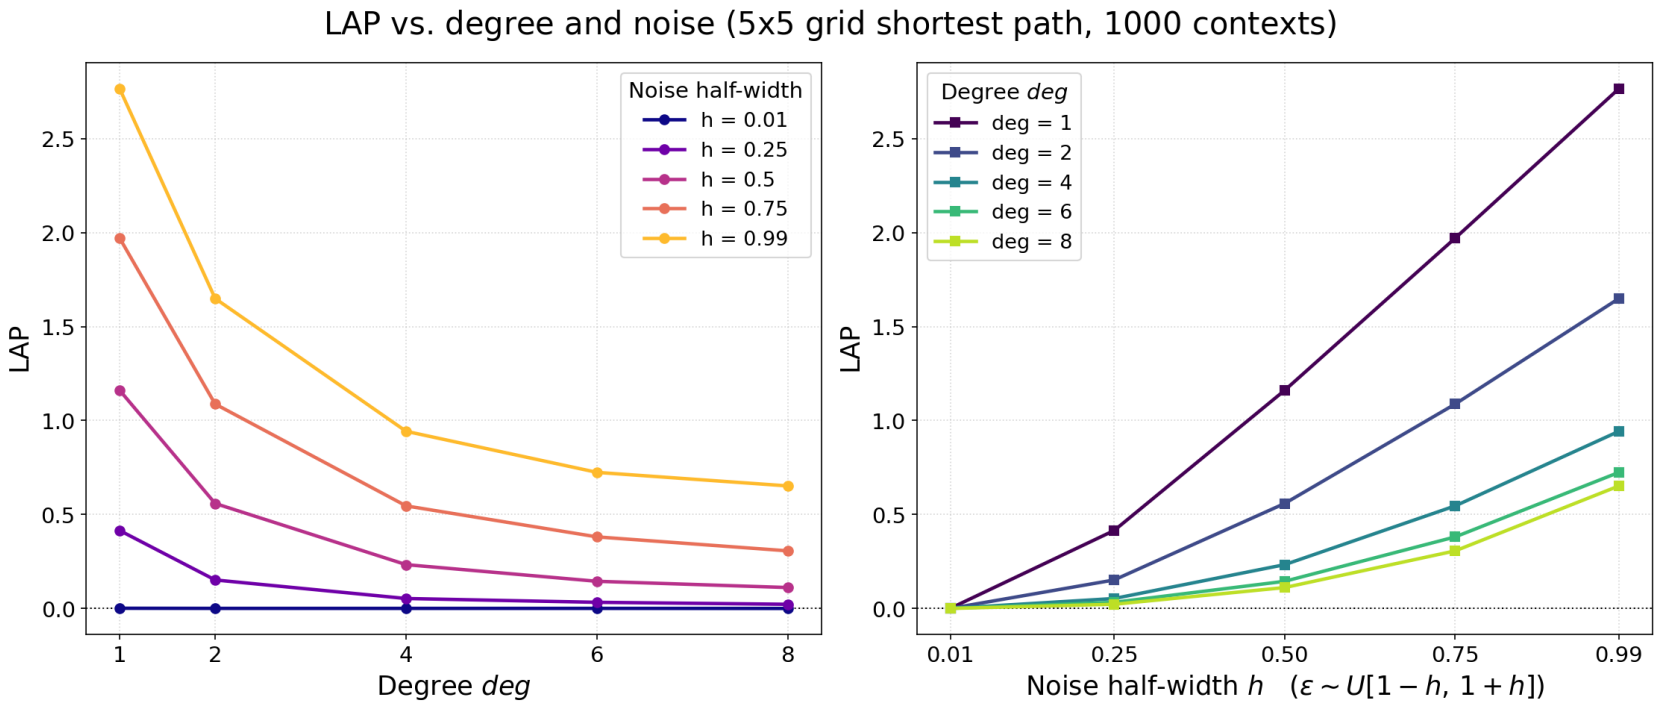


Figure 4.1: Estimated $\mathbb{E}[\mathrm{LAP}]$ as a function of deg and of h.

Shortest Path Problem (SPP)

Setup as in Section 3: $p = 5$, $d = 40$, fixed B with i.i.d. $\mathrm{Bernoulli}(0.5)$ entries. Sweep deg $\in \{1, 2, 4, 6, 8\}$ and $h \in \{0.01, 0.25, 0.5, 0.75, 0.99\}$ with $N = 1000$ test contexts per pair.

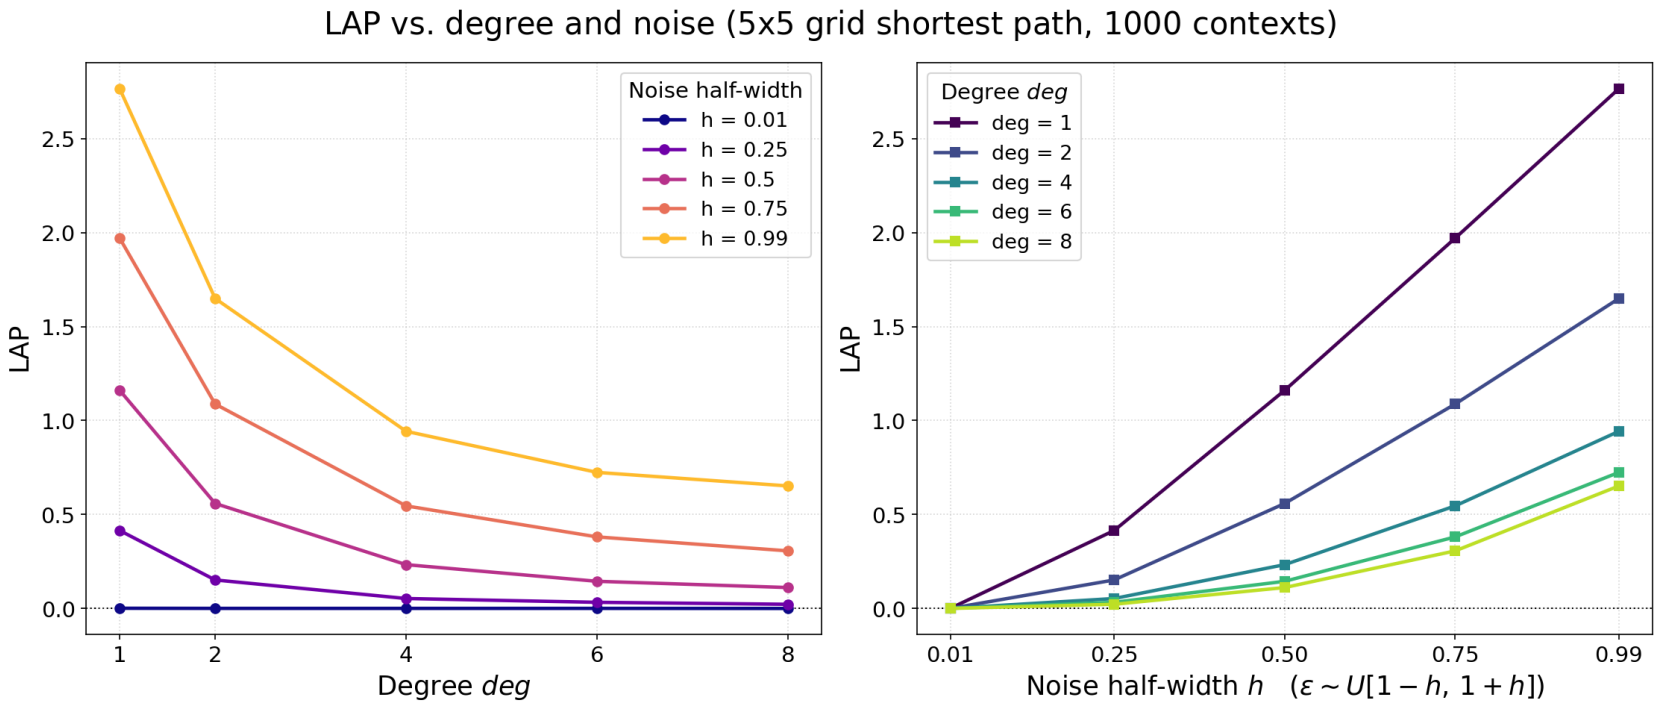


Figure 4.1: Estimated $\mathbb{E}[\mathrm{LAP}]$ as a function of deg and of h.

Monotone, convex and non-decreasing in h, exactly as Theorem 3.1 predicts.
Monotone, convex and non-increasing in deg.

SPP: Degree Disassociation

We empirically estimate the effect of Y_{d_1,d_2} as the true response. Fix $h = 0.5$ and estimate decision flip rate %age (DFR) and $\mathbb{E}[\text{LAP}]$ for every (d_1, d_2) pair.

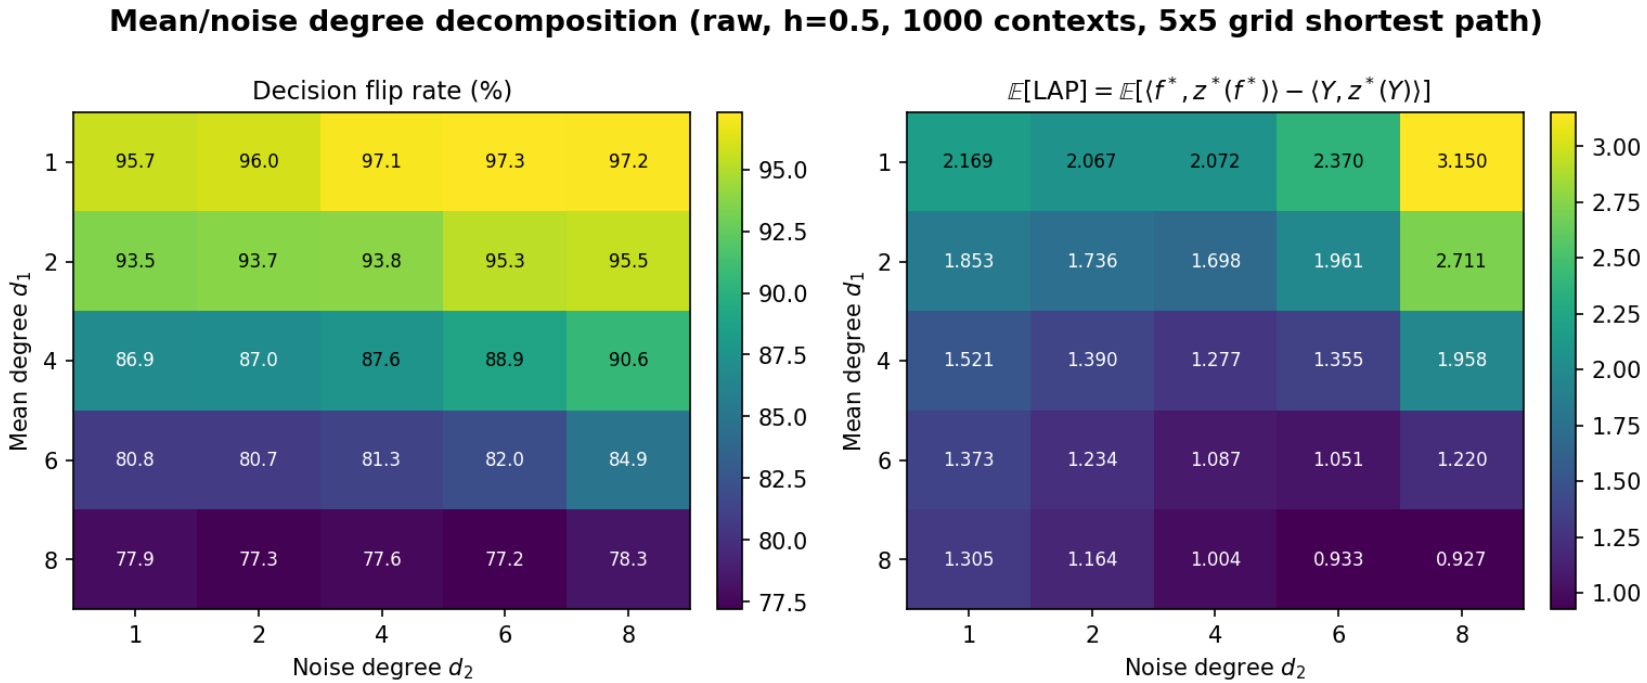


Figure 4.2: DFR and estimated $\mathbb{E}[\text{LAP}]$ as a function of (d_1, d_2).

SPP: Degree Disassociation

We empirically estimate the effect of Y_{d_1,d_2} as the true response. Fix $h = 0.5$ and estimate decision flip rate %age (DFR) and $\mathbb{E}[\text{LAP}]$ for every (d_1, d_2) pair.

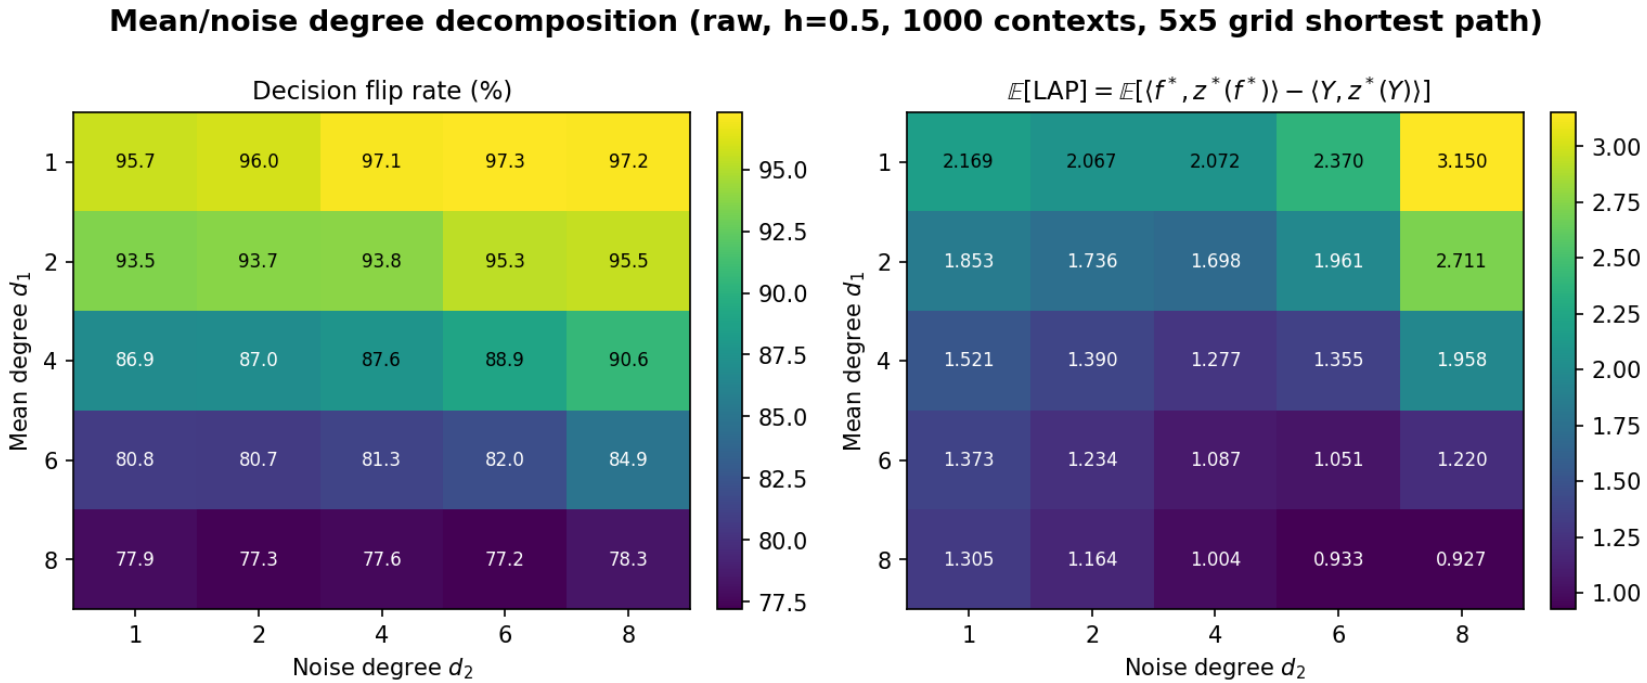


Figure 4.2: DFR and estimated $\mathbb{E}[\text{LAP}]$ as a function of (d_1, d_2).

Fixed d_2: DFR and $\mathbb{E}[\text{LAP}]$ decrease.

Fixed d_1: DFR increases for small d_1, decreases then increases for large d_1.
$\mathbb{E}[\text{LAP}]$ decreases, then increases.

Traveling Salesman Problem (TSP)

Symmetric TSP on v nodes. Following [Tang & Khalil, 2024], edge j's cost adds a **noise-free** Euclidean term to a noisy polynomial term:

$$Y_j = \mathrm{eucl}_j + \left[\frac{1}{3^{\deg-1}}\left(\frac{1}{\sqrt{p}}(Bx)_j + 3\right)^{\deg}\right] \cdot \epsilon_j, \qquad \epsilon_j \sim \mathrm{Unif}[1-h, 1+h]$$

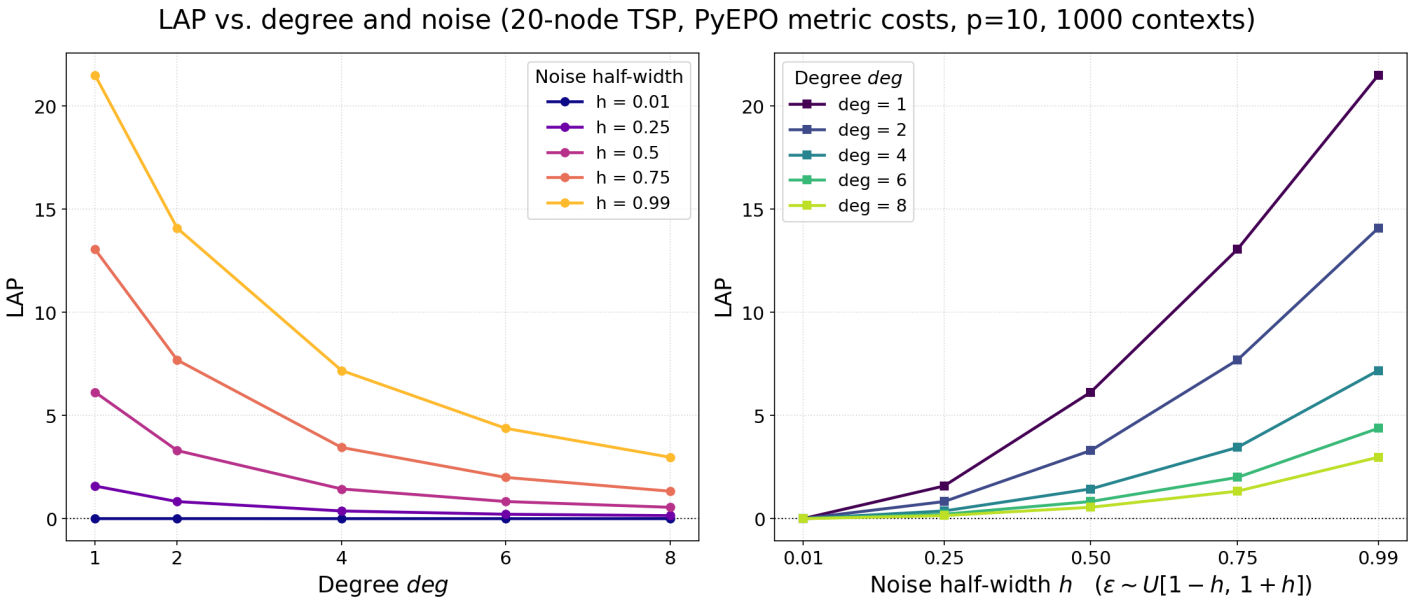


Figure 4.3: Estimated $\mathbb{E}[\mathrm{LAP}]$ for the TSP as a function of deg and h.

Traveling Salesman Problem (TSP)

Symmetric TSP on v nodes. Following [Tang & Khalil, 2024], edge j's cost adds a **noise-free** Euclidean term to a noisy polynomial term:

$$Y_j = \mathrm{eucl}_j + \left[\frac{1}{3^{\deg-1}}\left(\frac{1}{\sqrt{p}}(Bx)_j + 3\right)^{\deg}\right] \cdot \epsilon_j, \qquad \epsilon_j \sim \mathrm{Unif}[1-h, 1+h]$$

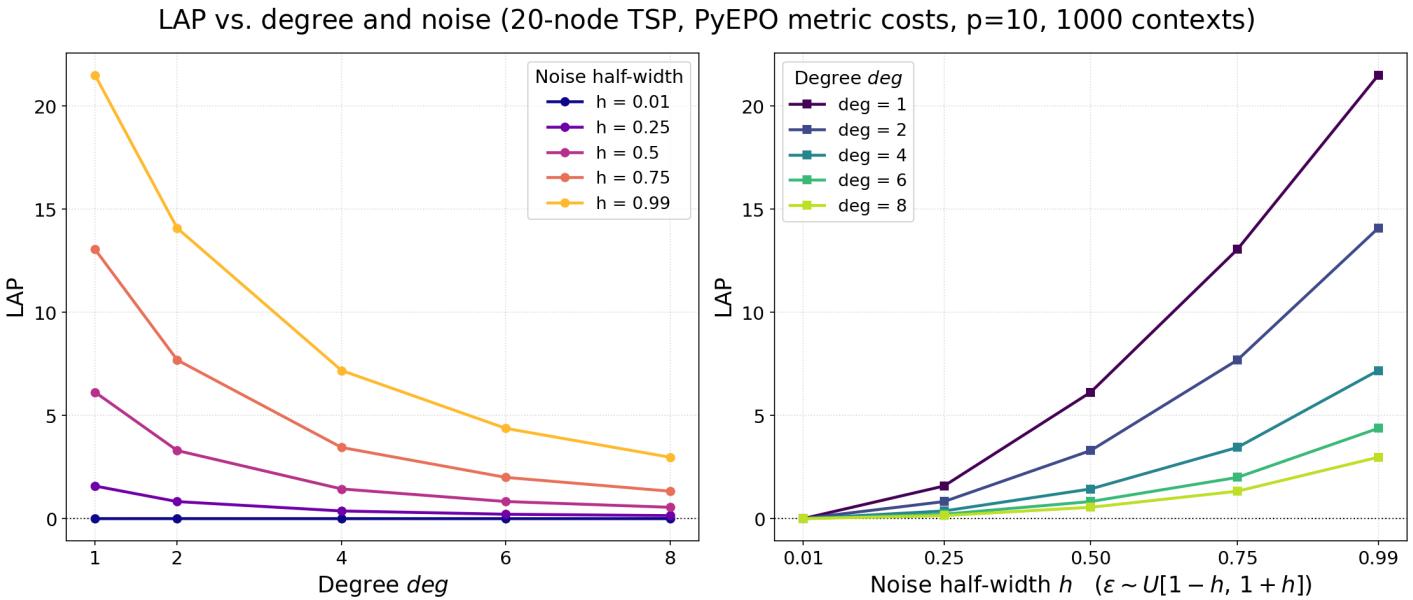


Figure 4.3: Estimated $\mathbb{E}[\mathrm{LAP}]$ for the TSP as a function of deg and h.

Monotone, convex and non-decreasing in h, exactly as Theorem 3.1 predicts.
Monotone, convex and non-increasing in deg.

Portfolio Optimization (PO): Setup

Mean–variance (Markowitz) problem on $d = 50$ assets [Elmachtoub & Grigas, 2022, Sec. 6.2]. A decision z allocates weights subject to budget and risk constraints:

$$P := \left\{ z \in \mathbb{R}^d : \; z^\top \Sigma z \le \gamma, \; \mathbf{1}^\top z \le 1, \; z \ge 0 \right\}$$

Writing $-Y$ as the excess returns, we solve the minimization $\min_{z \in P} \langle Y, z \rangle$.

Factor model

$$-f^*(X) = \left(\frac{0.05}{\sqrt{p}} (B^* x)_j + 0.1^{1/\text{deg}} \right)^{\text{deg}}, \qquad Y = f^*(X) - L\phi - 0.01\tau\epsilon$$

with $\phi \sim N(0, I_4)$, $\epsilon \sim N(0, I_d)$, and $\Sigma = LL^\top + (0.01\tau)^2 I_d$.

P is **continuous and convex** — $z^*(\cdot)$ is solved as a QCQP with a conic solver, not combinatorially. deg $\in \{1, 2, 3, 4, 6, 8, 16\}$, $\tau \in \{0.5, 1, 2, 4, 8\}$, $N = 1000$.

Portfolio Optimization: Results

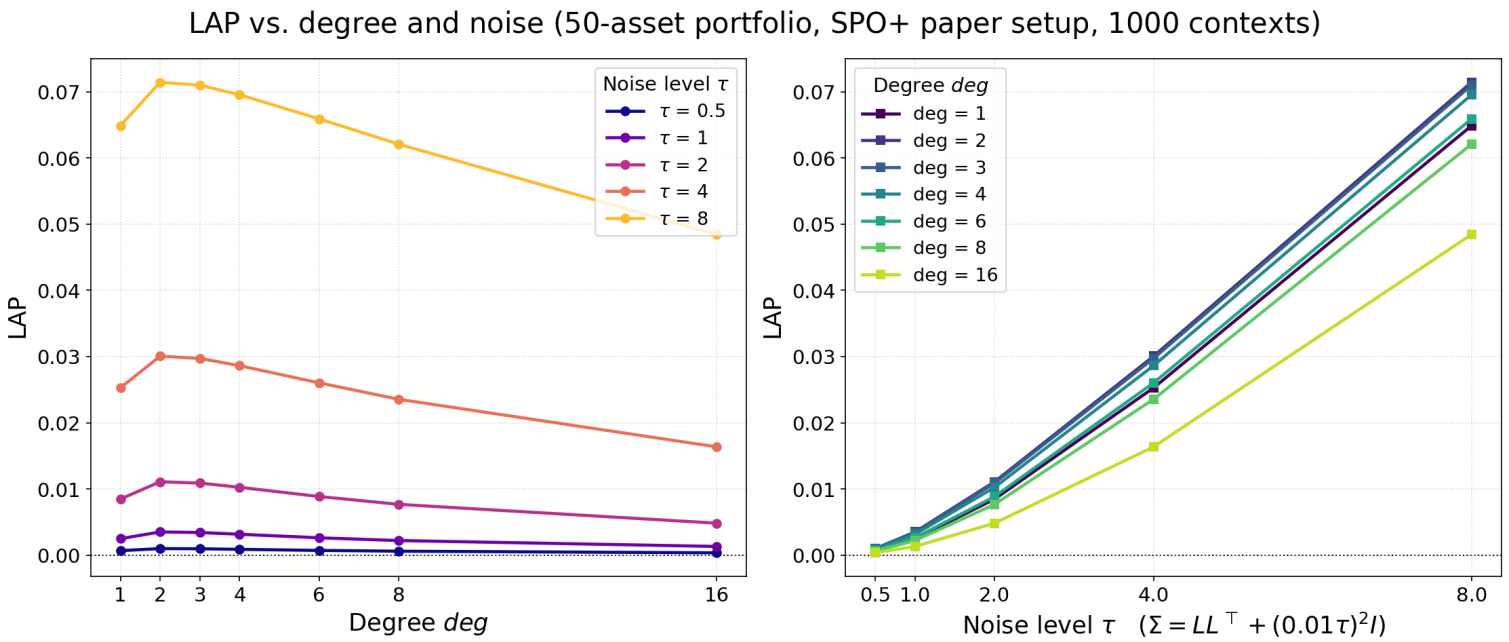


Figure 4.4: Estimated $\mathbb{E}[\text{LAP}]$ as a function of deg and noise level τ.

Portfolio Optimization: Results

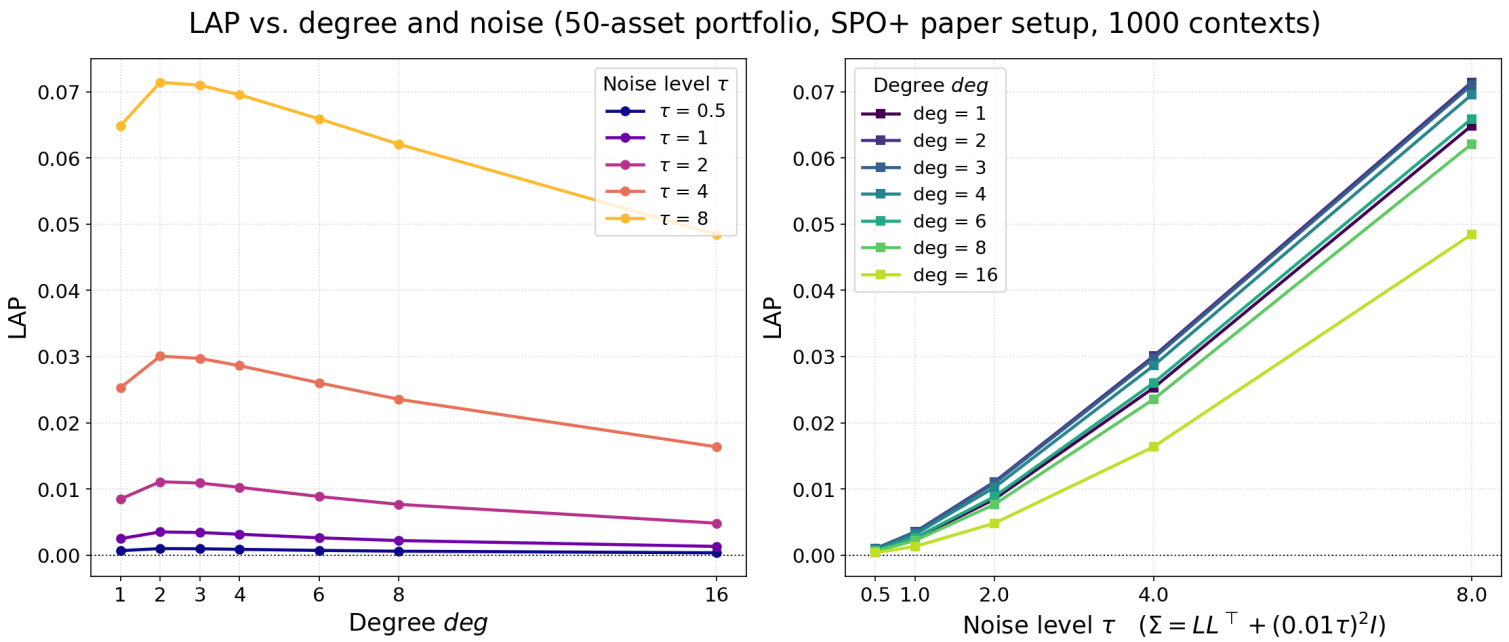


Figure 4.4: Estimated $\mathbb{E}[\text{LAP}]$ as a function of deg and noise level τ.

deg: **Parabolic!** Unexpected result compared to our prior findings, but note the difference in cost generation.

Portfolio Optimization: Results

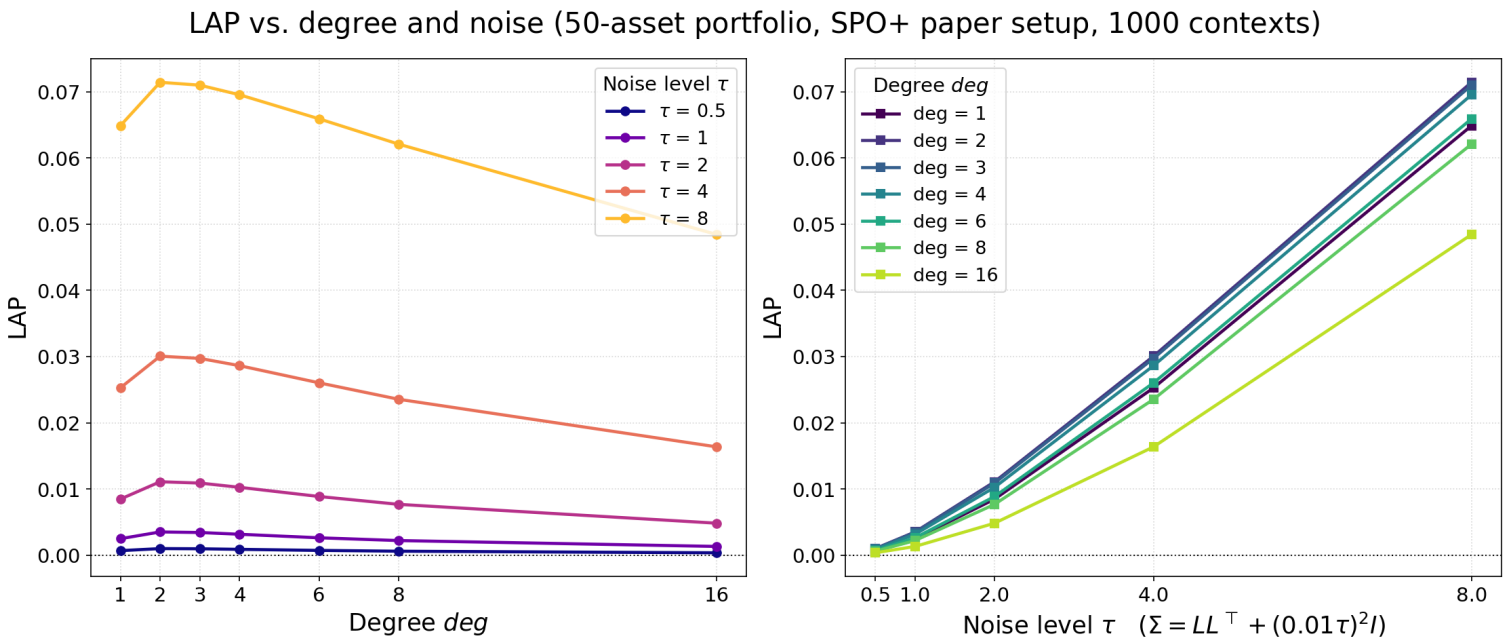


Figure 4.4: Estimated $\mathbb{E}[\text{LAP}]$ as a function of deg and noise level τ.

deg: **Parabolic!** Unexpected result compared to our prior findings, but note the difference in cost generation.

τ: **Monotone, convex and non-decreasing,** exactly as Theorem 3.1 predicts. Holds because $Y = f^*(X) - L\phi - 0.01\tau\epsilon$ is still an affine function in τ.

Outline

1. Problem + Motivation
   - Regret Metrics in Decision-Focused Learning
   - Our Contributions
2. What is the Look-Ahead Premium?
3. Characterizing LAP
   - Case Study: The Shortest Path Problem
   - How LAP Responds to the Noise Half-Width and Degree
4. Numerical Experiments
   - Shortest Path Problem
   - Traveling Salesman Problem
   - Portfolio Optimization
5. Conclusions

Takeaways

1. Look-Ahead Regret $\text{Regret}(f, Y)$ **always upper bounds** True Regret $\text{Regret}(f, f^*)$, and the gap $\mathbb{E}[\text{LAP}]$ is completely independent of the model.

Takeaways

1. Look-Ahead Regret $\text{Regret}(f, Y)$ **always upper bounds** True Regret $\text{Regret}(f, f^*)$, and the gap $\mathbb{E}[\text{LAP}]$ is completely independent of the model.
2. Look-Ahead Regret is helpful for model selection (since LAP is constant & additive) but misleading when comparing across different simulation protocols (different problems, misspecification levels, noise scales).

Takeaways

1. Look-Ahead Regret $\text{Regret}(f, Y)$ **always upper bounds** True Regret $\text{Regret}(f, f^*)$, and the gap $\mathbb{E}[\text{LAP}]$ is completely independent of the model.
2. Look-Ahead Regret is helpful for model selection (since LAP is constant & additive) but misleading when comparing across different simulation protocols (different problems, misspecification levels, noise scales).
3. $\mathbb{E}[\text{LAP}]$ is a **Jensen gap**: convex and non-decreasing in any parameter that scales a mean-zero, X-independent noise (shortest path h, TSP h, portfolio τ).

Takeaways

1. Look-Ahead Regret $\text{Regret}(f, Y)$ **always upper bounds** True Regret $\text{Regret}(f, f^*)$, and the gap $\mathbb{E}[\text{LAP}]$ is completely independent of the model.
2. Look-Ahead Regret is helpful for model selection (since LAP is constant & additive) but misleading when comparing across different simulation protocols (different problems, misspecification levels, noise scales).
3. $\mathbb{E}[\text{LAP}]$ is a **Jensen gap**: convex and non-decreasing in any parameter that scales a mean-zero, X-independent noise (shortest path h, TSP h, portfolio τ).
4. Parameters that **reshape** f^* (the polynomial degree) are not covered by that argument (and may produce **non-monotone** LAP). There is no universal consistency in how deg changes $\mathbb{E}[\text{LAP}]$.

Takeaways

1. Look-Ahead Regret $\text{Regret}(f, Y)$ **always upper bounds** True Regret $\text{Regret}(f, f^*)$, and the gap $\mathbb{E}[\text{LAP}]$ is completely independent of the model.
2. Look-Ahead Regret is helpful for model selection (since LAP is constant & additive) but misleading when comparing across different simulation protocols (different problems, misspecification levels, noise scales).
3. $\mathbb{E}[\text{LAP}]$ is a **Jensen gap**: convex and non-decreasing in any parameter that scales a mean-zero, X-independent noise (shortest path h, TSP h, portfolio τ).
4. Parameters that **reshape** f^* (the polynomial degree) are not covered by that argument (and may produce **non-monotone** LAP). There is no universal consistency in how deg changes $\mathbb{E}[\text{LAP}]$.

Wherever possible, report both regrets + acknowledge when the metric of interest is affected by the choice of regret.

References

A. N. Elmachtoub and P. Grigas. Smart "Predict, then Optimize". *Management Science*, 68(1):9–26, 2022.

Q. Berthet, M. Blondel, O. Teboul, M. Cuturi, J.-P. Vert, and F. Bach. Learning with Differentiable Perturbed Optimizers. *NeurIPS*, 2020.

M. Vlastelica, A. Paulus, V. Musil, G. Martius, and M. Rolínek. Differentiation of Blackbox Combinatorial Solvers. *ICLR*, 2020.

B. Tang and E. B. Khalil. PyEPO: A PyTorch-based End-to-End Predict-then-Optimize Library. *Mathematical Programming Computation*, 2024.

J. Mandi, J. Kotary, S. Berden, M. Mulamba, V. Bucarey, T. Guns, and F. Fioretto. Decision-Focused Learning: Foundations, State of the Art, Benchmark and Future Opportunities. *JAIR*, 2024.

J. Mandi, V. Bucarey, M. Mulamba, and T. Guns. Decision-Focused Learning: Through the Lens of Learning to Rank. *ICML*, 2022.

Schütte et al. Scalable Decision-Focused Learning. Working paper, 2026.

Questions?

Backup slide 1: Notation

- (X, Y): the random context–response pair; (x, y) a realization.
- f: a fitting function, producing prediction $f(X)$.
- $f^*(X) := \mathbb{E}[Y \mid X]$: the **true conditional mean**, or *perfect regressor*.
- $P \subseteq \mathbb{R}^d$: the feasible set of the downstream problem.
- $z^*(y) \in \arg\min_{z \in P} \langle y, z \rangle$: the induced decision.

Decision loss

The decision loss of f is the cost actually incurred by acting on $f(X)$:

$$\mathbb{E}\left[\left\langle Y,\ z^*(f(X))\right\rangle\right].$$

This is evaluated under the *true* parameter Y, not under the prediction.

Backup slide 2: The Perfect Regressor

Lemma 5.1 (The Perfect Regressor)

For a decision problem linear in the parameter Y, the ideal fitting function that minimizes expected decision loss is $f^*(X) = \mathbb{E}[Y \mid X]$.

Proof: Since $z^*(f(X))$ is a deterministic function of X, the tower rule gives

$$\mathbb{E}\left[\left\langle Y, z^*(f(X))\right\rangle\right] = \mathbb{E}\left[\mathbb{E}\left[\left\langle Y, z^*(f(X))\right\rangle \middle| X\right]\right] = \mathbb{E}\left[\left\langle \mathbb{E}[Y \mid X],\ z^*(f(X))\right\rangle\right].$$

Fix a realization $X = x$. By optimality of $z^*(\mathbb{E}[Y \mid X = x])$ under the cost vector $\mathbb{E}[Y \mid X = x]$,

$$\left\langle \mathbb{E}[Y \mid X = x], z^*(f(x))\right\rangle \ \geq\ \left\langle \mathbb{E}[Y \mid X = x], z^*(\mathbb{E}[Y \mid X = x])\right\rangle,$$

with equality at $f(x) = f^*(x)$. This holds for every x. □

So a fitting function f should be compared against f^* and not Y.

Backup slide 3: Look-Ahead Regret Always Upper Bounds Regret

Lemma 5.2

$\mathbb{E}\left[\langle Y, z^*(Y)\rangle\right] \;\leq\; \mathbb{E}\left[\left\langle f^*(X), z^*(f^*(X))\right\rangle\right]$, *and hence for* **any** f,

$$\text{Regret}(f, f^*) \;\leq\; \text{Regret}(f, Y).$$

Proof: By optimality, $\langle Y, z^*(Y)\rangle \leq \langle Y, z^*(f^*(X))\rangle$ almost surely. Taking expectations and conditioning on X,

$$\mathbb{E}\left[\langle Y, z^*(Y)\rangle\right] \leq \mathbb{E}\left[\left\langle \mathbb{E}\left[Y \mid X\right], z^*(f^*(X))\right\rangle\right] = \mathbb{E}\left[\left\langle f^*(X), z^*(f^*(X))\right\rangle\right].$$

Adding $\mathbb{E}\left[\langle f^*(X), z^*(f(X))\rangle\right]$ to both sides and using $\mathbb{E}\left[\langle f^*(X), z^*(f(X))\rangle\right] = \mathbb{E}\left[\langle Y, z^*(f(X))\rangle\right]$ (again by the tower rule) gives the second claim. □

Backup slide 4: A Lower-Variance Estimator

Remark 5.1 (Estimating Look-Ahead Regret)

When f^* is known, $\text{Regret}(f, Y)$ *may be estimated by either*

$$\mathbb{E}\left[\langle Y, z^*(f(X))\rangle - \langle Y, z^*(Y)\rangle\right] \quad \textit{or} \quad \mathbb{E}\left[\langle f^*(X), z^*(f(X))\rangle - \langle f^*(X), z^*(Y)\rangle\right].$$

The two agree in expectation, but the latter has **lower variance** *as an empirical estimator: it removes the randomness carried by the noisy realization Y.*

This is practically useful — it sharpens the boxplots in the experiments later without changing the quantity being measured.

Backup slide 5: Varying the Mean and the Noise Separately

Varying the mean (d_2 fixed). With $C := hf^*(X; d_2) \odot \gamma$, $\mathbb{E}[C] = 0$:

$$\mathbb{E}[\text{LAP}] = \mathbb{E}\left[\left\langle f^*(X; d_1), z^*(f^*(X; d_1))\right\rangle\right] - \mathbb{E}\left[\left\langle f^*(X; d_1), z^*(f^*(X; d_1) + C)\right\rangle\right]$$

An **additive** noise regime with fixed perturbation C. As d_1 grows, the spread of path costs widens and the top-ranked path becomes harder to overtake — pushing LAP *down*.

Varying the noise (d_1 fixed). With $C := f^*(X; d_1)$:

$$\mathbb{E}[\text{LAP}] = \mathbb{E}[\langle C, z^*(C)\rangle] - \mathbb{E}\left[\left\langle C,\ z^*(C + hf^*(X; d_2) \odot \gamma)\right\rangle\right]$$

Only the perturbation magnitude moves; larger d_2 inflates it — pushing LAP *up*.

The observed parabola in deg **is these two forces competing.** (In progress.)

Backup slide 6: Ongoing and Future Work

- **Strict monotonicity in h.** Conditions guaranteeing $\mathrm{LAP}(h) > 0$ for $h > 0$ to show that positive noise can flip the argmin with positive probability.
- **Explain $\mathbb{E}[\mathrm{LAP}]$ against deg for the SPP.** Rigorously prove the empirical finding that $\mathbb{E}[\mathrm{LAP}]$ decreases as deg increases for any noise h.
- **Formalize the strict concavity of $\mathbb{E}[\mathrm{LAP}]$ against deg for PO.** A proposition characterizing exactly when behavior of $\left(\frac{0.05}{\sqrt{p}}(B^*x) + 0.1^{1/\mathrm{deg}}\right)^{\mathrm{deg}}$ breaks monotonicity.
- **The mean/noise decomposition of deg.** Complete the analysis of Y_{d_1,d_2} to quantify how much of the parabola each effect contributes.
- **Real data.** When f^* is unavailable, can $\mathbb{E}[\mathrm{LAP}]$ be *estimated* and subtracted off, restoring a usable proxy for $\mathrm{Regret}(f, f^*)$?

Backup slide 7: About Me

- **Me:** Shammas Ahmed, originally from Lahore, Pakistan
- **Education:** Undergraduate Senior at Rice University (Houston, TX). Completing a B.S. in Operations Research
- **Interests:** Combinatorial optimization and graph problems, online optimization under competition
- **Hobbies:** Playing squash, listening to DJ sets, exploring matcha places in LA
- **Fun fact:** This is my first time in California!

