

Cucumber Report

Apr 2, 2024, 2:06:45 PM

Start : Apr 02, 2:05:49.540 PM

End : Apr 02, 2:06:45.063 PM

Duration : 55.523 s

Features







PASSED - 4
FAILED - 8
SKIPPED - 0

Scenarios

PASSED - 56
FAILED - 79
SKIPPED - 0

Steps

PASSED - 333
FAILED - 79
SKIPPED - 48

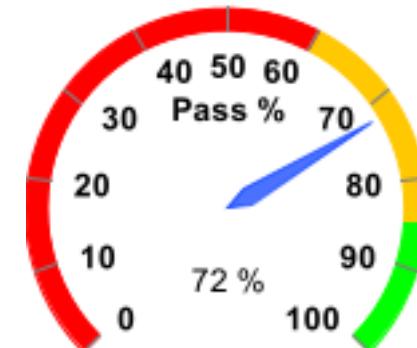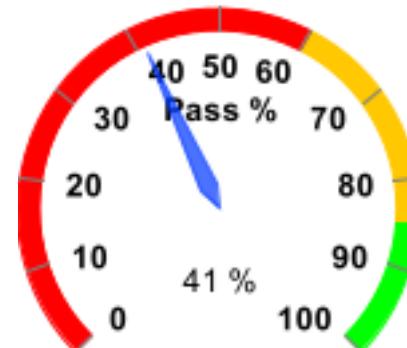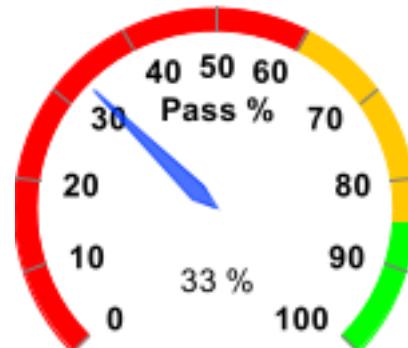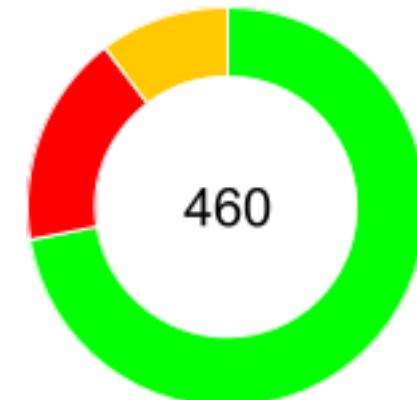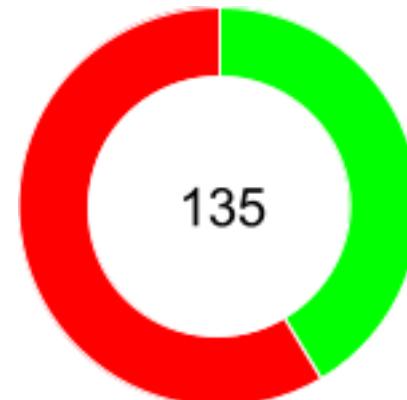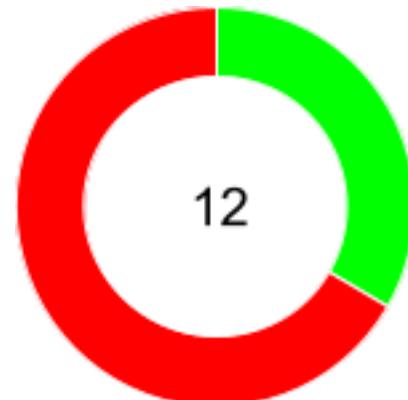

Feature		Scenario					Step			
Name	Duration	T	P	F	S	T	P	F	S	
<u>User Login Negative request</u>	5.868 s	2	2	0	0	6	6	0	0	
<u>To test the functionality of program controller Negative</u>	13.406 s	43	8	35	0	129	86	35	8	
<u>Negative scenario for User Module</u>	3.494 s	30	1	29	0	90	33	29	28	
<u>Negative scenario for User Controller</u>	0.331 s	3	0	3	0	9	3	3	3	
<u>User Login Post request</u>	0.324 s	1	1	0	0	3	3	0	0	
<u>program controller Positive</u>	2.961 s	6	1	5	0	24	18	5	1	
<u>Program Batch module</u>	14.276 s	24	22	2	0	98	93	2	3	
<u>User Module Positive request</u>	11.383 s	16	16	0	0	64	64	0	0	
<u>User Controller Positive</u>	0.896 s	2	1	1	0	8	6	1	1	
<u>Delete Request for all modules</u>	1.814 s	5	2	3	0	20	13	3	4	
<u>User Logout</u>	0.138 s	1	1	0	0	3	3	0	0	
<u>User Logout Negative</u>	0.250 s	2	1	1	0	6	5	1	0	

#	Feature Name	Scenario Name
1	<u>To test the functionality of program controller Negative</u>	<u>Check if Admin able to create a program with valid endpoint and request body with Authorization</u>
2		<u>Check if Admin able to create a program with invalid endpoint</u>
3		<u>Check if Admin able to create a program with already existing program name</u>
4		<u>Check if Admin able to create a program with invalid method</u>
5		<u>Check if Admin able to create a program with invalid request body</u>
6		<u>Check if Admin able to create a program with missing values in the request body</u>
7		<u>Check if Admin able to create a program with missing additional field</u>
8		<u>Check if Admin able to retrieve all programs with valid Endpoint</u>
9		<u>Check if Admin able to retrieve all programs with invalid Endpoint</u>
10		<u>Check if Admin able to retrieve all programs with invalid Method</u>
11		<u>Check if Admin able to retrieve a program with valid program ID</u>

#	Feature Name	Scenario Name
12	<u>To test the functionality of program controller Negative</u>	<u>Check if Admin able to retrieve a program with invalid program ID</u>
13		<u>Check if Admin able to retrieve a program with invalid baseURI</u>
14		<u>Check if Admin able to retrieve a program with invalid Endpoint</u>
15		<u>Check if Admin able to retrieve all programs with users and with valid Endpoint</u>
16		<u>Check if Admin able to retrieve all programs with invalid Endpoint</u>
17		<u>Check if Admin able to retrieve all programs with invalid Method</u>
18		<u>Check if Admin able to update a program with valid programID endpoint and valid request body</u>
19		<u>Check if Admin able to update a program with invalid programID endpoint and valid request body</u>
20		<u>Check if Admin able to update a program with invalid request body</u>
21		<u>Check if Admin able to update a program without request body</u>
22		<u>Check if Admin able to update a program with invalid baseURI</u>

#	Feature Name	Scenario Name
23	<u>To test the functionality of program controller Negative</u>	<u>Check if Admin able to update a program with invalid method</u>
24		<u>Check if Admin able to update a program with Valid program Name and request body</u>
25		<u>Check if Admin able to update a program status</u>
26		<u>Check if Admin able to update a program with invalid program Name and request body</u>
27		<u>Check if Admin able to update a program using valid program name - missing mandatory fields in request body</u>
28		<u>Check if Admin able to update a program with invalid values in request body</u>
29		<u>Check if Admin able to update a program with invalid program Description</u>
30		<u>Check if Admin able to delete a program with valid programName</u>
31		<u>Check if Admin able to delete a program with valid LMS API, invalid programName</u>

#	Feature Name	Scenario Name
32	<u>To test the functionality of program controller Negative</u>	<u>Check if Admin able to delete a program with valid program ID</u>
33		<u>Check if Admin able to delete a program with valid LMS API,invalid program ID</u>
34		<u>Check if Admin able to create a program with valid endpoint and request body with Authorization to be used for batch</u>
35		<u>Check if Admin able to create a program with valid endpoint and request body with Authorization to be used for batch inactive programID</u>
36	<u>Negative scenario for User Module</u>	<u>Check if admin is able to retreive all the available roles without Authorization</u>
37		<u>Check if admin is able to retreive all the available roles with invalid End point</u>
38		<u>Check if admin able to retrieve all Admin without Authorization</u>
39		<u>Check if admin able to retrieve all Admin with invalid endpoint</u>
40		<u>Check if admin able to retrieve a Admin with valid Admin ID and invalid endpoint</u>

#	Feature Name	Scenario Name
41	<u>Negative scenario for User Module</u>	<u>Check if admin able to retrieve a Admin with valid Admin ID with No authorization</u>
42		<u>Check if Admin able to retrieve a Admin with invalid Admin ID</u>
43		<u>Check if admin able to retrieve all Admins with roles with No authorization</u>
44		<u>Check if admin able to retrieve all Admins with roles with invalid endpoint</u>
45		<u>Check if admin is able to create a Admin with valid endpoint and invalid values in request body</u>
46		<u>Check if Admin able to create a Admin missing mandatory fields in request body</u>
47		<u>Check if admin able to create a new Admin with request body without authorization</u>
48		<u>Check if admin is able to get count of active and inactive Admins with invalid endpoint</u>
49		<u>Check if admin is able to get count of active and inactive Admins by invalid role ID</u>

#	Feature Name	Scenario Name
50	<u>Negative scenario for User Module</u>	<u>Check if admin is able to get count of active and inactive Admins with no authorization</u>
51		<u>Check if admin able to retrieve all active Admins with invalid endpoint</u>
52		<u>Check if admin is able to get the Admins by program batches for invalid batch ID</u>
53		<u>Check if admin is able to get the Admins for invalid program Id</u>
54		<u>Check if admin is able to retreive Admins by invalid role ID</u>
55		<u>Check if admin is able to retrieve all Admins with filters with no authorization</u>
56		<u>Check if admin is able to retrieve all Admins with filters with invalid endpoint</u>
57		<u>Check if admin is able to update Admin details with No authorization</u>
58		<u>Check if admin is able to update the Admin login status by Admin ID with invalid request body</u>

#	Feature Name	Scenario Name
59	<u>Negative scenario for User Module</u>	<u>Check if admin is able to update the Admin login status by Admin ID with invalid AdminId</u>
60		<u>Check if admin is able to update the Admin login status by Admin ID with NoAuth</u>
61		<u>Check if admin is able to delete Admin with invalid Admin ID</u>
62		<u>Check if admin is able to delete the Admin with NoAuth</u>
63		<u>Check if admin is able to delete the Admin with invalid endpoint</u>
64		<u>Check if admin is able to delete the Admin with invalid endpoint</u>
65	<u>Negative scenario for User Controller</u>	<u>Check if admin is able to retreive all Admins with assigned program batches with No Authorization</u>
66		<u>Check if admin is able to retreive assigned program batches for invalid AdminId</u>
67		<u>Check if admin is able to retreive assigned program batches for valid AdminId with No authorization</u>


#	Feature Name	Scenario Name
68	<u>program controller Positive</u>	<u>Check if Admin able to create a program with valid endpoint and request body with Authorization</u>
69		<u>Check if Admin able to retrieve all programs with valid Endpoint</u>
70		<u>Check if Admin able to retrieve a program with valid program ID</u>
71		<u>Check if Admin able to update a program with Valid program Name and request body</u>
72		<u>Check if Admin able to update a program with valid programID endpoint and valid request body</u>
73	<u>Program Batch module</u>	<u>Check if admin able to delete a Batch with invalid endpoint</u>
74		<u>Check if admin able to create a Batch with valid endpoint and request body (non existing values)</u>
75	<u>User Controller Positive</u>	<u>admin is able to retreive assigned program batches for valid AdminId</u>
76	<u>Delete Request for all modules</u>	<u>Check if admin is able to delete the program batch for a Admin</u>
77		<u>Check if Admin able to delete a Admin with valid Admin Id</u>

#	Feature Name	Scenario Name
78	<u>Delete Request for all modules</u>	<i>Check if admin able to delete a Batch with valid Batch ID</i>
79	<u>User Logout Negative</u>	<i>Check if Admin able to logout with valid endpoint with NoAuth</i>

TAG	Name	Scenario				Feature			
		T	P	F	S	T	P	F	S
@Test01		4	2	2	0	4	2	2	0
@tag1		2	2	0	0	1	1	0	0
@tag2		43	8	35	0	1	0	1	0
@tag4		30	1	29	0	1	0	1	0
@User_GetallRoles_Noauth		1	0	1	0	1	0	1	0
@User_GetallRoles_Invalidendpoint		1	0	1	0	1	0	1	0
@User_GetallUser_NoAuth		1	0	1	0	1	0	1	0
@User_GetallUser_Invalid_endpoint		1	0	1	0	1	0	1	0
@User.GetUser_ValidId_Invalidendpoint		1	0	1	0	1	0	1	0
@User.GetUser_ValidId_Noauth		1	0	1	0	1	0	1	0
@User.GetUser_InvalidId		1	0	1	0	1	0	1	0
@User_GetallUserswithRoles_Noauth		1	0	1	0	1	0	1	0
@User_GetallUserswithRoles_Invalidendpoint		1	0	1	0	1	0	1	0
@User_CreateUser_Invaliddata		1	0	1	0	1	0	1	0
@User_CreateUser_Missingfields		1	0	1	0	1	0	1	0
@User_CreateUser_Noauth		1	0	1	0	1	0	1	0
@Test02		1	0	1	0	1	0	1	0

TAG	Name	Scenario				Feature			
		T	P	F	S	T	P	F	S
@Test03		3	1	2	0	1	0	1	0
@Test04		1	0	1	0	1	0	1	0
@Test06		1	0	1	0	1	0	1	0
@Test07		1	0	1	0	1	0	1	0
@Get_Admin_with_filters_401		1	0	1	0	1	0	1	0
@Get_Admin_with_filters_404		1	0	1	0	1	0	1	0
@PUT_Admin_info_401		1	0	1	0	1	0	1	0
@Put_byAdmin_LoginStatus_400		1	0	1	0	1	0	1	0
@Put_byAdmin_LoginStatus_404		1	0	1	0	1	0	1	0
@Put_byAdmin_LoginStatus_401		1	0	1	0	1	0	1	0
@Del_User_404		2	0	2	0	1	0	1	0
@Del_User_401		1	0	1	0	1	0	1	0
@Del_User_405		1	0	1	0	1	0	1	0
@tag5		3	0	3	0	1	0	1	0
@tag08		1	1	0	0	1	1	0	0
@tag09		6	1	5	0	1	0	1	0
@tag3		24	22	2	0	1	0	1	0


TAG	Scenario				Feature			
	T	P	F	S	T	P	F	S
Name								
@programBatchWithAuthNegativeAndPositive	24	22	2	0	1	0	1	0
@tag11	16	16	0	0	1	1	0	0
@tag12	2	1	1	0	1	0	1	0
@tag13	5	2	3	0	1	0	1	0
@tag14	1	1	0	0	1	1	0	0
@tag07	2	1	1	0	1	0	1	0

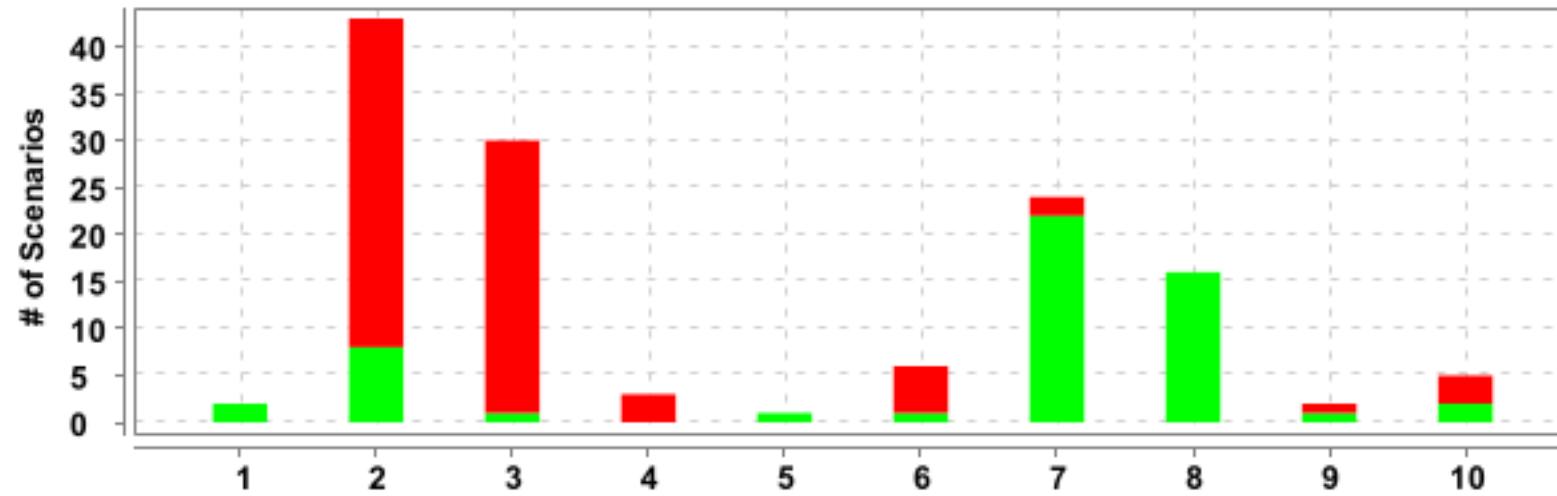

#	Feature Name	T	P	F	S	Duration
1	<u>User Login Negative request</u>	2	2	0	0	5.868 s
2	<u>To test the functionality of program controller Negative</u>	43	8	35	0	13.406 s
3	<u>Negative scenario for User Module</u>	30	1	29	0	3.494 s
4	<u>Negative scenario for User Controller</u>	3	0	3	0	0.331 s
5	<u>User Login Post request</u>	1	1	0	0	0.324 s
6	<u>program controller Positive</u>	6	1	5	0	2.961 s
7	<u>Program Batch module</u>	24	22	2	0	14.276 s
8	<u>User Module Positive request</u>	16	16	0	0	11.383 s
9	<u>User Controller Positive</u>	2	1	1	0	0.896 s
10	<u>Delete Request for all modules</u>	5	2	3	0	1.814 s




#	Feature Name	T	P	F	S	Duration
11	<u>User Logout</u>	1	1	0	0	0.138 s
12	<u>User Logout Negative</u>	2	1	1	0	0.250 s

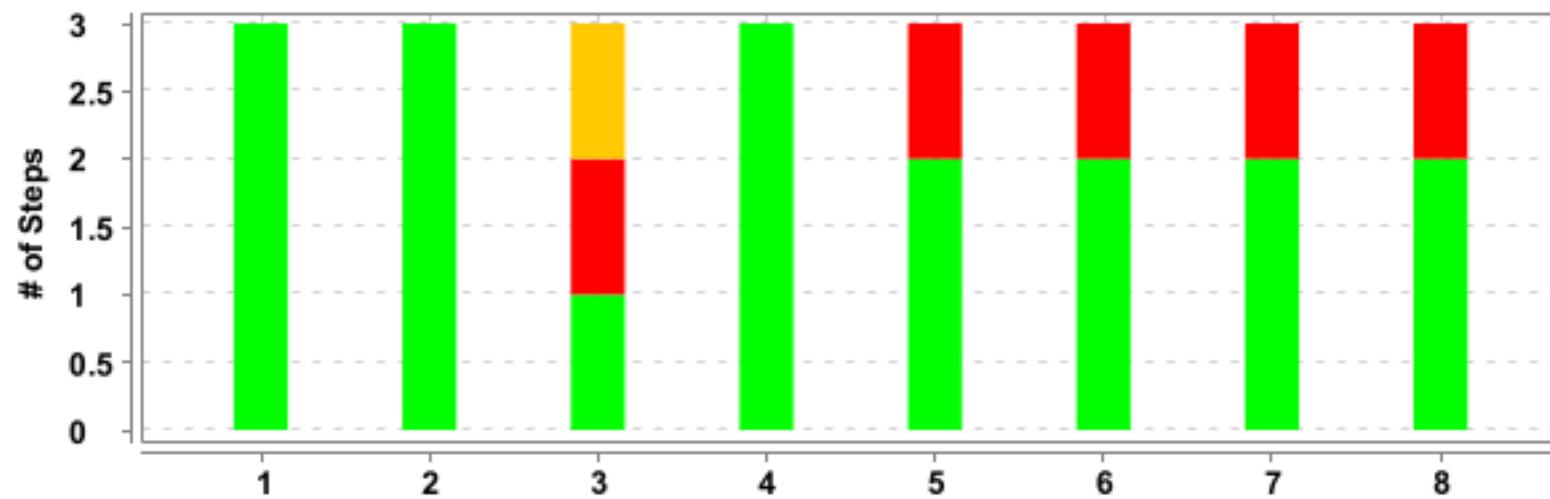


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>User Login Negative request</u>	<u>Check if Admin able to generate token with invalid endpoint</u>	3	3	0	0	4.381 s
2		<u>Check if Admin able to generate token with invalid credentials</u>	3	3	0	0	1.347 s
3	<u>To test the functionality of program controller Negative</u>	<u>Check if Admin able to create a program with valid endpoint and request body with Authorization</u>	3	1	1	1	0.491 s
4		<u>Check if Admin able to create a program with valid endpoint and request body without Authorization</u>	3	3	0	0	0.356 s
5		<u>Check if Admin able to create a program with invalid endpoint</u>	3	2	1	0	0.649 s
6		<u>Check if Admin able to create a program with already existing program name</u>	3	2	1	0	0.560 s
7		<u>Check if Admin able to create a program with invalid method</u>	3	2	1	0	0.428 s


#	Feature Name	Scenario Name	T	P	F	S	Duration
8		<u>Check if Admin able to create a program with invalid request body</u>	3	2	1	0	0.375 s

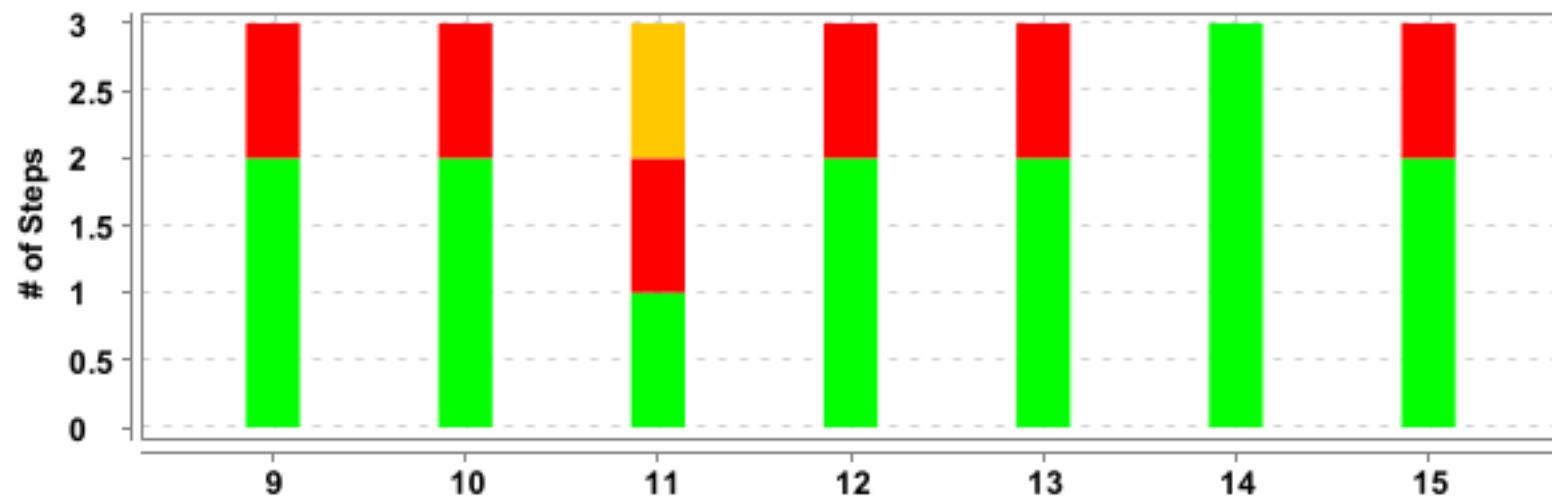

#	Feature Name	Scenario Name	T	P	F	S	Duration
9	<u>To test the functionality of program controller Negative</u>	<u>Check if Admin able to create a program with missing values in the request body</u>	3	2	1	0	0.625 s
10		<u>Check if Admin able to create a program with missing additional field</u>	3	2	1	0	0.268 s
11		<u>Check if Admin able to retrieve all programs with valid Endpoint</u>	3	1	1	1	0.024 s
12		<u>Check if Admin able to retrieve all programs with invalid Endpoint</u>	3	2	1	0	0.176 s
13		<u>Check if Admin able to retrieve all programs with invalid Method</u>	3	2	1	0	0.202 s
14		<u>Check if Admin able to retrieve all programs without Authorization</u>	3	3	0	0	0.386 s
15		<u>Check if Admin able to retrieve a program with valid program ID</u>	3	2	1	0	0.178 s

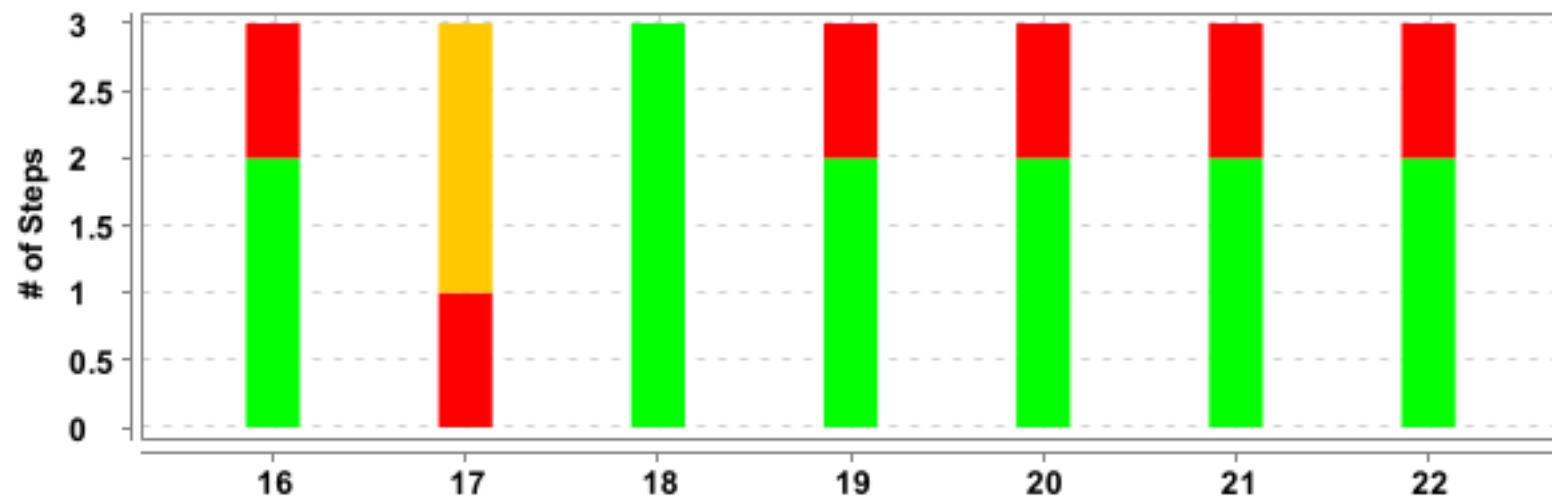


#	Feature Name	Scenario Name	T	P	F	S	Duration
16	<u>To test the functionality of program controller Negative</u>	<u>Check if Admin able to retrieve a program with invalid program ID</u>	3	2	1	0	0.158 s
17		<u>Check if Admin able to retrieve a program with invalid baseURI</u>	3	0	1	2	0.004 s
18		<u>Check if Admin able to retrieve a program without Authorization</u>	3	3	0	0	0.166 s
19		<u>Check if Admin able to retrieve a program with invalid Endpoint</u>	3	2	1	0	0.162 s
20		<u>Check if Admin able to retrieve all programs with users and with valid Endpoint</u>	3	2	1	0	1.243 s
21		<u>Check if Admin able to retrieve all programs with invalid Endpoint</u>	3	2	1	0	0.151 s
22		<u>Check if Admin able to retrieve all programs with invalid Method</u>	3	2	1	0	0.172 s

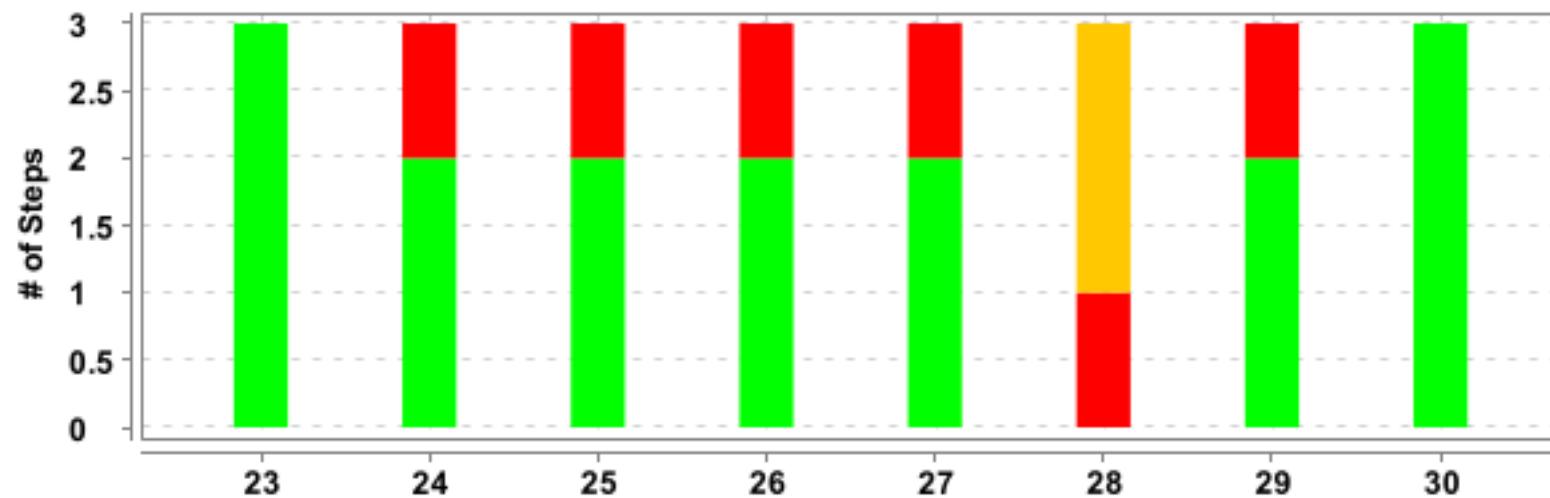


#	Feature Name	Scenario Name	T	P	F	S	Duration
23	<u>To test the functionality of program controller Negative</u>	<u>Check if Admin able to retrieve all programs without Authorization</u>	3	3	0	0	0.155 s
24		<u>Check if Admin able to update a program with valid programID endpoint and valid request body</u>	3	2	1	0	0.328 s
25		<u>Check if Admin able to update a program with invalid programID endpoint and valid request body</u>	3	2	1	0	0.291 s
26		<u>Check if Admin able to update a program with invalid request body</u>	3	2	1	0	0.285 s
27		<u>Check if Admin able to update a program without request body</u>	3	2	1	0	0.253 s
28		<u>Check if Admin able to update a program with invalid baseURI</u>	3	0	1	2	0.003 s
29		<u>Check if Admin able to update a program with invalid method</u>	3	2	1	0	0.230 s

#	Feature Name	Scenario Name	T	P	F	S	Duration
30		<u>Check if Admin able to update a program without Authorization</u>	3	3	0	0	0.250 s

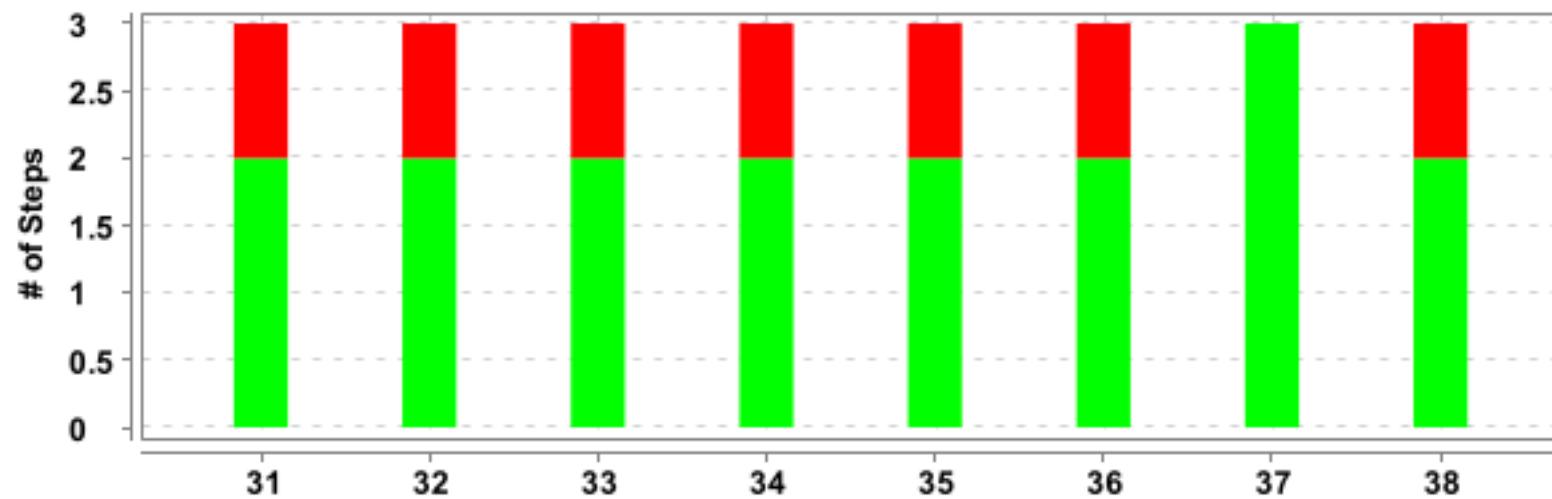


#	Feature Name	Scenario Name	T	P	F	S	Duration
31	<u>To test the functionality of program controller Negative</u>	<u>Check if Admin able to update a program with Valid program Name and request body</u>	3	2	1	0	0.258 s
32		<u>Check if Admin able to update a program status</u>	3	2	1	0	0.239 s
33		<u>Check if Admin able to update a program with invalid program Name and request body</u>	3	2	1	0	0.249 s
34		<u>Check if Admin able to update a program using valid program name - missing mandatory fields in request body</u>	3	2	1	0	0.217 s
35		<u>Check if Admin able to update a program with invalid values in request body</u>	3	2	1	0	0.204 s
36		<u>Check if Admin able to update a program with invalid program Description</u>	3	2	1	0	0.227 s
37		<u>Check if Admin able to update a program without Authorization</u>	3	3	0	0	0.257 s

#	Feature Name	Scenario Name	T	P	F	S	Duration
38		<i>Check if Admin able to delete a program with valid <u>programName</u></i>	3	2	1	0	0.148 s

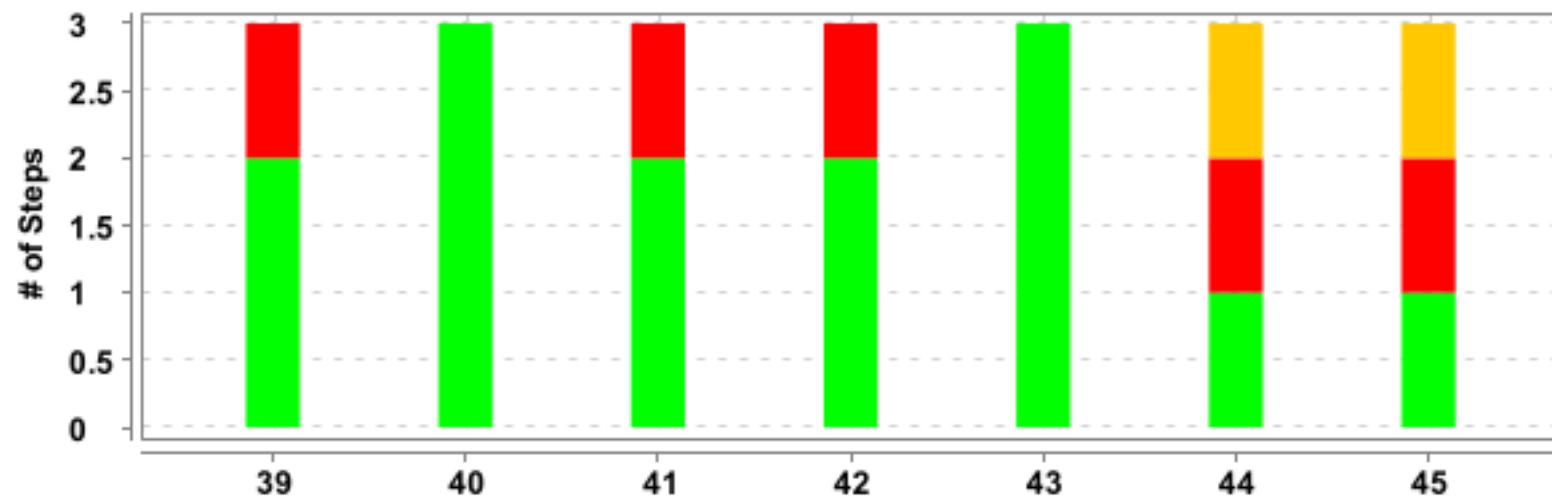


#	Feature Name	Scenario Name	T	P	F	S	Duration
39	<u>To test the functionality of program controller Negative</u>	<u>Check if Admin able to delete a program with valid LMS API, invalid programName</u>	3	2	1	0	0.150 s
40		<u>Check if Admin able to delete a program without Authorization</u>	3	3	0	0	0.146 s
41		<u>Check if Admin able to delete a program with valid program ID</u>	3	2	1	0	1.236 s
42		<u>Check if Admin able to delete a program with valid LMS API, invalid program ID</u>	3	2	1	0	0.149 s
43		<u>Check if Admin able to delete a program without Authorization</u>	3	3	0	0	0.149 s
44		<u>Check if Admin able to create a program with valid endpoint and request body with Authorization to be used for batch</u>	3	1	1	1	0.208 s
45		<u>Check if Admin able to create a program with valid endpoint and request body with Authorization to be used for batch *</u>	3	1	1	1	0.225 s


* The feature name and/or scenario name has been cropped to fit in the available space.

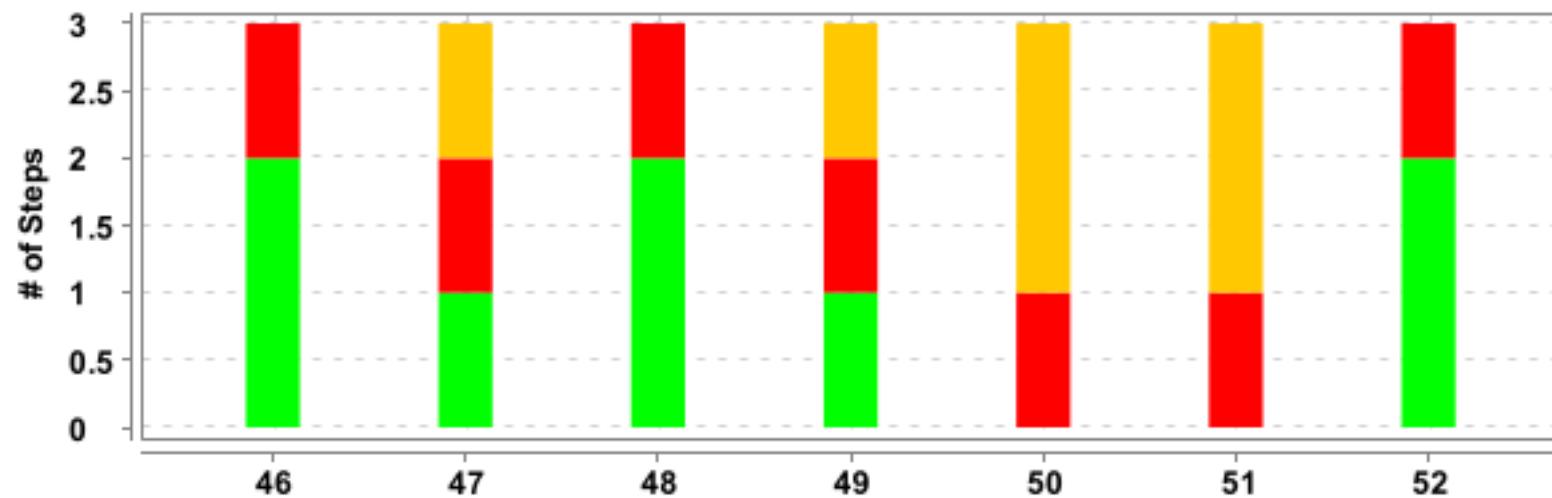

#	Feature Name	Scenario Name	T	P	F	S	Duration
46	<u>Negative scenario for User Module</u>	<u>Check if admin is able to retrieve all the available roles without Authorization</u>	3	2	1	0	0.168 s
47		<u>Check if admin is able to retrieve all the available roles with invalid End point</u>	3	1	1	1	0.005 s
48		<u>Check if admin able to retrieve all Admin without Authorization</u>	3	2	1	0	0.172 s
49		<u>Check if admin able to retrieve all Admin with invalid endpoint</u>	3	1	1	1	0.007 s
50		<u>Check if admin able to retrieve a Admin with valid Admin ID and invalid endpoint</u>	3	0	1	2	0.037 s
51		<u>Check if admin able to retrieve a Admin with valid Admin ID with No authorization</u>	3	0	1	2	0.004 s
52		<u>Check if Admin able to retrieve a Admin with invalid Admin ID</u>	3	2	1	0	0.205 s

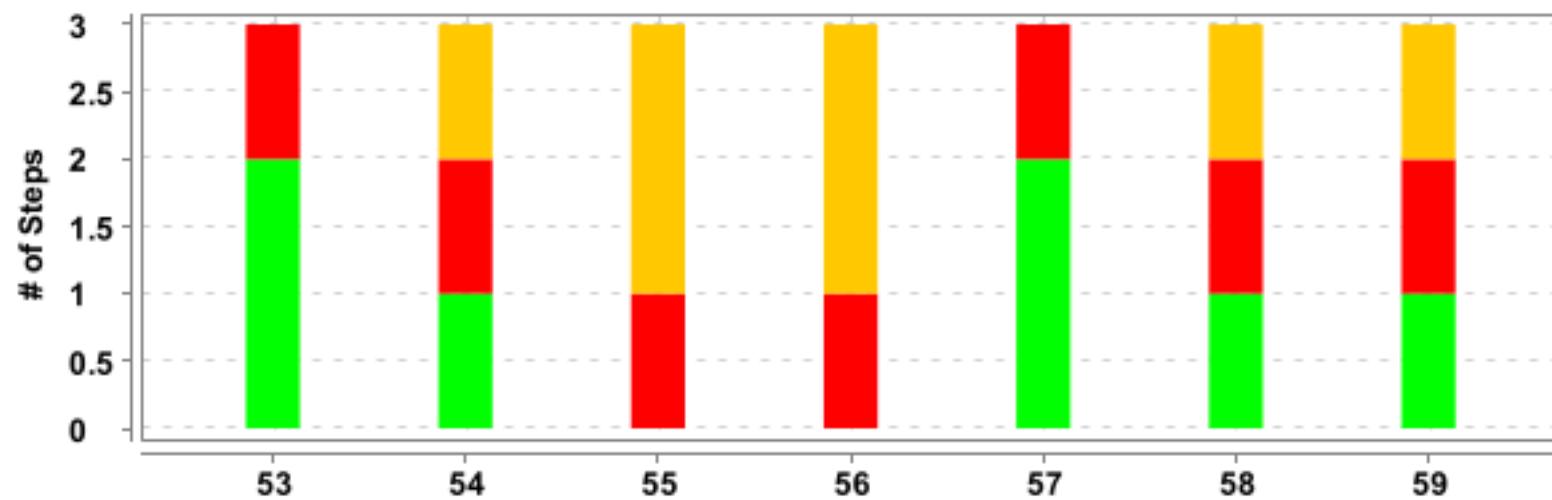


#	Feature Name	Scenario Name	T	P	F	S	Duration
53	<u>Negative scenario for User Module</u>	<u>Check if admin able to retrieve all Admins with roles with No authorization</u>	3	2	1	0	0.134 s
54		<u>Check if admin able to retrieve all Admins with roles with invalid endpoint</u>	3	1	1	1	0.004 s
55		<u>Check if admin is able to create a Admin with valid endpoint and invalid values in request body</u>	3	0	1	2	0.026 s
56		<u>Check if Admin able to create a Admin missing mandatory fields in request body</u>	3	0	1	2	0.023 s
57		<u>Check if admin able to create a new Admin with request body without authorization</u>	3	2	1	0	0.492 s
58		<u>Check if admin is able to get count of active and inactive Admins with invalid endpoint</u>	3	1	1	1	0.162 s
59		<u>Check if admin is able to get count of active and inactive Admins by invalid role ID</u>	3	1	1	1	0.031 s

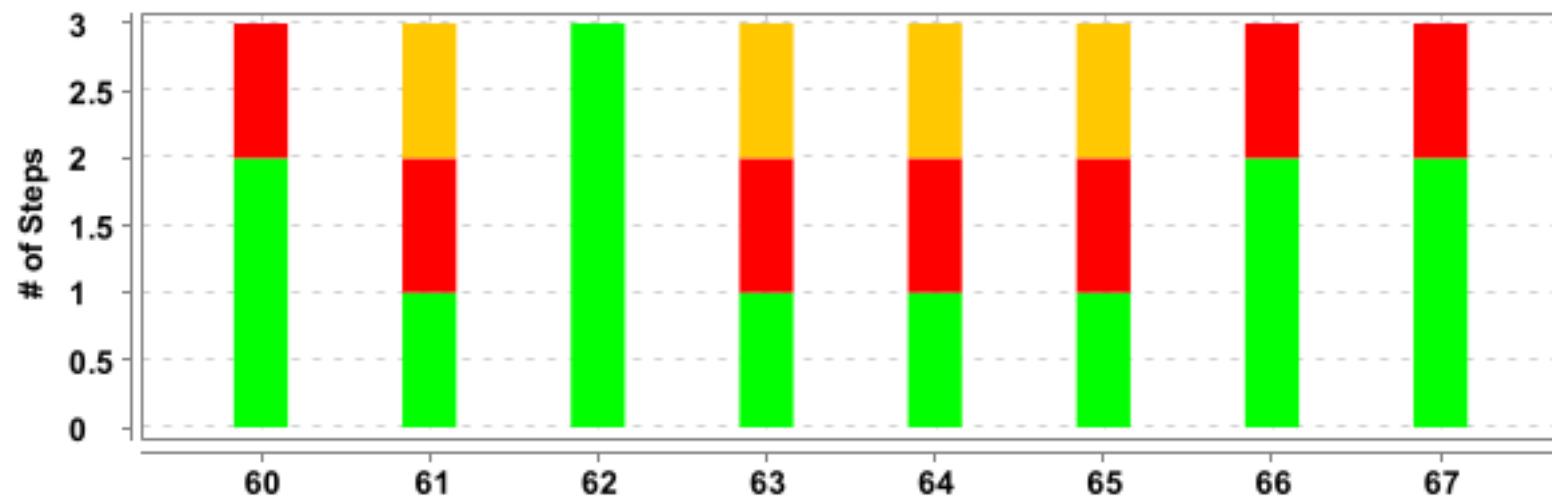


#	Feature Name	Scenario Name	T	P	F	S	Duration
60	<u>Negative scenario for User Module</u>	<u>Check if admin is able to get count of active and inactive Admins with no authorization</u>	3	2	1	0	0.157 s
61		<u>Check if admin able to retrieve all active Admins with invalid endpoint</u>	3	1	1	1	0.089 s
62		<u>Check if admin able to retrieve all active Admins with no authorization</u>	3	3	0	0	0.143 s
63		<u>Check if admin is able to get the Admins by program batches for invalid batch ID</u>	3	1	1	1	0.160 s
64		<u>Check if admin is able to get the Admins for invalid program Id</u>	3	1	1	1	0.164 s
65		<u>Check if admin is able to retreive Admins by invalid role ID</u>	3	1	1	1	0.255 s
66		<u>Check if admin is able to retrieve all Admins with filters with no authorization</u>	3	2	1	0	0.154 s

#	Feature Name	Scenario Name	T	P	F	S	Duration
67		<u><i>Check if admin is able to retrieve all Admins with filters with invalid endpoint</i></u>	3	2	1	0	0.098 s

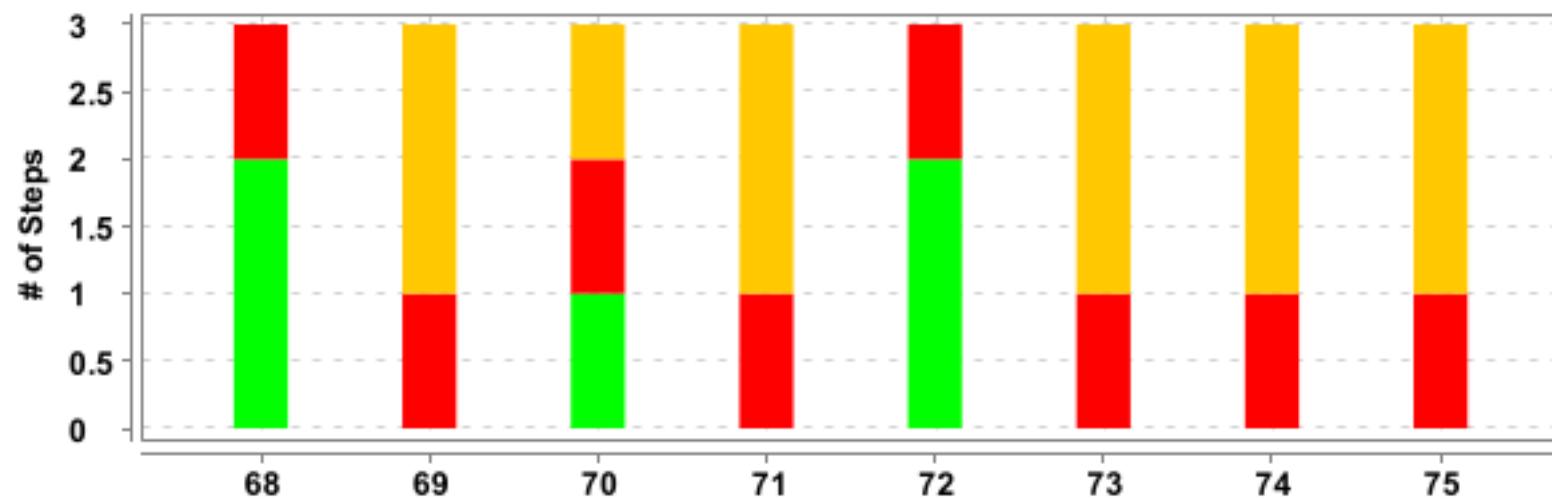


#	Feature Name	Scenario Name	T	P	F	S	Duration
68	<u>Negative scenario for User Module</u>	<u>Check if admin is able to update Admin details with No authorization</u>	3	2	1	0	0.260 s
69		<u>Check if admin is able to update the Admin login status by Admin ID with invalid request body</u>	3	0	1	2	0.005 s
70		<u>Check if admin is able to update the Admin login status by Admin ID with invalid AdminId</u>	3	1	1	1	0.020 s
71		<u>Check if admin is able to update the Admin login status by Admin ID with NoAuth</u>	3	0	1	2	0.010 s
72		<u>Check if admin is able to delete Admin with invalid Admin ID</u>	3	2	1	0	0.164 s
73		<u>Check if admin is able to delete the Admin with NoAuth</u>	3	0	1	2	0.005 s
74		<u>Check if admin is able to delete the Admin with invalid endpoint</u>	3	0	1	2	0.006 s

#	Feature Name	Scenario Name	T	P	F	S	Duration
75		<i>Check if admin is able to delete the Admin with invalid endpoint</i>	3	0	1	2	0.005 s

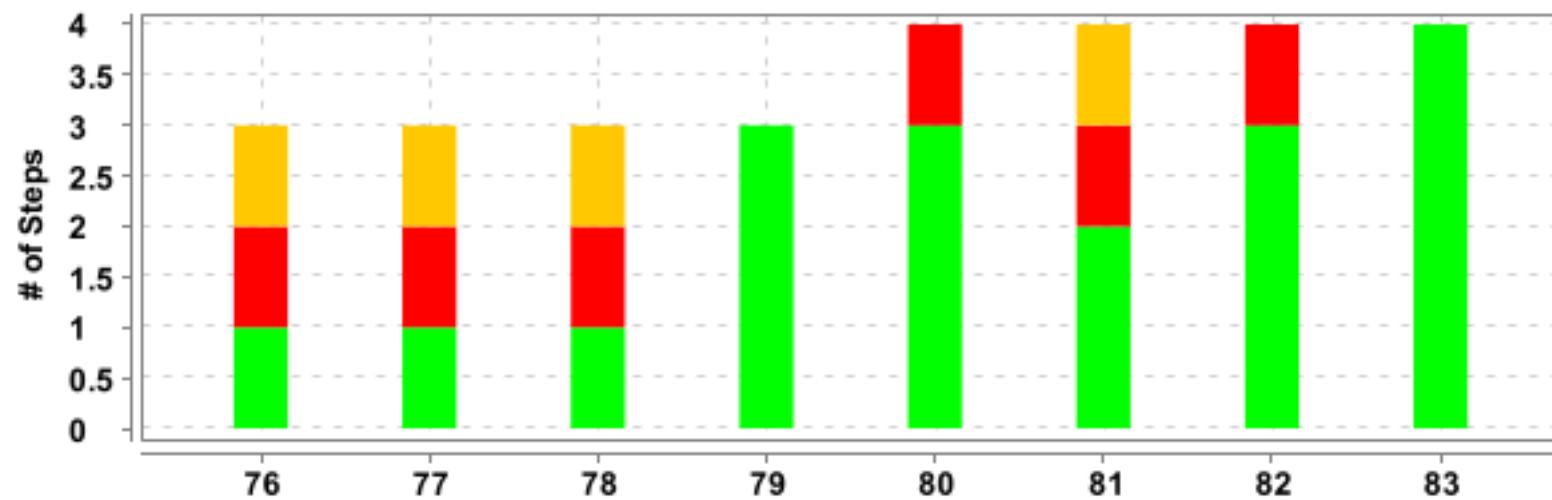


#	Feature Name	Scenario Name	T	P	F	S	Duration
76	<u>Negative scenario for User Controller</u>	<u>Check if admin is able to retrieve all Admins with assigned program batches with No Authorization</u>	3	1	1	1	0.141 s
77		<u>Check if admin is able to retrieve assigned program batches for invalid AdminId</u>	3	1	1	1	0.149 s
78		<u>Check if admin is able to retrieve assigned program batches for valid AdminId with No authorization</u>	3	1	1	1	0.012 s
79	<u>User Login Post request</u>	<u>Check if Admin able to generate token with valid credential</u>	3	3	0	0	0.324 s
80	<u>program controller Positive</u>	<u>Check if Admin able to create a program with valid endpoint and request body with Authorization</u>	4	3	1	0	0.545 s
81		<u>Check if Admin able to retrieve all programs with valid Endpoint</u>	4	2	1	1	0.267 s
82		<u>Check if Admin able to retrieve a program with valid program ID</u>	4	3	1	0	0.472 s


#	Feature Name	Scenario Name	T	P	F	S	Duration
83		<i>Check if Admin able to retrieve all programs with users and with valid Endpoint</i>	4	4	0	0	0.541 s

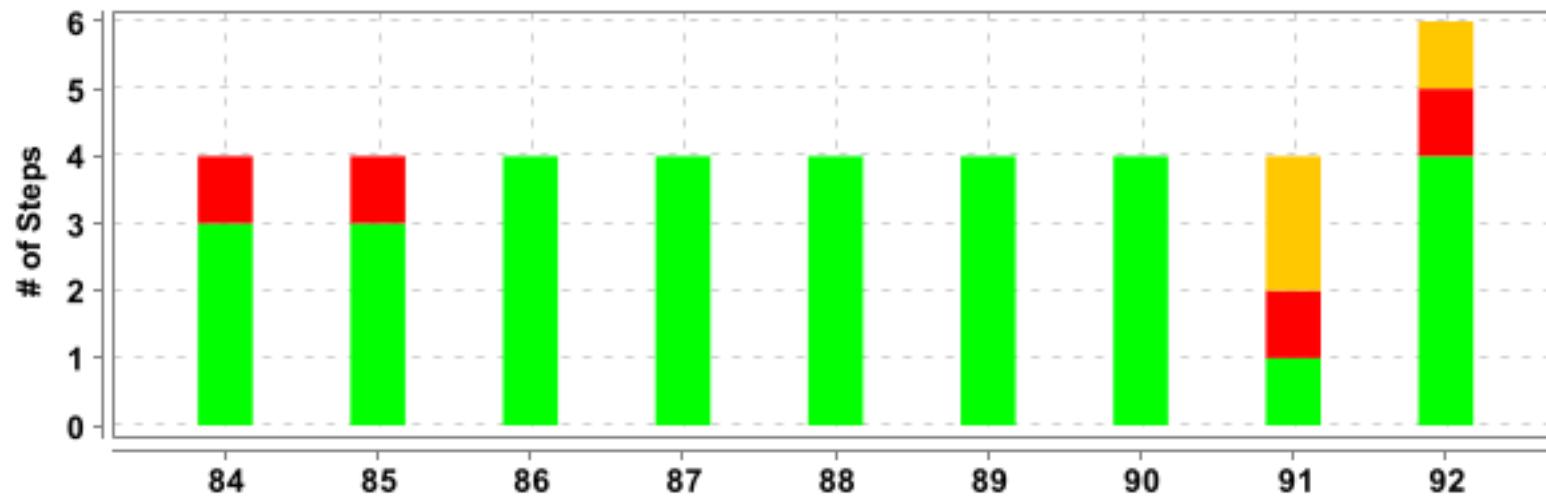

#	Feature Name	Scenario Name	T	P	F	S	Duration
84	<u>program controller Positive</u>	<u>Check if Admin able to update a program with Valid program Name and request body</u>	4	3	1	0	0.485 s
85		<u>Check if Admin able to update a program with valid programID endpoint and valid request body</u>	4	3	1	0	0.535 s
86	<u>Program Batch module</u>	<u>Check if admin able to retrieve all batches with invalid Endpoint</u>	4	4	0	0	0.691 s
87		<u>Check if admin able to retrieve a batch with invalid endpoint</u>	4	4	0	0	0.550 s
88		<u>Check if admin able to retrieve a batch with invalid endpoint</u>	4	4	0	0	0.430 s
89		<u>Check if admin able to retrieve a batch with invalid endpoint</u>	4	4	0	0	0.440 s
90		<u>Check if admin able to update a Batch with invalid endpoint</u>	4	4	0	0	0.514 s
91		<u>Check if admin able to delete a Batch with invalid endpoint</u>	4	1	1	2	0.258 s
92		<u>Check if admin able to create a Batch with valid endpoint and request body (non existing values)</u>	6	4	1	1	0.516 s

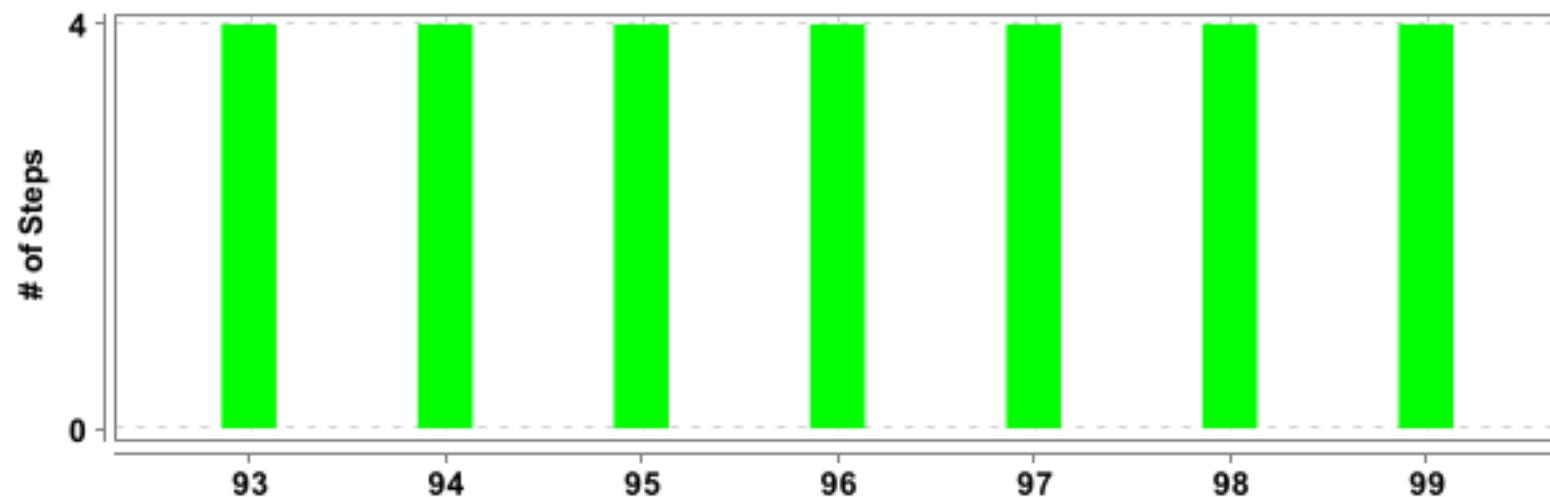


#	Feature Name	Scenario Name	T	P	F	S	Duration
93	<u>Program Batch module</u>	<u>Check if admin able to create a Batch with valid endpoint and request body (existing value in Batch Name)</u>	4	4	0	0	0.512 s
94		<u>Check if admin able to create a Batch missing mandatory fields in request body</u>	4	4	0	0	0.462 s
95		<u>Check if admin able to create a batch with invalid data in request body</u>	4	4	0	0	2.659 s
96		<u>Check if admin able to create a batch with inactive program ID</u>	4	4	0	0	0.513 s
97		<u>Check if admin able to retrieve a batch with invalid BATCH ID</u>	4	4	0	0	0.412 s
98		<u>Check if admin able to retrieve a batch with invalid BATCH Name</u>	4	4	0	0	0.407 s
99		<u>Check if admin able to retrieve a batch with invalid Program Id</u>	4	4	0	0	0.497 s

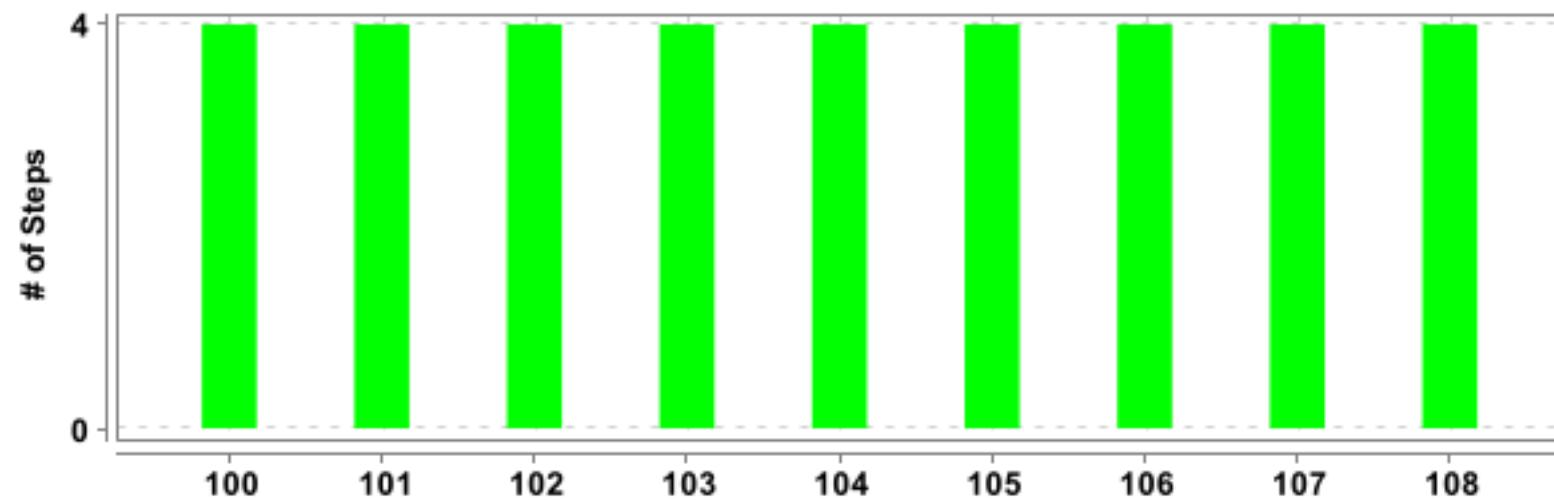

#	Feature Name	Scenario Name	T	P	F	S	Duration
10-0	<u>Program Batch module</u>	<u>Check if admin able to update a Batch with invalid batchID and mandatory fields in request body</u>	4	4	0	0	0.505 s
10-1		<u>Check if admin able to update a Batch with invalid batchID and missing mandatory fields request body</u>	4	4	0	0	0.488 s
10-2		<u>Check if admin able to retrieve all batches with valid LMS API</u>	4	4	0	0	0.737 s
10-3		<u>Check if admin able to retrieve all batches with search string</u>	4	4	0	0	0.557 s
10-4		<u>Check if admin able to retrieve a batch with valid BATCH ID</u>	4	4	0	0	0.415 s
10-5		<u>Check if admin able to retrieve a batch after deleting the batch</u>	4	4	0	0	0.587 s
10-6		<u>Check if admin able to retrieve a batch with valid BATCH NAME</u>	4	4	0	0	0.433 s


#	Feature Name	Scenario Name	T	P	F	S	Duration
10-7		<u><i>Check if admin able to retrieve a batch after deleting the batch using batch name</i></u>	4	4	0	0	0.554 s
10-8		<u><i>Check if admin able to retrieve a batch with valid Program ID</i></u>	4	4	0	0	0.407 s

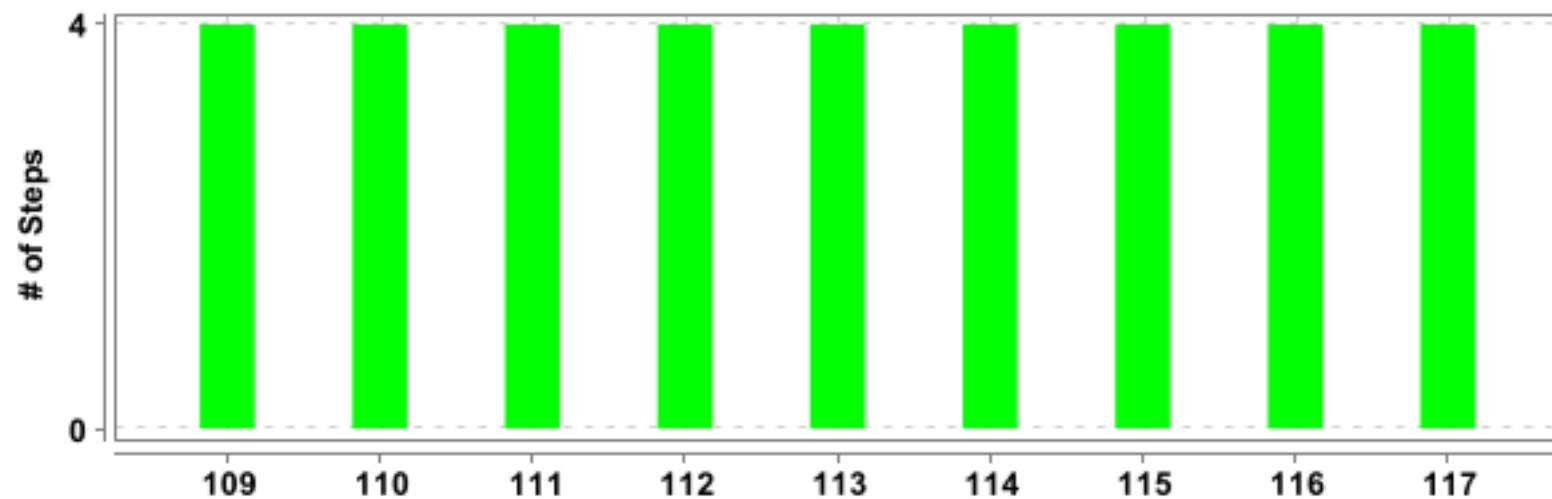

#	Feature Name	Scenario Name	T	P	F	S	Duration
10-9	<u>Program Batch module</u>	<u>Check if admin able to update a Batch with valid batchID and mandatory fields in request body</u>	4	4	0	0	0.467 s
11-0	<u>User Module Positive request</u>	<u>Check if admin is able to create a new Admin with valid endpoint and request body with mandatory fields</u>	4	4	0	0	0.900 s
11-1		<u>Check if admin able to create a new Admin with valid endpoint and request body with mandatory and additional *</u>	4	4	0	0	2.780 s
11-2		<u>Check if admin is able to retrieve all the available roles(all roles)</u>	4	4	0	0	0.774 s
11-3		<u>Check if admin able to retrieve a Admin with valid Admin ID</u>	4	4	0	0	0.432 s
11-4		<u>Check if admin able to retrieve all Admins with roles</u>	4	4	0	0	0.413 s
11-5		<u>Check if admin is able to get count of active and inactive Admins</u>	4	4	0	0	0.424 s


* The feature name and/or scenario name has been cropped to fit in the available space.

#	Feature Name	Scenario Name	T	P	F	S	Duration
11-6		<u>Check if admin able to retrieve all active Admins</u>	4	4	0	0	1.043 s
11-7		<u>Check if admin is able to assign Admin to with program/batch by Admin Id</u>	4	4	0	0	0.461 s

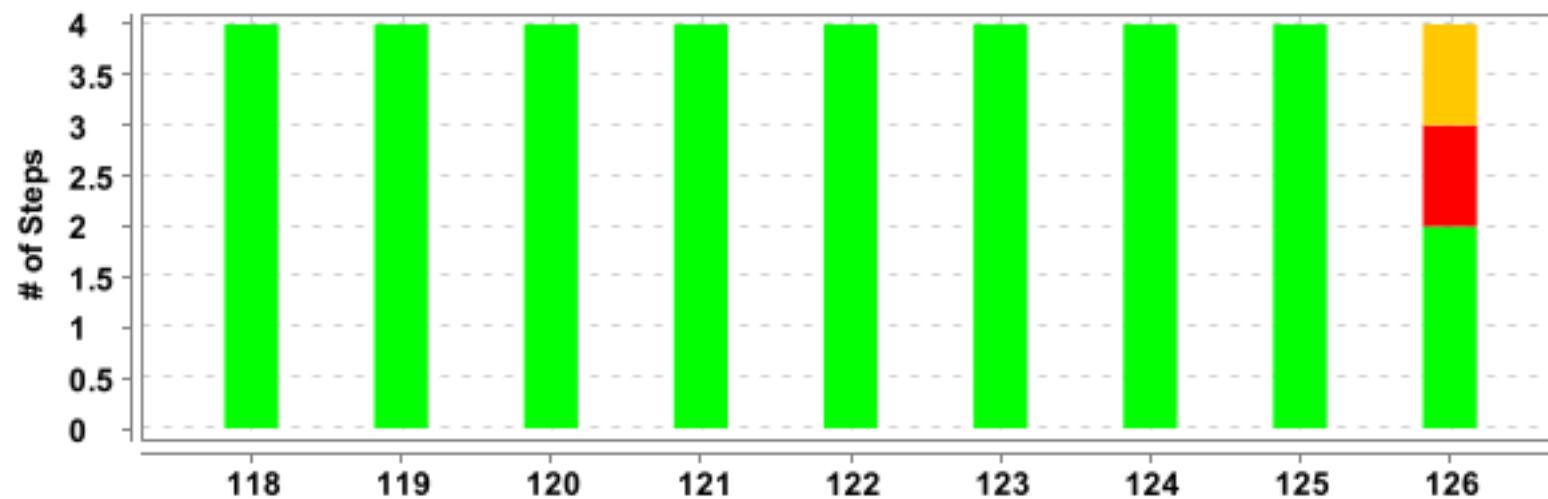

#	Feature Name	Scenario Name	T	P	F	S	Duration
11-8	<u>User Module Positive request</u>	<u>Check if admin is able to get the Admins by program batches for valid batch ID</u>	4	4	0	0	0.465 s
11-9		<u>Check if admin is able to get the Admins for valid program Id</u>	4	4	0	0	0.415 s
12-0		<u>Check if admin is able to retrieve Admins by valid role ID</u>	4	4	0	0	0.511 s
12-1		<u>Check if admin is able to retrieve all Admins with filters</u>	4	4	0	0	0.761 s
12-2		<u>Check if admin is able to update Admin details with Admin id and mandatory fields</u>	4	4	0	0	0.516 s
12-3		<u>Check if admin is able to update role status of a Admin with valid Admin id</u>	4	4	0	0	0.459 s
12-4		<u>Check if admin is able to update User by roleId with valid Admin id</u>	4	4	0	0	0.437 s

#	Feature Name	Scenario Name	T	P	F	S	Duration
12-5		<i>Check if admin is able to update the Admin login status by Admin ID</i>	4	4	0	0	0.431 s
12-6	<u>User Controller Positive</u>	<i>admin is able to retreive assigned program batches for valid AdminId</i>	4	2	1	1	0.407 s

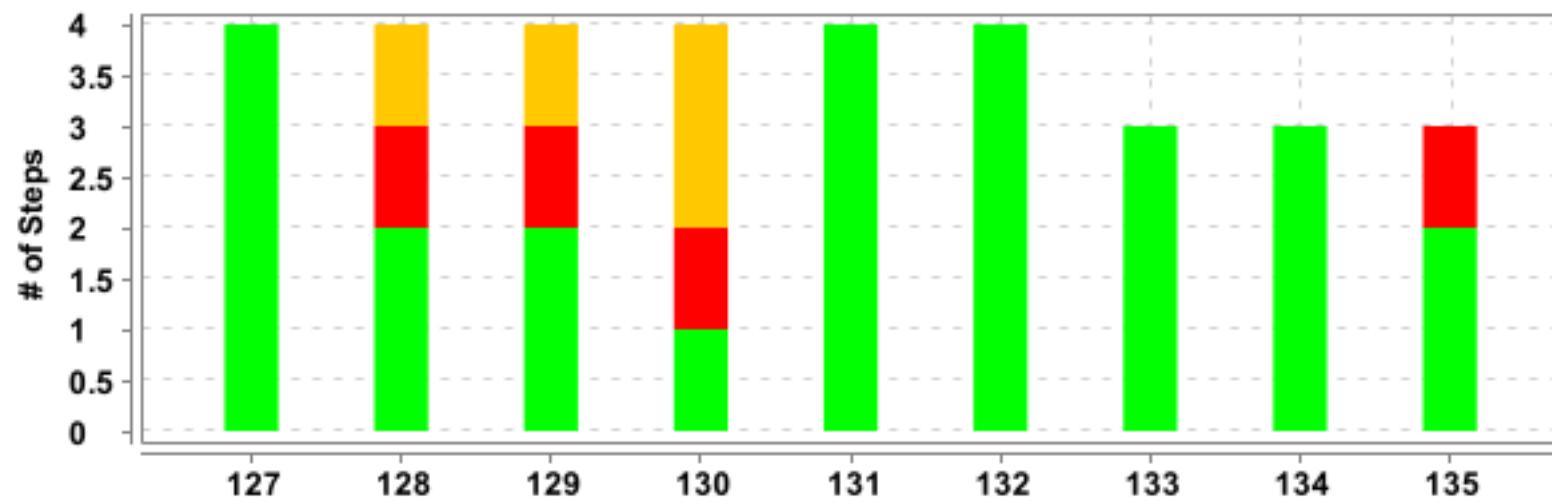


#	Feature Name	Scenario Name	T	P	F	S	Duration
12-7	<u>User Controller Positive</u>	<u>admin is able to retrieve all Admins with assigned program batches</u>	4	4	0	0	0.481 s
12-8	<u>Delete Request for all modules</u>	<u>Check if admin is able to delete the program batch for a Admin</u>	4	2	1	1	0.415 s
12-9		<u>Check if Admin able to delete a Admin with valid Admin Id</u>	4	2	1	1	0.278 s
13-0		<u>Check if admin able to delete a Batch with valid Batch ID</u>	4	1	1	2	0.256 s
13-1		<u>Check if Admin able to delete a program with valid programName</u>	4	4	0	0	0.398 s
13-2		<u>Check if Admin able to delete a program with valid program ID</u>	4	4	0	0	0.427 s
13-3	<u>User Logout</u>	<u>Check if Admin able to logout with valid endpoint</u>	3	3	0	0	0.138 s
13-4	<u>User Logout Negative</u>	<u>Check if Admin able to logout with invalid endpoint</u>	3	3	0	0	0.104 s

#	Feature Name	Scenario Name	T	P	F	S	Duration
13-5		<i>Check if Admin able to logout with valid endpoint with <u>NoAuth</u></i>	3	2	1	0	0.137 s

User Login Negative request




Check if Admin able to generate token with invalid endpoint

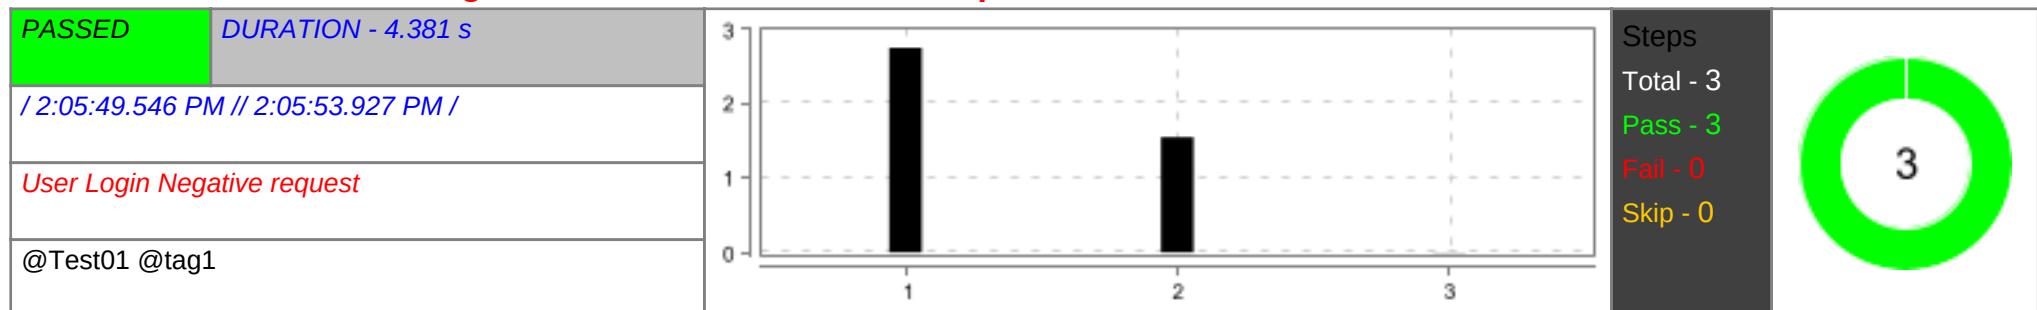


#	Step / Hook Details	Status	Duration
1	Given Add UserLogin Payload	PASSED	2.748 s
2	When Admin calls Post Https method with invalid endpoint	PASSED	1.548 s
3	Then Admin receives 401 unauthorized	PASSED	0.005 s

Check if Admin able to generate token with invalid credentials

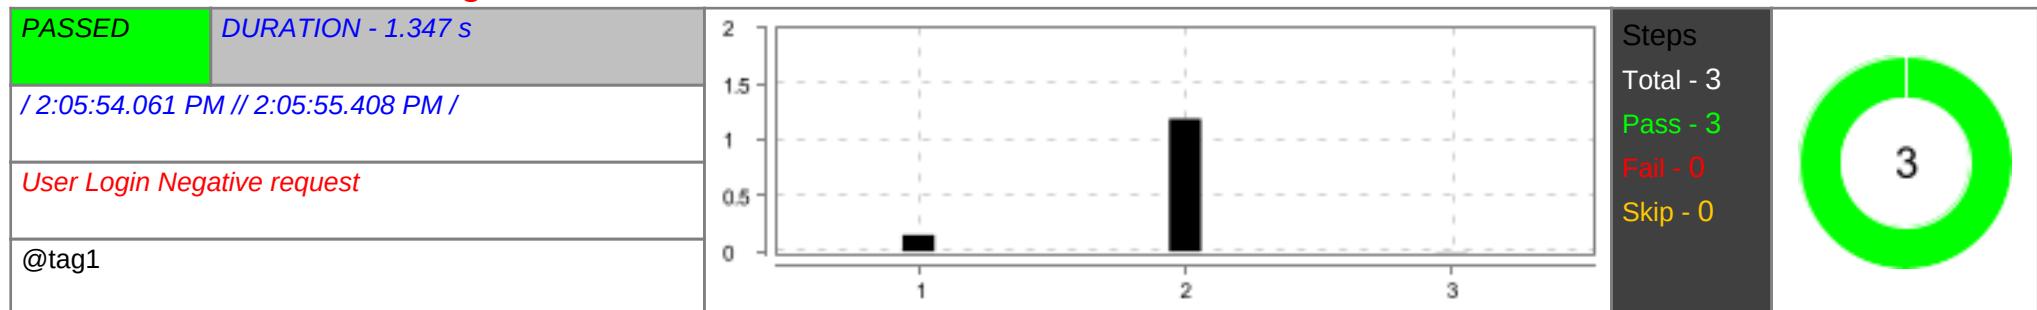


#	Step / Hook Details	Status	Duration
1	Given Admin creates request with invalid credentials	PASSED	0.148 s
2	When Admin calls Post Https method with valid endpoint	PASSED	1.188 s
3	Then Admin receives 400 Bad request	PASSED	0.004 s

To test the functionality of program controller Negative


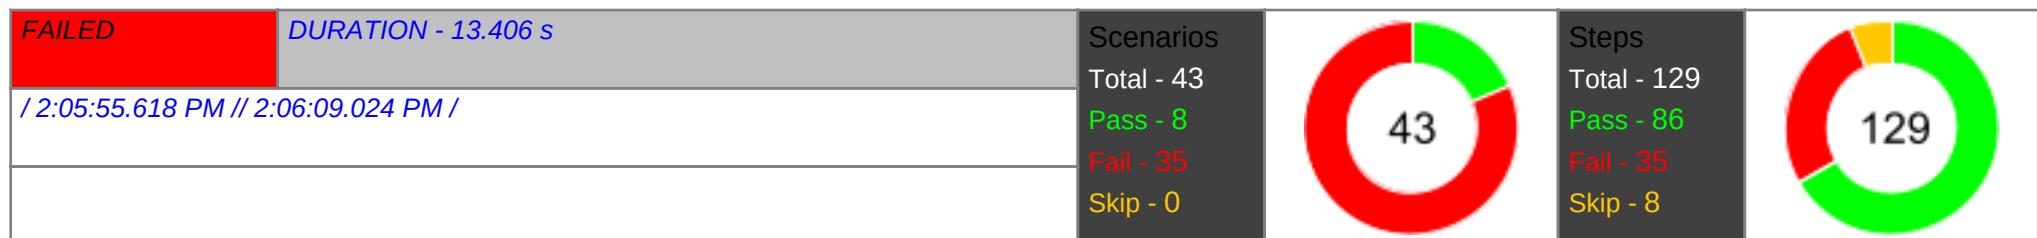


Check if Admin able to create a program with valid endpoint and request body with Authorization

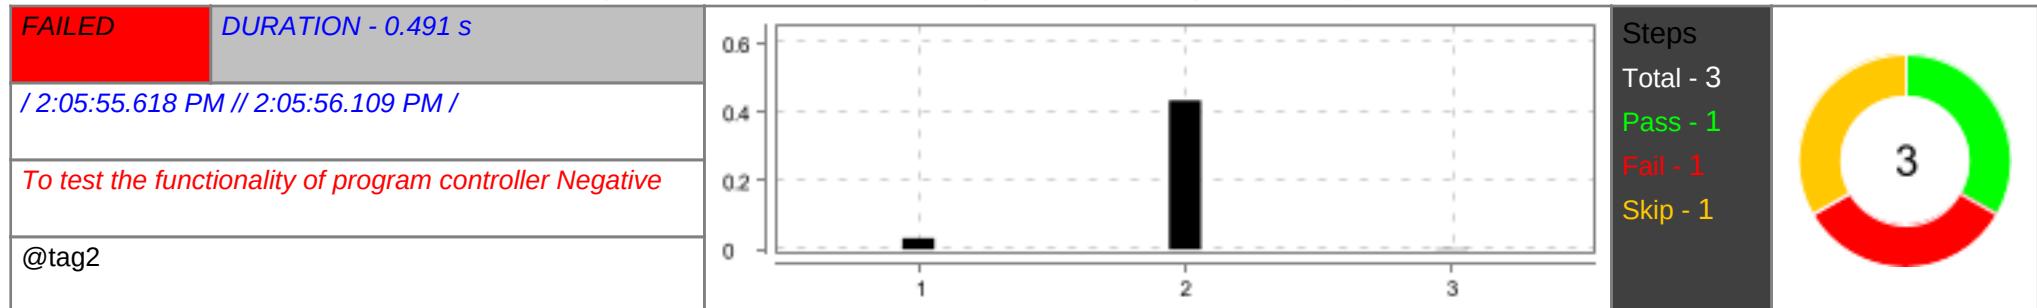



#	Step / Hook Details	Status	Duration
1	Given Admin creates POST Request for the LMS with request body	PASSED	0.032 s
2	When Admin sends HTTPS Request and request Body with endpoint java.lang.NumberFormatException: Cannot parse null string at java.base/java.lang.Integer.parseInt(Integer.java:630) at java.base/java.lang.Integer.parseInt(Integer.java:786) at api.stepdefinitions.ProgramPost.admin_sends_https_request_and_request_body_with_endpoint(ProgramPost.java:253) at ?.Admin sends HTTPS Request and request Body with endpoint(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:10) * Not displayable characters are replaced by '?'.	FAILED	0.434 s
3	Then Admin receives 201 Created Status with response body	SKIPPED	0.002 s

Check if Admin able to create a program with valid endpoint and request body without Authorization

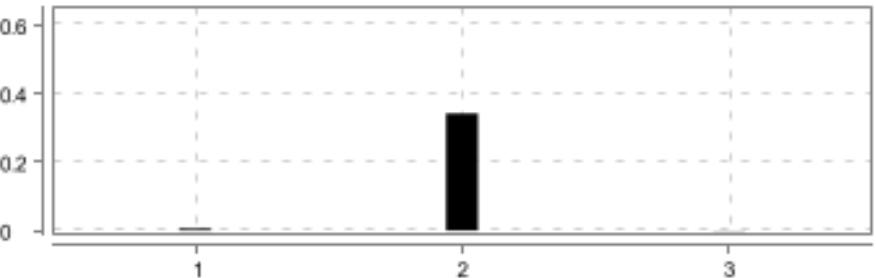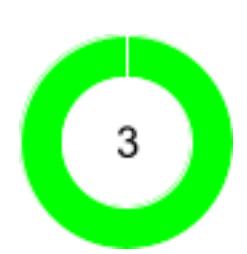PASSED	DURATION - 0.356 s		Steps Total - 3 Pass - 3 Fail - 0 Skip - 0	
/ 2:05:56.150 PM // 2:05:56.506 PM /				
To test the functionality of program controller Negative				
@tag2				


#	Step / Hook Details	Status	Duration
1	Given Admin creates POST Request for the LMS with request body	PASSED	0.006 s
2	When Admin sends HTTPS Request without authorization and request Body with endpoint	PASSED	0.342 s
3	Then Admin receives 401 Unauthorized	PASSED	0.001 s

Check if Admin able to create a program with invalid endpoint

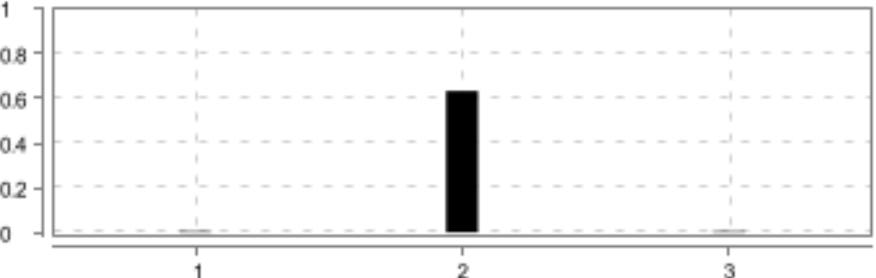FAILED	DURATION - 0.649 s		Steps Total - 3 Pass - 2 Fail - 1 Skip - 0	
/ 2:05:56.541 PM // 2:05:57.190 PM /				
To test the functionality of program controller Negative				
@tag2				


#	Step / Hook Details	Status	Duration
1	Given Admin creates POST Request for the LMS with request body	PASSED	0.005 s
2	When Admin sends HTTPS Request with invalid endpoint and request Body with endpoint	PASSED	0.633 s
3	Then Admin receives 404 not found Status with message and boolean success details java.lang.AssertionError: expected:<404> but was:<401> at org.junit.Assert.failAssert.java:89) at org.junit.Assert.failNotEqualsAssert.java:835) at org.junit.Assert.assertEqualsAssert.java:647) at org.junit.Assert.assertEqualsAssert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_not_found_status_with_message_and_boolean_success_details(ProgramPost.java:303) at ?.Admin receives 404 not found Status with message and boolean success details(file:///C:/Users/shanj/git/Team05_APITesters/ Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:23) * Not displayable characters are replaced by '?'.	FAILED	0.004 s

Check if Admin able to create a program with already existing program name

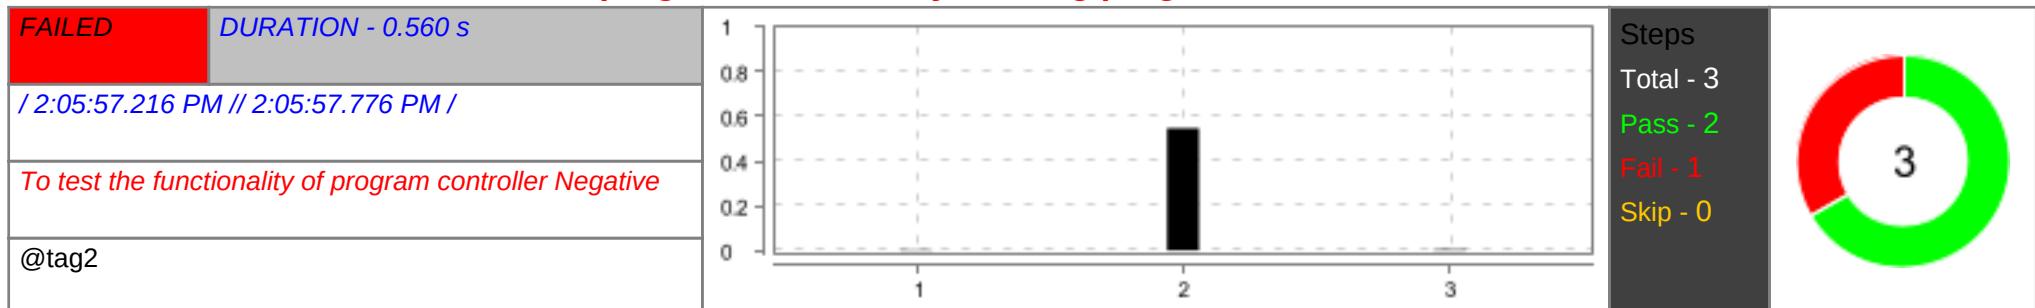


#	Step / Hook Details	Status	Duration
1	Given Admin creates POST Request for the LMS with request body	PASSED	0.003 s
2	When Admin sends HTTPS Request with already existing program name and request Body with endpoint	PASSED	0.547 s
3	Then Admin receives 400 Bad Request Status with message and boolean success details java.lang.AssertionError: expected:<400> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_bad_request_status_with_message_and_boolean_success_details(ProgramPost.java:319) at ?.Admin receives 400 Bad Request Status with message and boolean success details(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:29) * Not displayable characters are replaced by '?'.	FAILED	0.004 s

Check if Admin able to create a program with invalid method

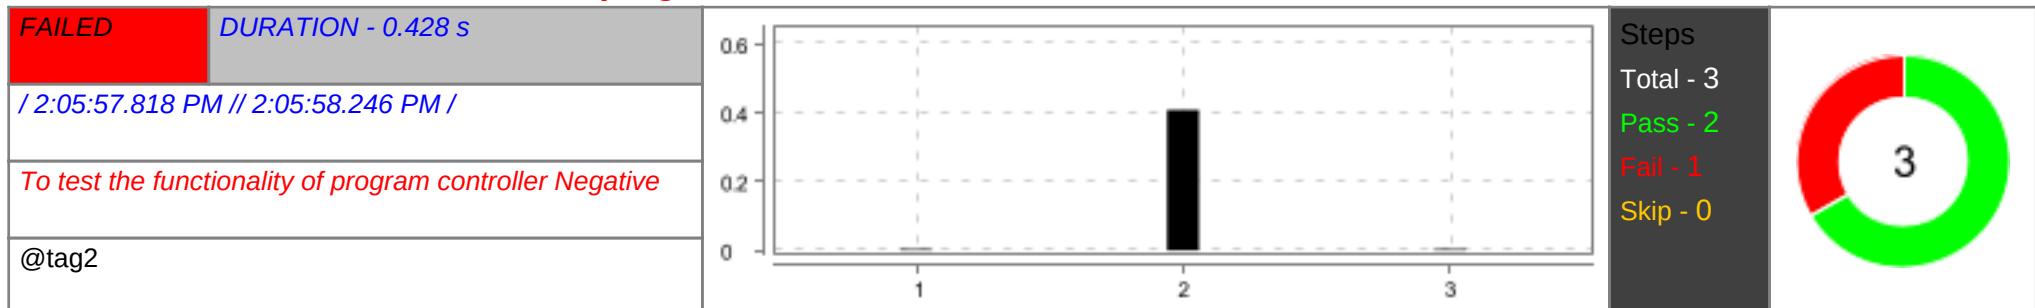


#	Step / Hook Details	Status	Duration
1	Given Admin creates POST Request for the LMS with request body	PASSED	0.004 s
2	When Admin sends HTTPS Request with invalid method and request Body with endpoint	PASSED	0.409 s
3	Then Admin receives 405 Method Not Allowed java.lang.AssertionError: expected:<405> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_method_not_allowed(ProgramPost.java:335) at ?.Admin receives 405 Method Not Allowed(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:35) * Not displayable characters are replaced by '?'.	FAILED	0.004 s

Check if Admin able to create a program with invalid request body

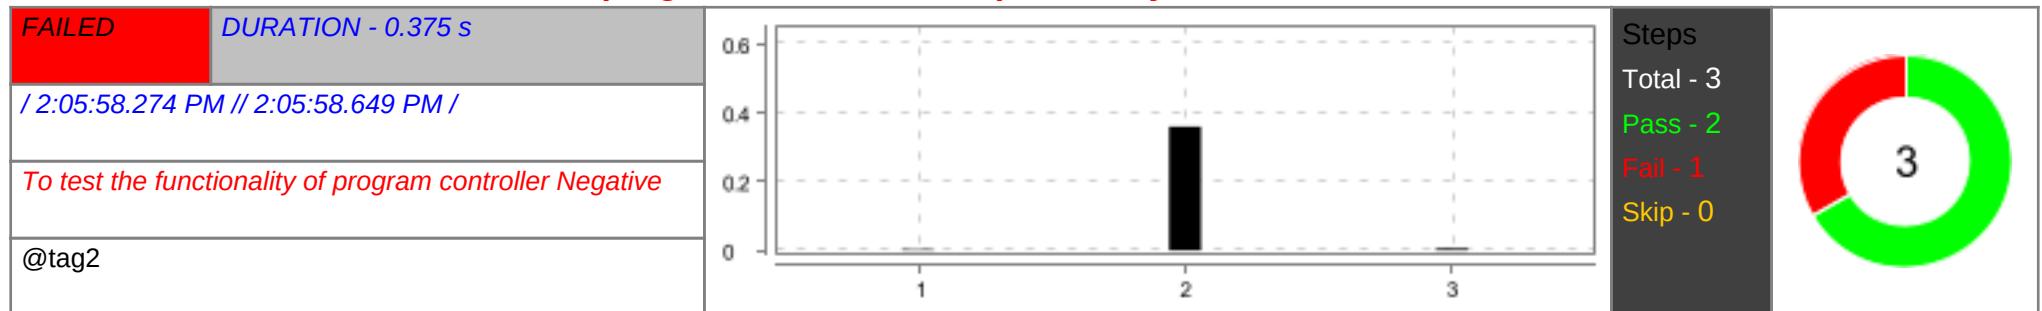

#	Step / Hook Details	Status	Duration
1	Given Admin creates POST Request for the LMS with request body	PASSED	0.003 s
2	When Admin sends HTTPS Request with invalid request body and request Body with endpoint	PASSED	0.360 s
3	Then Admin receives 400 Bad Request Status java.lang.AssertionError: expected:<400> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_bad_request_status(ProgramPost.java:351) at ?.Admin receives 400 Bad Request Status(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:41) * Not displayable characters are replaced by '?'.	FAILED	0.006 s

Check if Admin able to create a program with missing values in the request body

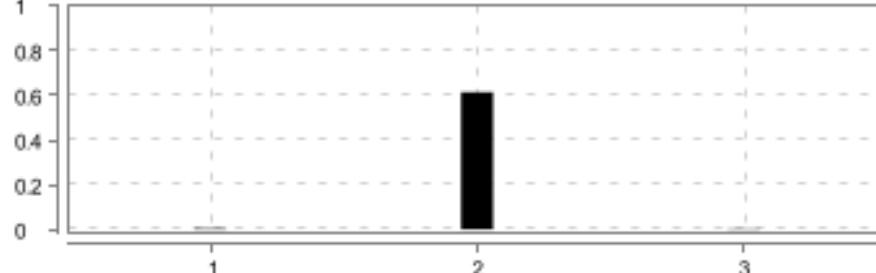
FAILED	DURATION - 0.625 s	 <p>A bar chart with three steps labeled 1, 2, and 3. Step 1 has a very small black bar near zero. Step 2 has a tall black bar reaching approximately 0.6. Step 3 has a very small black bar near zero.</p>	Steps Total - 3 Pass - 2 Fail - 1 Skip - 0	3
/ 2:05:58.672 PM // 2:05:59.297 PM /				

To test the functionality of program controller Negative

@tag2

#	Step / Hook Details	Status	Duration
1	Given Admin creates POST Request for the LMS with request body	PASSED	0.004 s
2	When Admin sends HTTPS Request with missing values and request Body with endpoint	PASSED	0.614 s
3	Then Admin receives 400 Bad Request Status code java.lang.AssertionError: expected:<400> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_bad_request_status_code(ProgramPost.java:367) at ?.Admin receives 400 Bad Request Status code(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:47) * Not displayable characters are replaced by '?'.	FAILED	0.003 s

Check if Admin able to create a program with missing additional field

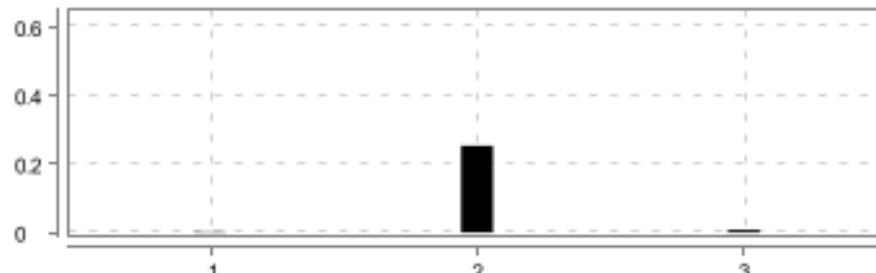FAILED	DURATION - 0.268 s	 <p>A bar chart with three steps labeled 1, 2, and 3. Step 1 has a very small black bar near zero. Step 2 has a tall black bar reaching approximately 0.25. Step 3 has a very small black bar near zero.</p>	Steps Total - 3 Pass - 2 Fail - 1 Skip - 0	3
/ 2:05:59.317 PM // 2:05:59.585 PM /				


To test the functionality of program controller Negative

@tag2

#	Step / Hook Details	Status	Duration
1	Given Admin creates POST Request for the LMS with request body	PASSED	0.002 s


#	Step / Hook Details	Status	Duration
2	When Admin sends HTTPS Request with missing additional field and request Body with endpoint	PASSED	0.254 s
3	<p>Then Admin receives 400 Bad Request</p> <pre>java.lang.AssertionError: expected:<400> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_bad_request(ProgramPost.java:383) at ?.Admin receives 400 Bad Request(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:53) * Not displayable characters are replaced by '?'.</pre>	FAILED	0.008 s

Check if Admin able to retrieve all programs with valid Endpoint

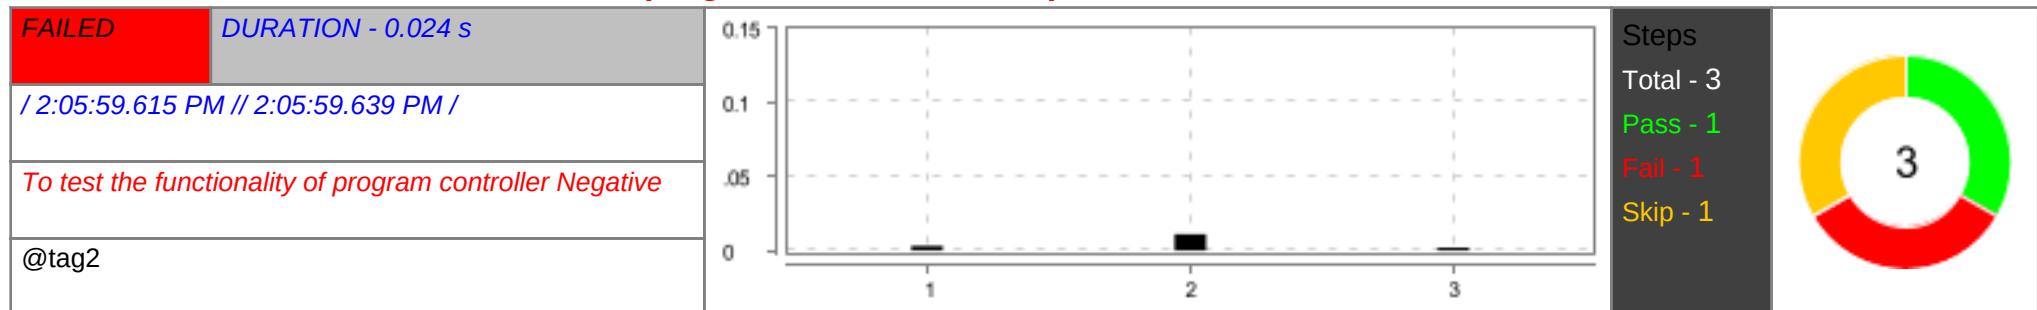


#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request for the LMS API	PASSED	0.003 s
2	<p>When Admin sends HTTPS Request with endpoint</p> <pre>java.lang.NullPointerException: Cannot invoke "io.restassured.specification.RequestSpecification.when()" because "this.request" is null at api.stepdefinitions.UserModule.admin_sends_https_request_with_endpoint(UserModule.java:65) at ?.Admin sends HTTPS Request with endpoint(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:58) * Not displayable characters are replaced by '?'.</pre>	FAILED	0.011 s
3	Then Admin receives 200 OK Status with response body.	SKIPPED	0.002 s

Check if Admin able to retrieve all programs with invalid Endpoint

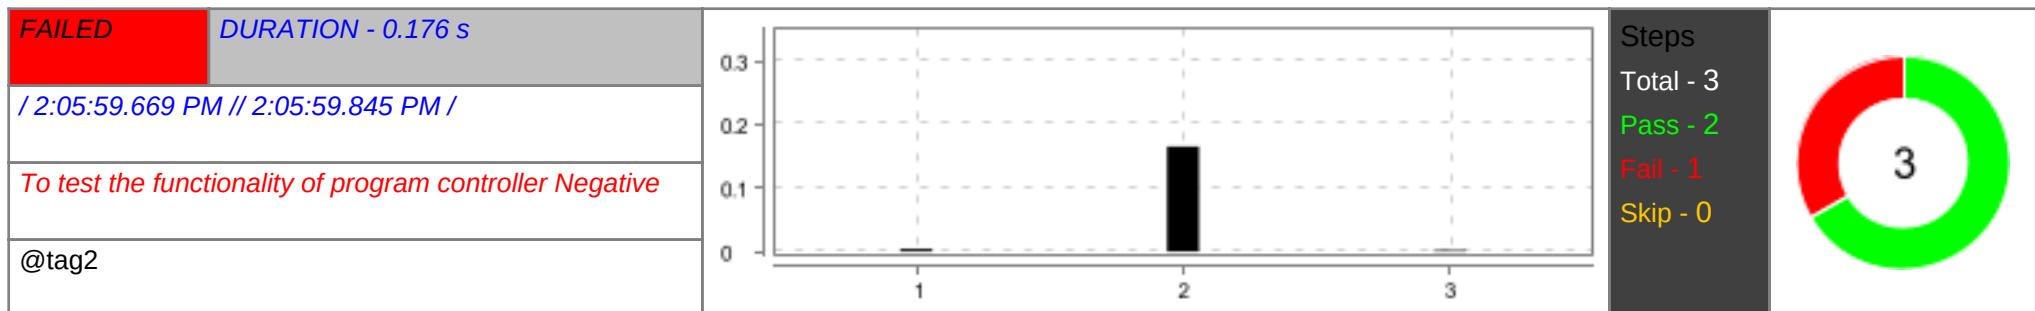

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request for the LMS API	PASSED	0.004 s
2	When Admin sends HTTPS Request with invalid Endpoint	PASSED	0.165 s
3	<p>Then Admin receives 404 not found Status with error message</p> <pre>java.lang.AssertionError: expected:<404> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_not_found_status_with_error_message(ProgramPost.java:423) at ?.Admin receives 404 not found Status with error message(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:65)</pre> <p>* Not displayable characters are replaced by '?'.</p>	FAILED	0.002 s


Check if Admin able to retrieve all programs with invalid Method

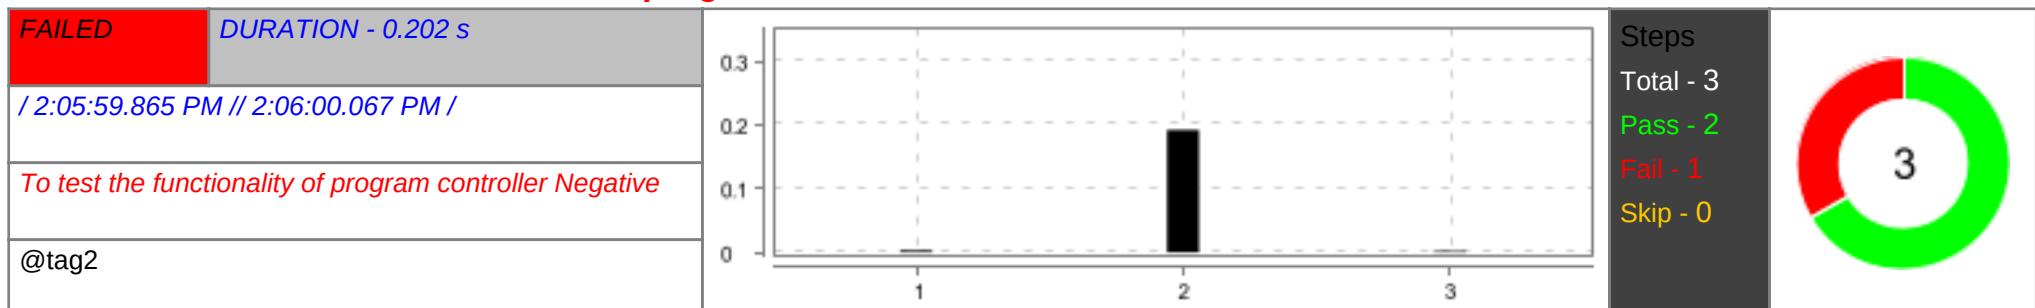

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request for the LMS API	PASSED	0.003 s
2	When Admin sends HTTPS Request with invalid Method and endpoint	PASSED	0.192 s
3	Then Admin receives 405 Method Not Allowed status code	FAILED	0.002 s


#	Step / Hook Details	Status	Duration
	<pre>java.lang.AssertionError: expected:<405> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_method_not_allowed_status_code(ProgramPost.java:438) at ?.Admin receives 405 Method Not Allowed status code(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:71) * Not displayable characters are replaced by '?'.</pre>		

Check if Admin able to retrieve all programs without Authorization

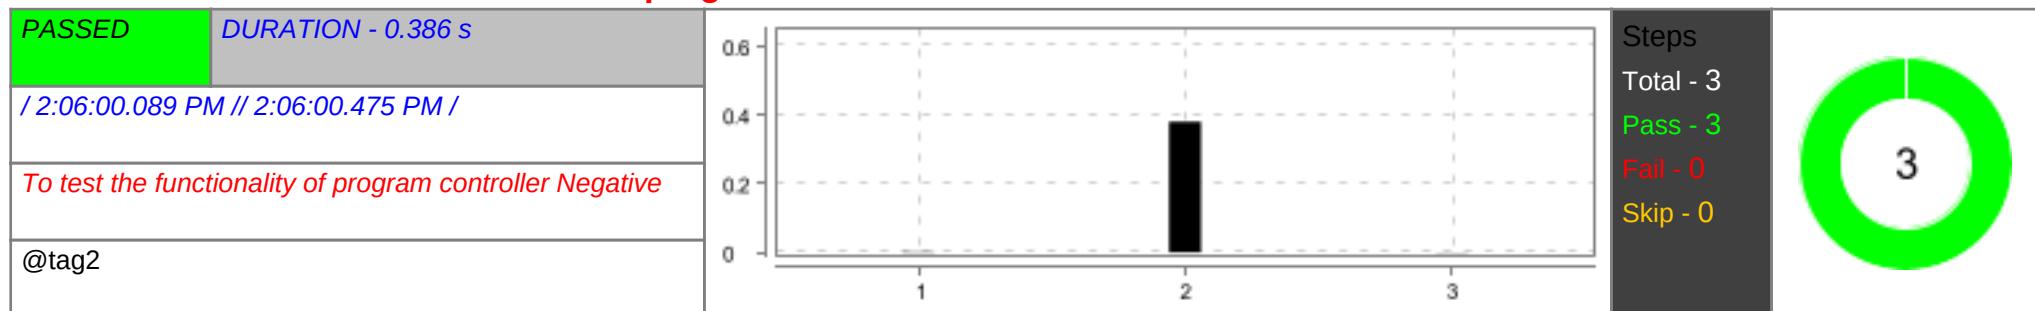


#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request for the LMS API	PASSED	0.002 s
2	When Admin sends HTTPS Request without Authorization with endpoint	PASSED	0.380 s
3	Then Admin receives 401 Status with response body as Unauthorized	PASSED	0.001 s

Check if Admin able to retrieve a program with valid program ID

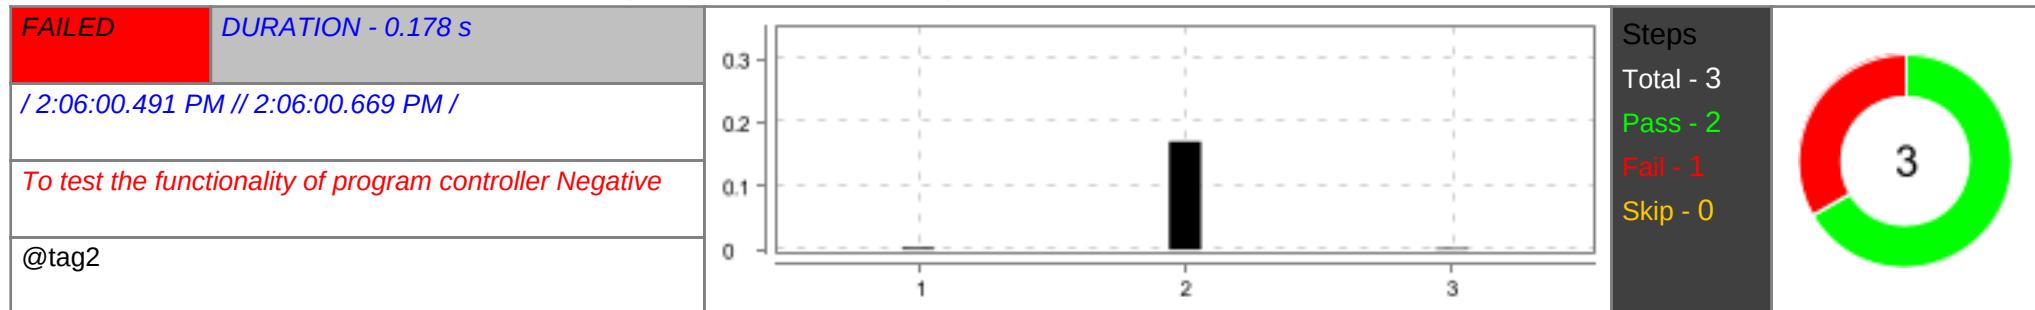


#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request for the LMS API to retrieve a program by valid program ID	PASSED	0.003 s
2	When Admin sends HTTPS Request with endpoint and stores the response	PASSED	0.170 s
3	Then Admin receives 200 OK Status code with response body. java.lang.AssertionError: expected:<200> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_ok_status_code_with_response_body(ProgramPost.java:477) at ?.Admin receives 200 OK Status code with response body.(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:83) * Not displayable characters are replaced by '?'.	FAILED	0.002 s

Check if Admin able to retrieve a program with invalid program ID

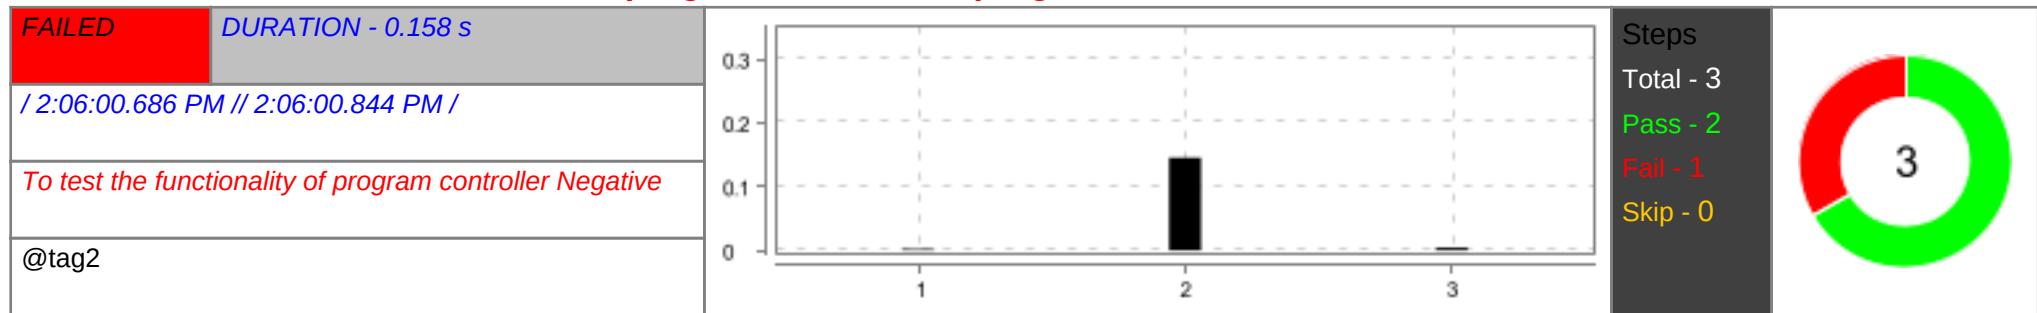


#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request for the LMS API with invalid program ID	PASSED	0.002 s
2	When Admin sends HTTPS Request with invalid program ID and endpoint	PASSED	0.145 s
3	Then Admin receives 404 Not Found Status with message and boolean success details java.lang.NullPointerException: Cannot invoke "io.restassured.response.Response.getStatusCode()" because "this.response" is null at api.stepdefinitions.ProgramBatch.admin_receives_not_found_status_with_message_and_boolean_success_details(ProgramBatch.java:536) at ?.Admin receives 404 Not Found Status with message and boolean success details(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:89) * Not displayable characters are replaced by '?'.	FAILED	0.004 s

Check if Admin able to retrieve a program with invalid baseURI

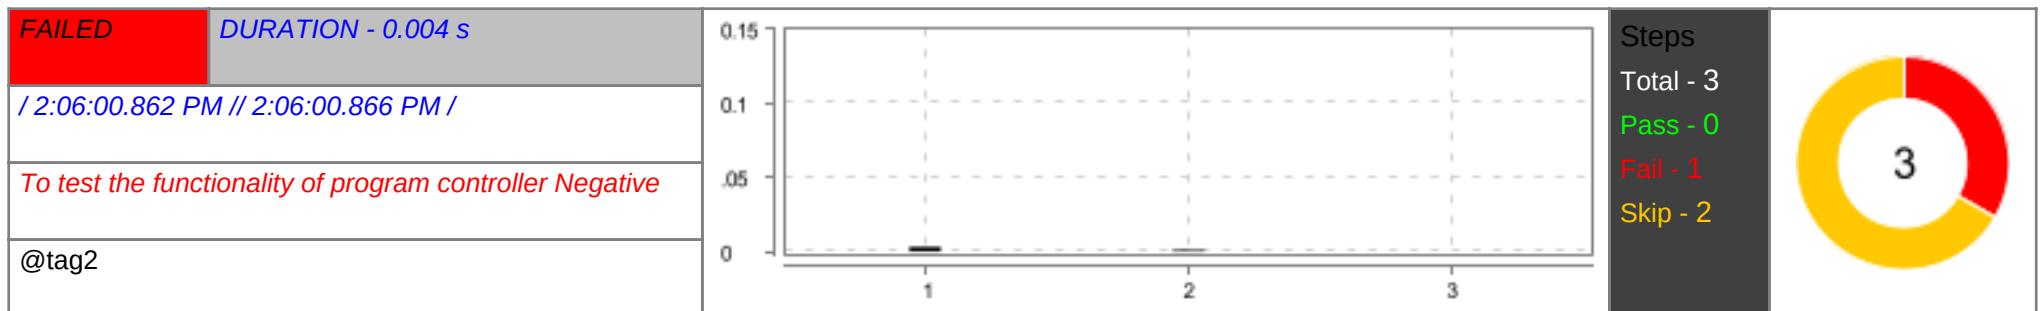


#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request with invalid baseURI for the LMS API java.util.MissingResourceException: Can't find resource for bundle java.util.PropertyResourceBundle, key invalid_baseUrl at java.base/java.util.ResourceBundle.getObject(ResourceBundle.java:564) at java.base/java.util.ResourceBundle.getString(ResourceBundle.java:521) at api.stepdefinitions.ProgramPost.admin_creates_get_request_with_invalid_base_uri_for_the_lms_api(ProgramPost.java:507) at ?.Admin creates GET Request with invalid baseURI for the LMS API(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:93) * Not displayable characters are replaced by '?'.	FAILED	0.003 s
2	When Admin sends HTTPS Request with invalid baseURI endpoint	SKIPPED	0.001 s
3	Then Admin receives 404 Not Found Status code with message and boolean success details	SKIPPED	0.000 s

Check if Admin able to retrieve a program without Authorization

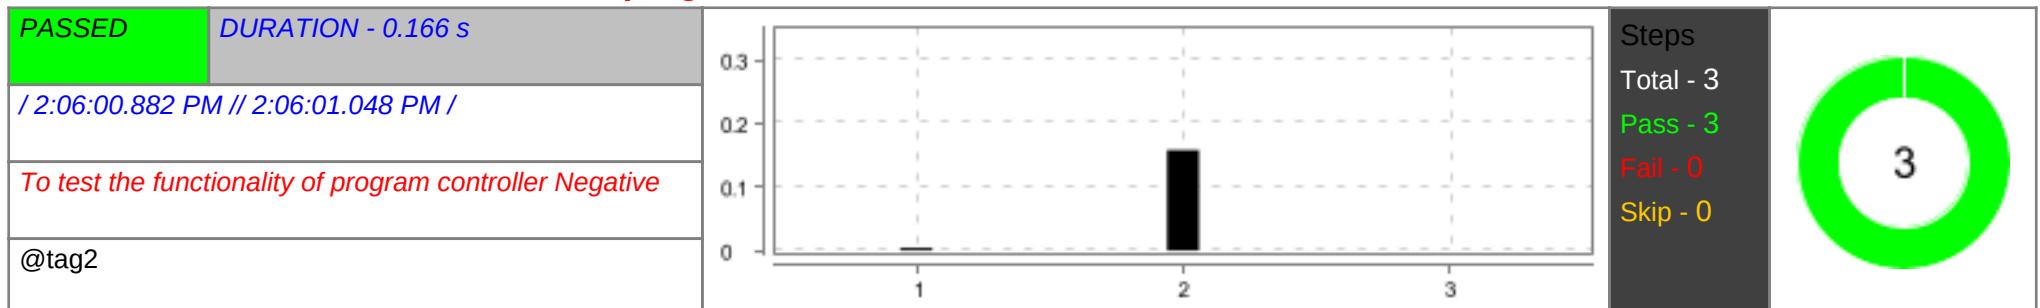


#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request for the LMS API to retrieve a program without Authorization	PASSED	0.004 s
2	When Admin sends HTTPS Request to retrieve a program without Authorization with endpoint	PASSED	0.158 s
3	Then Admin receives 401 Unauthorized status code	PASSED	0.000 s

Check if Admin able to retrieve a program with invalid Endpoint

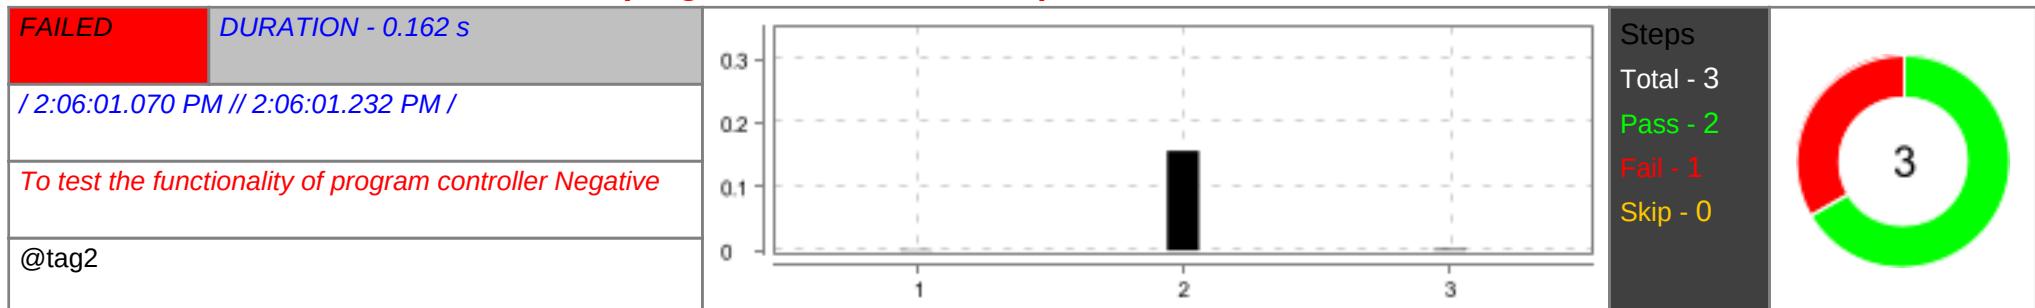


#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request for the LMS API to retrieve a program with invalid endpoint	PASSED	0.001 s
2	When Admin sends HTTPS Request to retrieve a program with invalid Endpoint	PASSED	0.156 s
3	<p>Then Admin receives 404 Not Found status code with message and boolean success details</p> <pre>java.lang.AssertionError: expected:<404> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_Not_found_status_code_with_message_and_boolean_success_details(ProgramPost.java:564) at ?.Admin receives 404 Not Found status code with message and boolean success details(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:107)</pre> <p>* Not displayable characters are replaced by '?'.</p>	FAILED	0.002 s

Check if Admin able to retrieve all programs with users and with valid Endpoint

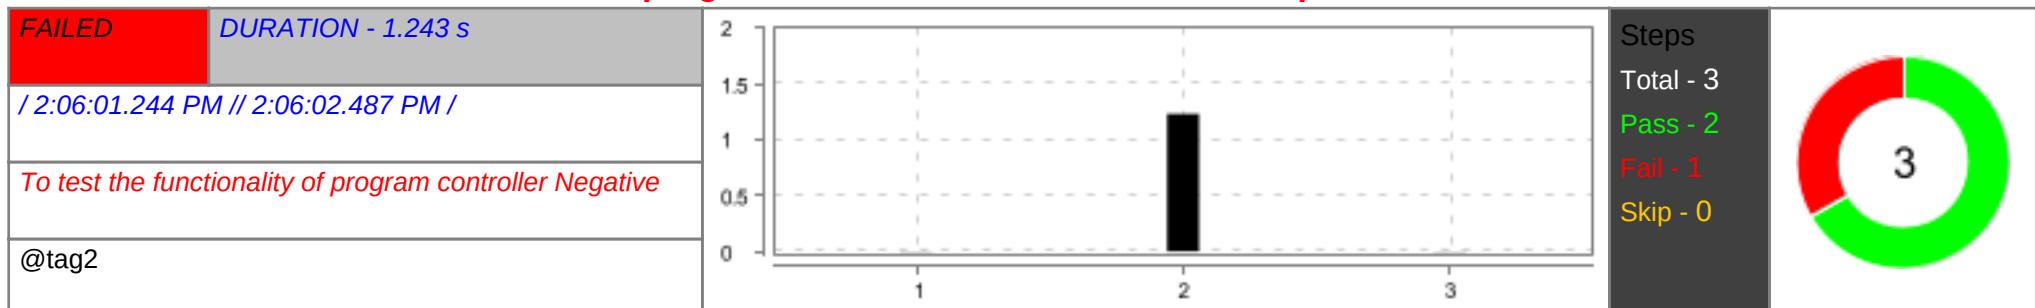


#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request for the LMS API retrieve all programs with users	PASSED	0.002 s
2	When Admin sends HTTPS Request with valid endpoint and stores the response	PASSED	1.233 s
3	<p>Then Admin receives 200 OK Status with response body and asserts the response.</p> <pre>java.lang.AssertionError: expected:<200> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_ok_status_with_response_body_and_asserts_the_response(ProgramPost.java:587) at ?.Admin receives 200 OK Status with response body and asserts the response.(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:113)</pre> <p>* Not displayable characters are replaced by '?'.</p>	FAILED	0.004 s

Check if Admin able to retrieve all programs with invalid Endpoint

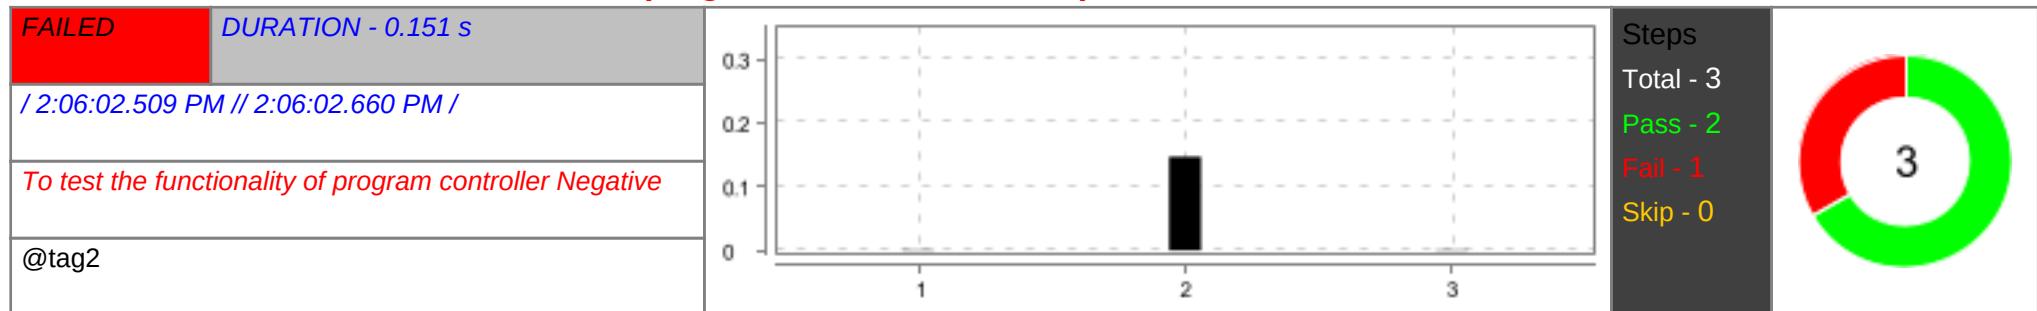



#	Step / Hook Details	Status	Duration
1	Given Admin creates GET request for the LMS API	PASSED	0.001 s
2	When Admin sends HTTPS Request with invalid endpoint	PASSED	0.147 s
3	<p>Then Admin receives 404 not found status with error message</p> <pre>java.lang.AssertionError: expected:<404> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_not_found_status_with_errorMessage(ProgramPost.java:609) at ?.Admin receives 404 not found status with error message(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:119)</pre> <p>* Not displayable characters are replaced by '?'.</p>	FAILED	0.001 s

Check if Admin able to retrieve all programs with invalid Method

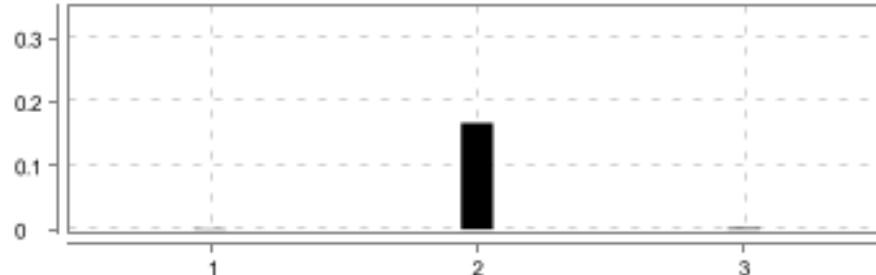FAILED	DURATION - 0.172 s		Steps Total - 3 Pass - 2 Fail - 1 Skip - 0	
/ 2:06:02.671 PM // 2:06:02.843 PM /				
To test the functionality of program controller Negative				
@tag2				

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET request for the LMS API	PASSED	0.001 s
2	When Admin sends HTTPS Request to retrieve all programs with invalid Method and endpoint	PASSED	0.167 s
3	Then Admin receives 405 Method Not Allowed Status Code java.lang.AssertionError: expected:<405> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_method_not_allowed_statusCode(ProgramPost.java:624) at ?.Admin receives 405 Method Not Allowed Status Code(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:125) * Not displayable characters are replaced by '?'.	FAILED	0.002 s


Check if Admin able to retrieve all programs without Authorization

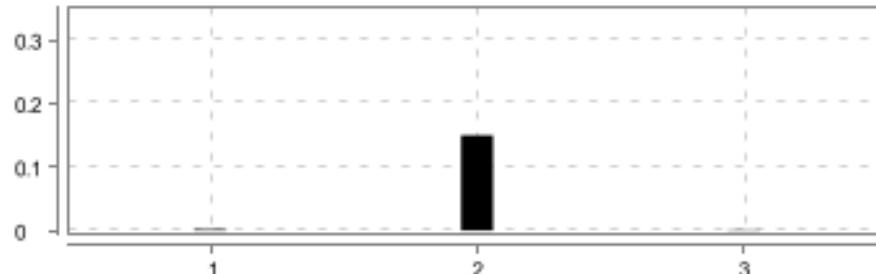PASSED	DURATION - 0.155 s		Steps Total - 3 Pass - 3 Fail - 0 Skip - 0	
/ 2:06:02.857 PM // 2:06:03.012 PM /				
To test the functionality of program controller Negative				
@tag2				

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET request for the LMS API	PASSED	0.002 s


#	Step / Hook Details	Status	Duration
2	When Admin sends HTTPS Request with endpoint to retrieve all programs without Authorization	PASSED	0.150 s
3	Then Admin receives 401 status code with response body as Unauthorized	PASSED	0.001 s

Check if Admin able to update a program with valid programID endpoint and valid request body

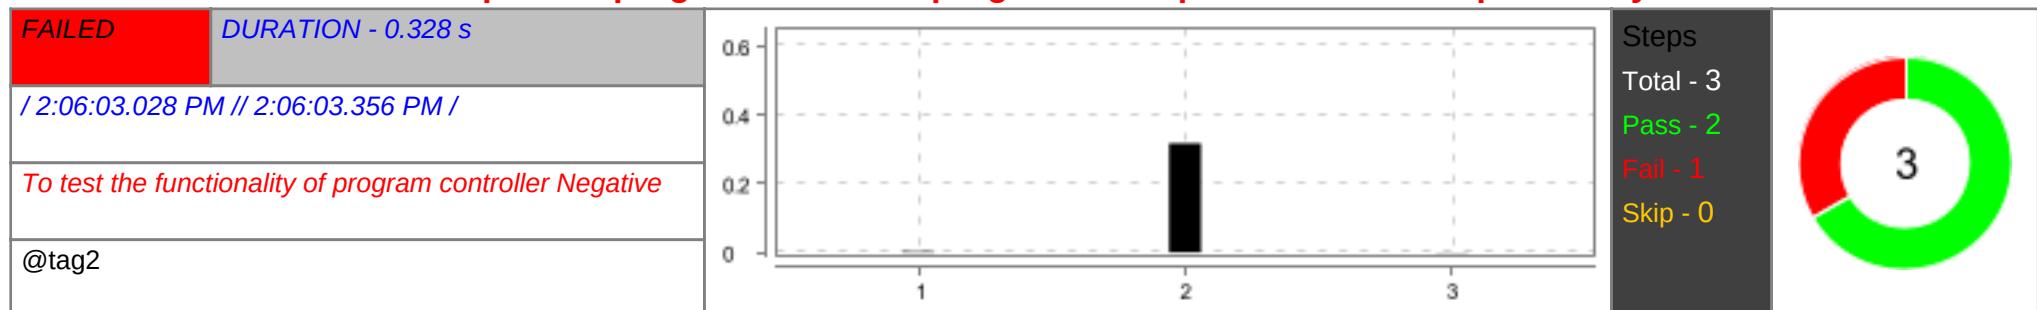


#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request for the LMS API endpoint with request Body with mandatory, additional fields.	PASSED	0.003 s
2	When Admin sends HTTPS Request with valid endpoint and receives the response	PASSED	0.317 s
3	Then Admin receives 200 OK Status code with updated value. java.lang.AssertionError: expected:<200> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertequals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_ok_status_with_updated_value_in_response_body(ProgramPost.java:664) at ?.Admin receives 200 OK Status code with updated value.(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:137) * Not displayable characters are replaced by '?'. 	FAILED	0.001 s

Check if Admin able to update a program with invalid programID endpoint and valid request body

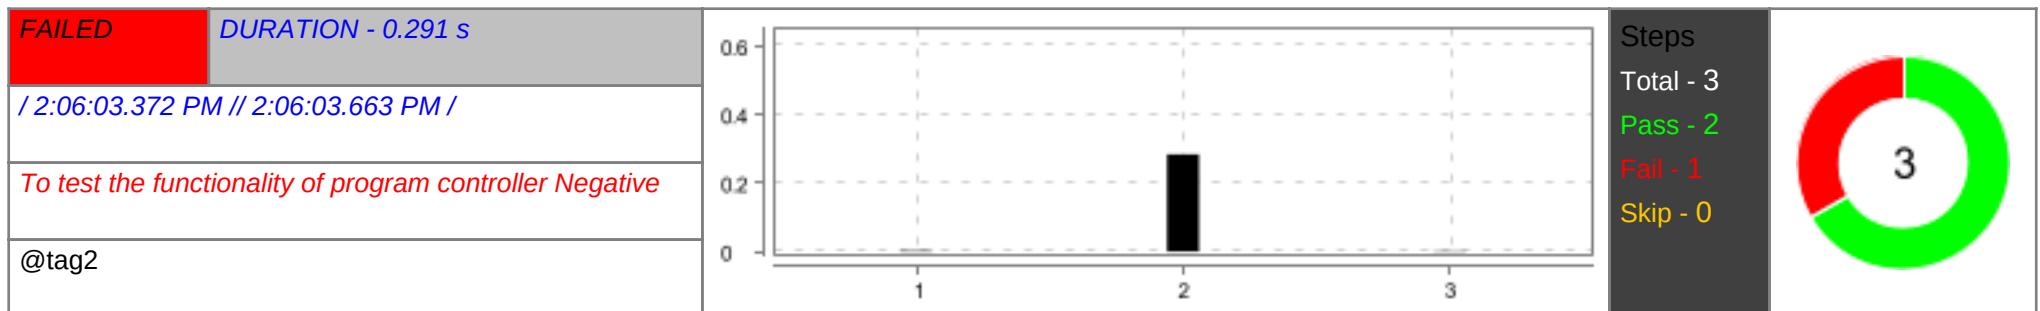

#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request for the LMS API endpoint with valid request Body with mandatory , additional fields.	PASSED	0.003 s
2	When Admin sends HTTPS Request to update a program with invalid programID with invalid endpoint	PASSED	0.284 s
3	Then Admin receives 404 Not Found status with message and boolean success details java.lang.AssertionError: expected:<404> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertequals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_not_found_with_message(ProgramPost.java:690) at ?.Admin receives 404 Not Found status with message and boolean success details(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:143) * Not displayable characters are replaced by '?'.	FAILED	0.002 s


Check if Admin able to update a program with invalid request body

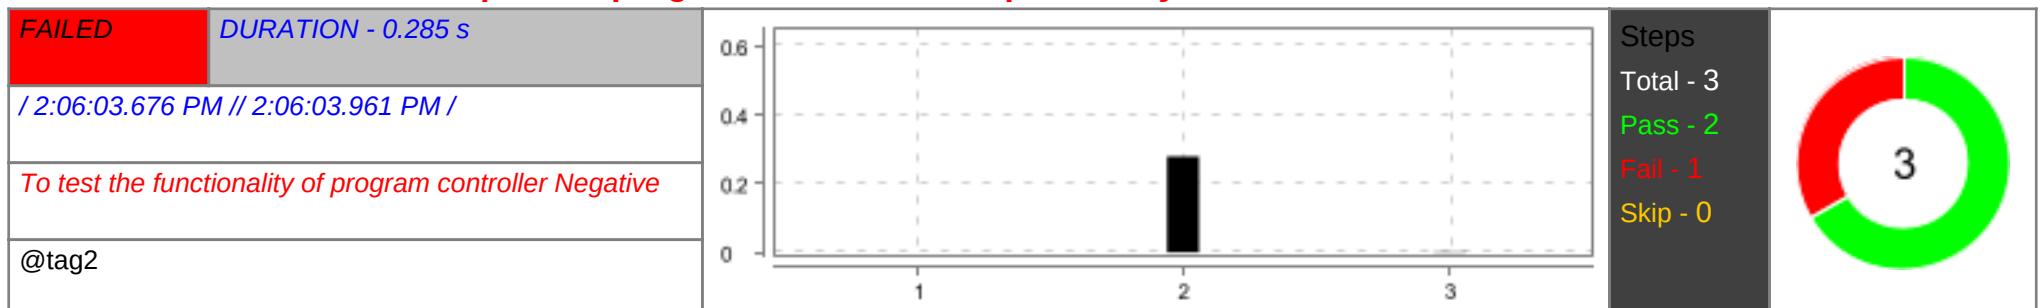

#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request for the LMS API with invalid request body	PASSED	0.000 s
2	When Admin sends HTTPS Request to update a program with invalid request body and valid endpoint	PASSED	0.279 s
3	Then Admin receives 400 Bad Request status with message and boolean success details	FAILED	0.002 s


#	Step / Hook Details	Status	Duration
	<pre>java.lang.AssertionError: expected:<400> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_bad_request_with_message_and_boolean_success_details(ProgramPost.java:711) at ?.Admin receives 400 Bad Request status with message and boolean success details(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:149) * Not displayable characters are replaced by '?'.</pre>		

Check if Admin able to update a program without request body

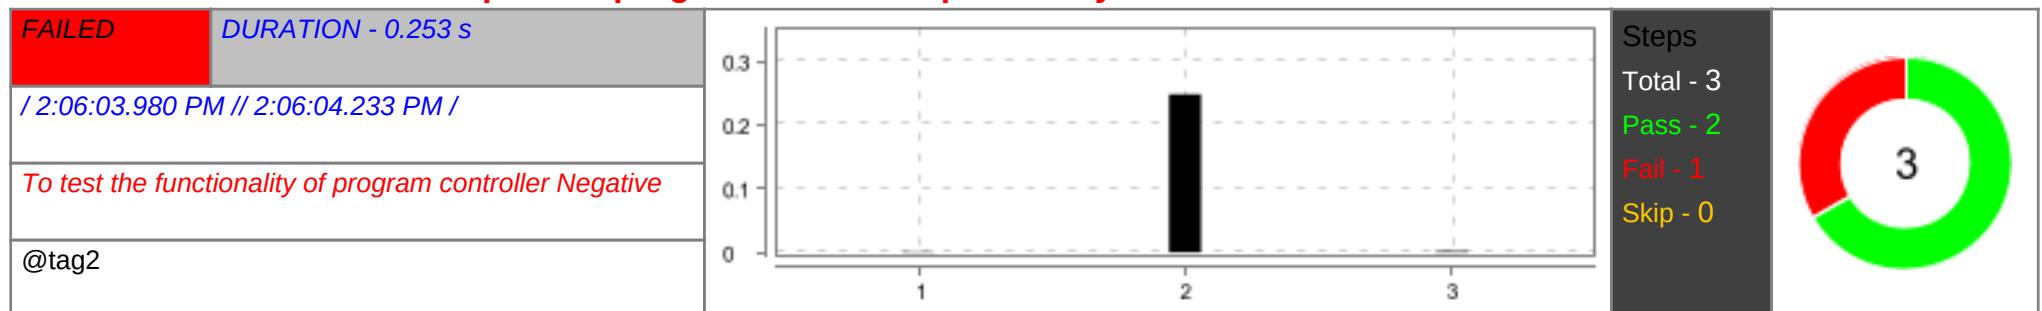


#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request for the LMS API with missing mandatory fields	PASSED	0.001 s
2	When Admin sends HTTPS Request with missing mandatory fields and valid endpoint	PASSED	0.248 s
3	<p>Then Admin receives 400 Bad Request Status code with message</p> <pre>java.lang.AssertionError: expected:<400> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_bad_request_status_code_with_message(ProgramPost.java:732) at ?.Admin receives 400 Bad Request Status code with message(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:155) * Not displayable characters are replaced by '?'.</pre>	FAILED	0.002 s

Check if Admin able to update a program with invalid baseURI

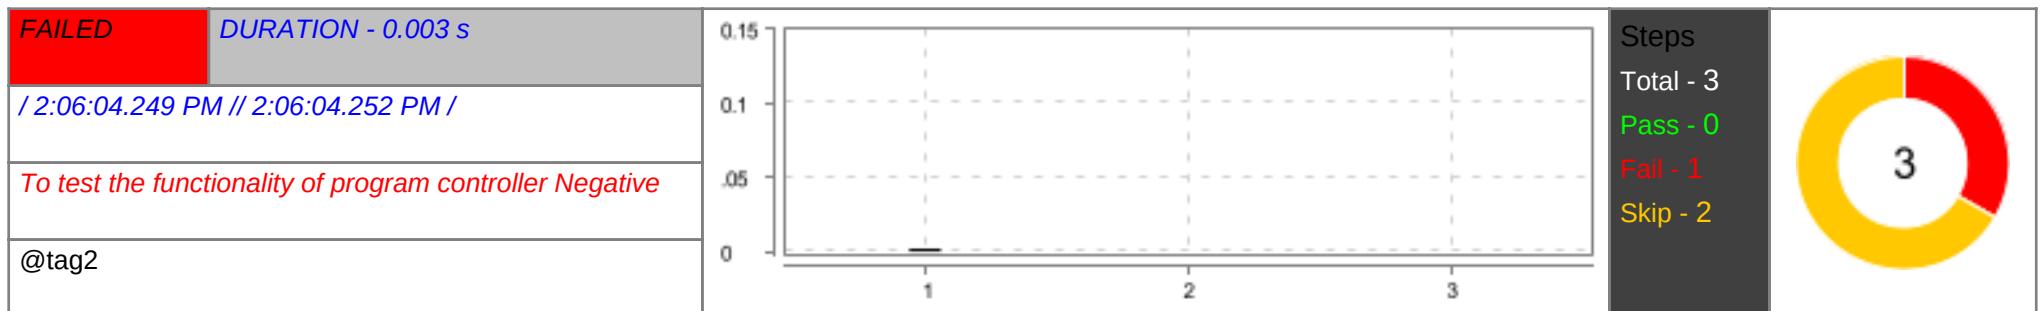

#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request for the LMS API endpoint with request Body with mandatory , additional fields. java.util.MissingResourceException: Can't find resource for bundle java.util.PropertyResourceBundle, key invalidBaseUrl at java.base/java.util.ResourceBundle.getObject(ResourceBundle.java:564) at java.base/java.util.ResourceBundle.getString(ResourceBundle.java:521) at api.stepdefinitions.ProgramPost. adminCreatesPutRequestForTheLmsApiEndpointWithRequestBodyWithMandatoryAndAdditionalFields(ProgramPost.java:738) at ?.Admin creates PUT Request for the LMS API endpoint with request Body with mandatory , additional fields.(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:159) * Not displayable characters are replaced by '?'.	FAILED	0.002 s
2	When Admin sends HTTPS Request with request Body with mandatory, additional fields and valid endpoint	SKIPPED	0.000 s
3	Then Admin receives 404 Not Found with message and boolean success details	SKIPPED	0.000 s


Check if Admin able to update a program with invalid method

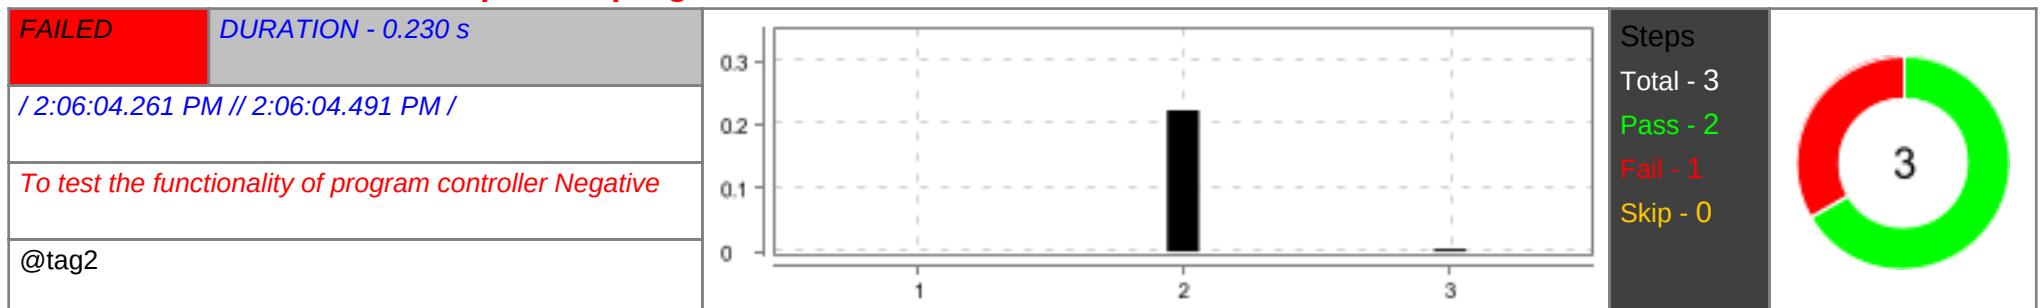

#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request for the LMS API endpoint with request Body	PASSED	0.000 s
2	When Admin sends HTTPS Request with request body and valid endpoint	PASSED	0.222 s
3	Then Admin receives 405 Method Not Allowed status	FAILED	0.004 s


#	Step / Hook Details	Status	Duration
	<pre>java.lang.AssertionError: expected:<405> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_method_not_allowed_status(ProgramPost.java:775) at ?.Admin receives 405 Method Not Allowed status(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:167) * Not displayable characters are replaced by '?'.</pre>		

Check if Admin able to update a program without Authorization

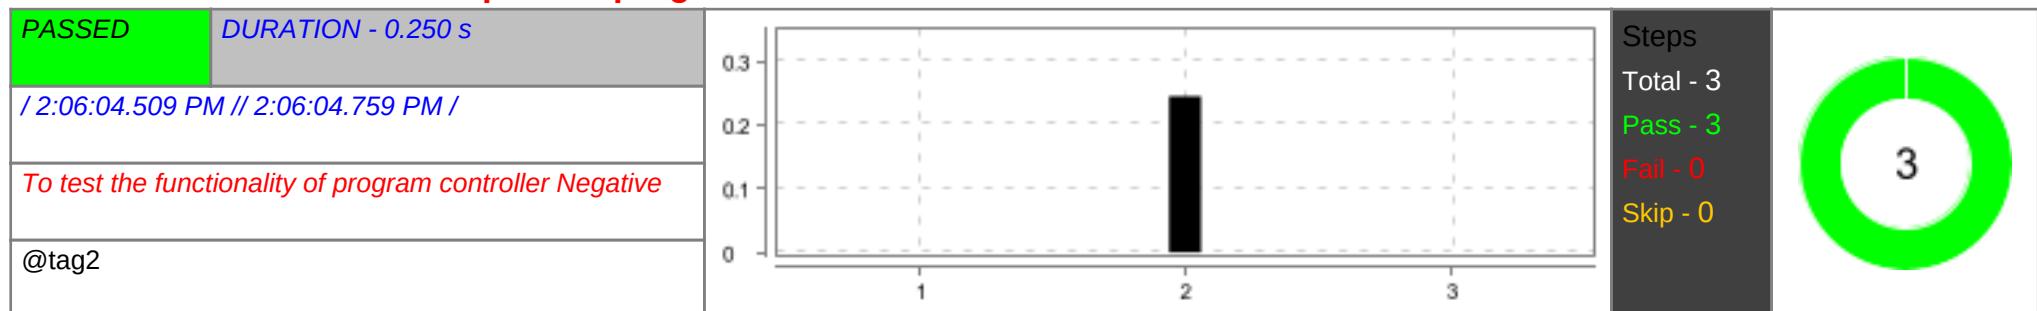


#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request for the LMS API without Authorization and endpoint with request Body and mandatory, additional fields.	PASSED	0.000 s
2	When Admin sends HTTPS Request with valid endpoint to update a program without Authorization	PASSED	0.245 s
3	Then Admin receives 401 Unauthorized status	PASSED	0.000 s

Check if Admin able to update a program with Valid program Name and request body

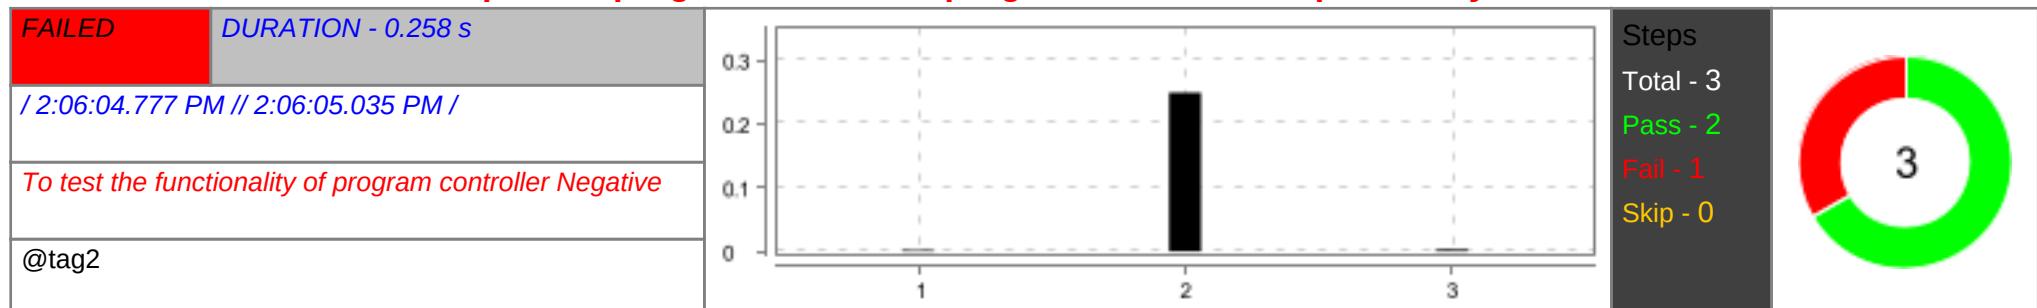



#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request for the LMS API endpoint with valid request Body with all fields.	PASSED	0.002 s
2	When Admin sends HTTPS Request with valid endpoint and gets the response	PASSED	0.249 s
3	<p>Then Admin receives 200 OK Status code with updated value in response body.</p> <pre>java.lang.AssertionError: expected:<200> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_ok_status_code_with_updated_value_in_response_body(ProgramPost.java:821) at ?.Admin receives 200 OK Status code with updated value in response body.(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:179)</pre> <p>* Not displayable characters are replaced by '?'.</p>	FAILED	0.003 s

Check if Admin able to update a program status

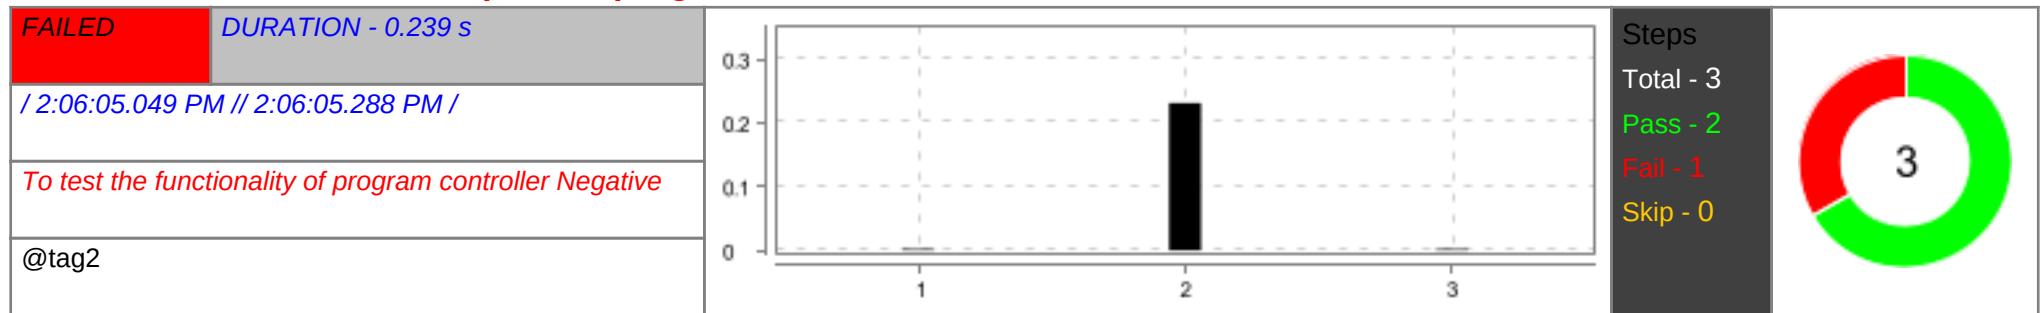


#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request for the LMS API endpoint and Valid program Name and status	PASSED	0.002 s
2	When Admin sends HTTPS Request with Valid program Name, status and endpoint	PASSED	0.231 s
3	<p>Then Admin receives 200 OK with updated value in response body.</p> <pre>java.lang.AssertionError: expected:<200> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_ok_with_updated_value_in_response_body(ProgramPost.java:848) at ?.Admin receives 200 OK with updated value in response body.(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:185)</pre> <p>* Not displayable characters are replaced by '?'.</p>	FAILED	0.002 s

Check if Admin able to update a program with invalid program Name and request body

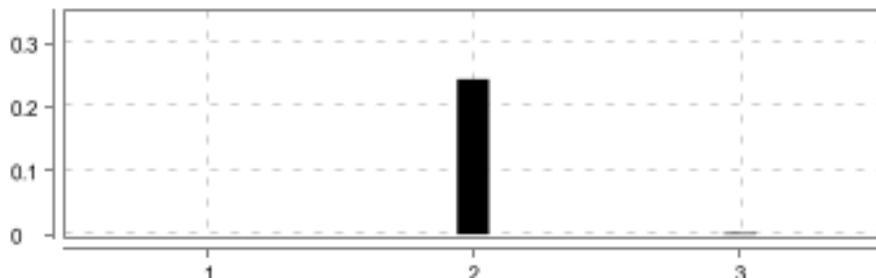FAILED	DURATION - 0.249 s		Steps Total - 3 Pass - 2 Fail - 1 Skip - 0	
	/ 2:06:05.296 PM // 2:06:05.545 PM /			
	<i>To test the functionality of program controller Negative</i>			
	@tag2			

#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request for the LMS API endpoint with valid request body with mandatory, additional fields.	PASSED	0.000 s
2	When Admin sends HTTPS request with invalid endpoint to update a program with invalid program Name	PASSED	0.243 s
3	Then Admin gets 404 Not Found Status with message and boolean success details <i>java.lang.AssertionError: expected:<404> but was:<401></i> <i> at org.junit.Assert.fail(Assert.java:89)</i> <i> at org.junit.Assert.failNotEquals(Assert.java:835)</i> <i> at org.junit.Assert.assertEquals(Assert.java:647)</i> <i> at org.junit.Assert.assertEquals(Assert.java:633)</i> <i> at api.stepdefinitions.ProgramPost.admin_gets_not_found_status_with_message_and_boolean_success_details(ProgramPost.java:869)</i> <i> at ?.Admin gets 404 Not Found Status with message and boolean success details(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:191)</i> <i>* Not displayable characters are replaced by '?'.</i>	FAILED	0.002 s


Check if Admin able to update a program using valid program name - missing mandatory fields in request body

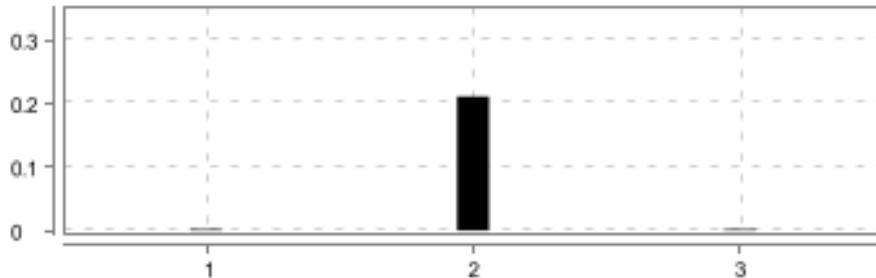FAILED	DURATION - 0.217 s		Steps Total - 3 Pass - 2 Fail - 1 Skip - 0	
	/ 2:06:05.563 PM // 2:06:05.780 PM /			
	<i>To test the functionality of program controller Negative</i>			
	@tag2			

#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request for the LMS API with missing programName and programStatus	PASSED	0.002 s


#	Step / Hook Details	Status	Duration
2	When Admin sends HTTPS Request with missing mandatory fields and valid endpoint	PASSED	0.211 s
3	<p>Then Admin receives 400 Bad Request Status Code with message and boolean success details</p> <pre>java.lang.AssertionError: expected:<400> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_bad_request_status_code_with_message_and_boolean_success_details(ProgramPost.java:890) at ?.Admin receives 400 Bad Request Status Code with message and boolean success details(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:197)</pre> <p>* Not displayable characters are replaced by '?'.</p>	FAILED	0.002 s

Check if Admin able to update a program with invalid values in request body

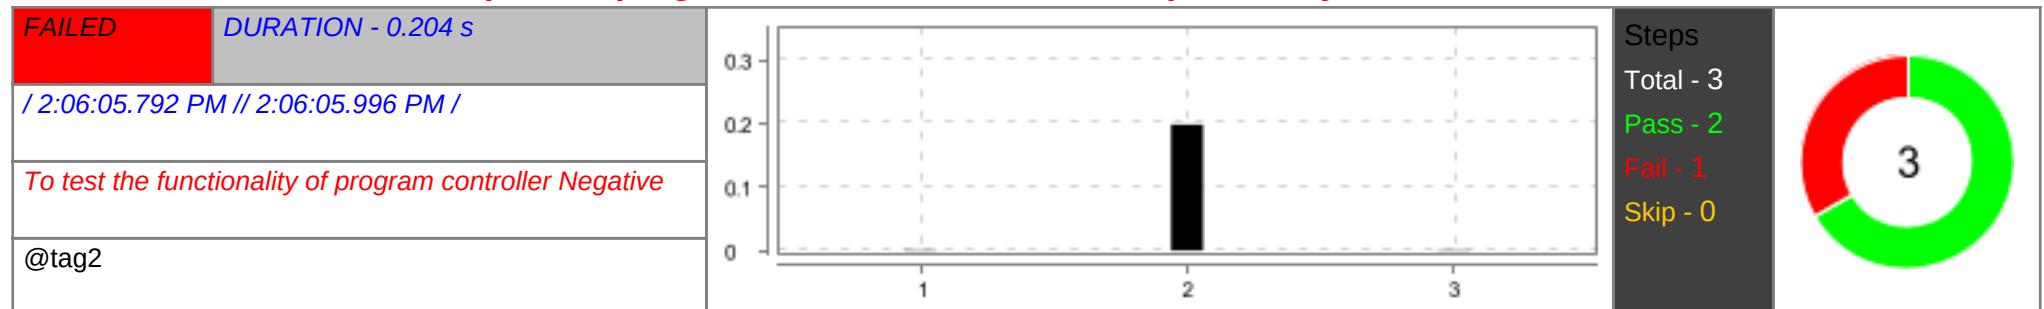



#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request for the LMS API endpoint and invalid program Name	PASSED	0.001 s
2	When Admin sends HTTPS Request and request Body with invalid values in mandatory fields. (program Description , program Name, program status)	PASSED	0.198 s
3	<p>Then Admin receives 400 Bad Request with message and boolean success details</p> <pre>java.lang.AssertionError: expected:<400> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_bad_request_with_message(ProgramPost.java:911) at ?.Admin receives 400 Bad Request with message and boolean success details(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:203)</pre> <p>* Not displayable characters are replaced by '?'.</p>	FAILED	0.001 s

Check if Admin able to update a program with invalid program Description

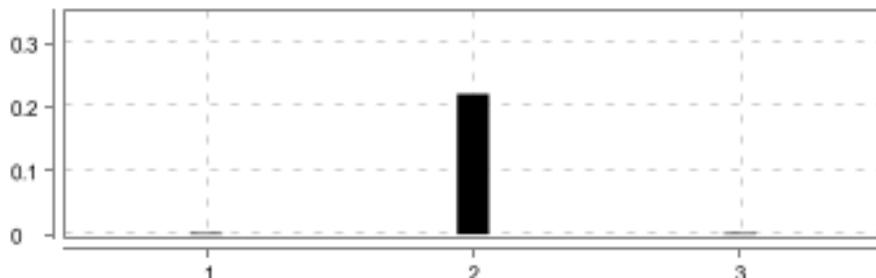FAILED	DURATION - 0.227 s		Steps Total - 3 Pass - 2 Fail - 1 Skip - 0	
/ 2:06:06.015 PM // 2:06:06.242 PM /				
To test the functionality of program controller Negative				
@tag2				


#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request for the LMS API endpoint and invalid program Description	PASSED	0.002 s
2	When Admin sends HTTPS Request and request Body with invalid program Description in mandatory fields. (program Description , program Name, program status)	PASSED	0.220 s
3	<p>Then Admin receives 400 Bad Request response with message and boolean success details</p> <pre>java.lang.AssertionError: expected:<400> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_receives_bad_request_response_with_message_and_boolean_success_details(ProgramPost.java:932) at ?.Admin receives 400 Bad Request response with message and boolean success details(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:209) * Not displayable characters are replaced by '?'.</pre>	FAILED	0.002 s

Check if Admin able to update a program without Authorization

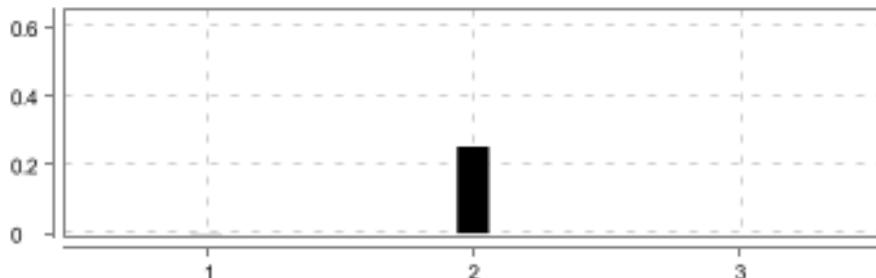PASSED	DURATION - 0.257 s		Steps Total - 3 Pass - 3 Fail - 0 Skip - 0	
/ 2:06:06.259 PM // 2:06:06.516 PM /				
To test the functionality of program controller Negative				
@tag2				


#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request for the LMS API endpoint with request Body with all the fields.	PASSED	0.001 s
2	When Admin sends HTTPS Request with valid endpoint to update a program without authorization	PASSED	0.253 s
3	Then Admin receives 401 Unauthorized Status	PASSED	0.000 s

Check if Admin able to delete a program with valid programName

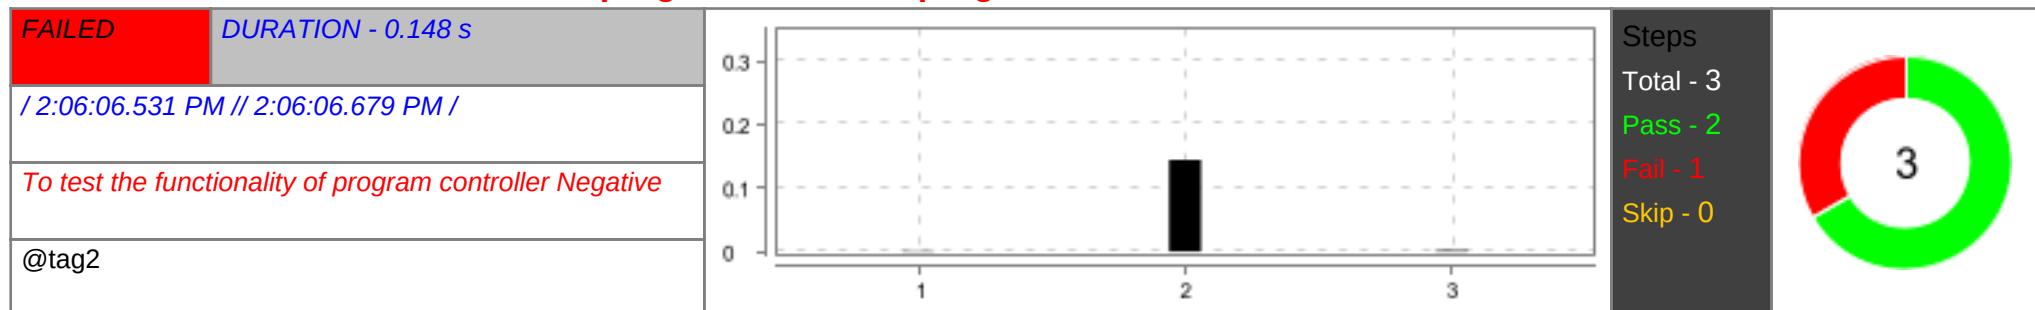


#	Step / Hook Details	Status	Duration
1	Given Admin creates DELETE Request for the LMS API endpoint and valid programName	PASSED	0.001 s
2	When Admin sends HTTPS Request with endpoint to delete a program with program name	PASSED	0.144 s
3	Then Admin receives 200 Ok status with message <i>java.lang.AssertionError: expected:<200> but was:<401></i> <i> at org.junit.Assert.failAssert.java:89)</i> <i> at org.junit.Assert.failNotEqualsAssert.java:835)</i> <i> at org.junit.Assert.assertEqualsAssert.java:647)</i> <i> at org.junit.Assert.assertEqualsAssert.java:633)</i> <i> at api.stepdefinitions.ProgramPost.admin_receives_ok_status_with_message(ProgramPost.java:976)</i> <i> at ?.Admin receives 200 Ok status with message(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:221)</i> <i>* Not displayable characters are replaced by '?'.</i>	FAILED	0.002 s

Check if Admin able to delete a program with valid LMS API, invalid programName

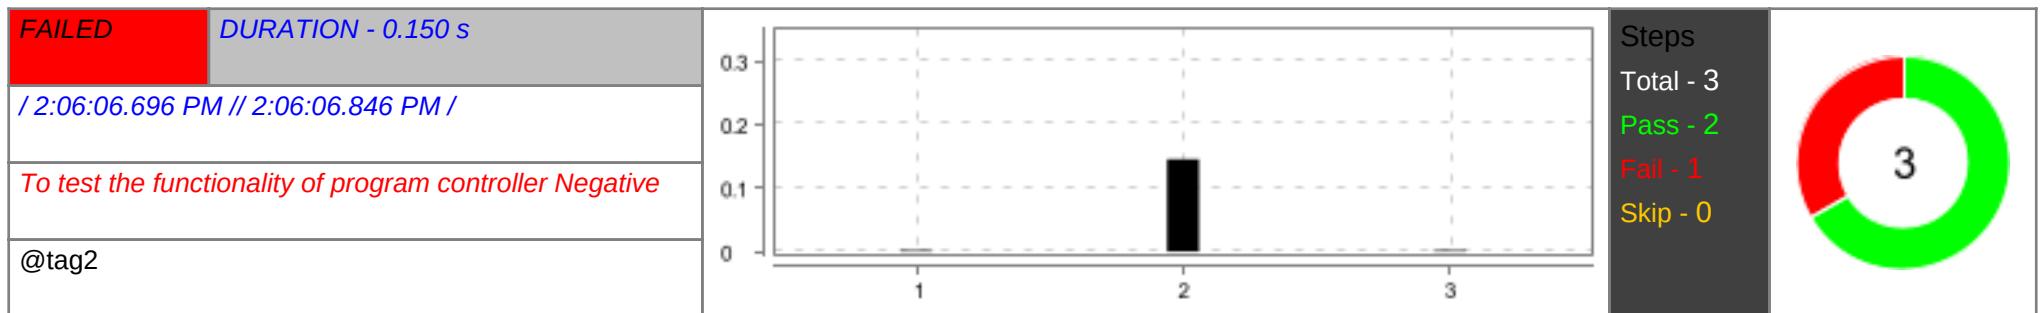

#	Step / Hook Details	Status	Duration
1	Given Admin creates DELETE Request for the LMS API endpoint and invalid {programName}	PASSED	0.002 s
2	When Admin sends HTTPS Request with endpoint to delete a program with invalid programName	PASSED	0.145 s
3	Then Admin gets 404 Not Found status code with message and boolean success details java.lang.AssertionError: expected:<404> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertequals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost.admin_gets_not_found_status_code_with_message_and_boolean_success_details(ProgramPost.java:997) at ?.Admin gets 404 Not Found status code with message and boolean success details(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:227) * Not displayable characters are replaced by '?'.	FAILED	0.002 s


Check if Admin able to delete a program without Authorization

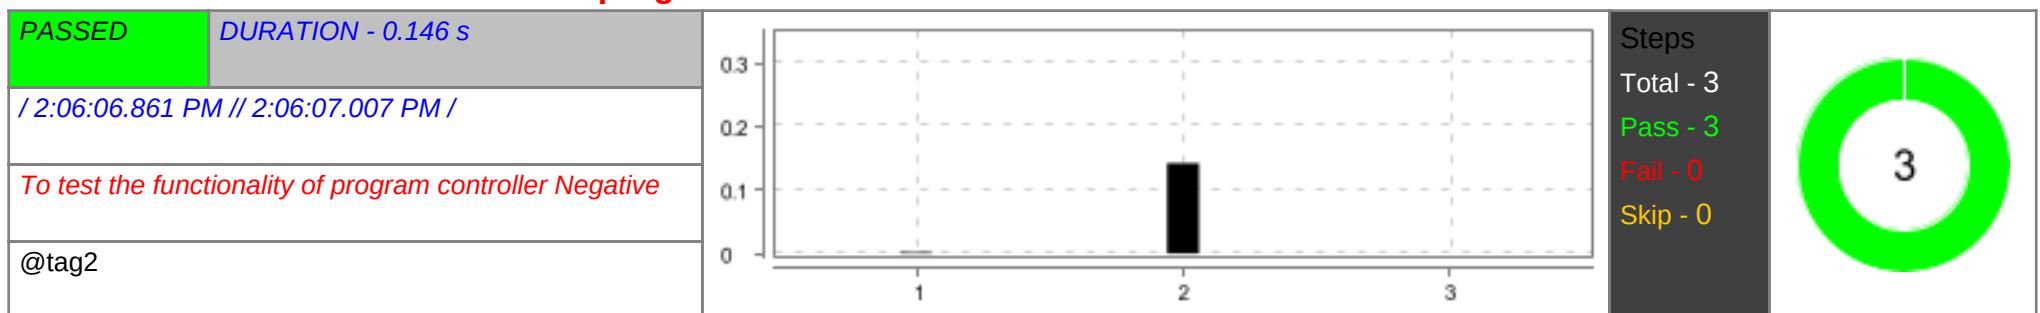

#	Step / Hook Details	Status	Duration
1	Given Admin creates DELETE Request for the LMS API endpoint and valid programName	PASSED	0.002 s
2	When Admin sends HTTPS Request with endpoint to delete a program without Authorization	PASSED	0.142 s


#	Step / Hook Details	Status	Duration
3	Then Admin receives 401 unauthorized status code	PASSED	0.000 s

Check if Admin able to delete a program with valid program ID

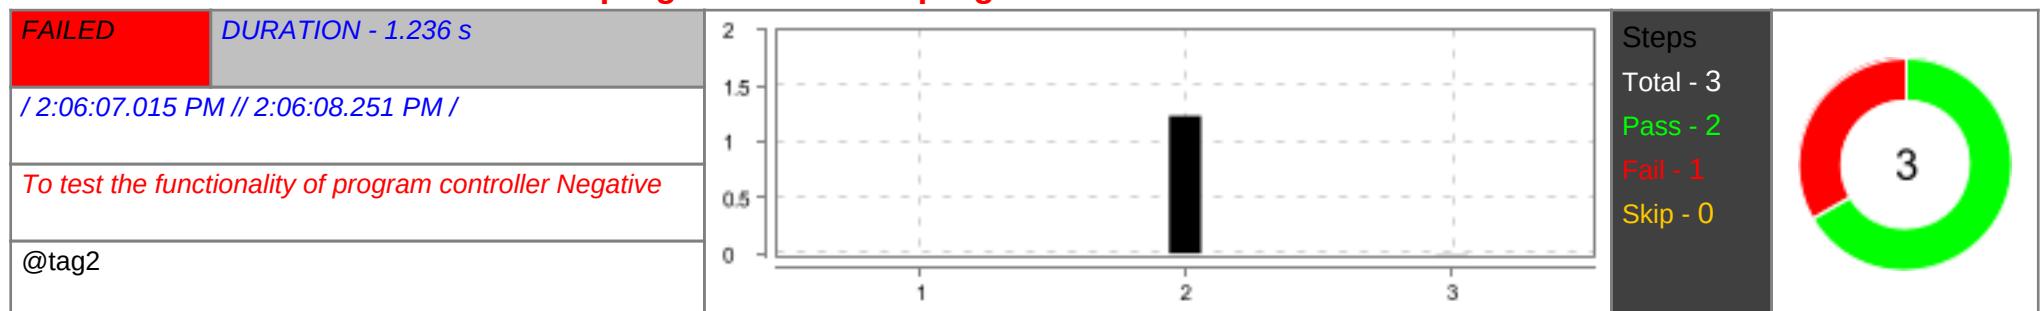


#	Step / Hook Details	Status	Duration
1	Given Admin creates DELETE Request for the LMS API endpoint and valid program ID	PASSED	0.000 s
2	When Admin sends HTTPS Request with endpoint to delete a program with program ID	PASSED	1.232 s
3	Then Admin receives 200 Ok and validates the status <i>java.lang.AssertionError: expected:<200> but was:<401></i> <i> at org.junit.Assert.fail(Assert.java:89)</i> <i> at org.junit.Assert.failNotEquals(Assert.java:835)</i> <i> at org.junit.Assert.assertEquals(Assert.java:647)</i> <i> at org.junit.Assert.assertEquals(Assert.java:633)</i> <i> at api.stepdefinitions.ProgramPost.admin_receives_ok_and_validates_the_status(ProgramPost.java:1041)</i> <i> at ?.Admin receives 200 Ok and validates the status(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:239)</i> <i>* Not displayable characters are replaced by '?'.</i>	FAILED	0.002 s

Check if Admin able to delete a program with valid LMS API,invalid program ID

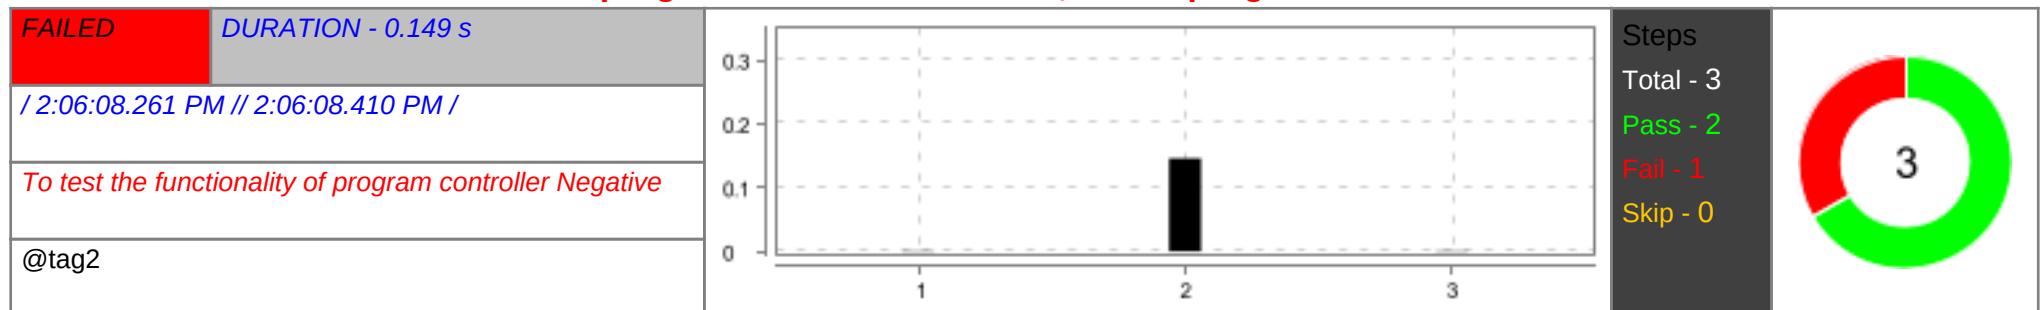


#	Step / Hook Details	Status	Duration
1	Given Admin creates DELETE Request for the LMS API endpoint and invalid program ID	PASSED	0.001 s
2	When Admin sends HTTPS Request with endpoint to delete a program with invalid program ID	PASSED	0.146 s
3	Then Admin receives 404 Not Found Status Code as response with message and boolean success details java.lang.AssertionError: expected:<404> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.ProgramPost. admin_receives_not_found_status_code_as_response_with_message_and_boolean_success_details(ProgramPost.java:1062) at ?.Admin receives 404 Not Found Status Code as response with message and boolean success details(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:245) * Not displayable characters are replaced by '?'. 	FAILED	0.001 s

Check if Admin able to delete a program without Authorization

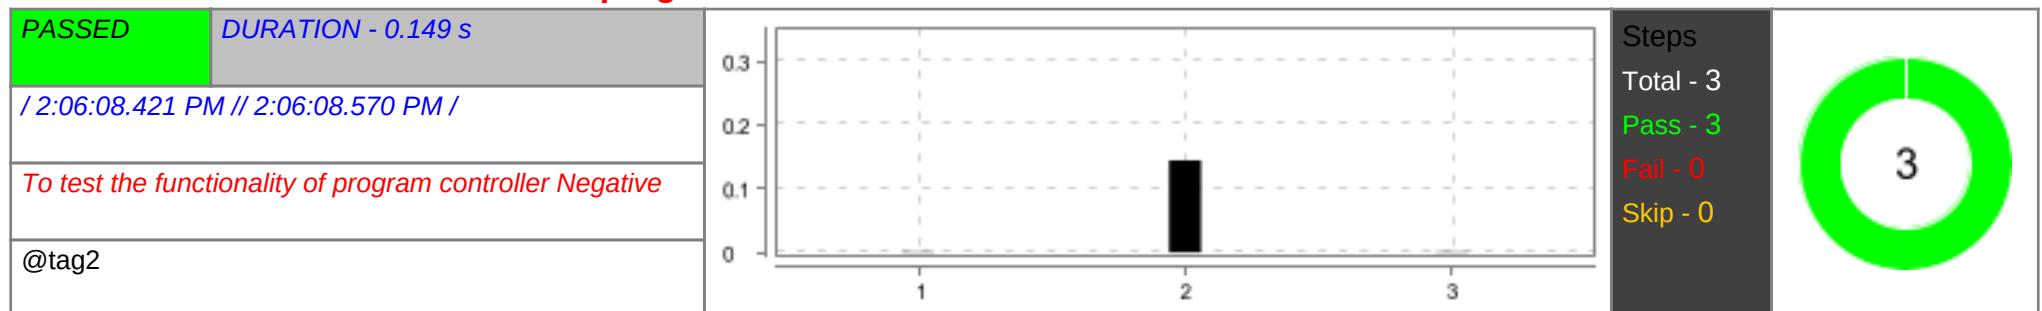


#	Step / Hook Details	Status	Duration
1	Given Admin creates DELETE Request for the LMS API with endpoint and valid programId	PASSED	0.001 s
2	When Admin sends HTTPS Request with endpoint to delete a program by programId without Authorization	PASSED	0.144 s
3	Then Admin gets 401 Unauthorized status code	PASSED	0.001 s

Check if Admin able to create a program with valid endpoint and request body with Authorization to be used for batch

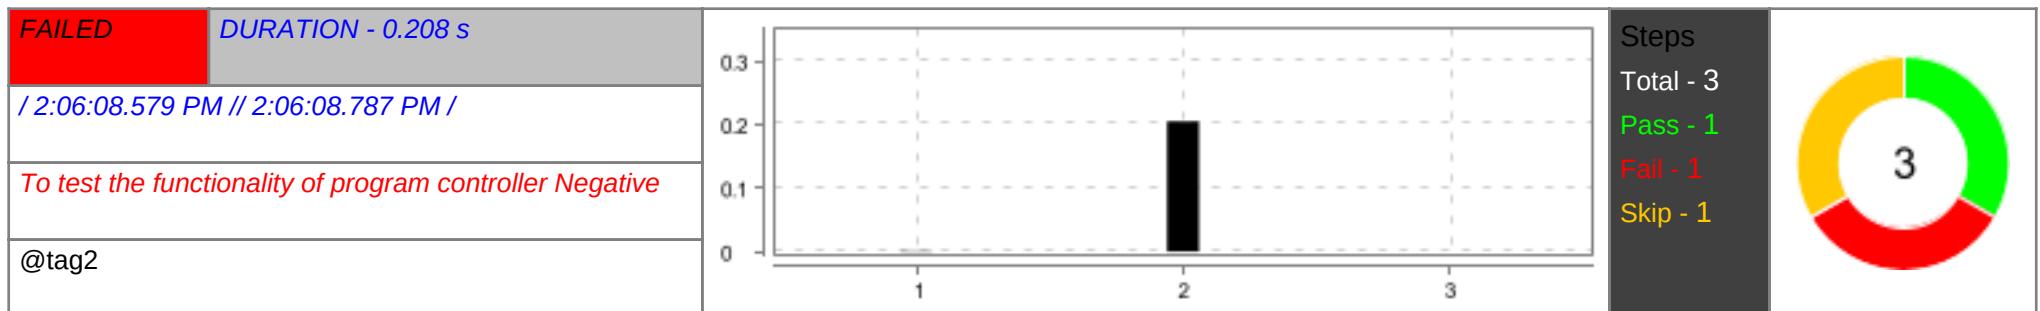

#	Step / Hook Details	Status	Duration
1	Given Admin creates POST Request for the LMS with request body to be used for batch	PASSED	0.001 s
2	When Admin sends HTTPS Request and request Body with endpoint to be used for batch java.lang.NumberFormatException: Cannot parse null string at java.base/java.lang.Integer.parseInt(Integer.java:630) at java.base/java.lang.Integer.parseInt(Integer.java:786) at api.stepdefinitions.ProgramPost.admin_sends_https_request_and_request_body_with_endpoint_active_batch(ProgramPost.java:1102) at ?.Admin sends HTTPS Request and request Body with endpoint to be used for batch(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:256) * Not displayable characters are replaced by '?'.	FAILED	0.205 s
3	Then Admin receives 201 Created Status with response body to be used for batch	SKIPPED	0.000 s


Check if Admin able to create a program with valid endpoint and request body with Authorization to be used for batch inactive programID

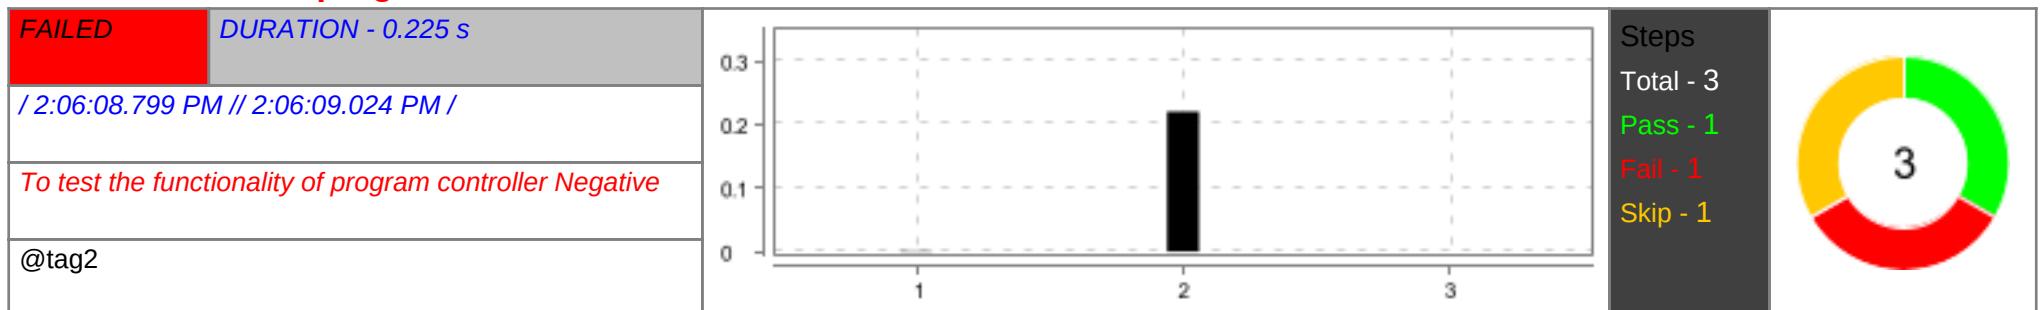


#	Step / Hook Details	Status	Duration
1	Given Admin creates POST Request for the LMS with request body to be used for batch inactive programID	PASSED	0.001 s
2	When Admin sends HTTPS Request and request Body with endpoint to be used for batch inactive programID java.lang.NumberFormatException: Cannot parse null string	FAILED	0.220 s

#	Step / Hook Details	Status	Duration
	at java.base/java.lang.Integer.parseInt(Integer.java:630) at java.base/java.lang.Integer.parseInt(Integer.java:786) at api.stepdefinitions.ProgramPost. admin_sends_https_request_and_request_body_with_endpoint_active_batch_inactive_programID(ProgramPost.java:1139) at ?.Admin sends HTTPS Request and request Body with endpoint to be used for batch inactive programID(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/02ProgramNegative.feature:262) * Not displayable characters are replaced by '?'.		
3	Then Admin receives 201 Created Status with response body to be used for batch inactive programID	SKIPPED	0.000 s

Negative scenario for User Module

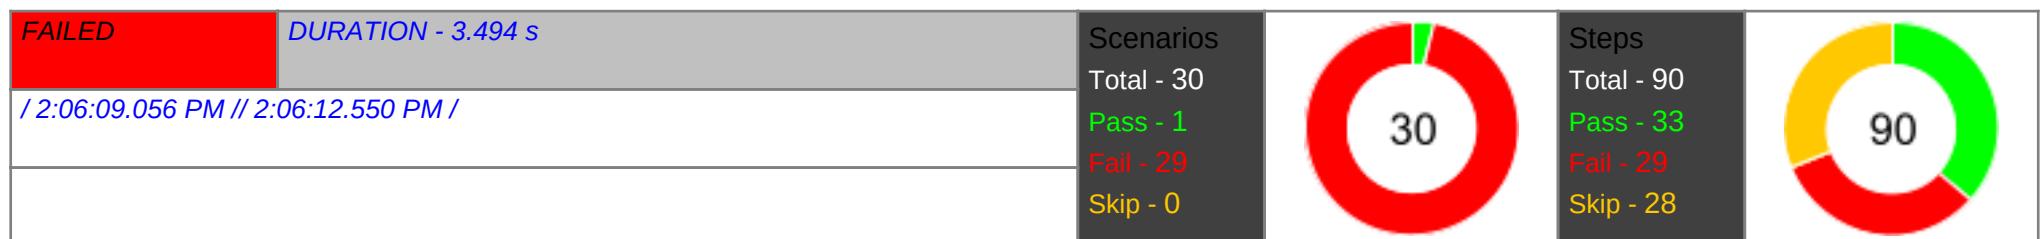

Check if admin is able to retrieve all the available roles without Authorization

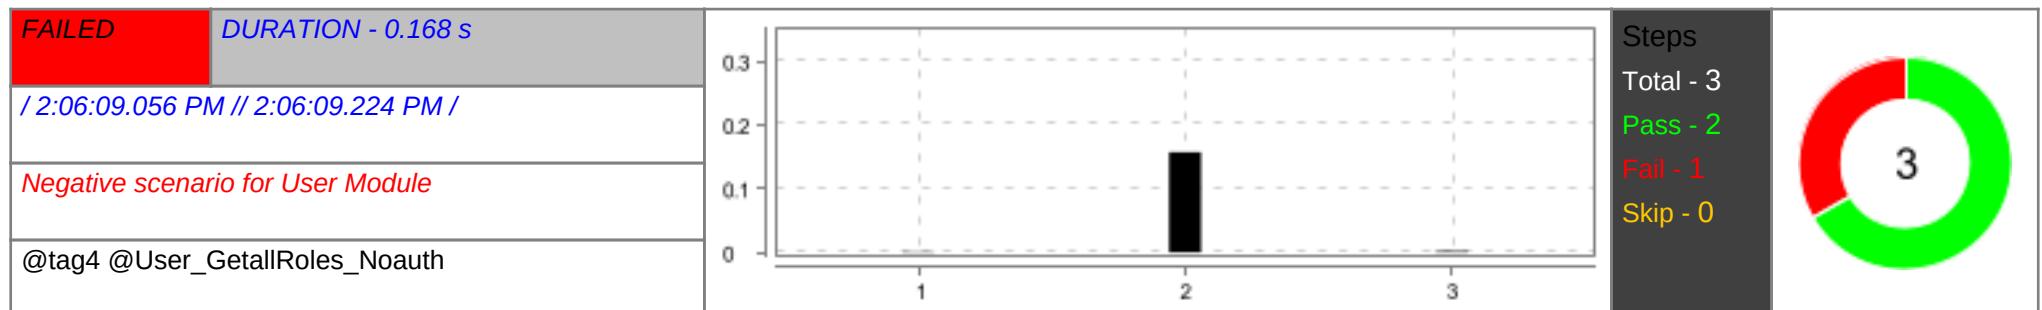

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request without Authorization	PASSED	0.001 s
2	When Admin sends HTTPS Request with GET All Roles endpoint	PASSED	0.157 s
3	Then Admin receives status 401 with Unauthorized message java.lang.NullPointerException: Cannot invoke "io.restassured.response.Response.getStatusCode()" because "this.response" is null at api.stepdefinitions.UserController.admin_receives_status_with_unauthorized_message(UserController.java:96) at ?.Admin receives status 401 with Unauthorized message(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:9)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
* Not displayable characters are replaced by '?'.			

Check if admin is able to retrieve all the available roles with invalid End point

FAILED	DURATION - 0.005 s		Steps Total - 3 Pass - 1 Fail - 1 Skip - 1	
	/ 2:06:09.241 PM // 2:06:09.246 PM /			
	Negative scenario for User Module			
	@User_GetallRoles_Invalidendpoint @tag4			

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request	PASSED	0.001 s
2	When Admin sends HTTPS Request with invalid endpoint java.lang.NullPointerException: Cannot invoke "io.restassured.specification.RequestSpecification.header(String, Object, Object[])" because "this.request" is null at api.stepdefinitions.ProgramPost.admin_sends_https_request_with_invalidEndpoint(ProgramPost.java:600) at ?.Admin sends HTTPS Request with invalid endpoint(file:///C:/Users/shanji/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:14) * Not displayable characters are replaced by '?'.	FAILED	0.001 s
3	Then Admin receives status 404 with Not Found error message	SKIPPED	0.001 s


Check if admin able to retrieve all Admin without Authorization

FAILED	DURATION - 0.172 s		Steps Total - 3 Pass - 2 Fail - 1 Skip - 0	
	/ 2:06:09.257 PM // 2:06:09.429 PM /			
	Negative scenario for User Module			
	@User_GetallUser_NoAuth @tag4			

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request without Authorization	PASSED	0.001 s


#	Step / Hook Details	Status	Duration
2	When Admin sends HTTPS Request with valid endpoint	PASSED	0.167 s
3	<p>Then Admin receives status 401 with Unauthorized message</p> <pre>java.lang.NullPointerException: Cannot invoke "io.restassured.response.Response.getStatusCode()" because "this.response" is null at api.stepdefinitions.UserController.admin_receives_status_with_unauthorized_message(UserController.java:96) at ?.Admin receives status 401 with Unauthorized message(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:21) * Not displayable characters are replaced by '?'.</pre>	FAILED	0.003 s

Check if admin able to retrieve all Admin with invalid endpoint

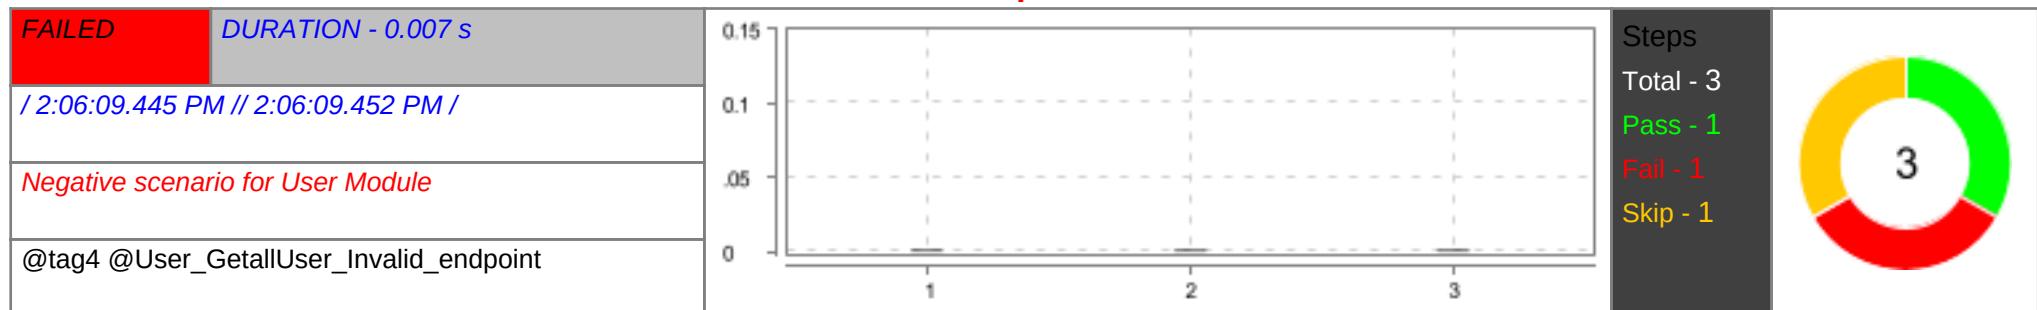


#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request	PASSED	0.001 s
2	<p>When Admin sends HTTPS Request with invalid endpoint</p> <pre>java.lang.NullPointerException: Cannot invoke "io.restassured.specification.RequestSpecification.header(String, Object, Object[])" because "this.request" is null at api.stepdefinitions.ProgramPost.admin_sends_https_request_with_invalidEndpoint(ProgramPost.java:600) at ?.Admin sends HTTPS Request with invalid endpoint(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:26) * Not displayable characters are replaced by '?'.</pre>	FAILED	0.001 s
3	Then Admin receives status 404 with Not Found error message	SKIPPED	0.001 s

Check if admin able to retrieve a Admin with valid Admin ID and invalid endpoint

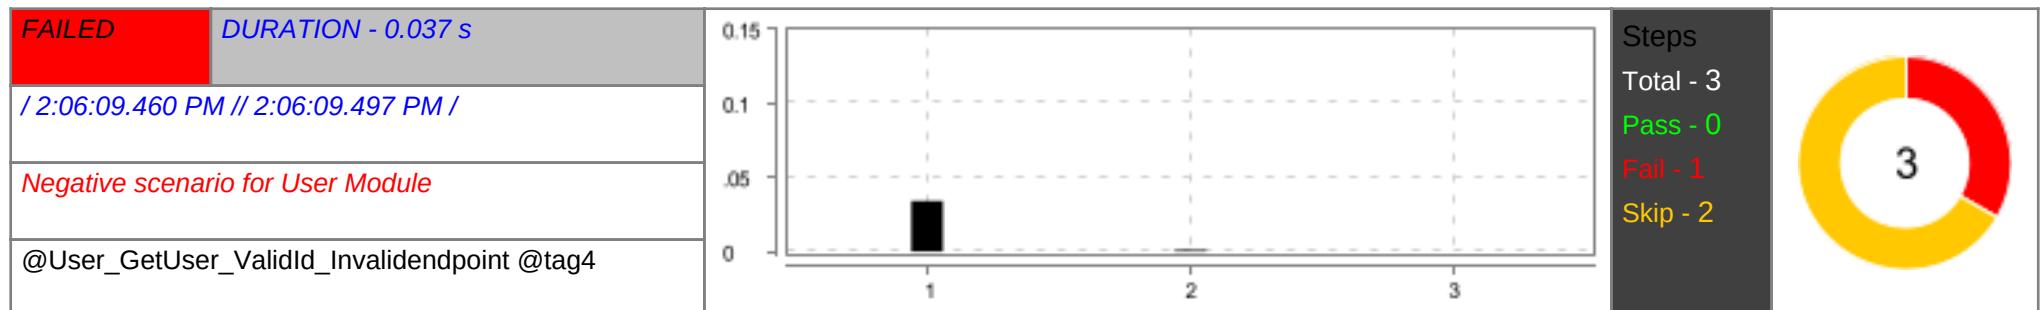


#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request with valid AdminId <i>java.lang.IllegalArgumentException: parameterValue cannot be null</i> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.reflection.CachedConstructor.doConstructorInvoke(CachedConstructor.java:60) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrap.callConstructor(ConstructorSite.java:86) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallConstructor(CallSiteArray.java:57) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:263) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.common.assertion.AssertParameter.notNull(AssertParameter.groovy:26) at io.restassured.internal.common.assertion.AssertParameter\$notNull.callStatic(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallStatic(CallSiteArray.java:53) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callStatic(AbstractCallSite.java:217) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callStatic(AbstractCallSite.java:240) at io.restassured.internal.RequestSpecificationImpl.pathParam(RequestSpecificationImpl.groovy:515) at api.stepdefinitions.UserModule.adminCreates_get_request_with_valid_admin_id(UserModule.java:138) at ?.Admin creates GET Request with valid AdminId(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:31) * Not displayable characters are replaced by '?'.	FAILED	0.034 s
2	When Admin sends HTTPS Request with invalid endpointId	SKIPPED	0.001 s
3	Then Admin receives status 404 with Not Found error message	SKIPPED	0.000 s

Check if admin able to retrieve a Admin with valid Admin ID with No authorization

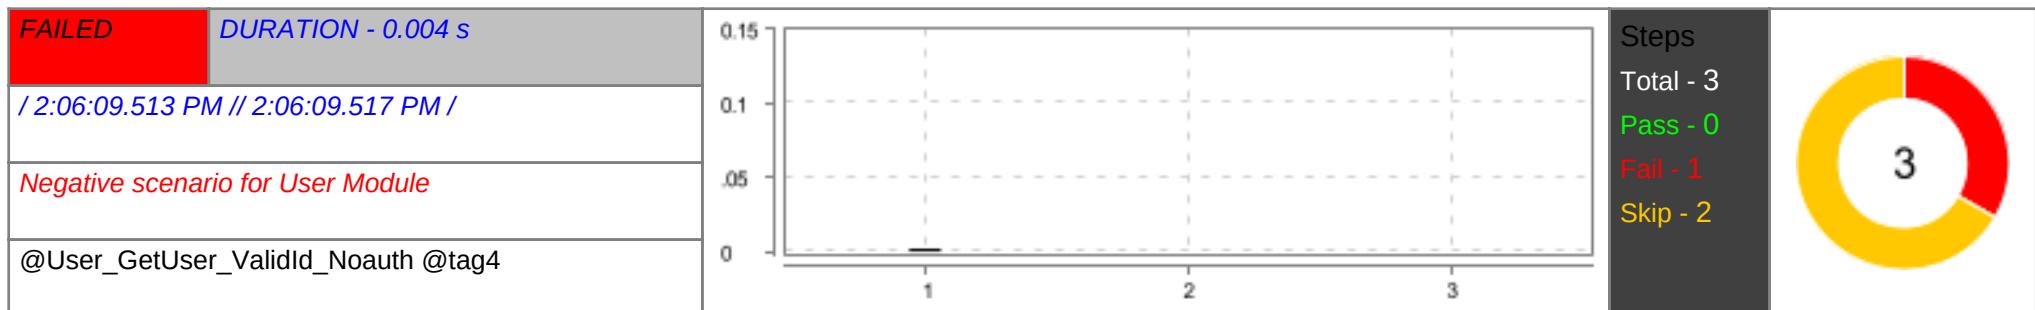


#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request with valid AdminId and with No Auth <i>java.lang.IllegalArgumentException: parameterValue cannot be null</i> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.reflection.CachedConstructor.doConstructorInvoke(CachedConstructor.java:60) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrap.callConstructor(ConstructorSite.java:86) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.common.assertion.AssertParameter.notNull(AssertParameter.groovy:26) at io.restassured.internal.common.assertion.AssertParameter\$notNull.callStatic(Unknown Source) at io.restassured.internal.RequestSpecificationImpl.pathParam(RequestSpecificationImpl.groovy:515) at api.stepdefinitions.UserModule.adminCreatesGetRequestWithValidAdminIdAndWithNoAuth(UserModule.java:700) at ?.Admin creates GET Request with valid AdminId and with No Auth(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:37) * Not displayable characters are replaced by '?'.	FAILED	0.002 s
2	When Admin sends HTTPS Request with a valid endpoint	SKIPPED	0.000 s
3	Then Admin receives status 401 with Unauthorized message	SKIPPED	0.000 s

Check if Admin able to retrieve a Admin with invalid Admin ID

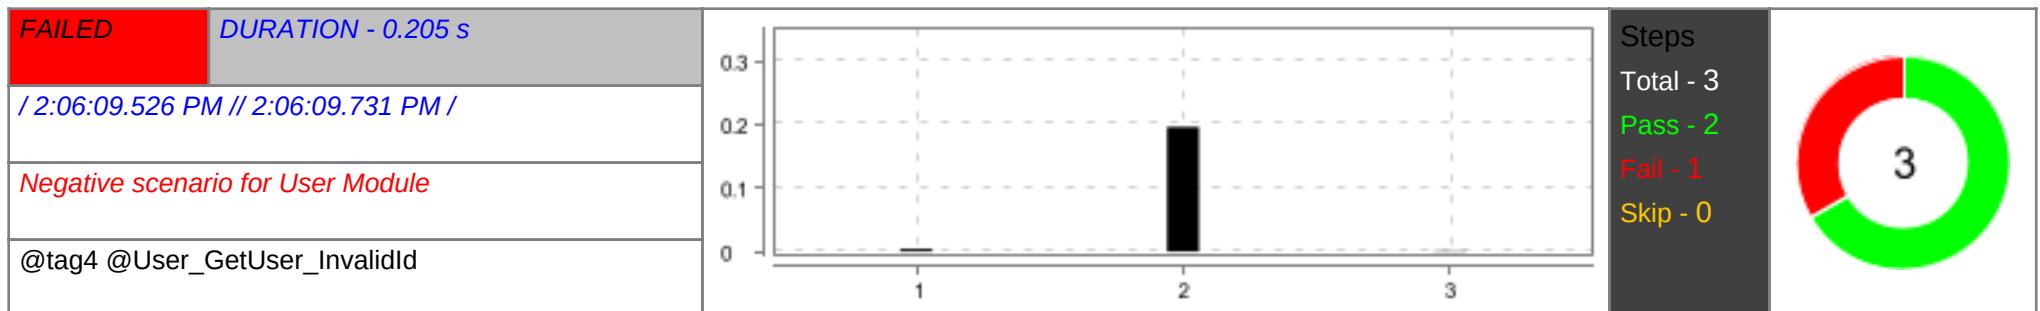

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request with invalid AdminId	PASSED	0.004 s
2	When Admin sends HTTPS Request with a valid endpoint	PASSED	0.196 s
3	Then Admin receives status 404 with Not Found error message java.lang.AssertionError: expected:<404> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertequals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.UserModule.admin_receives_status_with_not_found_error_message(UserModule.java:674) at ?.Admin receives status 404 with Not Found error message(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:45) * Not displayable characters are replaced by '?'.	FAILED	0.001 s



Check if admin able to retrieve all Admins with roles with No authorization

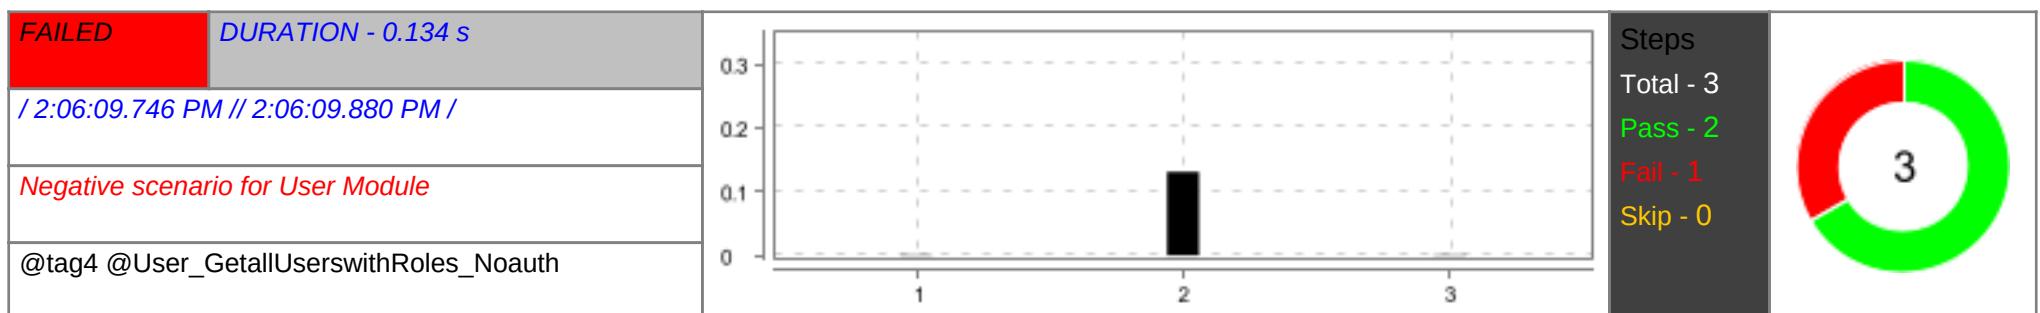

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request without Authorization	PASSED	0.001 s
2	When Admin sends HTTPS Request with endpoint as Alluserswithroles	PASSED	0.131 s
3	Then Admin receives status 401 with Unauthorized message	FAILED	0.001 s



#	Step / Hook Details	Status	Duration
	<pre>java.lang.NullPointerException: Cannot invoke "io.restassured.response.Response.getStatusCode()" because "this.response" is null at api.stepdefinitions.UserController.admin_receives_status_with_unauthorized_message(UserController.java:96) at ?.Admin receives status 401 with Unauthorized message(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:51) * Not displayable characters are replaced by '?'.</pre>		

Check if admin able to retrieve all Admins with roles with invalid endpoint

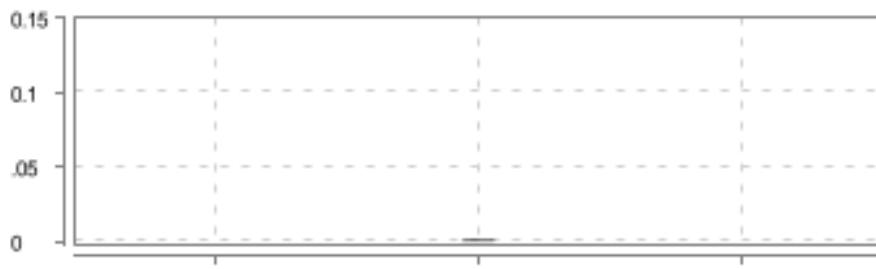FAILED	DURATION - 0.004 s		Steps Total - 3 Pass - 1 Fail - 1 Skip - 1	
/ 2:06:09.887 PM // 2:06:09.891 PM /				
Negative scenario for User Module				
@tag4 @User_GetallUserswithRoles_Invalidendpoint				


#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request	PASSED	0.000 s
2	When Admin sends HTTPS Request with invalid endpoint <pre>java.lang.NullPointerException: Cannot invoke "io.restassured.specification.RequestSpecification.header(String, Object, Object[])" because "this.request" is null at api.stepdefinitions.ProgramPost.admin_sends_https_request_with_invalidEndpoint(ProgramPost.java:600) at ?.Admin sends HTTPS Request with invalid endpoint(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:56) * Not displayable characters are replaced by '?'.</pre>	FAILED	0.001 s
3	Then Admin receives status 404 with Not Found error message	SKIPPED	0.000 s

Check if admin is able to create a Admin with valid endpoint and invalid values in request body

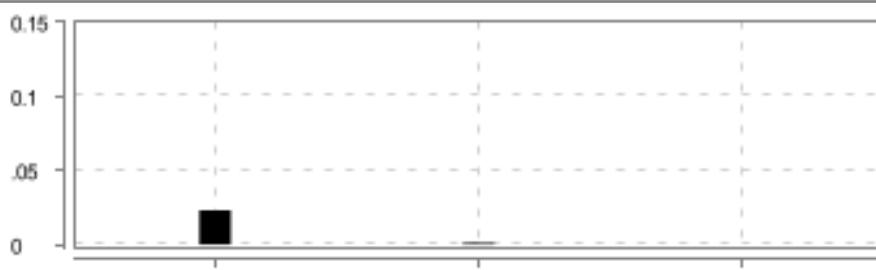FAILED	DURATION - 0.026 s		Steps Total - 3 Pass - 0 Fail - 1 Skip - 2	
/ 2:06:09.900 PM // 2:06:09.926 PM /				
Negative scenario for User Module				
@User_CreateUser_Invaliddata @tag4				


#	Step / Hook Details	Status	Duration
1	Given Admin creates POST request with all mandatory fields and additional fields java.lang.NullPointerException: Cannot invoke "org.apache.poi.xssf.usermodel.XSSFSheet.getRow(int)" because "this.sheet" is null at api.utils.ExcelReader.getCellData(ExcelReader.java:37) at api.resources.UserPostInvaliddata.dataBuild(UserPostInvaliddata.java:22) at api.stepdefinitions.UserModule.adminCreatesPostRequestWithAllMandatoryFieldsAndAdditionalFields(UserModule.java:724) at ?.Admin creates POST request with all mandatory fields and additional fields(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:61) * Not displayable characters are replaced by '?'.	FAILED	0.023 s
2	When Admin sends HTTPS Request with endpoint	SKIPPED	0.001 s
3	Then Admin receives 400 Bad Request Status with message and boolean success details	SKIPPED	0.000 s

Check if Admin able to create a Admin missing mandatory fields in request body

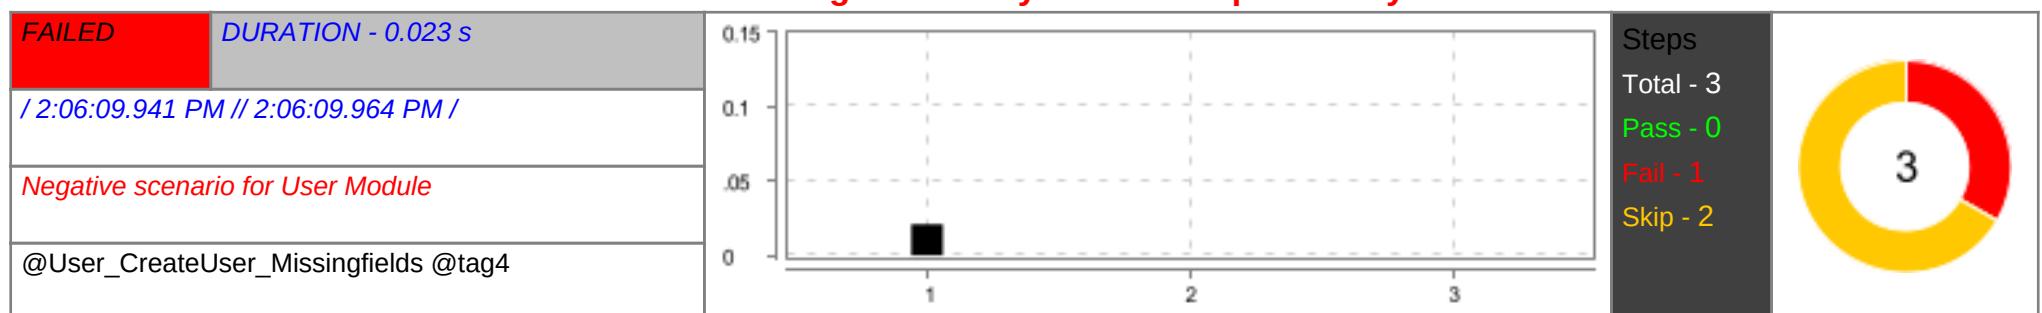


#	Step / Hook Details	Status	Duration
1	Given Admin creates POST request with missing mandatory fields in request body java.lang.NullPointerException: Cannot invoke "org.apache.poi.xssf.usermodel.XSSFSheet.getRow(int)" because "this.sheet" is null at api.utils.ExcelReader.getCellData(ExcelReader.java:37) at api.resources.UserpostMissManddata.dataBuild(UserpostMissManddata.java:22) at api.stepdefinitions.UserModule.adminCreatesPostRequestWithMissingMandatoryFieldsInRequestBody(UserModule.java:732) at ?.Admin creates POST request with missing mandatory fields in request body(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:67) * Not displayable characters are replaced by '?'.	FAILED	0.021 s
2	When Admin sends HTTPS Request with endpoint	SKIPPED	0.000 s
3	Then Admin receives 400 Bad Request Status with error message	SKIPPED	0.000 s

Check if admin able to create a new Admin with request body without authorization

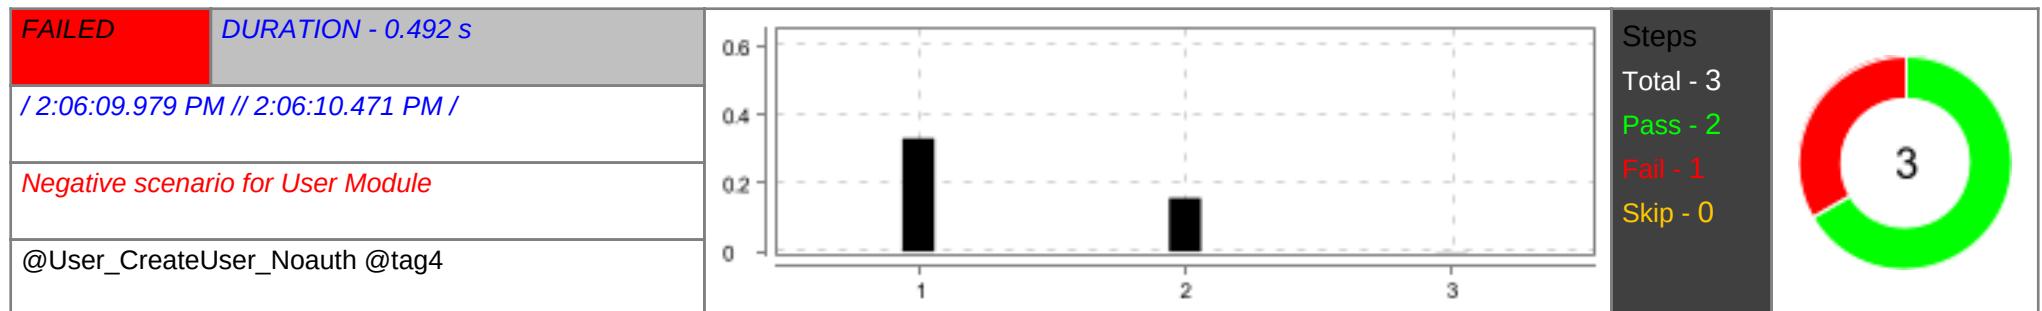

#	Step / Hook Details	Status	Duration
1	Given Admin creates POST request with all mandatory fields and additional fields with No Auth	PASSED	0.331 s
2	When Admin sends HTTPS Request with endpoint	PASSED	0.156 s
3	Then Admin receives status 401 with Unauthorized message java.lang.NullPointerException: Cannot invoke "io.restassured.response.Response.getStatusCode()" because "this.response" is null at api.stepdefinitions.UserController.admin_receives_status_with_unauthorized_message(UserController.java:96) at ?.Admin receives status 401 with Unauthorized message(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:75) * Not displayable characters are replaced by '?'. 	FAILED	0.001 s


Check if admin is able to get count of active and inactive Admins with invalid endpoint

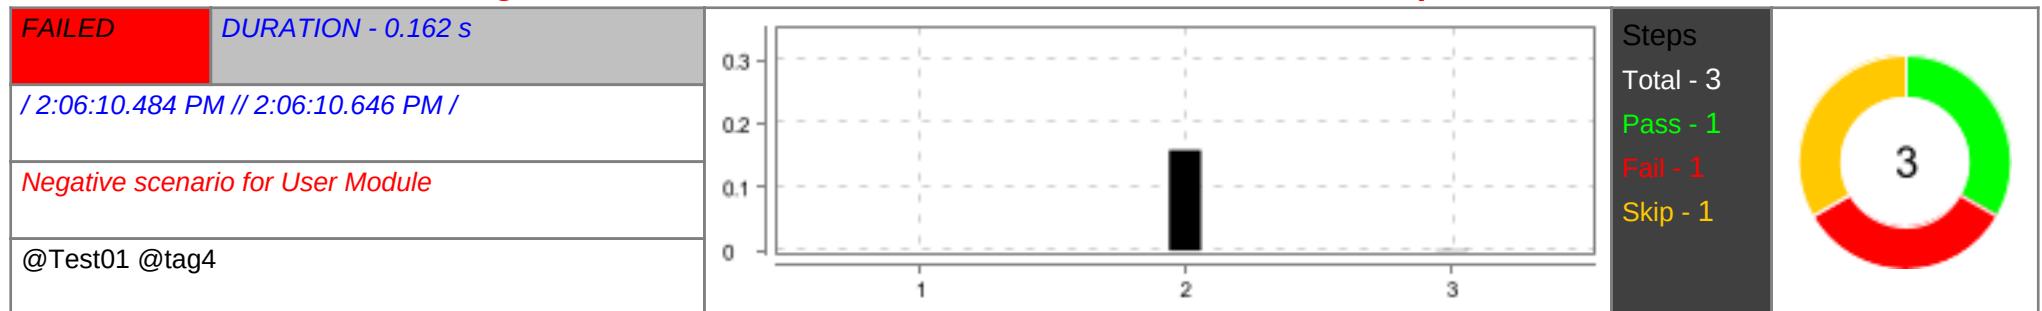

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request	PASSED	0.000 s
2	When Admin sends HTTPS Request with endpoint with invalid endpoint java.lang.AssertionError: 1 expectation failed. Expected status code <404> but was <401>. at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)	FAILED	0.158 s

#	Step / Hook Details	Status	Duration
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrapNoCoerce.callConstructor(ConstructorSite.java:108) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallConstructor(CallSiteArray.java:57) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:263) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure.validate(ResponseSpecificationImpl.groovy:512) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure\$validate\$1.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:125) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:139) at io.restassured.internal.ResponseSpecificationImpl.validateResponseIfRequired(ResponseSpecificationImpl.groovy:696) at io.restassured.internal.ResponseSpecificationImpl.this\$2\$validateResponseIfRequired(ResponseSpecificationImpl.groovy) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.runtime.callsite.PlainObjectMetaMethodSite.doInvoke(PlainObjectMetaMethodSite.java:43) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite\$PogoCachedMethodSiteNoUnwrapNoCoerce.invoke(PogoMetaMethodSite.java:198) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite.callCurrent(PogoMetaMethodSite.java:62) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallCurrent(CallSiteArray.java:49) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:171) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:185) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:135) at io.restassured.specification.ResponseSpecification\$statusCode\$0.callCurrent(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallCurrent(CallSiteArray.java:49) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:171) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:185) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:143) at io.restassured.internal.ValidatableResponseOptionsImpl.statusCode(ValidatableResponseOptionsImpl.java:89) at api.stepdefinitions.UserModule.admin_sends_https_request_with_endpoint_with_invalid_endpoint(UserModule.java:423) at ?.Admin sends HTTPS Request with endpoint with invalid endpoint(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:81) * Not displayable characters are replaced by '?'.		
3	Then Admin receives status 404 with Not Found error message	SKIPPED	0.001 s

Check if admin is able to get count of active and inactive Admins by invalid role ID

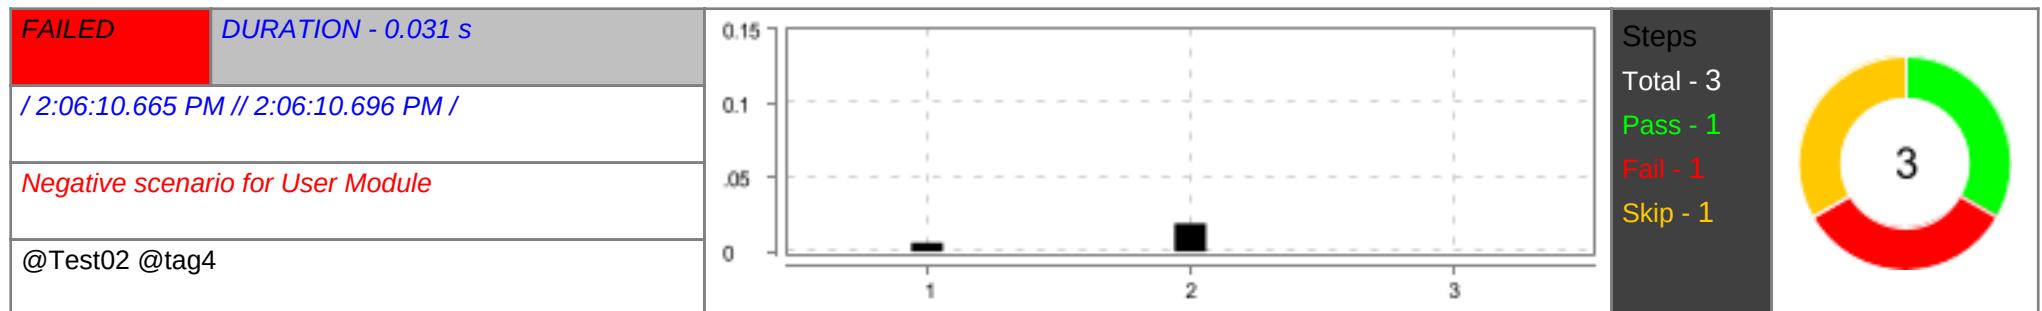


#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request with active and inactive Admins Negative endpoint	PASSED	0.006 s
2	When Admin sends GET HTTPS Request endpoint with invalid role ID <i>java.lang.IllegalArgumentException: Invalid number of path parameters. Expected 1, was 0. Undefined path parameters are: roleId.</i> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.reflection.CachedConstructor.doConstructorInvoke(CachedConstructor.java:60) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrap.callConstructor(ConstructorSite.java:86) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallConstructor(CallSiteArray.java:57) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:263) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.RequestSpecificationImpl.assertCorrectNumberOfPathParams(RequestSpecificationImpl.groovy:1277) at jdk.internal.reflect.GeneratedMethodAccessor236.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:343) at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:328) at groovy.lang.MetaClassImpl.doInvokeMethod(MetaClassImpl.java:1331) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1086) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1006) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:789) at io.restassured.internal.RequestSpecificationImpl.invokeMethod(RequestSpecificationImpl.groovy) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.call(PogoInterceptableSite.java:46) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.callCurrent(PogoInterceptableSite.java:57) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:176) at io.restassured.internal.RequestSpecificationImpl.sendRequest(RequestSpecificationImpl.groovy:1161) at io.restassured.internal.RequestSpecificationImpl.this\$2\$sendRequest(RequestSpecificationImpl.groovy)	FAILED	0.019 s

#	Step / Hook Details	Status	Duration
	at jdk.internal.reflect.GeneratedMethodAccessor234.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:343) at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:328) at groovy.lang.MetaClassImpl.doInvokeMethod(MetaClassImpl.java:1331) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1086) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1006) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:789) at io.restassured.internal.RequestSpecificationImpl.invokeMethod(RequestSpecificationImpl.groovy) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.call(PogoInterceptableSite.java:46) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:166) at io.restassured.internal.filter.SendRequestFilter.filter(SendRequestFilter.groovy:30) at io.restassured.filter.Filter\$filter\$0.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.time.TimingFilter.filter(TimingFilter.java:56) at io.restassured.filter.Filter\$filter.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter\$0.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.FilterContext\$next.call(Unknown Source) at io.restassured.internal.filter.CsrfFilter.filter(CsrfFilter.groovy:70) at io.restassured.filter.Filter\$filter\$0.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.log.StatusCodeBasedLoggingFilter.filter(StatusCodeBasedLoggingFilter.java:112) at io.restassured.filter.log.ResponseLoggingFilter.filter(ResponseLoggingFilter.java:31) at io.restassured.filter.Filter\$filter.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.log.RequestLoggingFilter.filter(RequestLoggingFilter.java:146) at io.restassured.filter.Filter\$filter.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter\$0.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.FilterContext\$next.call(Unknown Source) at io.restassured.internal.RequestSpecificationImpl.applyPathParamsAndSendRequest(RequestSpecificationImpl.groovy:1704)		


#	Step / Hook Details	Status	Duration
	<pre> at io.restassured.internal.RequestSpecificationImpl.this\$2\$applyPathParamsAndSendRequest(RequestSpecificationImpl.groovy) at jdk.internal.reflect.GeneratedMethodAccessor225.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:343) at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:328) at groovy.lang.MetaClassImpl.doInvokeMethod(MetaClassImpl.java:1331) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1086) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1006) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:789) at io.restassured.internal.RequestSpecificationImpl.invokeMethod(RequestSpecificationImpl.groovy) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.call(PogoInterceptableSite.java:46) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.callCurrent(PogoInterceptableSite.java:57) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:203) at io.restassured.internal.RequestSpecificationImpl.applyPathParamsAndSendRequest(RequestSpecificationImpl.groovy:1710) at io.restassured.internal.RequestSpecificationImpl.this\$2\$applyPathParamsAndSendRequest(RequestSpecificationImpl.groovy) at jdk.internal.reflect.GeneratedMethodAccessor224.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:343) at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:328) at groovy.lang.MetaClassImpl.doInvokeMethod(MetaClassImpl.java:1331) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1086) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1006) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:789) at io.restassured.internal.RequestSpecificationImpl.invokeMethod(RequestSpecificationImpl.groovy) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.call(PogoInterceptableSite.java:46) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.callCurrent(PogoInterceptableSite.java:57) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:203) at io.restassured.internal.RequestSpecificationImpl.get(RequestSpecificationImpl.groovy:172) at io.restassured.internal.RequestSpecificationImpl.get(RequestSpecificationImpl.groovy) at api.stepdefinitions.UserModule.admin_sends_get_https_request_endpoint_with_invalid_role_id(UserModule.java:530) at ?.Admin sends GET HTTPS Request endpoint with invalid role ID(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:87) * Not displayable characters are replaced by '?'. </pre>		
3	Then Admin receives status 401 with Unauthorized message	SKIPPED	0.000 s

Check if admin is able to get count of active and inactive Admins with no authorization

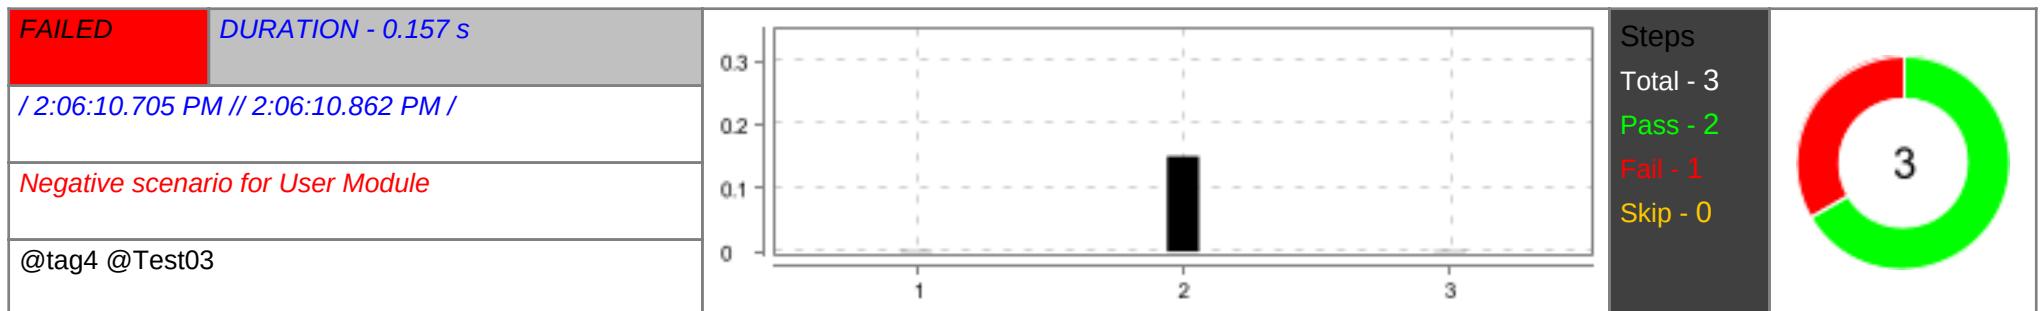

#	Step / Hook Details	Status	Duration
1	Given Admin creates no authorization GET Request	PASSED	0.001 s
2	When Admin sends a HTTPS Request with endpoint no authorization	PASSED	0.150 s
3	Then Admin receives status 401 with Unauthorized message java.lang.NullPointerException: Cannot invoke "io.restassured.response.Response.getStatusCode()" because "this.response" is null at api.stepdefinitions.UserController.admin_receives_status_with_unauthorized_message(UserController.java:96) at ?.Admin receives status 401 with Unauthorized message(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:95) * Not displayable characters are replaced by '?'. 	FAILED	0.001 s


Check if admin able to retrieve all active Admins with invalid endpoint

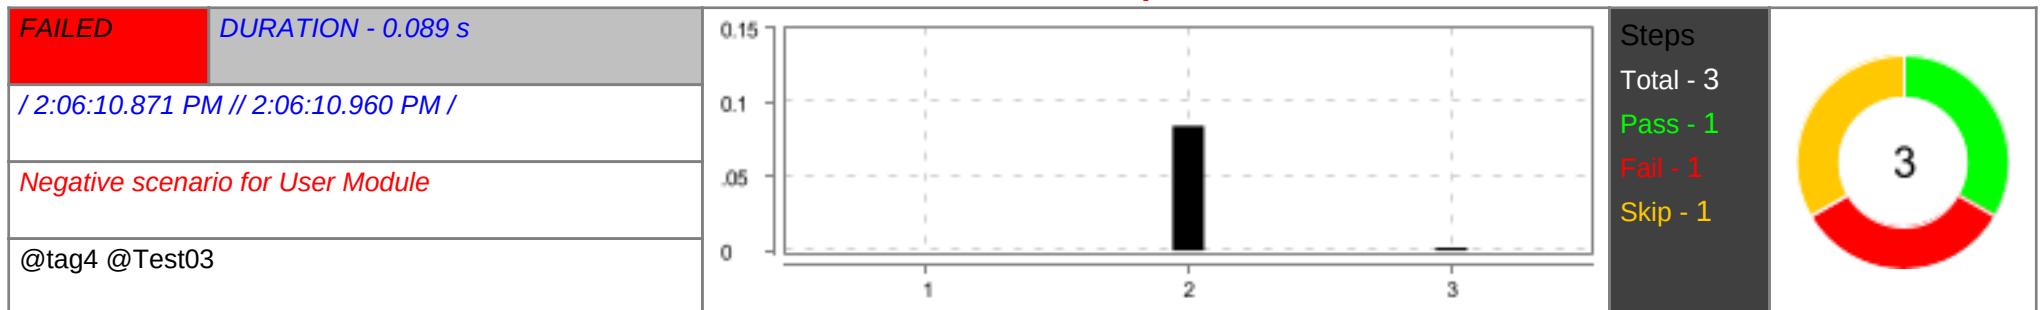

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request	PASSED	0.000 s
2	When Admin sends HTTPS Request with all active Admins with invalid endpoint java.lang.AssertionError: 1 expectation failed. Expected status code <404> but was <401>. at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)	FAILED	0.084 s


#	Step / Hook Details	Status	Duration
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrapNoCoerce.callConstructor(ConstructorSite.java:108) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure.validate(ResponseSpecificationImpl.groovy:512) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure\$validate\$1.call(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.validateResponseIfRequired(ResponseSpecificationImpl.groovy:696) at io.restassured.internal.ResponseSpecificationImpl.this\$2\$validateResponseIfRequired(ResponseSpecificationImpl.groovy) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.runtime.callsite.PlainObjectMetaMethodSite.doInvoke(PlainObjectMetaMethodSite.java:43) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite\$PogoCachedMethodSiteNoUnwrapNoCoerce.invoke(PogoMetaMethodSite.java:198) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite.callCurrent(PogoMetaMethodSite.java:62) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:185) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:135) at io.restassured.specification.ResponseSpecification\$statusCode\$0.callCurrent(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:143) at io.restassured.internal.ValidatableResponseOptionsImpl.statusCode(ValidatableResponseOptionsImpl.java:89) at api.stepdefinitions.UserModule.admin_sends_https_request_with_all_active_admins_with_invalid_endpoint(UserModule.java:463) at ?.Admin sends HTTPS Request with all active Admins with invalid endpoint(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:101) * Not displayable characters are replaced by '?'.		
3	Then Admin receives status 404 with Not Found error message	SKIPPED	0.002 s

Check if admin able to retrieve all active Admins with no authorization

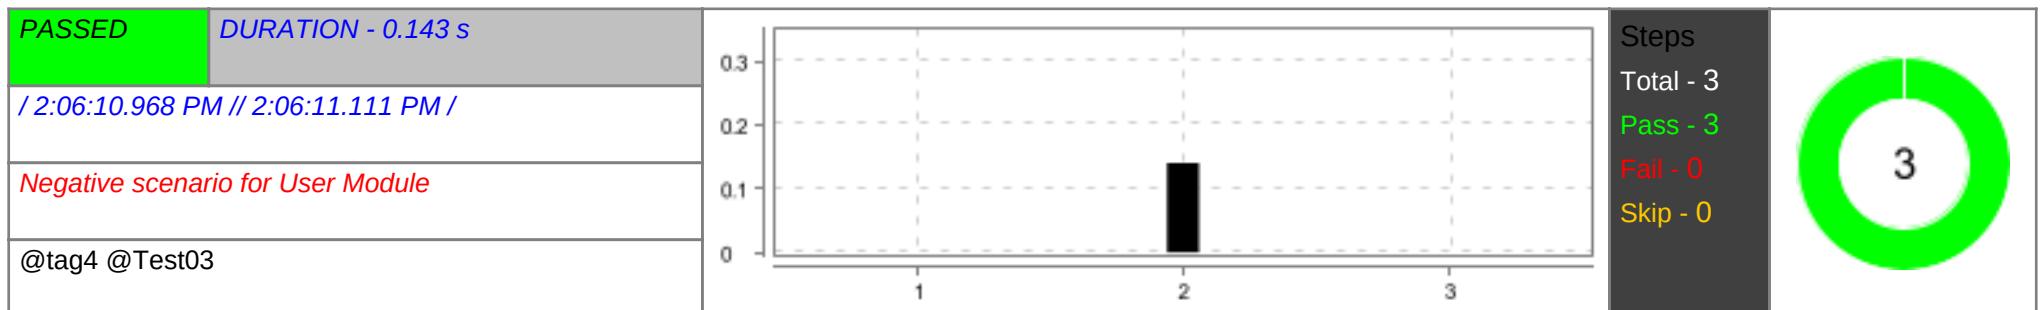

#	Step / Hook Details	Status	Duration
1	Given Admin creates no authorization GET Request	PASSED	0.000 s
2	When Admin sends HTTPS Request with endpoint with no auth	PASSED	0.140 s
3	Then Admin receives status 401 with Unauthorized	PASSED	0.000 s


Check if admin is able to get the Admins by program batches for invalid batch ID

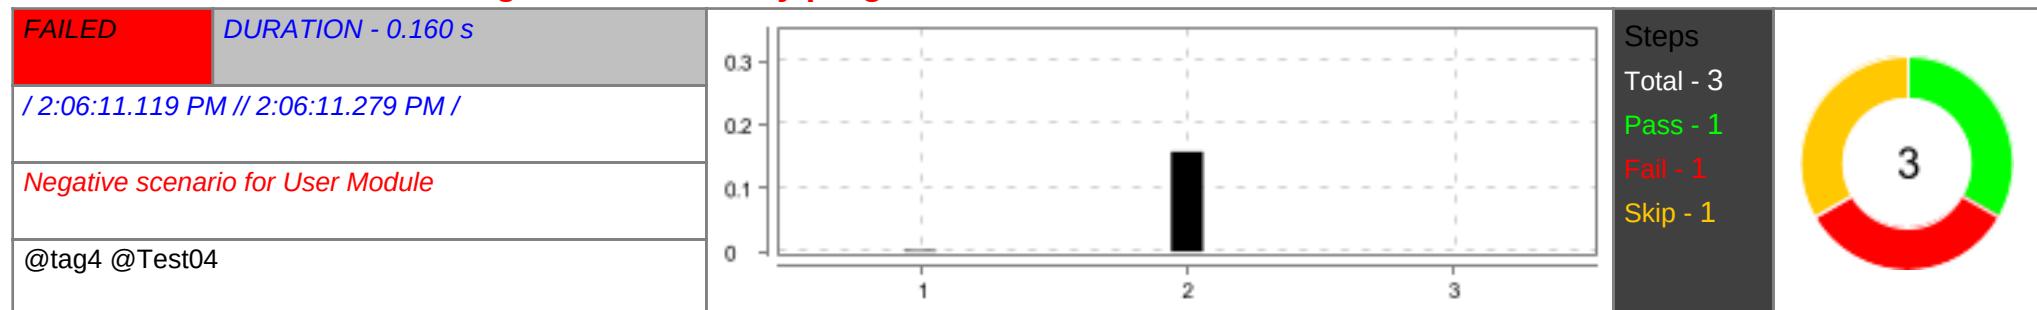

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request with invalid batchId	PASSED	0.002 s
2	When Admin sends GET Request with invalid batchId by Program Batches endpoint java.lang.AssertionError: 1 expectation failed. Expected status code <404> but was <401>. at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrapNoCoerce.callConstructor(ConstructorSite.java:108) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure.validate(ResponseSpecificationImpl.groovy:512) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure\$validate\$1.call(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.validateResponseIfRequired(ResponseSpecificationImpl.groovy:696) at io.restassured.internal.ResponseSpecificationImpl.this\$2\$validateResponseIfRequired(ResponseSpecificationImpl.groovy) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.runtime.callsite.PlainObjectMetaMethodSite.doInvoke(PlainObjectMetaMethodSite.java:43) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite\$PogoCachedMethodSiteNoUnwrapNoCoerce.invoke(PogoMetaMethodSite.java:198)	FAILED	0.157 s

#	Step / Hook Details	Status	Duration
	at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite.callCurrent(PogoMetaMethodSite.java:62) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:185) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:135) at io.restassured.specification.ResponseSpecification\$statusCode\$0.callCurrent(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:143) at io.restassured.internal.ValidatableResponseOptionsImpl.statusCode(ValidatableResponseOptionsImpl.java:89) at api.stepdefinitions.UserModule.admin_sends_get_request_with_invalid_batch_id_by_program_batches_endpoint(UserModule.java:495) at ?.Admin sends GET Request with invalid batchId by Program Batches endpoint(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:114) * Not displayable characters are replaced by '?'.		
3	Then Admin receives status 404 with Not Found error message	SKIPPED	0.000 s


Check if admin is able to get the Admins for invalid program Id

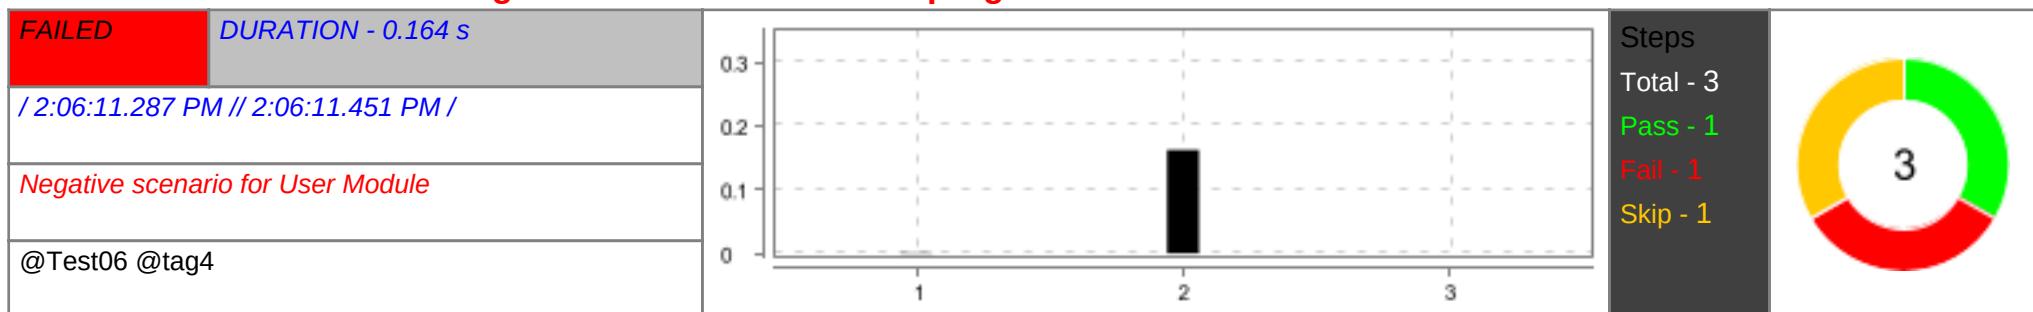

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request with invalid program Id	PASSED	0.001 s
2	When Admin sends GET Request with invalid program Id by Program endpoint <pre>java.lang.AssertionError: 1 expectation failed. Expected status code <404> but was <401>. at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrapNoCoerce.callConstructor(ConstructorSite.java:108) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure.validate(ResponseSpecificationImpl.groovy:512) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure\$validate\$1.call(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.validateResponseIfRequired(ResponseSpecificationImpl.groovy:696)</pre>	FAILED	0.162 s

#	Step / Hook Details	Status	Duration
	<pre> at io.restassured.internal.ResponseSpecificationImpl.this\$2\$validateResponseIfRequired(ResponseSpecificationImpl.groovy) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.runtime.callsite.PlainObjectMetaMethodSite.doInvoke(PlainObjectMetaMethodSite.java:43) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite\$PogoCachedMethodSiteNoUnwrapNoCoerce.invoke(PogoMetaMethodSite.java:198) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite.callCurrent(PogoMetaMethodSite.java:62) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:185) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:135) at io.restassured.specification.ResponseSpecification\$statusCode\$0.callCurrent(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:143) at io.restassured.internal.ValidatableResponseOptionsImpl.statusCode(ValidatableResponseOptionsImpl.java:89) at api.stepdefinitions.UserModule.admin_sends_get_request_with_invalid_program_id_by_program_endpoint(UserModule.java:515) at ?.Admin sends GET Request with invalid program Id by Program endpoint(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:121) * Not displayable characters are replaced by '?'. </pre>		
3	Then Admin receives status 404 with Not Found error message	SKIPPED	0.000 s


Check if admin is able to retrieve Admins by invalid role ID

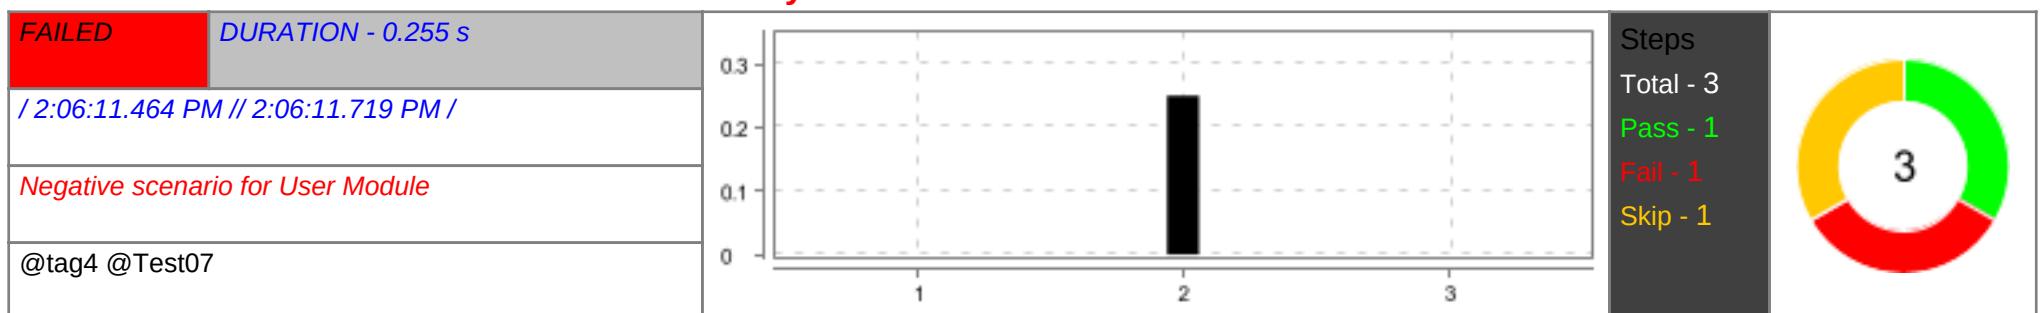

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request for GET with invalid role ID	PASSED	0.000 s
2	When Admin sends GET HTTPS Request endpoint with invalid role ID <pre> java.lang.AssertionError: 1 expectation failed. Expected status code <404> but was <401>. at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) </pre>	FAILED	0.250 s


#	Step / Hook Details	Status	Duration
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrapNoCoerce.callConstructor(ConstructorSite.java:108) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure.validate(ResponseSpecificationImpl.groovy:512) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure\$validate\$1.call(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.validateResponseIfRequired(ResponseSpecificationImpl.groovy:696) at io.restassured.internal.ResponseSpecificationImpl.this\$2\$validateResponseIfRequired(ResponseSpecificationImpl.groovy) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.runtime.callsite.PlainObjectMetaMethodSite.doInvoke(PlainObjectMetaMethodSite.java:43) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite\$PogoCachedMethodSiteNoUnwrapNoCoerce.invoke(PogoMetaMethodSite.java:198) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite.callCurrent(PogoMetaMethodSite.java:62) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:185) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:135) at io.restassured.specification.ResponseSpecification\$statusCode\$0.callCurrent(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:143) at io.restassured.internal.ValidatableResponseOptionsImpl.statusCode(ValidatableResponseOptionsImpl.java:89) at api.stepdefinitions.UserModule.admin_sends_get_https_request_endpoint_with_invalid_role_id(UserModule.java:532) at ?.Admin sends GET HTTPS Request endpoint with invalid role ID(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:127) * Not displayable characters are replaced by '?'.		
3	Then Admin receives status 404 with Not Found error message	SKIPPED	0.000 s

Check if admin is able to retrieve all Admins with filters with no authorization

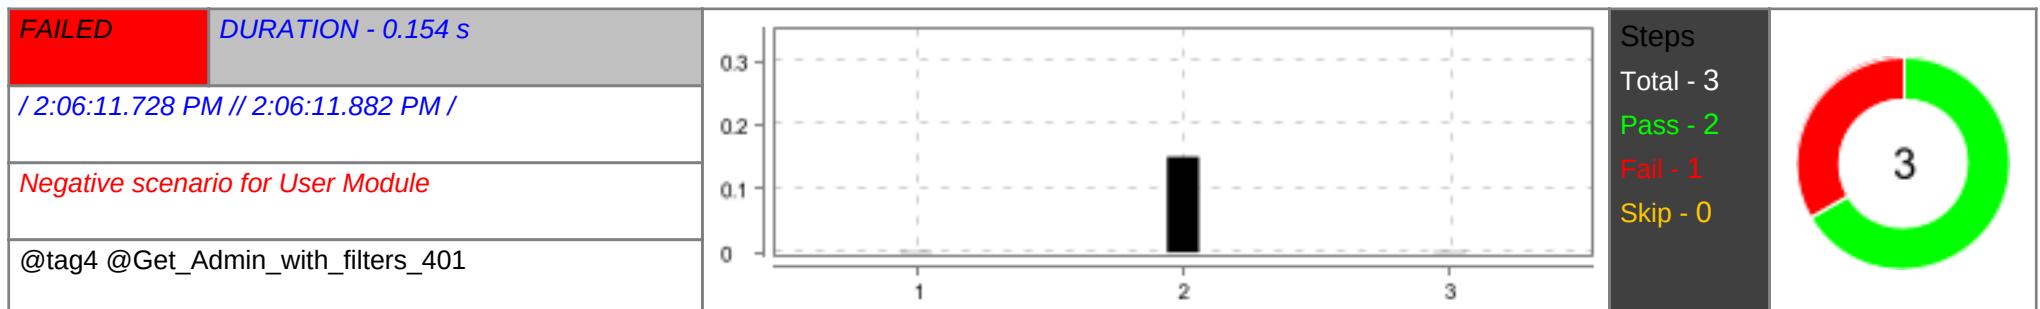


#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request with filters with no authorization	PASSED	0.001 s
2	When Admin sends HTTPS Request with filters with no authorization with endpoint	PASSED	0.150 s
3	Then Admin receives status 401 with Unauthorized message java.lang.NullPointerException: Cannot invoke "io.restassured.response.Response.getStatusCode()" because "this.response" is null at api.stepdefinitions.UserController.admin_receives_status_with_unauthorized_message(UserController.java:96) at ?.Admin receives status 401 with Unauthorized message(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:134) * Not displayable characters are replaced by '?'.	FAILED	0.001 s

Check if admin is able to retrieve all Admins with filters with invalid endpoint

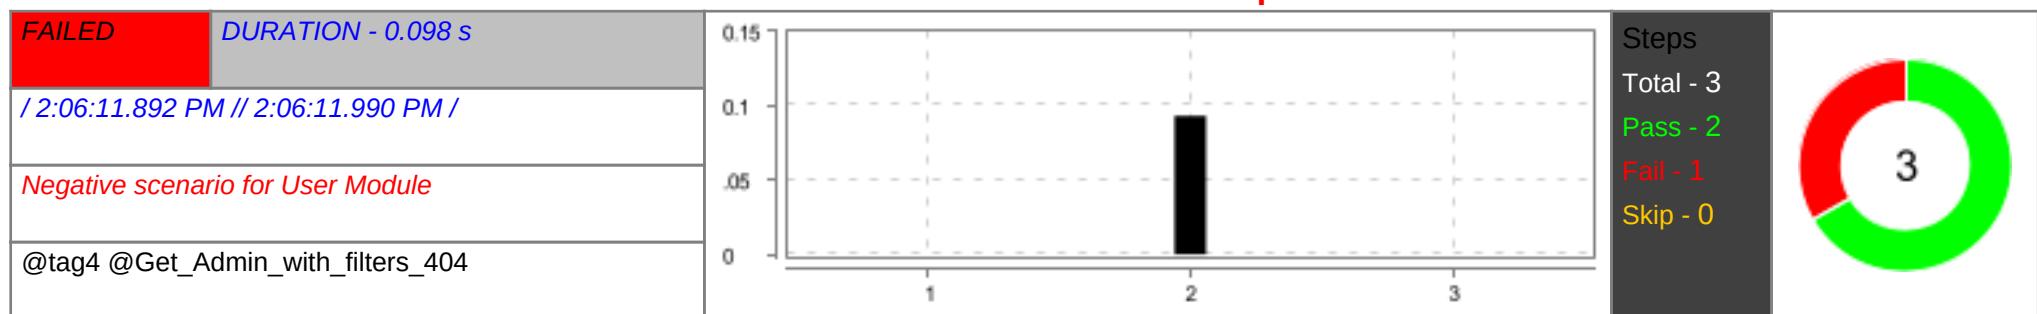


#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request with filters with invalid endpoint	PASSED	0.000 s
2	When Admin sends HTTPS Request with filters with invalid endpoint	PASSED	0.093 s
3	Then Admin receives status 404 with Not Found error message java.lang.AssertionError: expected:<404> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:647) at org.junit.Assert.assertEquals(Assert.java:633) at api.stepdefinitions.UserModule.admin_receives_status_with_not_found_error_message(UserModule.java:674) at ?.Admin receives status 404 with Not Found error message(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:140) * Not displayable characters are replaced by '?'.	FAILED	0.000 s

Check if admin is able to update Admin details with No authorization

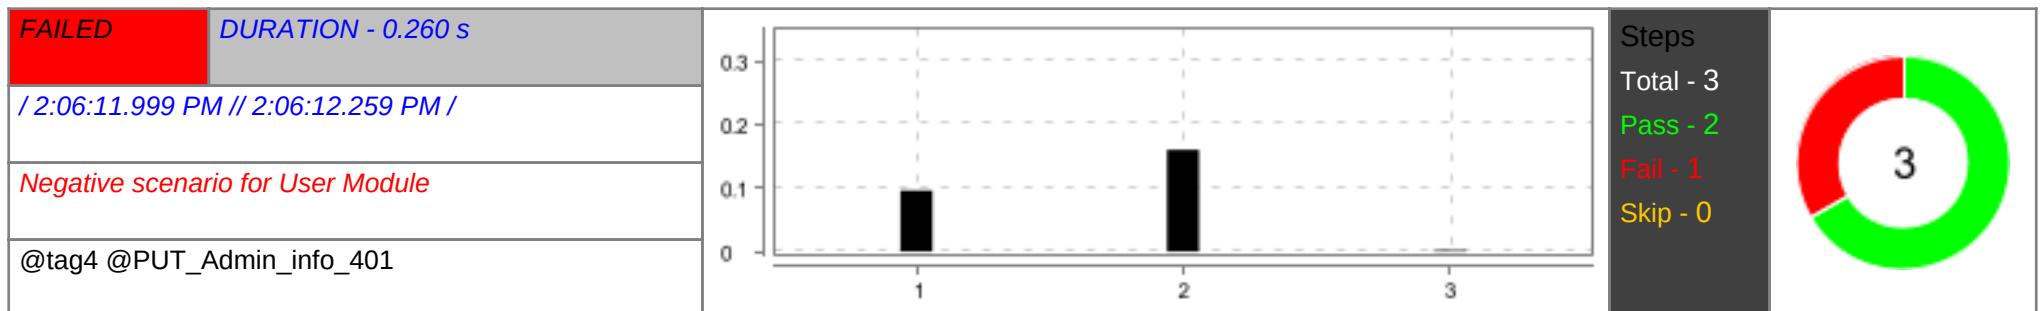

#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request with valid data in request body with No Authorization	PASSED	0.096 s
2	When Admin sends HTTPS request with endpoint with No Authorization	PASSED	0.160 s
3	Then Admin receives status 401 with Unauthorized message java.lang.NullPointerException: Cannot invoke "io.restassured.response.Response.getStatusCode()" because "this.response" is null at api.stepdefinitions.UserController.admin_receives_status_with_unauthorized_message(UserController.java:96) at ?.Admin receives status 401 with Unauthorized message(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:146) * Not displayable characters are replaced by '?'. 	FAILED	0.002 s


Check if admin is able to update the Admin login status by Admin ID with invalid request body

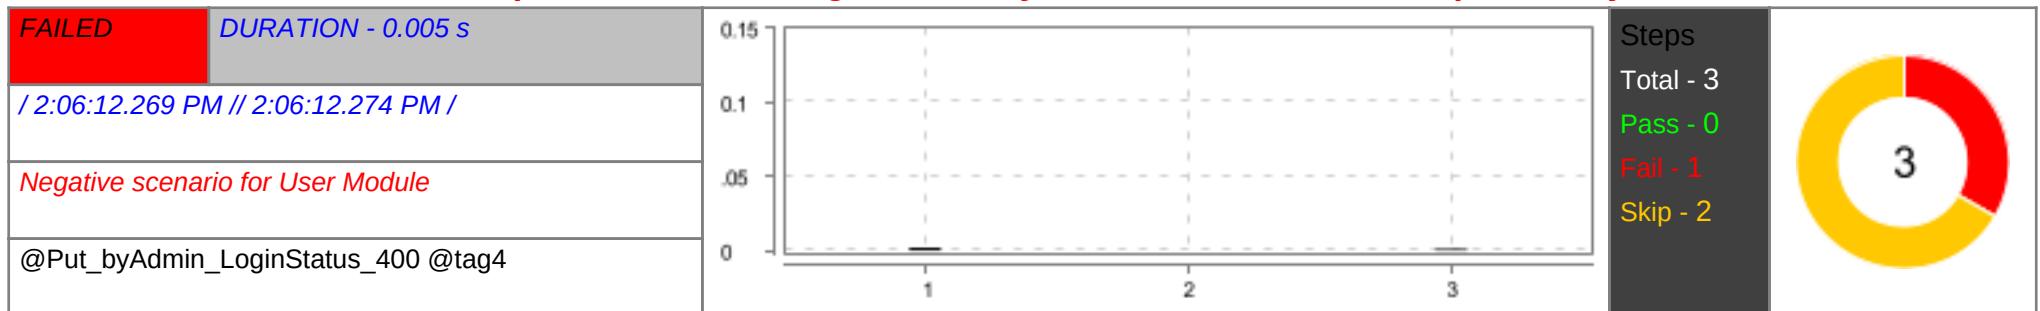

#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request with Admin login status by Admin ID with invalid request body java.lang.IllegalArgumentException: parameterValue cannot be null at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) 	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.reflection.CachedConstructor.doConstructorInvoke(CachedConstructor.java:60) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrap.callConstructor(ConstructorSite.java:86) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.common.assertion.AssertParameter.notNull(AssertParameter.groovy:26) at io.restassured.internal.common.assertion.AssertParameter\$notNull.callStatic(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallStatic(CallSiteArray.java:53) at io.restassured.internal.common.assertion.AssertParameter\$notNull.callStatic(Unknown Source) at io.restassured.internal.RequestSpecificationImpl.pathParam(RequestSpecificationImpl.groovy:515) at api.stepdefinitions.UserModule. adminCreatesPutRequestWithAdminLoginStatusByAdminIdWithInvalidRequestBody(UserModule.java:758) at ?.Admin creates PUT Request with Admin login status by Admin ID with invalid request body(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:150) * Not displayable characters are replaced by '?'. </pre>		
2	When Admin sends HTTPS Request for update User with Admin login status by Admin ID with invalid request body	SKIPPED	0.000 s
3	Then Admin receives status "400" Bad Request	SKIPPED	0.001 s

Check if admin is able to update the Admin login status by Admin ID with invalid AdminId

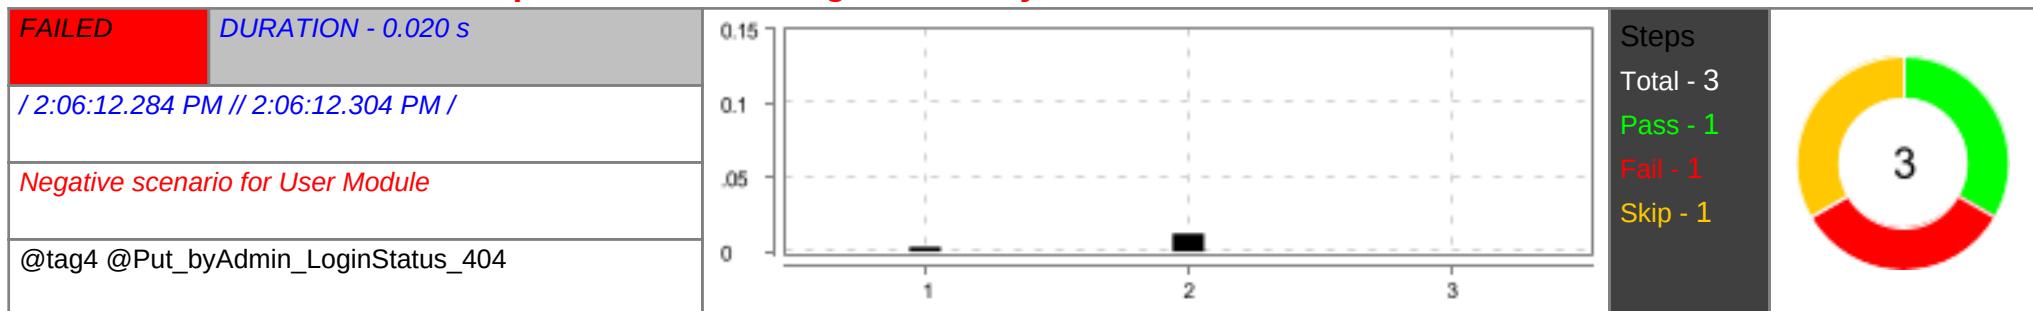


#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request with Admin login status by Admin ID with invalid AdminId	PASSED	0.003 s
2	When Admin sends HTTPS Request for update User with Admin login status by Admin ID with invalid AdminId java.lang.IllegalArgumentException: Path parameters were not correctly defined. Redundant path parameters are: userID=1388. Undefined path parameters are: userId. <pre> at java.base/jdk/internal/reflect/NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk/internal/reflect/NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk/internal/reflect/DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) </pre>	FAILED	0.012 s

#	Step / Hook Details	Status	Duration
	at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.reflection.CachedConstructor.doConstructorInvoke(CachedConstructor.java:60) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrap.callConstructor(ConstructorSite.java:86) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.RequestSpecificationImpl.assertCorrectNumberOfPathParams(RequestSpecificationImpl.groovy:1277) at jdk.internal.reflect.GeneratedMethodAccessor236.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:343) at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:328) at groovy.lang.MetaClassImpl.doInvokeMethod(MetaClassImpl.java:1331) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1086) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1006) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:789) at io.restassured.internal.RequestSpecificationImpl.invokeMethod(RequestSpecificationImpl.groovy) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.call(PogoInterceptableSite.java:46) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.callCurrent(PogoInterceptableSite.java:57) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:176) at io.restassured.internal.RequestSpecificationImpl.sendRequest(RequestSpecificationImpl.groovy:1161) at io.restassured.internal.RequestSpecificationImpl.this\$2\$sendRequest(RequestSpecificationImpl.groovy) at jdk.internal.reflect.GeneratedMethodAccessor234.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:343) at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:328) at groovy.lang.MetaClassImpl.doInvokeMethod(MetaClassImpl.java:1331) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1086) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1006) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:789) at io.restassured.internal.RequestSpecificationImpl.invokeMethod(RequestSpecificationImpl.groovy) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.call(PogoInterceptableSite.java:46) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:166) at io.restassured.internal.filter.SendRequestFilter.filter(SendRequestFilter.groovy:30) at io.restassured.filter.Filter\$filter\$0.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.time.TimingFilter.filter(TimingFilter.java:56) at io.restassured.filter.Filter\$filter.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter\$0.call(Unknown Source)		

#	Step / Hook Details	Status	Duration
	at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.FilterContext\$next.call(Unknown Source) at io.restassured.internal.filter.CsrfFilter.filter(CsrfFilter.groovy:70) at io.restassured.filter.Filter\$filter\$0.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.log.StatusCodeBasedLoggingFilter.filter.StatusCodeBasedLoggingFilter.java:112) at io.restassured.filter.log.ResponseLoggingFilter.filter(ResponseLoggingFilter.java:31) at io.restassured.filter.Filter\$filter.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.log.RequestLoggingFilter.filter(RequestLoggingFilter.java:146) at io.restassured.filter.Filter\$filter.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter\$0.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.FilterContext\$next.call(Unknown Source) at io.restassured.internal.RequestSpecificationImpl.applyPathParamsAndSendRequest(RequestSpecificationImpl.groovy:1704) at io.restassured.internal.RequestSpecificationImpl.this\$2\$applyPathParamsAndSendRequest(RequestSpecificationImpl.groovy) at jdk.internal.reflect.GeneratedMethodAccessor225.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:343) at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:328) at groovy.lang.MetaClassImpl.doInvokeMethod(MetaClassImpl.java:1331) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1086) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1006) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:789) at io.restassured.internal.RequestSpecificationImpl.invokeMethod(RequestSpecificationImpl.groovy) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.call(PogoInterceptableSite.java:46) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.callCurrent(PogoInterceptableSite.java:57) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:203) at io.restassured.internal.RequestSpecificationImpl.applyPathParamsAndSendRequest(RequestSpecificationImpl.groovy:1710) at io.restassured.internal.RequestSpecificationImpl.this\$2\$applyPathParamsAndSendRequest(RequestSpecificationImpl.groovy) at jdk.internal.reflect.GeneratedMethodAccessor224.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:343) at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:328)		

#	Step / Hook Details	Status	Duration
	<pre> at groovy.lang.MetaClassImpl.doInvokeMethod(MetaClassImpl.java:1331) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1086) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1006) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:789) at io.restassured.internal.RequestSpecificationImpl.invokeMethod(RequestSpecificationImpl.groovy) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.call(PogoInterceptableSite.java:46) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.callCurrent(PogoInterceptableSite.java:57) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:203) at io.restassured.internal.RequestSpecificationImpl.put(RequestSpecificationImpl.groovy:180) at io.restassured.internal.RequestSpecificationImpl.put(RequestSpecificationImpl.groovy) at api.stepdefinitions.UserModule. admin_sends_https_request_for_update_user_with_admin_login_status_by_admin_id_with_invalid_admin_id(UserModule.java:778) at ?.Admin sends HTTPS Request for update User with Admin login status by Admin ID with invalid AdminId(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:157) * Not displayable characters are replaced by '?'. </pre>		
3	Then Admin receives status "404" with Not Found error message	SKIPPED	0.000 s


Check if admin is able to update the Admin login status by Admin ID with NoAuth

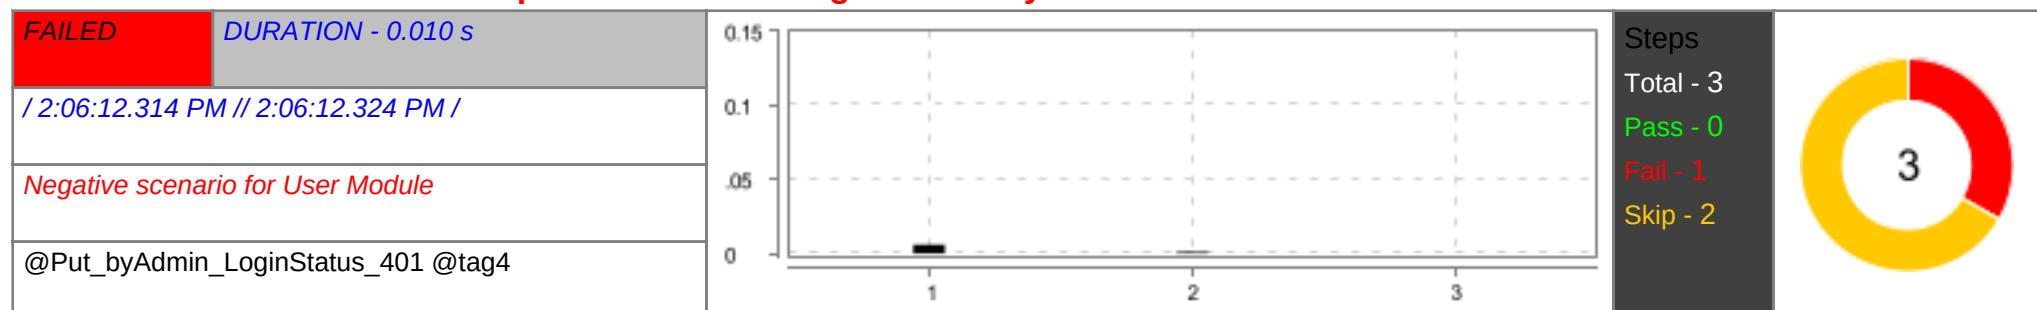

#	Step / Hook Details	Status	Duration
1	Given Admin creates PUT Request with Admin login status by Admin ID with NoAuth <pre> java.lang.IllegalArgumentException: parameterValue cannot be null at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.reflection.CachedConstructor.doConstructorInvoke(CachedConstructor.java:60) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrap.callConstructor(ConstructorSite.java:86) </pre>	FAILED	0.006 s


#	Step / Hook Details	Status	Duration
	at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.common.assertion.AssertParameter.notNull(AssertParameter.groovy:26) at io.restassured.internal.common.assertion.AssertParameter\$notNull.callStatic(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallStatic(CallSiteArray.java:53) at io.restassured.internal.common.assertion.AssertParameter\$notNull.callStatic(Unknown Source) at io.restassured.internal.RequestSpecificationImpl.pathParam(RequestSpecificationImpl.groovy:515) at api.stepdefinitions.UserModule.admin_creates_put_request_with_admin_login_status_by_admin_id_with_no_auth(UserModule.java:788) at ?.Admin creates PUT Request with Admin login status by Admin ID with NoAuth(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:162) * Not displayable characters are replaced by '?'.		
2	When Admin sends HTTPS Request for update User with Admin login status by Admin ID with NoAuth	SKIPPED	0.001 s
3	Then Admin receives status "401" with Unauthorized message	SKIPPED	0.000 s

Check if admin is able to delete Admin with invalid Admin ID

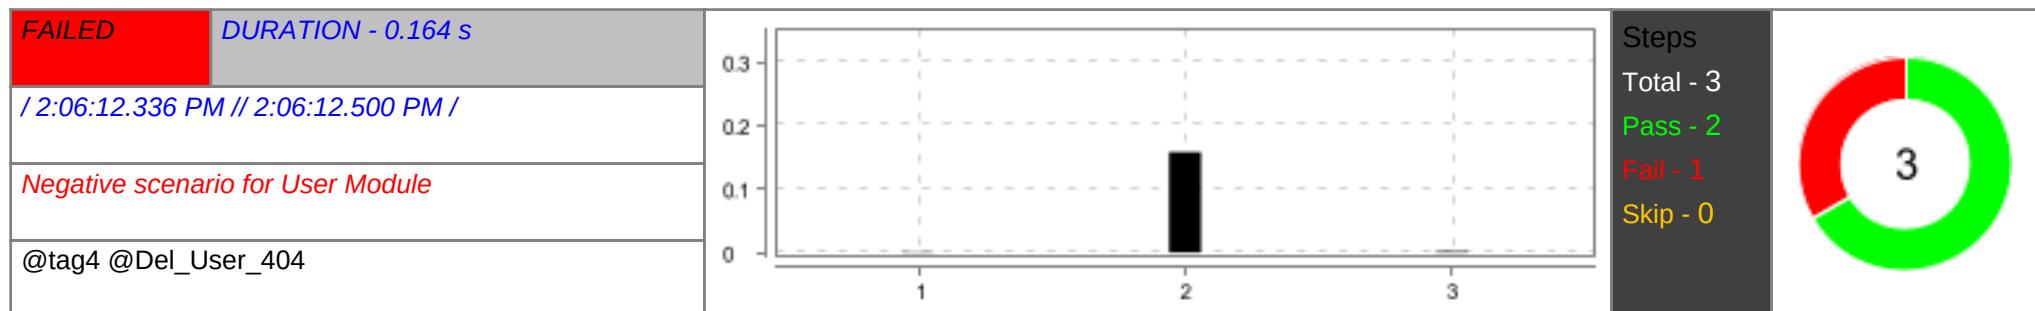


#	Step / Hook Details	Status	Duration
1	Given Admin creates DELETE Request with Admin with invalid Admin ID	PASSED	0.001 s
2	When Admin sends HTTPS Request for delete User with invalid Admin ID	PASSED	0.158 s
3	Then Admin receives status "404" with Not Found error message java.lang.AssertionError: expected:<404> but was:<401> at org.junit.Assert.fail(Assert.java:89) at org.junit.Assert.failNotEquals(Assert.java:835) at org.junit.Assert.assertEquals(Assert.java:120) at org.junit.Assert.assertEquals(Assert.java:146) at api.stepdefinitions.UserModule.admin_receives_status_with_not_found_error_message(UserModule.java:576) at ?.Admin receives status "404" with Not Found error message(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:170) * Not displayable characters are replaced by '?'.	FAILED	0.002 s

Check if admin is able to delete the Admin with NoAuth

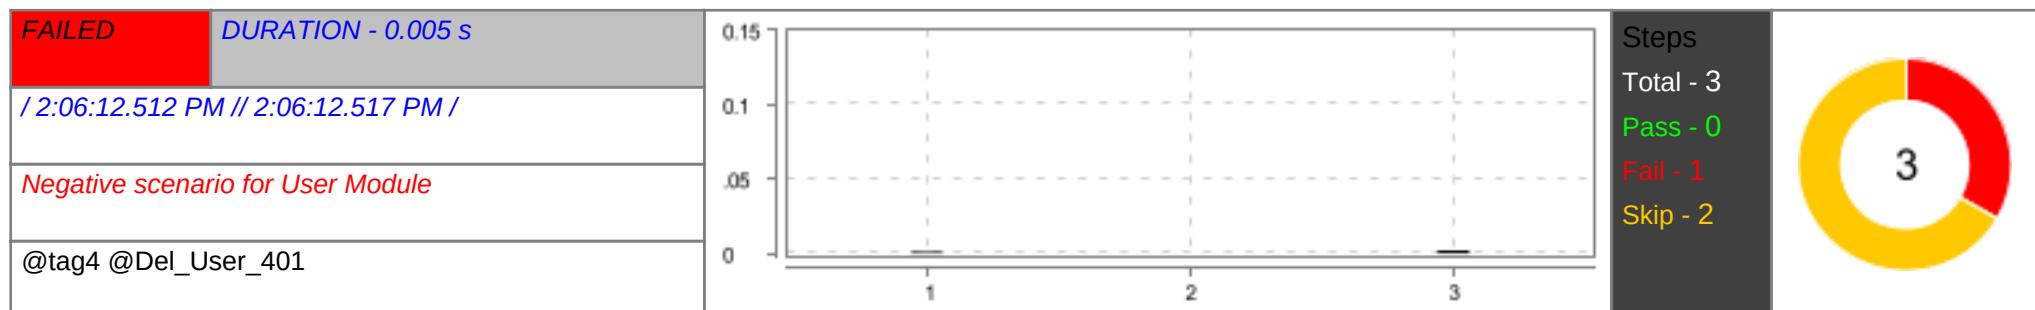


#	Step / Hook Details	Status	Duration
1	Given Admin creates DELETE Request with Admin with NoAuth <i>java.lang.IllegalArgumentException: parameterValue cannot be null</i> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.reflection.CachedConstructor.doConstructorInvoke(CachedConstructor.java:60) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrap.callConstructor(ConstructorSite.java:86) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.common.assertion.AssertParameter.notNull(AssertParameter.groovy:26) at io.restassured.internal.common.assertion.AssertParameter\$notNull.callStatic(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallStatic(CallSiteArray.java:53) at io.restassured.internal.common.assertion.AssertParameter\$notNull.callStatic(Unknown Source) at io.restassured.internal.RequestSpecificationImpl.pathParam(RequestSpecificationImpl.groovy:515) at api.stepdefinitions.UserModule.adminCreatesDeleteRequestWithAdminWithNoAuth(UserModule.java:820) at ?.Admin creates DELETE Request with Admin with NoAuth(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:174) * Not displayable characters are replaced by '?'.	FAILED	0.001 s
2	When Admin sends HTTPS Request for delete User with NoAuth	SKIPPED	0.000 s
3	Then Admin receives status "401" with Unauthorized message	SKIPPED	0.002 s

Check if admin is able to delete the Admin with invalid endpoint

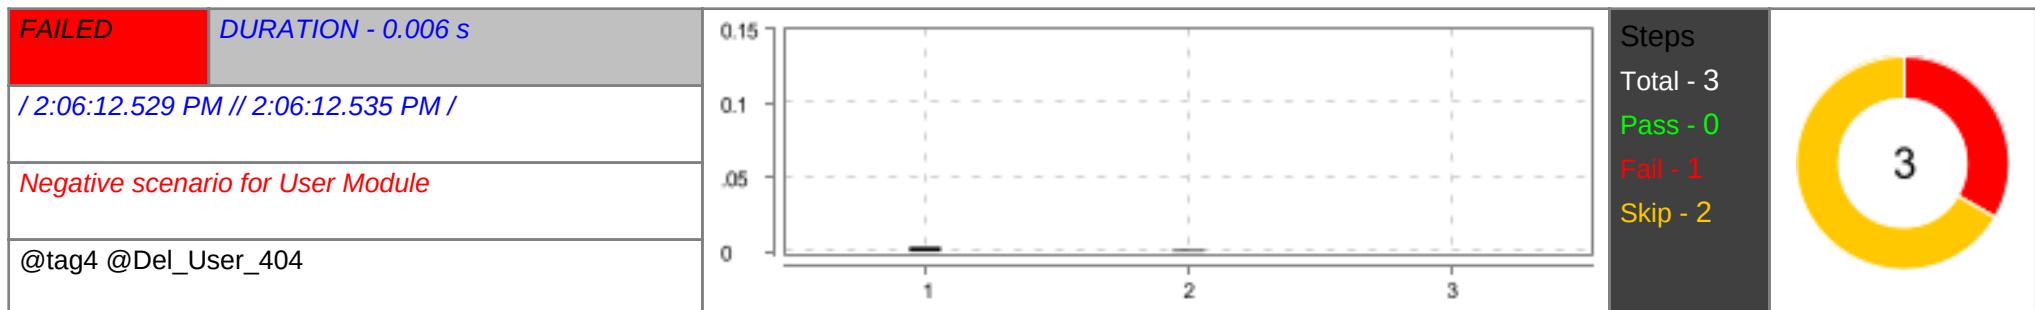

#	Step / Hook Details	Status	Duration
1	Given Admin creates DELETE Request with Admin with invalid endpoint <i>java.lang.IllegalArgumentException: parameterValue cannot be null</i> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.reflection.CachedConstructor.doConstructorInvoke(CachedConstructor.java:60) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrap.callConstructor(ConstructorSite.java:86) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.common.assertion.AssertParameter.notNull(AssertParameter.groovy:26) at io.restassured.internal.common.assertion.AssertParameter\$notNull.callStatic(Unknown Source) at io.restassured.internal.RequestSpecificationImpl.pathParam(RequestSpecificationImpl.groovy:515) at api.stepdefinitions.UserModule.adminCreatesDeleteRequestWithAdminWithInvalidEndpoint(UserModule.java:836) at ?.Admin creates DELETE Request with Admin with invalid endpoint(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:180) * Not displayable characters are replaced by '?'.	FAILED	0.003 s
2	When Admin sends HTTPS Request for delete User with invalid endpoint	SKIPPED	0.001 s
3	Then Admin receives status "404" with Not Found error message	SKIPPED	0.000 s

Check if admin is able to delete the Admin with invalid endpoint

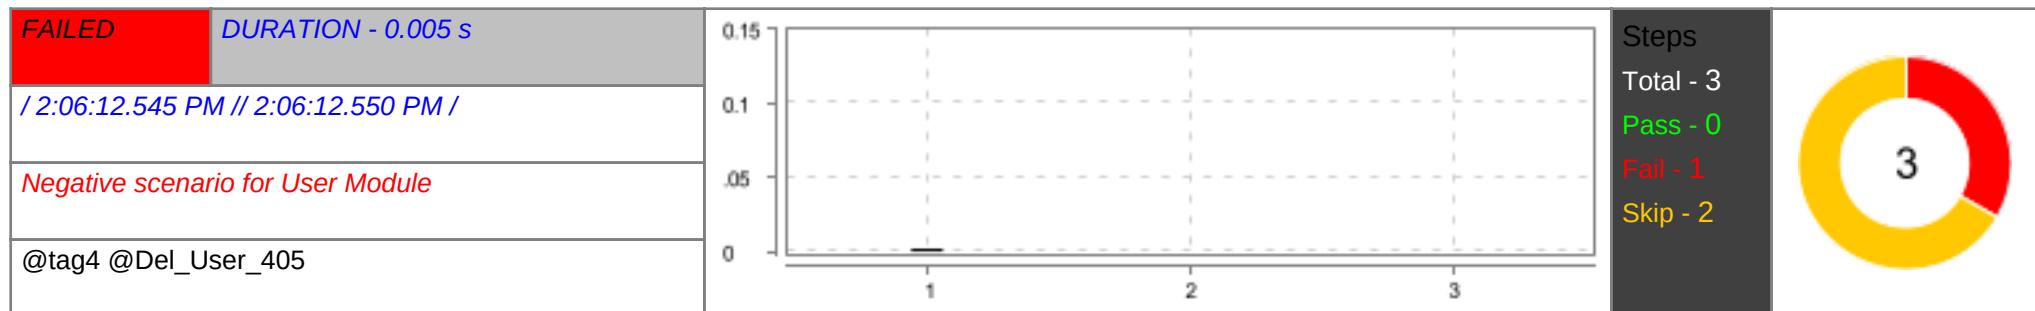


#	Step / Hook Details	Status	Duration
1	<p>Given Admin creates DELETE Request with Admin with invalid endpoint</p> <pre>java.lang.IllegalArgumentException: parameterValue cannot be null at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.reflection.CachedConstructor.doConstructorInvoke(CachedConstructor.java:60) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrap.callConstructor(ConstructorSite.java:86) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.common.assertion.AssertParameter.notNull(AssertParameter.groovy:26) at io.restassured.internal.common.assertion.AssertParameter\$notNull.callStatic(Unknown Source) at io.restassured.internal.RequestSpecificationImpl.pathParam(RequestSpecificationImpl.groovy:515) at api.stepdefinitions.UserModule.adminCreatesDeleteRequestWithAdminWithInvalidEndpoint(UserModule.java:836) at ?.Admin creates DELETE Request with Admin with invalid endpoint(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/04UserModuleNegative.feature:186) * Not displayable characters are replaced by '?'.</pre>	FAILED	0.002 s
2	When Admin sends HTTPS DELETE Request for delete User with invalid endpoint	SKIPPED	0.000 s
3	Then Admin receives status "405" with Method Not Allowed message	SKIPPED	0.000 s

Negative scenario for User Controller




Check if admin is able to retrieve all Admins with assigned program batches with No Authorization

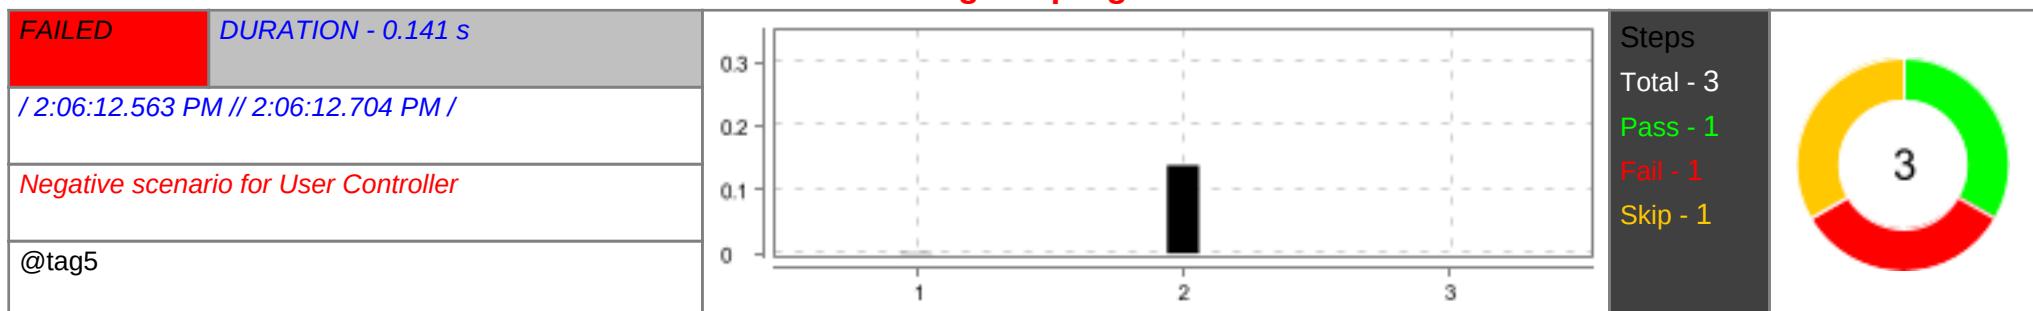

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request for all Admins No Authorization	PASSED	0.001 s
2	<p>When Admin sends HTTPS Request to retrieve all Admins with assigned program batches</p> <pre>java.lang.AssertionError: 1 expectation failed. Expected status code <200> but was <401>. at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrapNoCoerce.callConstructor(ConstructorSite.java:108) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure.validate(ResponseSpecificationImpl.groovy:512) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure\$validate\$1.call(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.validateResponseIfRequired(ResponseSpecificationImpl.groovy:696) at io.restassured.internal.ResponseSpecificationImpl.this\$2\$validateResponseIfRequired(ResponseSpecificationImpl.groovy) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.runtime.callsite.PlainObjectMetaMethodSite.doInvoke(PlainObjectMetaMethodSite.java:43) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite\$PogoCachedMethodSiteNoUnwrapNoCoerce.invoke(PogoMetaMethodSite.java:198) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite.callCurrent(PogoMetaMethodSite.java:62) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:185) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:135) at io.restassured.specification.ResponseSpecification\$statusCode\$0.callCurrent(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:143) at io.restassured.internal.ValidatableResponseOptionsImpl.statusCode(ValidatableResponseOptionsImpl.java:89)</pre>	FAILED	0.138 s

#	Step / Hook Details	Status	Duration
	<p>at api.stepdefinitions.UserController.admin_sends_https_request_to_retreive_all_admins_with_assigned_program_batches(UserController.java:89)</p> <p>at ?.Admin sends HTTPS Request to retreive all Admins with assigned program batches(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/05UserControllerNegative.feature:8)</p> <p>* Not displayable characters are replaced by '?'.</p>		
3	Then Admin receives status 401 with Unauthorized message	SKIPPED	0.000 s


Check if admin is able to retreive assigned program batches for invalid AdminId

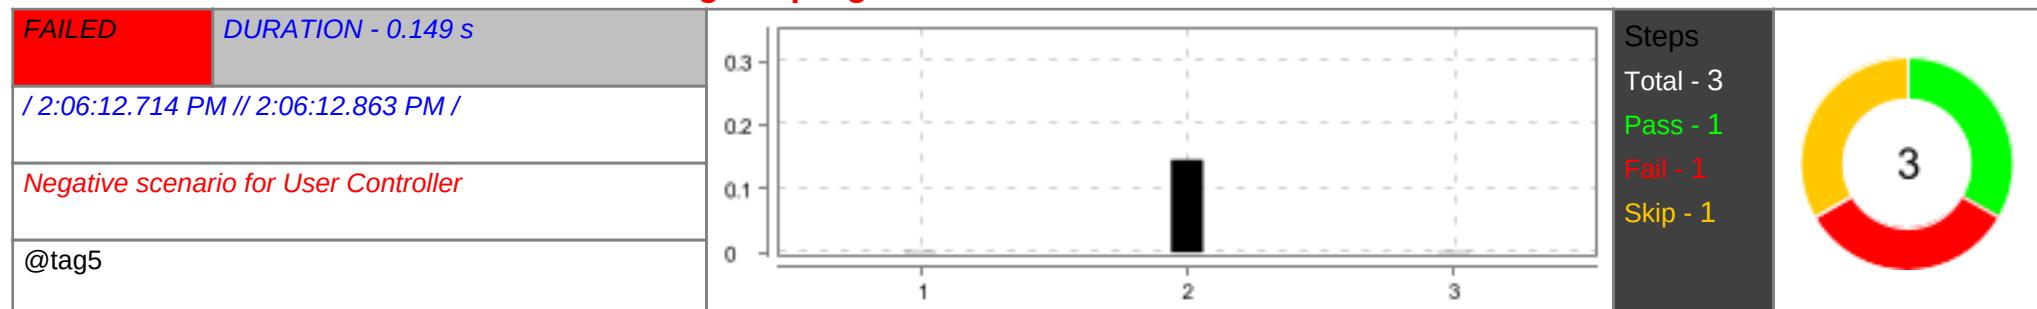

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request to retrieve Admin assigned to Program Batch by invalid AdminID	PASSED	0.001 s
2	<p>When Admin sends HTTPS Request to retreive assigned program batches for invalid AdminId</p> <p>java.lang.AssertionError: 1 expectation failed. Expected status code <200> but was <401>.</p> <pre> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrapNoCoerce.callConstructor(ConstructorSite.java:108) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure.validate(ResponseSpecificationImpl.groovy:512) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure\$validate\$1.call(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.validateResponseIfRequired(ResponseSpecificationImpl.groovy:696) at io.restassured.internal.ResponseSpecificationImpl.this\$2\$validateResponseIfRequired(ResponseSpecificationImpl.groovy) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.runtime.callsite.PlainObjectMetaMethodSite.doInvoke(PlainObjectMetaMethodSite.java:43) </pre>	FAILED	0.145 s

#	Step / Hook Details	Status	Duration
	at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite\$PogoCachedMethodSiteNoUnwrapNoCoerce.invoke(PogoMetaMethodSite.java:198) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite.callCurrent(PogoMetaMethodSite.java:62) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:185) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:135) at io.restassured.specification.ResponseSpecification\$statusCode\$0.callCurrent(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:143) at io.restassured.internal.ValidatableResponseOptionsImpl.statusCode(ValidatableResponseOptionsImpl.java:89) at api.stepdefinitions.UserController. admin_sends_https_request_to_retrieve_assigned_program_batches_for_invalid_admin_id(UserController.java:110) at ?.Admin sends HTTPS Request to retrieve assigned program batches for invalid AdminId(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/05UserControllerNegative.feature:15) * Not displayable characters are replaced by '?'.		
3	Then Admin receives status "404" with Not Found error message	SKIPPED	0.001 s

Check if admin is able to retrieve assigned program batches for valid AdminId with No authorization

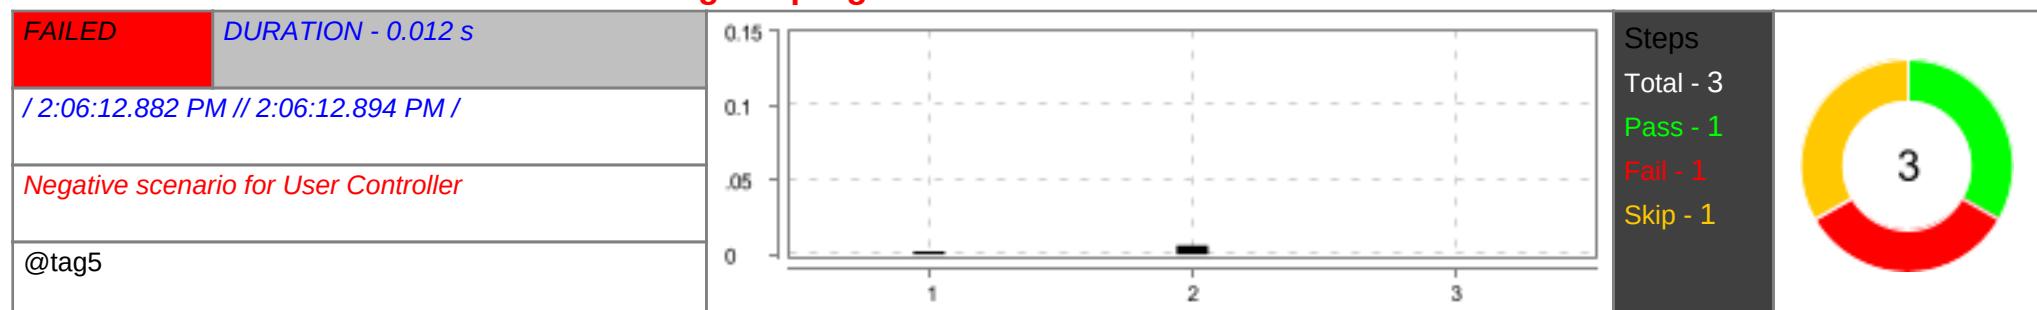

#	Step / Hook Details	Status	Duration
1	Given Admin creates GET Request for all Admins No Authorization	PASSED	0.002 s
2	When Admin sends HTTPS Request to retrieve assigned program batches for valid AdminId with No authorization java.lang.IllegalArgumentException: Invalid number of path parameters. Expected 1, was 0. Undefined path parameters are: userId. at java.base/jdk/internal/reflect/NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk/internal/reflect/NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk/internal/reflect/DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java/lang/reflect/Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java/lang/reflect/Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.reflection.CachedConstructor.doConstructorInvoke(CachedConstructor.java:60) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrap.callConstructor(ConstructorSite.java:86) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277)	FAILED	0.006 s

#	Step / Hook Details	Status	Duration
	<pre> at io.restassured.internal.RequestSpecificationImpl.assertCorrectNumberOfPathParams(RequestSpecificationImpl.groovy:1277) at jdk.internal.reflect.GeneratedMethodAccessor236.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:343) at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:328) at groovy.lang.MetaClassImpl.doInvokeMethod(MetaClassImpl.java:1331) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1086) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1006) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:789) at io.restassured.internal.RequestSpecificationImpl.invokeMethod(RequestSpecificationImpl.groovy) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.call(PogoInterceptableSite.java:46) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.callCurrent(PogoInterceptableSite.java:57) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:176) at io.restassured.internal.RequestSpecificationImpl.sendRequest(RequestSpecificationImpl.groovy:1161) at io.restassured.internal.RequestSpecificationImpl.this\$2\$sendRequest(RequestSpecificationImpl.groovy) at jdk.internal.reflect.GeneratedMethodAccessor234.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:343) at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:328) at groovy.lang.MetaClassImpl.doInvokeMethod(MetaClassImpl.java:1331) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1086) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1006) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:789) at io.restassured.internal.RequestSpecificationImpl.invokeMethod(RequestSpecificationImpl.groovy) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.call(PogoInterceptableSite.java:46) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:166) at io.restassured.internal.filter.SendRequestFilter.filter(SendRequestFilter.groovy:30) at io.restassured.filter.Filter\$filter\$0.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.time.TimingFilter.filter(TimingFilter.java:56) at io.restassured.filter.Filter\$filter.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter\$0.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.FilterContext\$next.call(Unknown Source) at io.restassured.internal.filter.CsrfFilter.filter(CsrfFilter.groovy:70) at io.restassured.filter.Filter\$filter\$0.call(Unknown Source) </pre>		


#	Step / Hook Details	Status	Duration
	at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.log.StatusCodeBasedLoggingFilter.filter.StatusCodeBasedLoggingFilter.java:112) at io.restassured.filter.log.ResponseLoggingFilter.filter(ResponseLoggingFilter.java:31) at io.restassured.filter.Filter\$filter.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.log.RequestLoggingFilter.filter(RequestLoggingFilter.java:146) at io.restassured.filter.Filter\$filter.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter\$0.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.FilterContext\$next.call(Unknown Source) at io.restassured.internal.RequestSpecificationImpl.applyPathParamsAndSendRequest(RequestSpecificationImpl.groovy:1704) at io.restassured.internal.RequestSpecificationImpl.this\$2\$applyPathParamsAndSendRequest(RequestSpecificationImpl.groovy) at jdk.internal.reflect.GeneratedMethodAccessor225.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:343) at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:328) at groovy.lang.MetaClassImpl.doInvokeMethod(MetaClassImpl.java:1331) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1086) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1006) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:789) at io.restassured.internal.RequestSpecificationImpl.invokeMethod(RequestSpecificationImpl.groovy) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.call(PogoInterceptableSite.java:46) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.callCurrent(PogoInterceptableSite.java:57) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:203) at io.restassured.internal.RequestSpecificationImpl.applyPathParamsAndSendRequest(RequestSpecificationImpl.groovy:1710) at io.restassured.internal.RequestSpecificationImpl.this\$2\$applyPathParamsAndSendRequest(RequestSpecificationImpl.groovy) at jdk.internal.reflect.GeneratedMethodAccessor224.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:343) at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:328) at groovy.lang.MetaClassImpl.doInvokeMethod(MetaClassImpl.java:1331) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1086) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1006) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:789)		

#	Step / Hook Details	Status	Duration
	<pre> at io.restassured.internal.RequestSpecificationImpl.invokeMethod(RequestSpecificationImpl.groovy) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.call(PogoInterceptableSite.java:46) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.callCurrent(PogoInterceptableSite.java:57) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:203) at io.restassured.internal.RequestSpecificationImpl.get(RequestSpecificationImpl.groovy:172) at io.restassured.internal.RequestSpecificationImpl.get(RequestSpecificationImpl.groovy) at api.stepdefinitions.UserController. admin_sends_https_request_to_retrieve_assigned_program_batches_for_valid_admin_id_with_no_authorization(UserController.java:124) at ?.Admin sends HTTPS Request to retrieve assigned program batches for valid AdminId with No authorization(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/05UserControllerNegative.feature:21) * Not displayable characters are replaced by '?'. </pre>		
3	Then Admin receives status 401 with Unauthorized message	SKIPPED	0.000 s

User Login Post request



Check if Admin able to generate token with valid credential

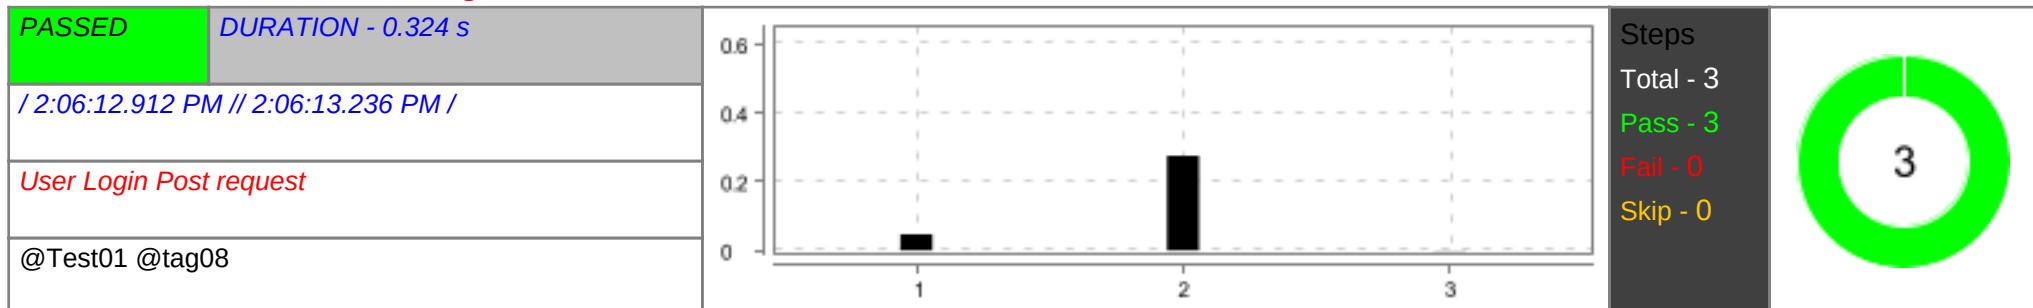


#	Step / Hook Details	Status	Duration
1	Given Add UserLogin Payload	PASSED	0.047 s
2	When Admin calls Post Https method with valid endpoint	PASSED	0.275 s
3	Then Admin receives 201 created with auto generated token	PASSED	0.001 s

program controller Positive




Check if Admin able to create a program with valid endpoint and request body with Authorization

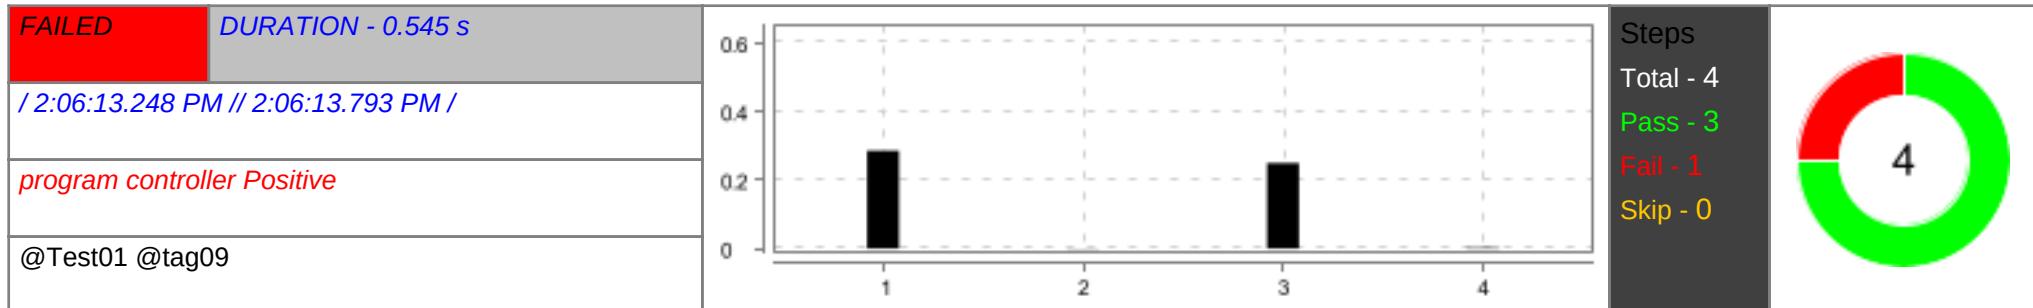


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization	PASSED	0.286 s
2	Given Admin creates POST Request for the LMS with request body	PASSED	0.001 s
3	When Admin sends HTTPS Request and request Body with endpoint	PASSED	0.250 s
4	Then Admin receives 201 Created Status with response body java.lang.IllegalArgumentException: Schema to use cannot be null at io.restassured.module.json.JsonSchemaValidator.validateSchemasNotNull(JsonSchemaValidator.java:270) at io.restassured.module.json.JsonSchemaValidator.access\$300(JsonSchemaValidator.java:75) at io.restassured.module.json.JsonSchemaValidator\$JsonSchemaValidatorFactory.create(JsonSchemaValidator.java:281) at io.restassured.module.json.JsonSchemaValidator.matchesJsonSchema(JsonSchemaValidator.java:166) at io.restassured.module.json.JsonSchemaValidator.matchesJsonSchemaInClasspath(JsonSchemaValidator.java:117) at api.stepdefinitions.ProgramPost.admin_receives_created_status_with_response_body(ProgramPost.java:269) at ?.Admin receives 201 Created Status with response body(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/09ProgramPositive.feature:11) * Not displayable characters are replaced by '?'.	FAILED	0.003 s

Check if Admin able to retrieve all programs with valid Endpoint

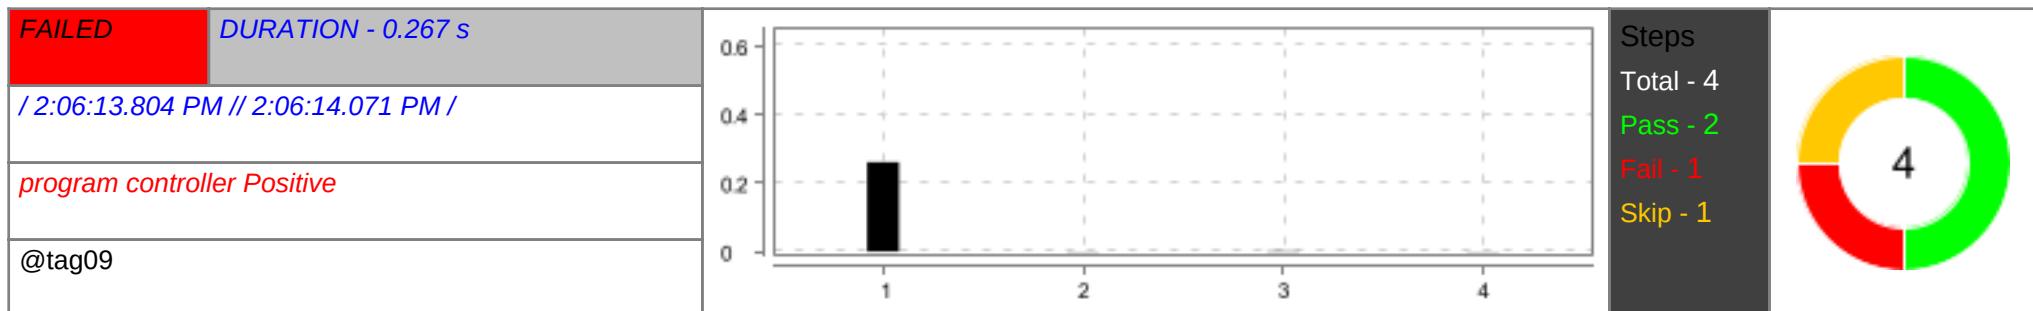

#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization	PASSED	0.261 s
2	Given Admin creates GET Request for the LMS API	PASSED	0.001 s
3	When Admin sends HTTPS Request with endpoint java.lang.NullPointerException: Cannot invoke "io.restassured.specification.RequestSpecification.when()" because "this.request" is null at api.stepdefinitions.UserModule.admin_sends_https_request_with_endpoint(UserModule.java:65) at ?.Admin sends HTTPS Request with endpoint(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/09ProgramPositive.feature:16) * Not displayable characters are replaced by '?'. 4 Then Admin receives 200 OK Status with response body.	FAILED	0.002 s
4	Then Admin receives 200 OK Status with response body.	SKIPPED	0.001 s


Check if Admin able to retrieve a program with valid program ID

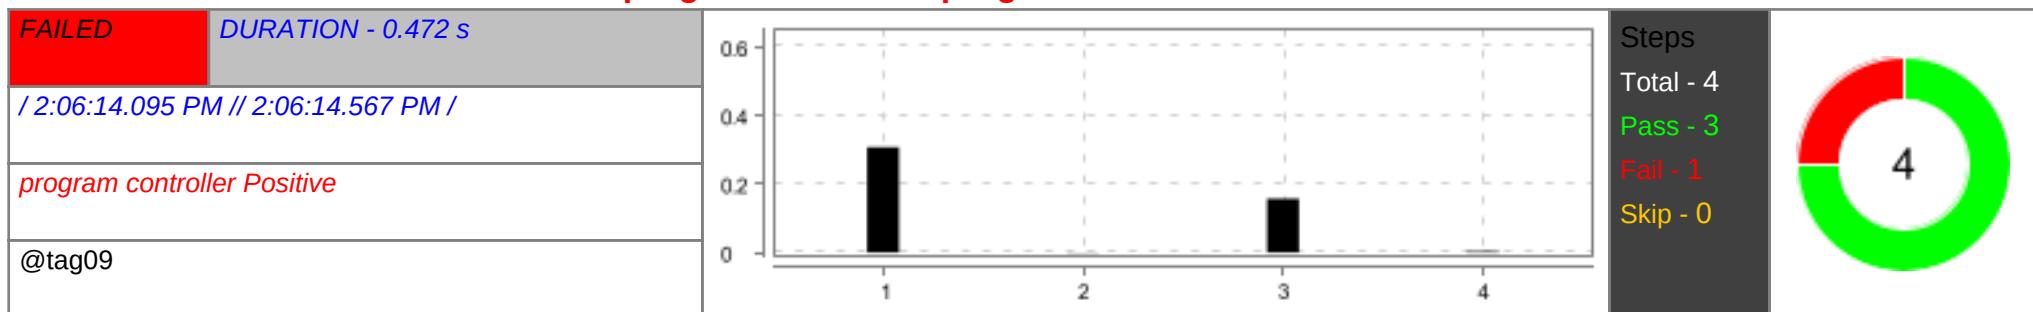

#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization	PASSED	0.308 s
2	Given Admin creates GET Request for the LMS API to retrieve a program by valid program ID	PASSED	0.001 s
3	When Admin sends HTTPS Request with endpoint and stores the response	PASSED	0.157 s
4	Then Admin receives 200 OK Status code with response body. java.lang.IllegalArgumentException: Schema to use cannot be null	FAILED	0.004 s


#	Step / Hook Details	Status	Duration
	<pre>at io.restassured.module.json.JsonSchemaValidator.validateSchemasNotNull(JsonSchemaValidator.java:270) at io.restassured.module.json.JsonSchemaValidator.access\$300(JsonSchemaValidator.java:75) at io.restassured.module.json.JsonSchemaValidator\$JsonSchemaValidatorFactory.create(JsonSchemaValidator.java:281) at io.restassured.module.json.JsonSchemaValidator.matchesJsonSchema(JsonSchemaValidator.java:166) at io.restassured.module.json.JsonSchemaValidator.matchesJsonSchemaInClasspath(JsonSchemaValidator.java:117) at api.stepdefinitions.ProgramPost.admin_receives_ok_status_code_with_response_body(ProgramPost.java:481) at ?.Admin receives 200 OK Status code with response body.(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/09ProgramPositive.feature:23)</pre> <p>* Not displayable characters are replaced by '?'.</p>		

Check if Admin able to retrieve all programs with users and with valid Endpoint

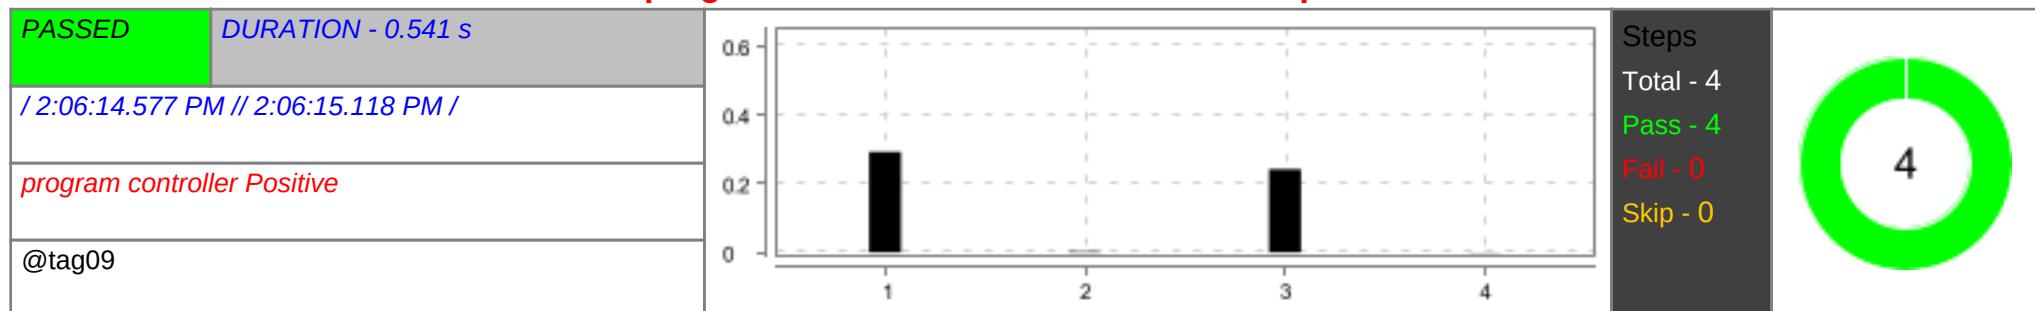


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization	PASSED	0.293 s
2	Given Admin creates GET Request for the LMS API retrieve all programs with users	PASSED	0.003 s
3	When Admin sends HTTPS Request with valid endpoint and stores the response	PASSED	0.242 s
4	Then Admin receives 200 OK Status with response body and asserts the response.	PASSED	0.001 s

Check if Admin able to update a program with Valid program Name and request body

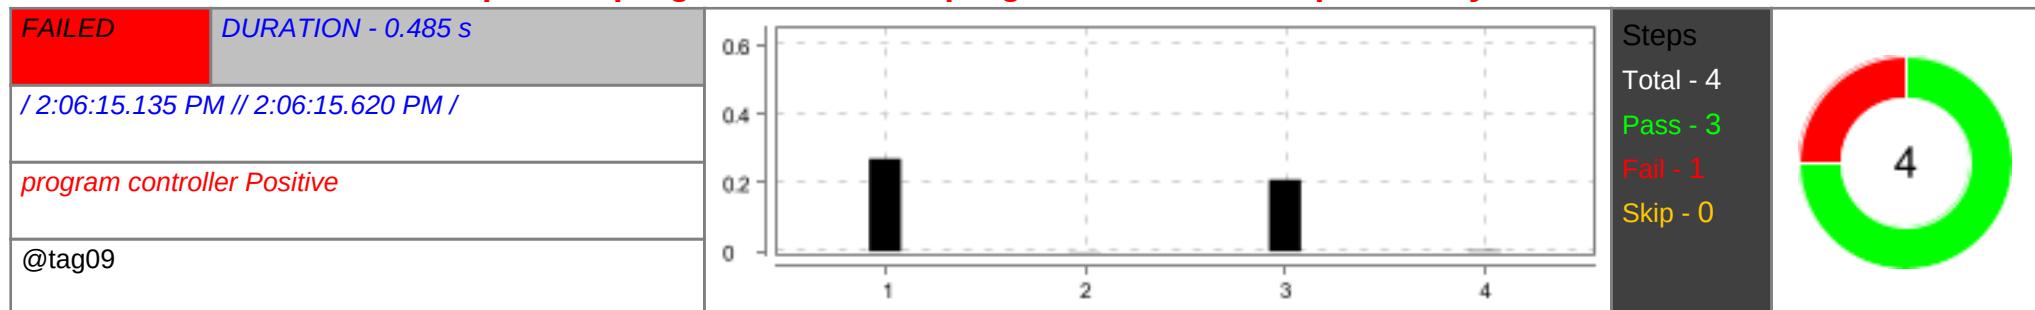

#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization	PASSED	0.270 s
2	Given Admin creates PUT Request for the LMS API endpoint with valid request Body with all fields.	PASSED	0.001 s
3	When Admin sends HTTPS Request with valid endpoint and gets the response	PASSED	0.209 s
4	Then Admin receives 200 OK Status code with updated value in response body. java.lang.IllegalArgumentException: Schema to use cannot be null at io.restassured.module.jsv.JsonSchemaValidator.validateSchemasNotNull(JsonSchemaValidator.java:270) at io.restassured.module.jsv.JsonSchemaValidator.access\$300(JsonSchemaValidator.java:75) at io.restassured.module.jsv.JsonSchemaValidator\$JsonSchemaValidatorFactory.create(JsonSchemaValidator.java:281) at io.restassured.module.jsv.JsonSchemaValidator.matchesJsonSchema(JsonSchemaValidator.java:166) at io.restassured.module.jsv.JsonSchemaValidator.matchesJsonSchemaInClasspath(JsonSchemaValidator.java:117) at api.stepdefinitions.ProgramPost.admin_receives_ok_status_code_with_updated_value_in_response_body(ProgramPost.java:825) at ?.Admin receives 200 OK Status code with updated value in response body.(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/09ProgramPositive.feature:35) * Not displayable characters are replaced by '?'.	FAILED	0.003 s

Check if Admin able to update a program with valid programID endpoint and valid request body

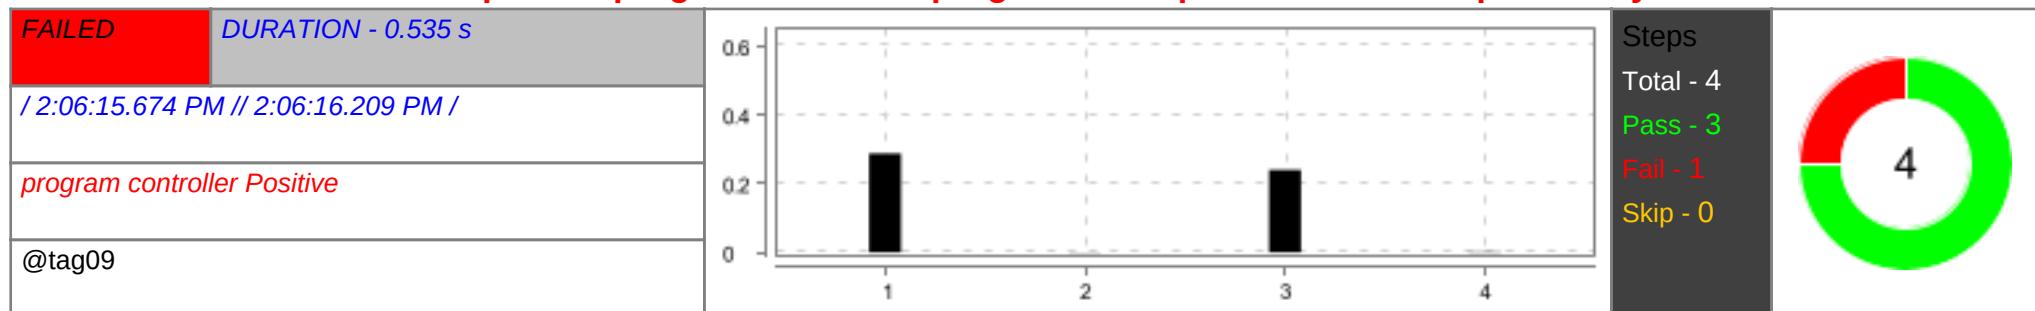


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization	PASSED	0.288 s
2	Given Admin creates PUT Request for the LMS API endpoint with request Body with mandatory, additional fields.	PASSED	0.001 s
3	When Admin sends HTTPS Request with valid endpoint and recieves the response	PASSED	0.240 s
4	Then Admin receives 200 OK Status with updated value in response body.	FAILED	0.002 s
	Step undefined		

Program Batch module




Check if admin able to retrieve all batches with invalid Endpoint

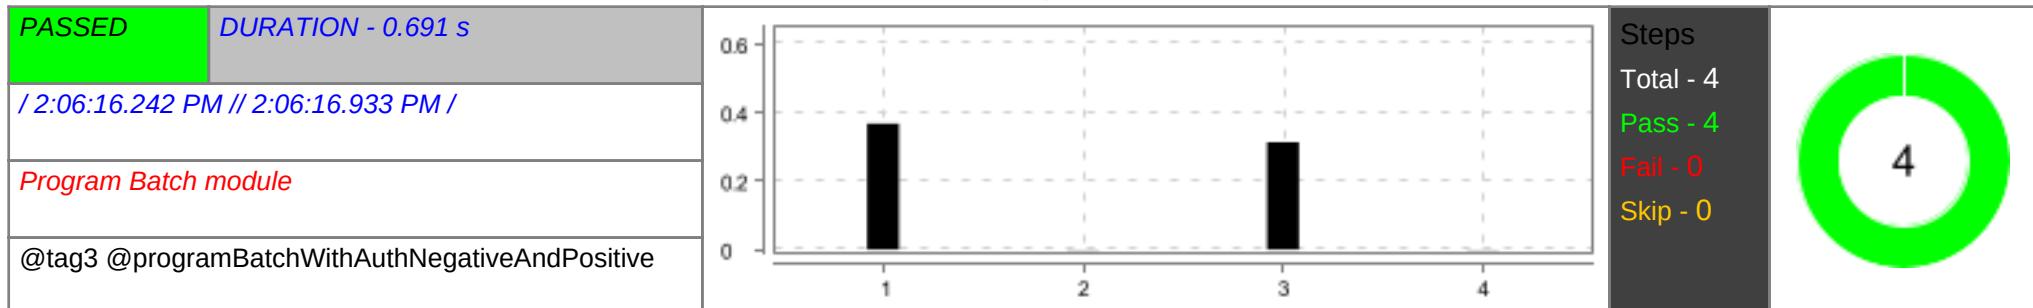

#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.368 s
2	Given Admin creates GET Request of program batch of all batches	PASSED	0.001 s
3	When Admin sends HTTPS GET Request with invalid endpoint to retrieve all batches	PASSED	0.314 s
4	Then Admin receives 404 status with error message Not Found.	PASSED	0.001 s

Check if admin able to retrieve a batch with invalid endpoint

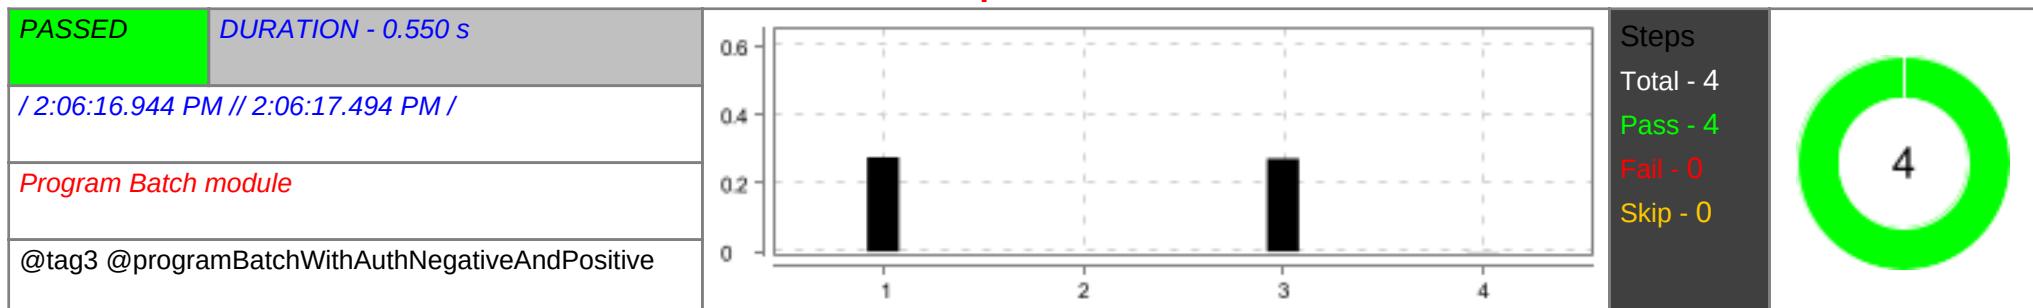

#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.275 s

#	Step / Hook Details	Status	Duration
2	Given Admin creates GET Request with valid Batch ID	PASSED	0.000 s
3	When Admin sends HTTPS Request with invalid endpoint to retrieve batch by batchId	PASSED	0.272 s
4	Then Admin receives 404 status with error message Not Found.	PASSED	0.001 s

Check if admin able to retrieve a batch with invalid endpoint

PASSED	DURATION - 0.430 s		Steps Total - 4 Pass - 4 Fail - 0 Skip - 0	
/2:06:17.511 PM // 2:06:17.941 PM /				
Program Batch module				
@tag3 @programBatchWithAuthNegativeAndPositive				

#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.274 s
2	Given Admin creates GET Request with valid batch name	PASSED	0.001 s
3	When Admin sends HTTPS Request with invalid endpoint to retrieve batch by batchName	PASSED	0.151 s
4	Then Admin receives 404 status with error message Not Found.	PASSED	0.001 s


Check if admin able to retrieve a batch with invalid endpoint

PASSED	DURATION - 0.440 s		Steps Total - 4 Pass - 4 Fail - 0 Skip - 0	
/2:06:17.956 PM // 2:06:18.396 PM /				
Program Batch module				
@tag3 @programBatchWithAuthNegativeAndPositive				

#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.295 s
2	Given Admin creates GET Request with valid Program Id	PASSED	0.001 s
3	When Admin sends HTTPS Request with invalid endpoint to retrieve batch by programid	PASSED	0.141 s


#	Step / Hook Details	Status	Duration
4	Then Admin receives 404 status with error message Not Found.	PASSED	0.001 s

Check if admin able to update a Batch with invalid endpoint

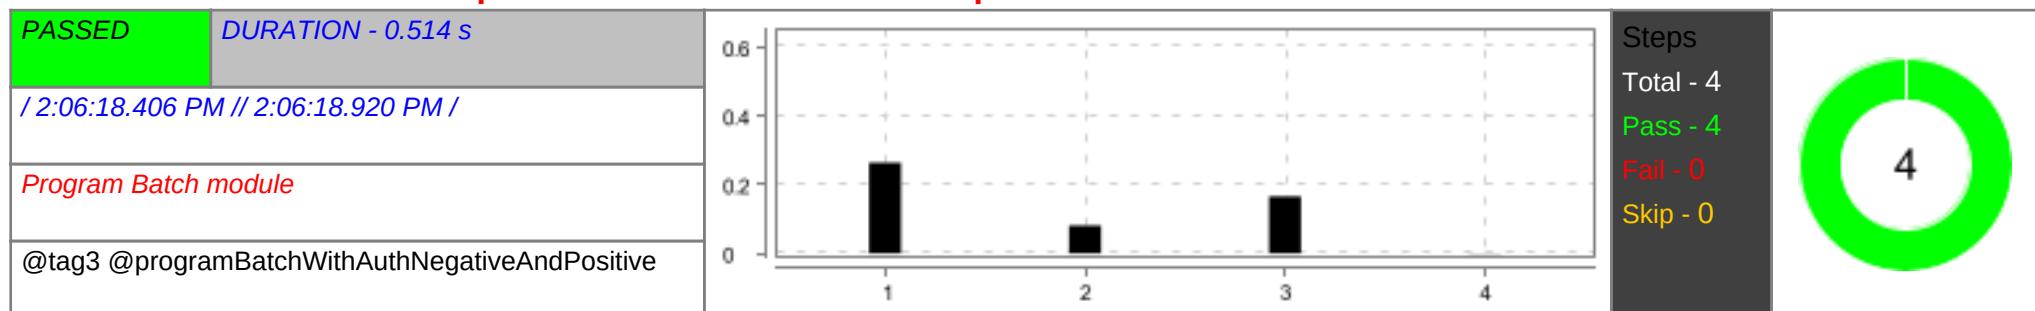


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.264 s
2	Given Admin creates PUT Request with valid BatchId and Data	PASSED	0.081 s
3	When Admin sends PUT HTTPS Request with invalid endpoint	PASSED	0.166 s
4	Then Admin receives 404 status with error message Not Found.	PASSED	0.001 s

Check if admin able to delete a Batch with invalid endpoint

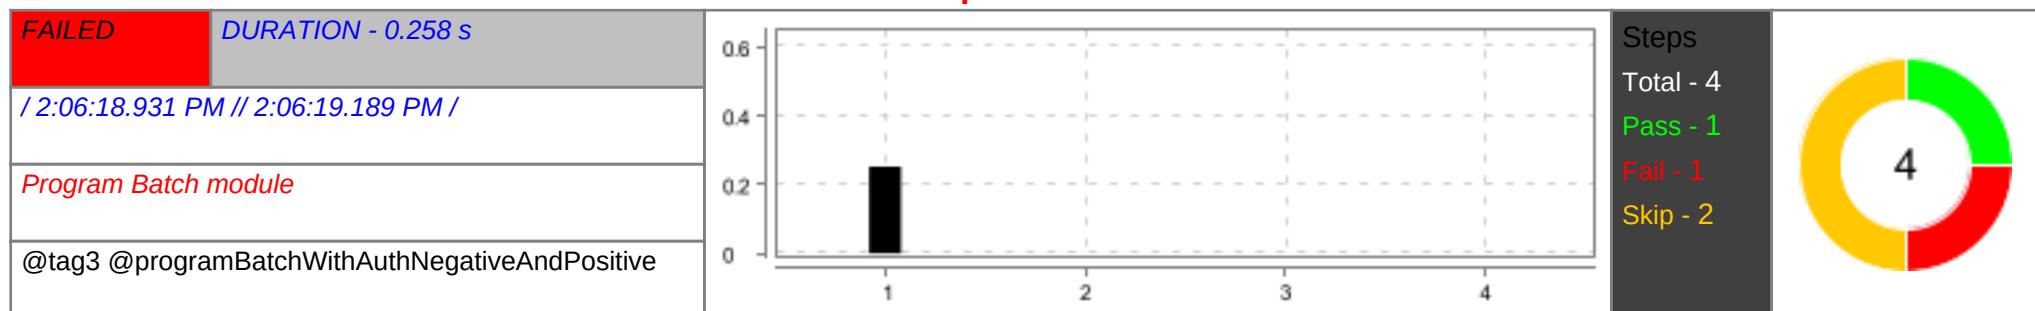


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.253 s
2	Given Admin creates DELETE Request with valid BatchId	FAILED	0.000 s
	Step undefined		
3	When Admin sends HTTPS Request with invalid endpoint for delete batch	SKIPPED	0.000 s
4	Then Admin receives 404 status with error message Not Found.	SKIPPED	0.000 s

Check if admin able to create a Batch with valid endpoint and request body (non existing values)

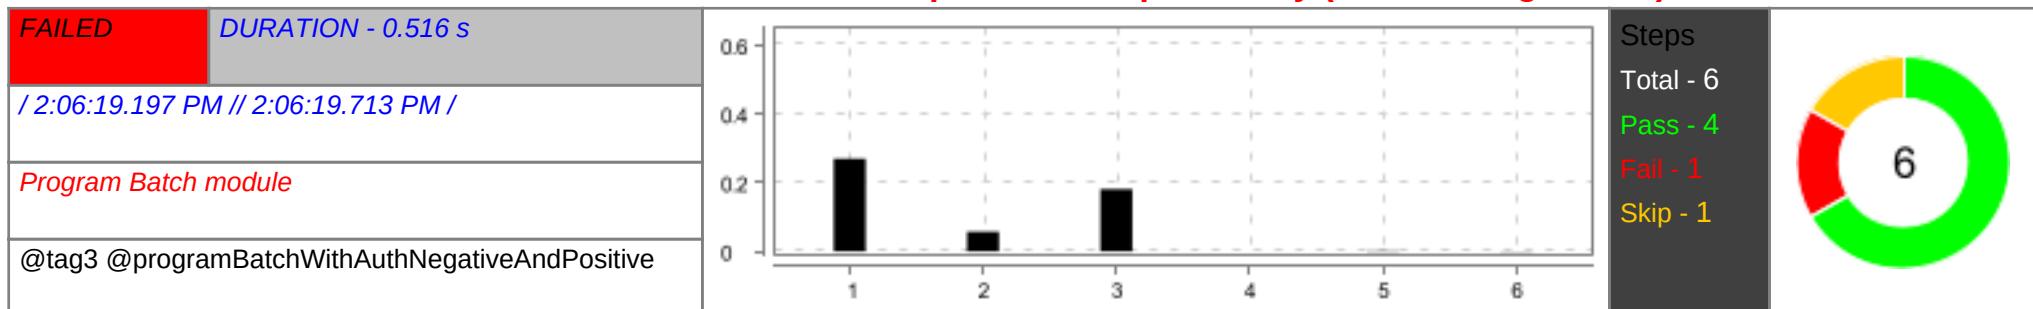


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.270 s
2	Given Admin creates POST Request with valid data in request body	PASSED	0.057 s
3	When Admin sends POST HTTPS Request with endpoint of program batch	PASSED	0.181 s
4	Then Admin receives 201 Created Status with response body of Post Batch request	PASSED	0.000 s
5	And Validate the Schema after post batch request java.lang.IllegalArgumentException: Schema to use cannot be null at io.restassured.module.jsv.JsonSchemaValidator.validateSchemasNotNull(JsonSchemaValidator.java:270) at io.restassured.module.jsv.JsonSchemaValidator.access\$300(JsonSchemaValidator.java:75) at io.restassured.module.jsv.JsonSchemaValidator\$JsonSchemaValidatorFactory.create(JsonSchemaValidator.java:281) at io.restassured.module.jsv.JsonSchemaValidator.matchesJsonSchema(JsonSchemaValidator.java:166) at io.restassured.module.jsv.JsonSchemaValidator.matchesJsonSchemaInClasspath(JsonSchemaValidator.java:117) at api.stepdefinitions.ProgramBatch.validate_the_schema_after_post_batch_request(ProgramBatch.java:698) at ?.Validate the Schema after post batch request(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/10APProgramBatchNegative.feature:48) * Not displayable characters are replaced by '?'.	FAILED	0.002 s
6	And Validate the header after post batch request	SKIPPED	0.001 s

Check if admin able to create a Batch with valid endpoint and request body (existing value in Batch Name)

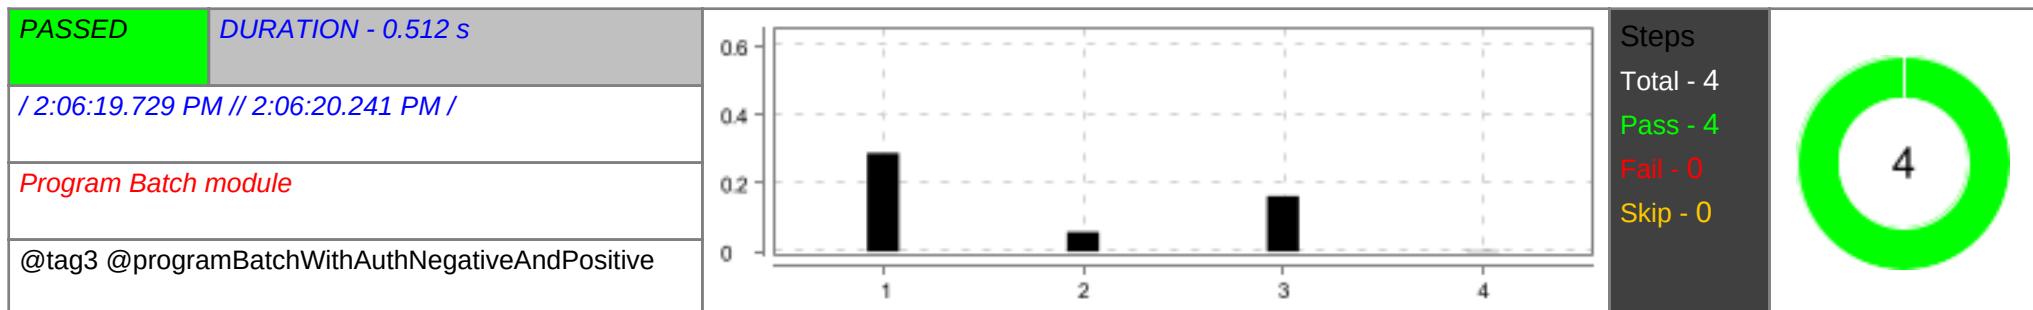


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.288 s
2	Given Admin creates POST Request with existing value in request body	PASSED	0.057 s
3	When Admin sends POST HTTPS Request with endpoint	PASSED	0.162 s
4	Then Admin receives 400 Bad Request Status with message and boolean success details.	PASSED	0.002 s

Check if admin able to create a Batch missing mandatory fields in request body

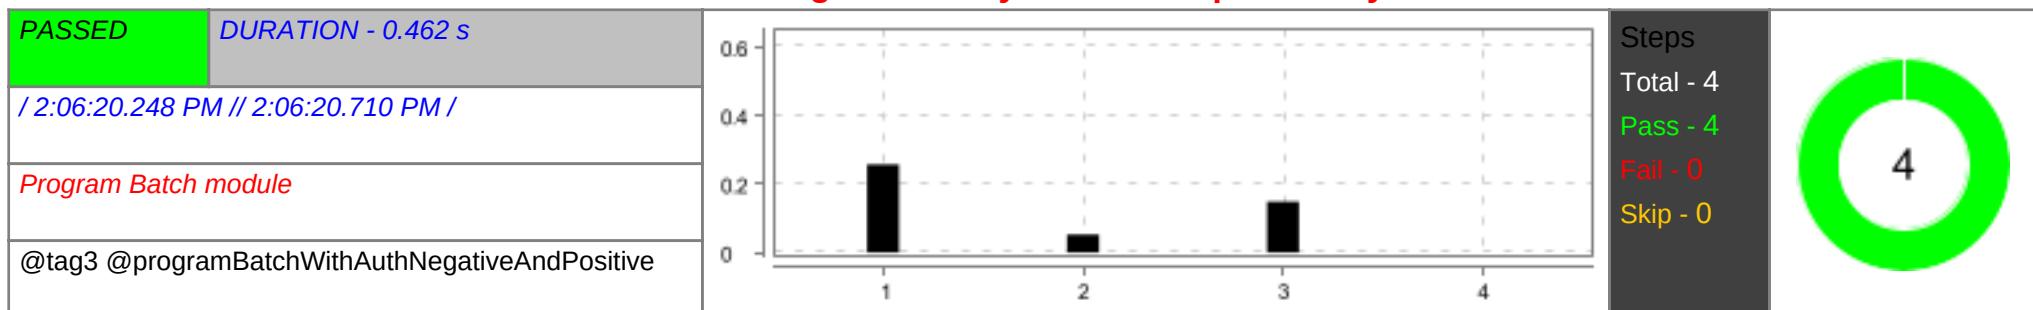


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.257 s
2	Given Admin creates POST Request with invalid data missing mandatory feild in request body	PASSED	0.052 s
3	When Admin sends POST HTTPS Request with endpoint	PASSED	0.149 s
4	Then Admin receives 400 Bad Request Status with message and boolean success details.	PASSED	0.000 s

Check if admin able to create a batch with invalid data in request body

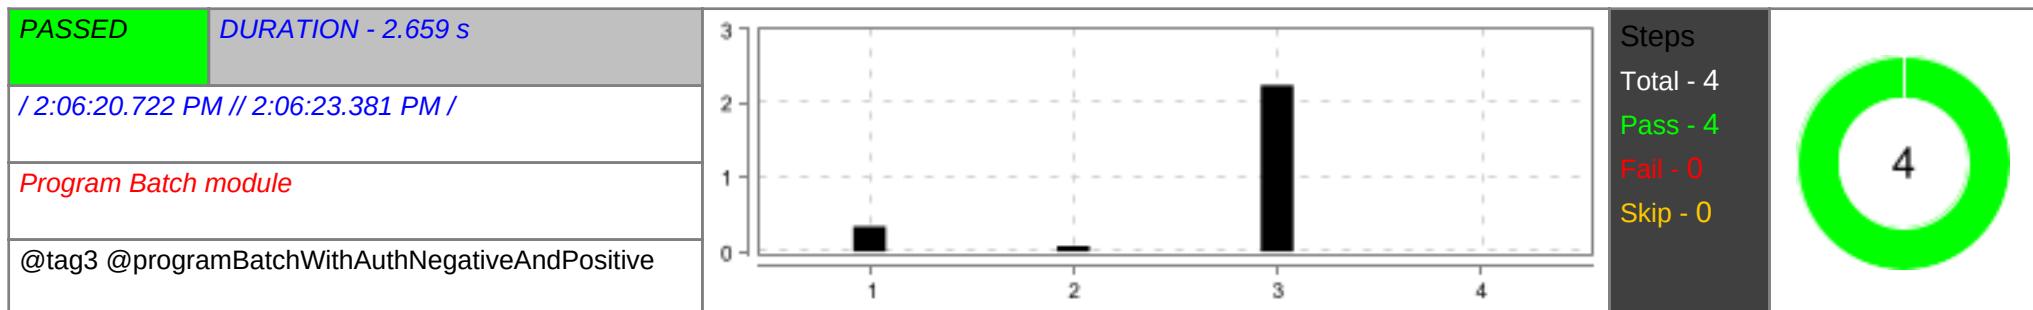


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.339 s
2	Given Admin creates POST Request with invalid data in request body	PASSED	0.074 s
3	When Admin sends POST HTTPS Request with endpoint	PASSED	2.244 s
4	Then Admin receives 400 Bad Request Status with message and boolean success details.	PASSED	0.001 s

Check if admin able to create a batch with inactive program ID

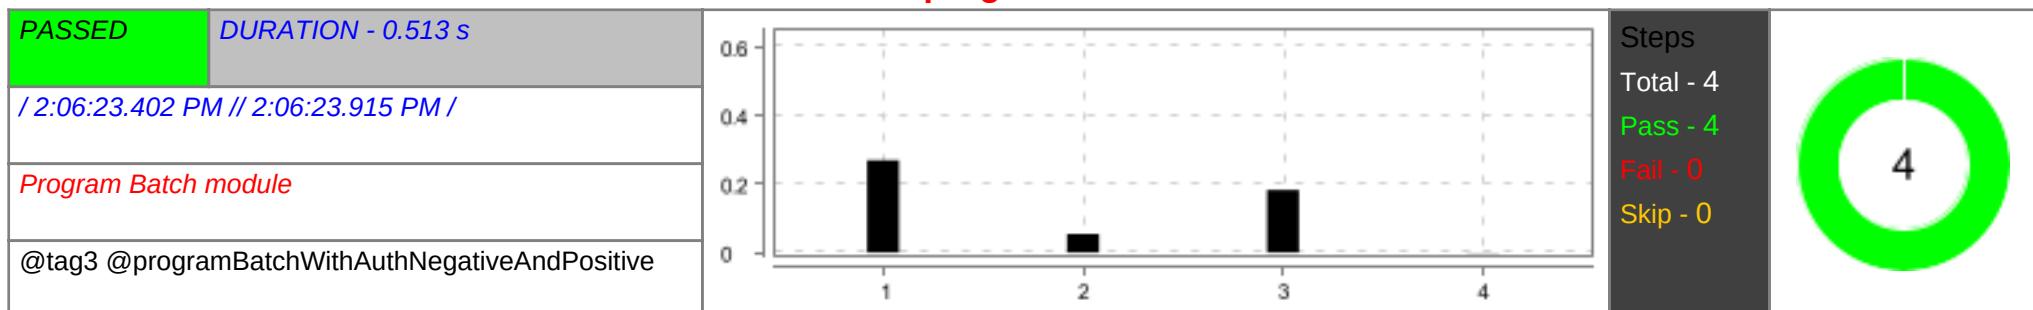


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.270 s
2	Given Admin creates POST Request with inactive program id	PASSED	0.054 s
3	When Admin sends POST HTTPS Request with endpoint	PASSED	0.183 s
4	Then Admin receives 400 Bad Request Status with message and boolean success details.	PASSED	0.001 s

Check if admin able to retrieve a batch with invalid BATCH ID

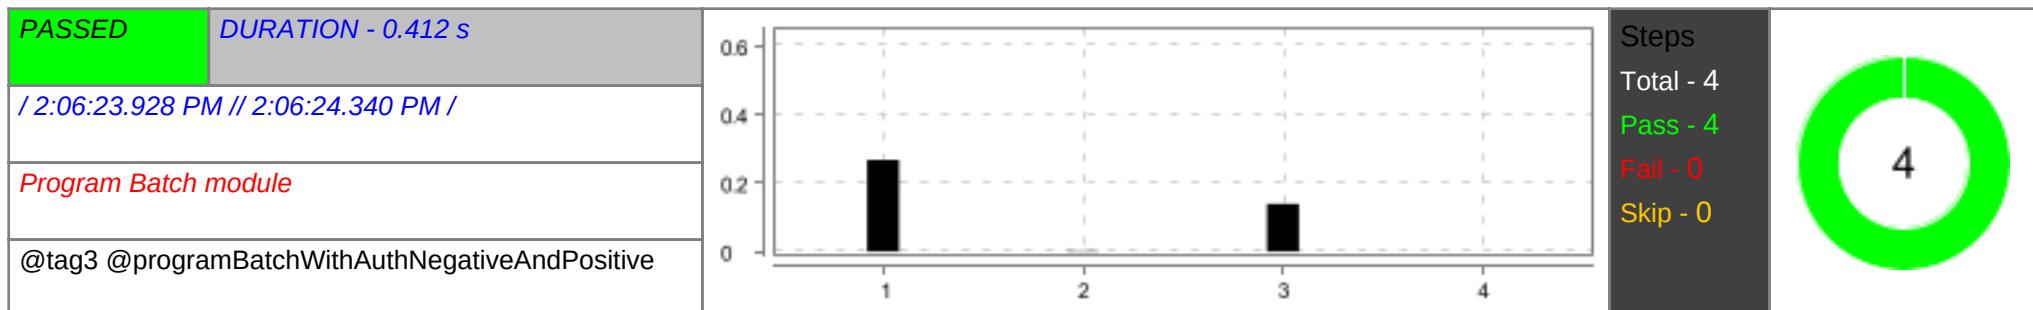


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.268 s
2	Given Admin creates GET Request with invalid Batch ID	PASSED	0.002 s
3	When Admin sends GET HTTPS Request with endpoint with invalid batch id	PASSED	0.139 s
4	Then Admin receives 404 Not Found Status with message and boolean success details	PASSED	0.000 s

Check if admin able to retrieve a batch with invalid BATCH Name

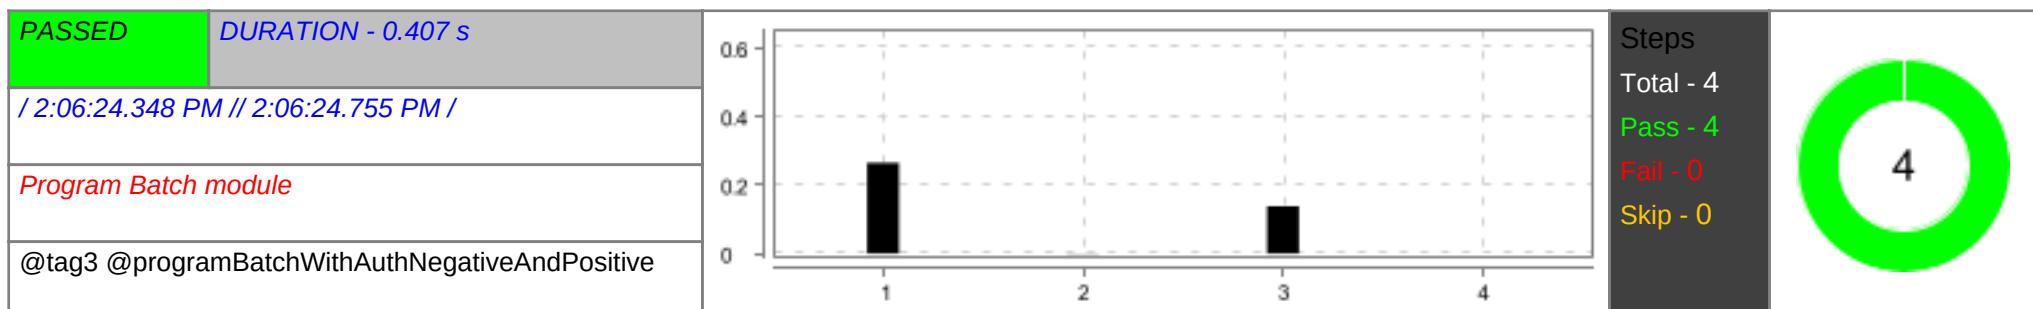


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.265 s
2	Given Admin creates GET Request with invalid Batch Name	PASSED	0.001 s
3	When Admin sends GET HTTPS Request with endpoint with invalid batch name	PASSED	0.138 s
4	Then Admin receives 404 Not Found Status with message and boolean success details	PASSED	0.000 s

Check if admin able to retrieve a batch with invalid Program Id

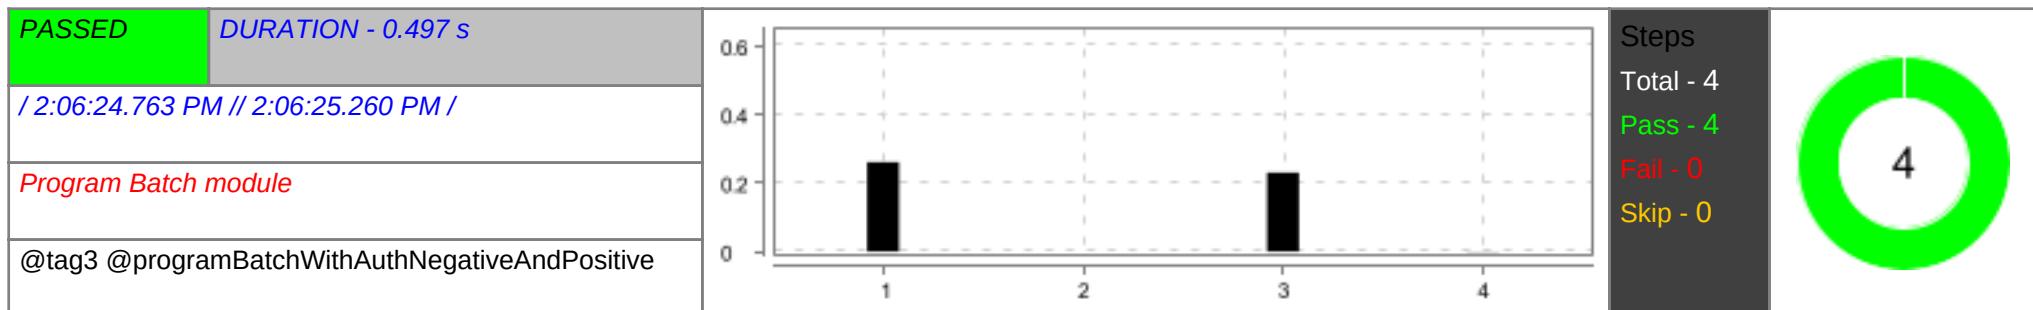


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.261 s
2	Given Admin creates GET Request with invalid Program Id	PASSED	0.000 s
3	When Admin sends GET HTTPS Request with endpoint with invalid program id	PASSED	0.231 s
4	Then Admin receives 404 Not Found Status with message and boolean success details	PASSED	0.001 s

Check if admin able to update a Batch with invalid batchID and mandatory fields in request body

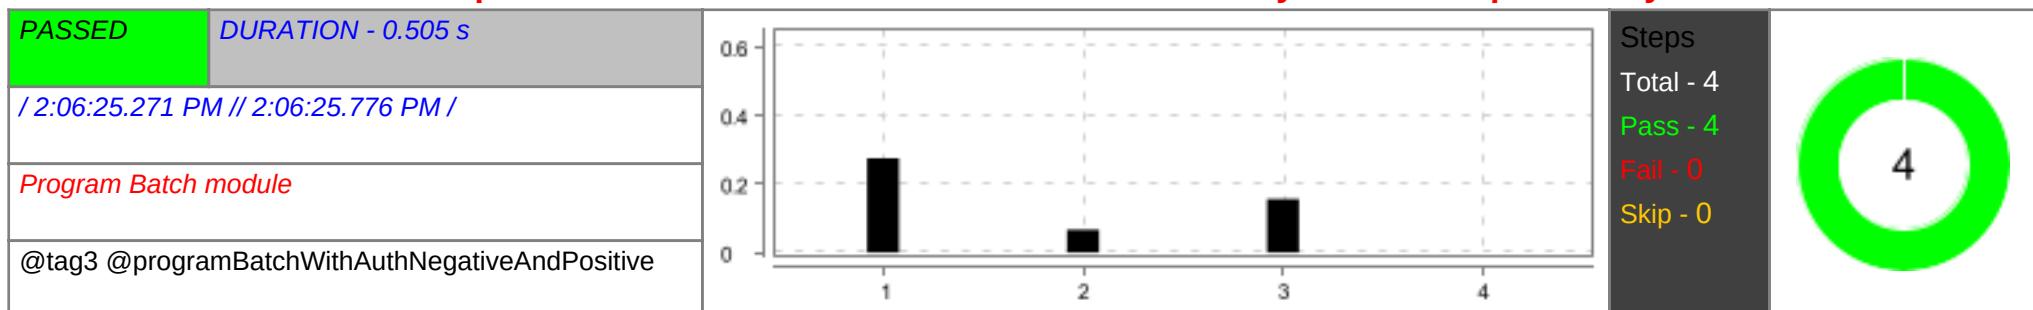


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.275 s
2	Given Admin creates PUT Request with invalid BatchId and valid Data	PASSED	0.067 s
3	When Admin sends PUT HTTPS Request endpoint with invalid BatchId and valid Data in request body	PASSED	0.156 s
4	Then Admin receives 404 Not Found Status with message and boolean success details	PASSED	0.000 s

Check if admin able to update a Batch with invalid batchID and missing mandatory fields request body

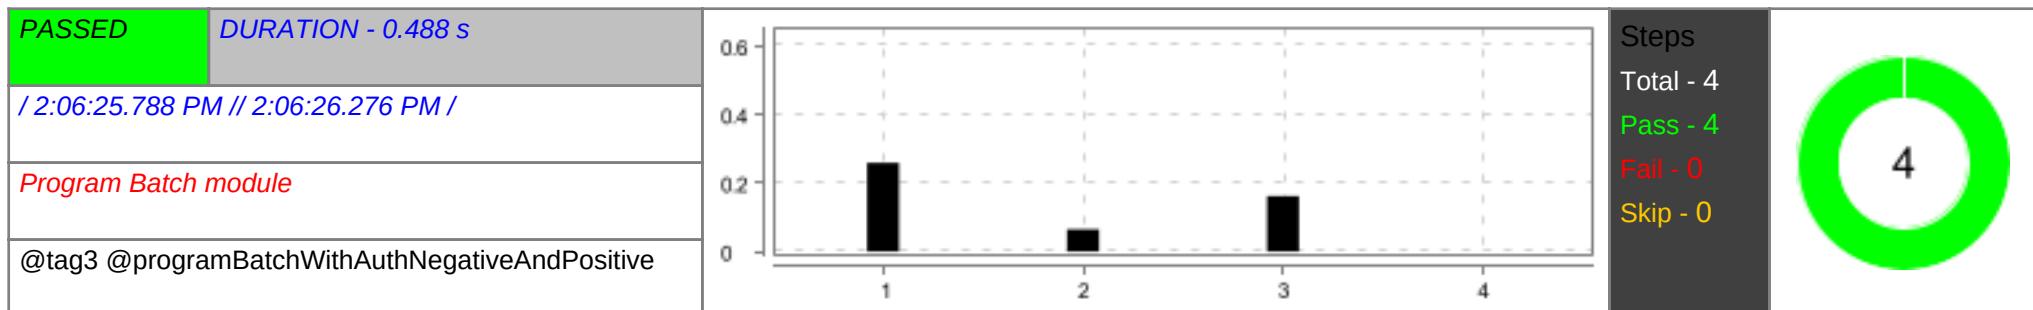


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.259 s
2	Given Admin creates PUT Request with invalid data	PASSED	0.065 s
3	When Admin sends PUT HTTPS Request with endpoint with invalid data	PASSED	0.162 s
4	Then Admin receives 400 Bad Request Status with message and boolean success details.	PASSED	0.000 s

Check if admin able to retrieve all batches with valid LMS API

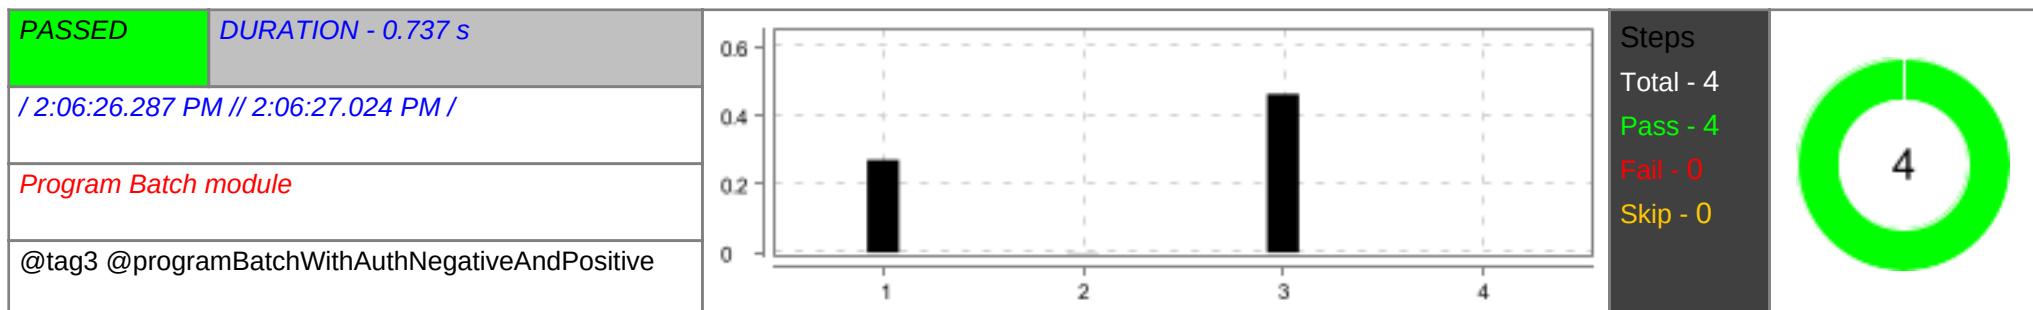


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.271 s
2	Given Admin creates GET Request of program batch of all batches	PASSED	0.001 s
3	When Admin sends HTTPS Request with endpoint of program batch of all batches	PASSED	0.463 s
4	Then Admin receives 200 OK Status with response body of program batch of all batches.	PASSED	0.000 s

Check if admin able to retrieve all batches with search string

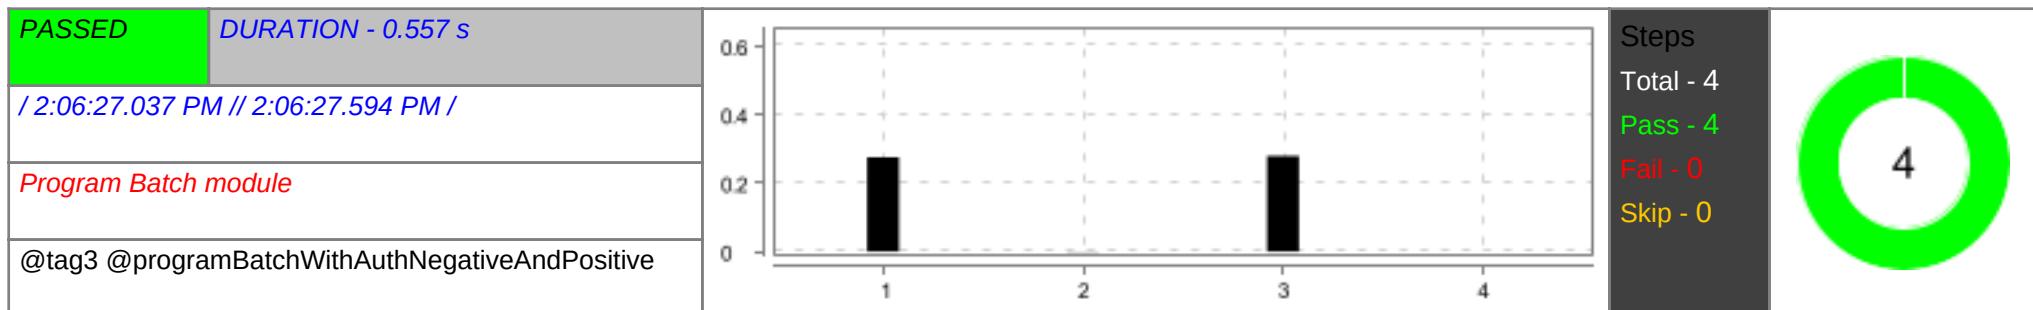


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.275 s
2	Given Admin creates GET Request with search string of program batch	PASSED	0.001 s
3	When Admin sends HTTPS Request with endpoint of program batch of search string	PASSED	0.279 s
4	Then Admin receives 200 Ok status with response body of program batch of search string	PASSED	0.000 s

Check if admin able to retrieve a batch with valid BATCH ID

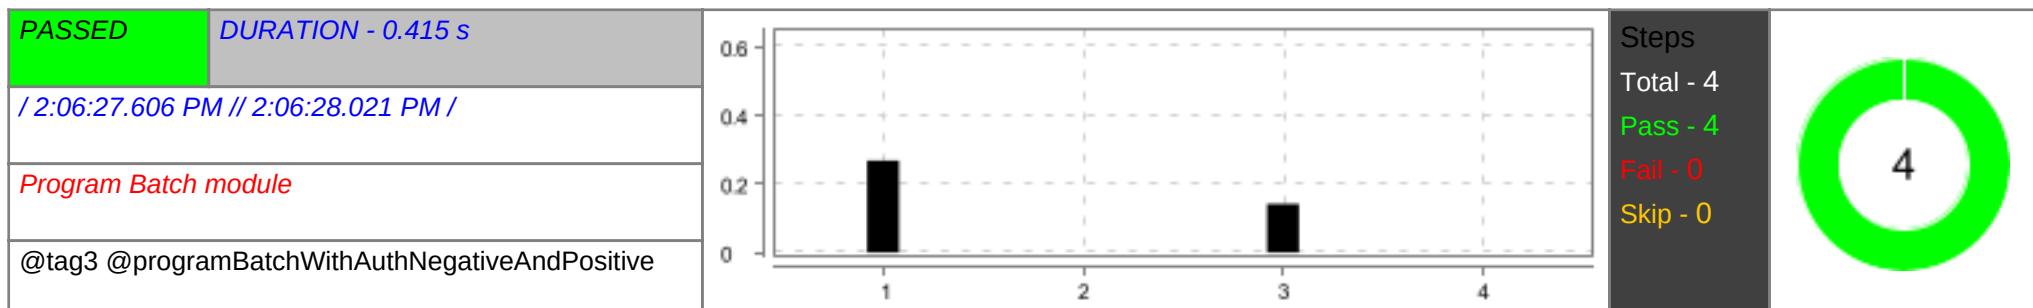


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.269 s
2	Given Admin creates GET Request with valid Batch ID	PASSED	0.000 s
3	When Admin sends HTTPS Request with endpoint of program batch with batch id	PASSED	0.142 s
4	Then Admin receives 200 Ok status with response body of program batch of batch id	PASSED	0.000 s

Check if admin able to retrieve a batch after deleting the batch

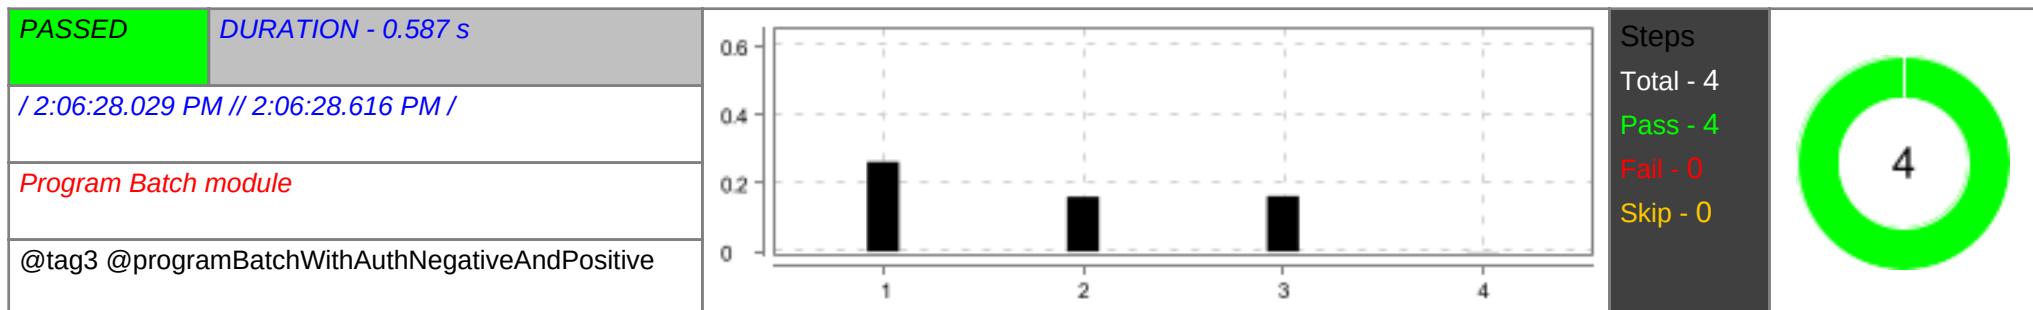


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.262 s
2	Given Admin creates GET Request with valid Batch ID after deleting batch	PASSED	0.160 s
3	When Admin sends HTTPS Request with endpoint of program batch with batch id after deleting batch	PASSED	0.162 s
4	Then Admin receives 200 OK Status with batchStatus field "Inactive" in the response body.	PASSED	0.001 s

Check if admin able to retrieve a batch with valid BATCH NAME

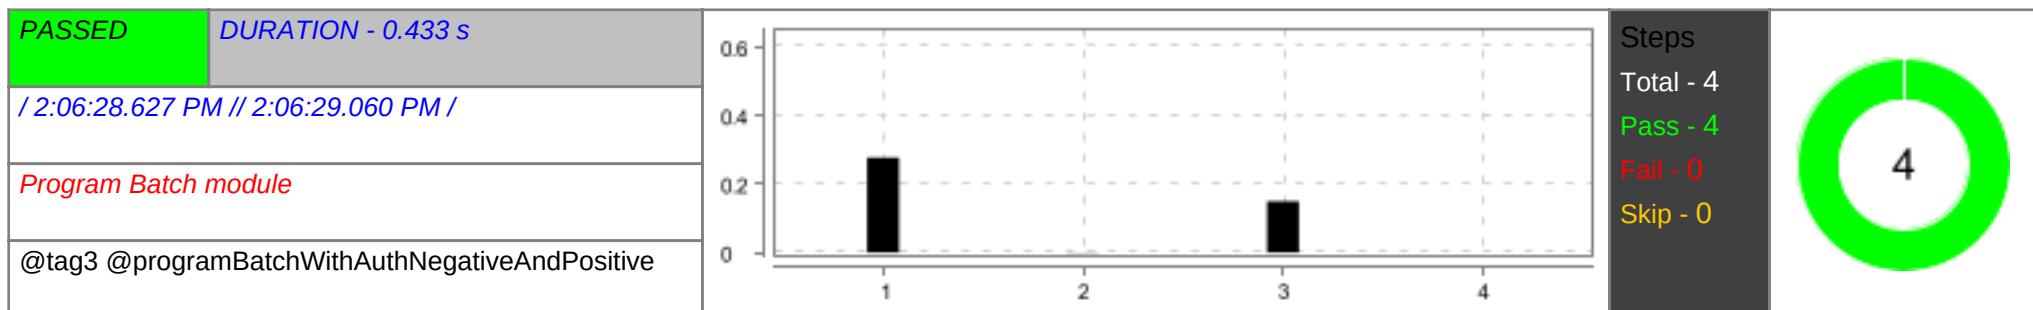


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.277 s
2	Given Admin creates GET Request with valid batch name	PASSED	0.001 s
3	When Admin sends HTTPS Request with endpoint with batch name	PASSED	0.150 s
4	Then Admin receives 200 OK Status with response body of batch name.	PASSED	0.000 s

Check if admin able to retrieve a batch after deleting the batch using batch name

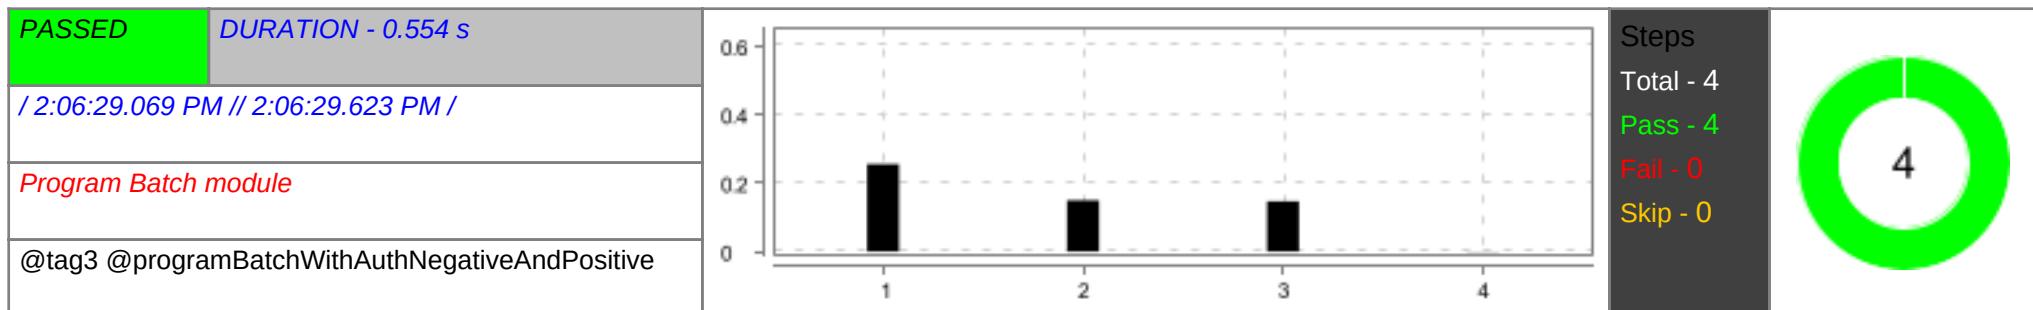


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.255 s
2	Given Admin creates GET Request with batch Name after deleting batch	PASSED	0.150 s
3	When Admin sends HTTPS Request with endpoint of program batch with batch name after deleting batch	PASSED	0.147 s
4	Then Admin receives 200 OK Status with batchStatus field "Inactive" in the response body using batchName.	PASSED	0.001 s

Check if admin able to retrieve a batch with valid Program ID

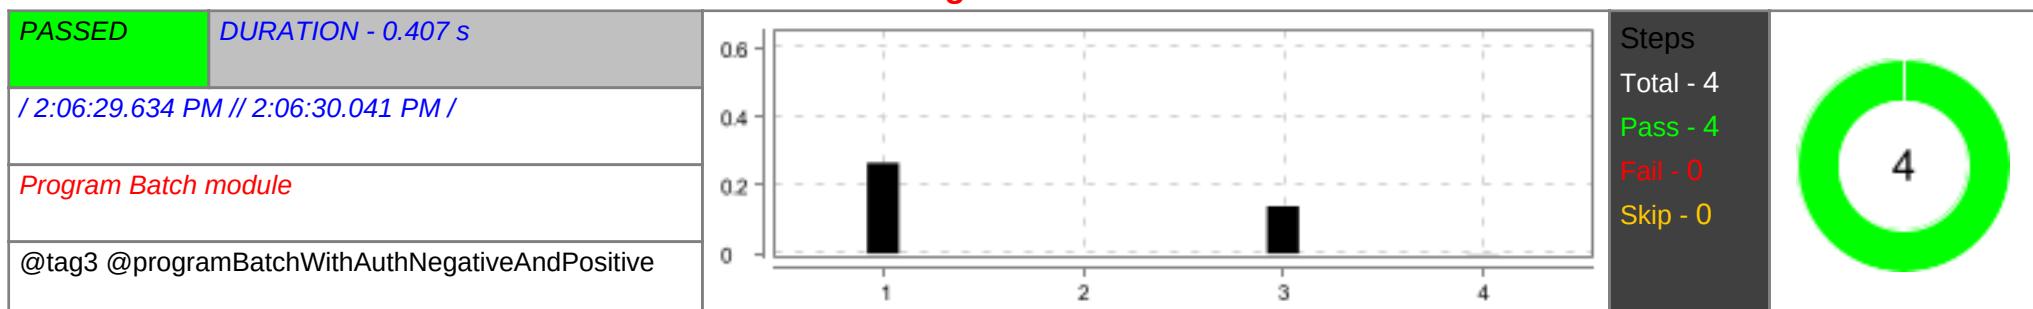

#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.265 s
2	Given Admin creates GET Request with valid Program Id	PASSED	0.000 s
3	When Admin sends HTTPS Request with endpoint with valid program id	PASSED	0.138 s
4	Then Admin receives 200 OK Status with response body with valid program id.	PASSED	0.001 s

Check if admin able to update a Batch with valid batchID and mandatory fields in request body

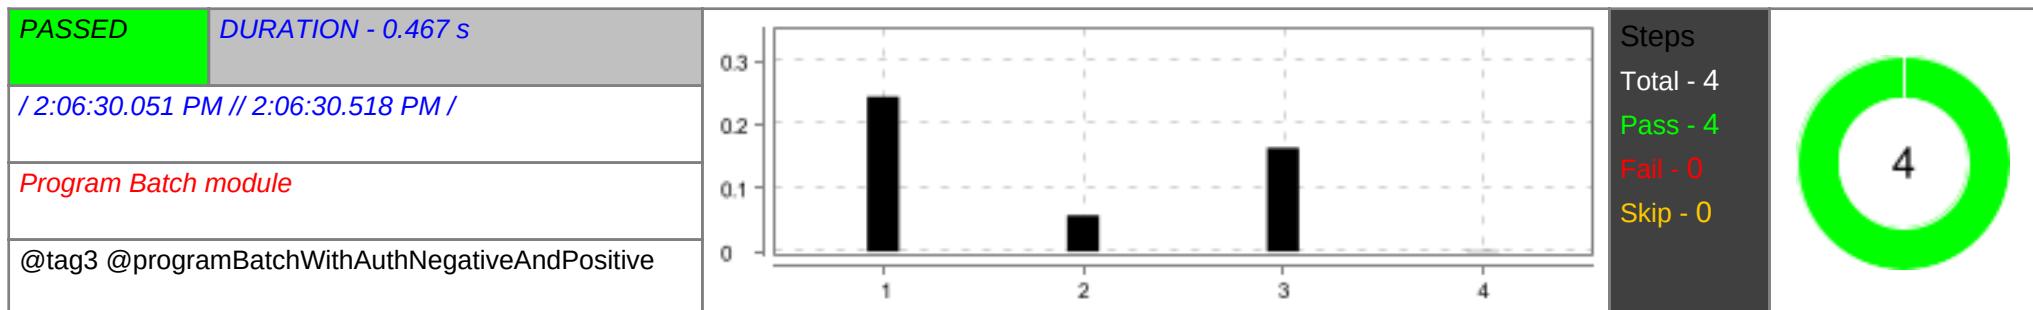


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token for program batch.	PASSED	0.244 s
2	Given Admin creates PUT Request with valid BatchId and Data	PASSED	0.057 s
3	When Admin sends HTTPS Request with endpoint with PUT in request body	PASSED	0.163 s
4	Then Admin receives 200 OK Status with updated value in response body with PUT.	PASSED	0.001 s

User Module Positive request




Check if admin is able to create a new Admin with valid endpoint and request body with mandatory fields

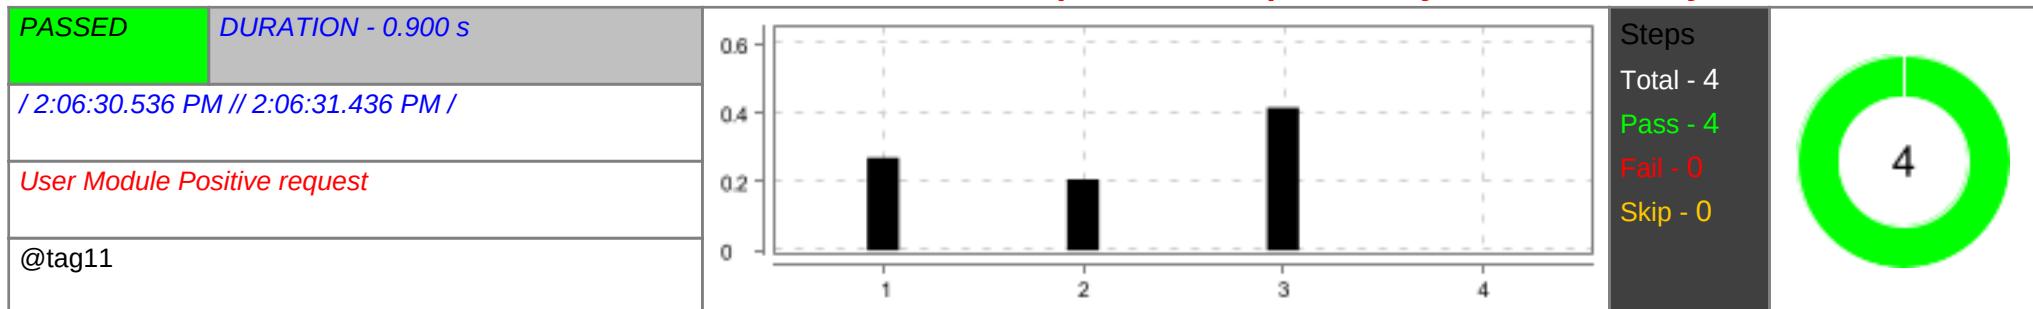

#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization token	PASSED	0.270 s


#	Step / Hook Details	Status	Duration
2	Given Admin creates POST request with all mandatory fields	PASSED	0.207 s
3	When Admin sends HTTPS Request with endpoint	PASSED	0.416 s
4	Then Admin receives 201 Created Status with response body.	PASSED	0.000 s

Check if admin able to create a new Admin with valid endpoint and request body with mandatory and additional fields

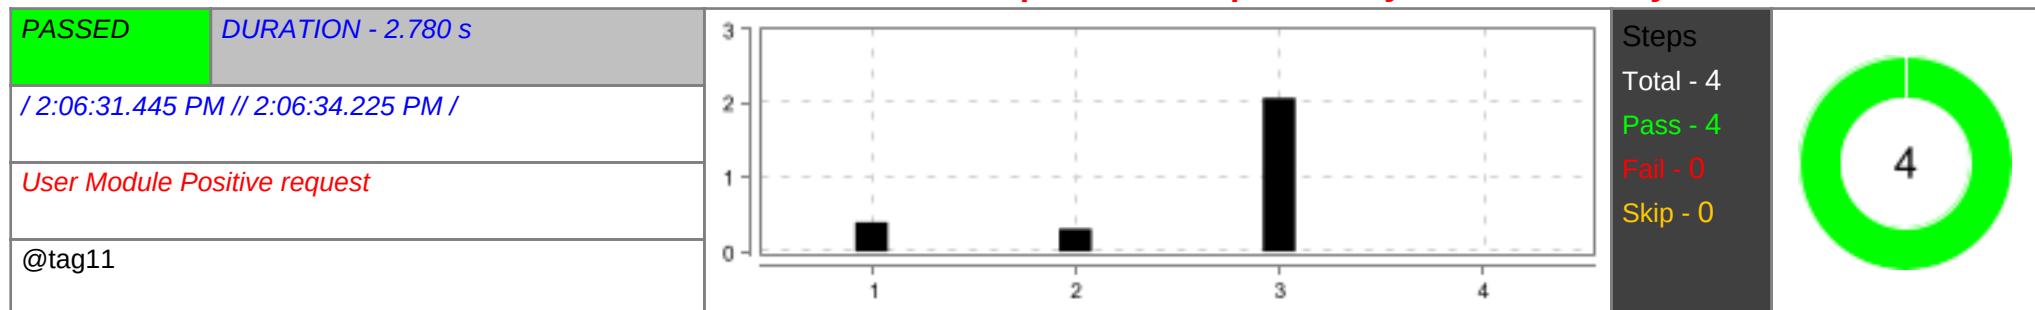

#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization token	PASSED	0.398 s
2	Given Admin creates POST request with all mandatory fields and an additional fields	PASSED	0.306 s
3	When Admin sends POST HTTPS Request with mandatory and additional fields	PASSED	2.073 s
4	Then Admin receives 201 Created Status	PASSED	0.000 s


Check if admin is able to retrieve all the available roles(all roles)

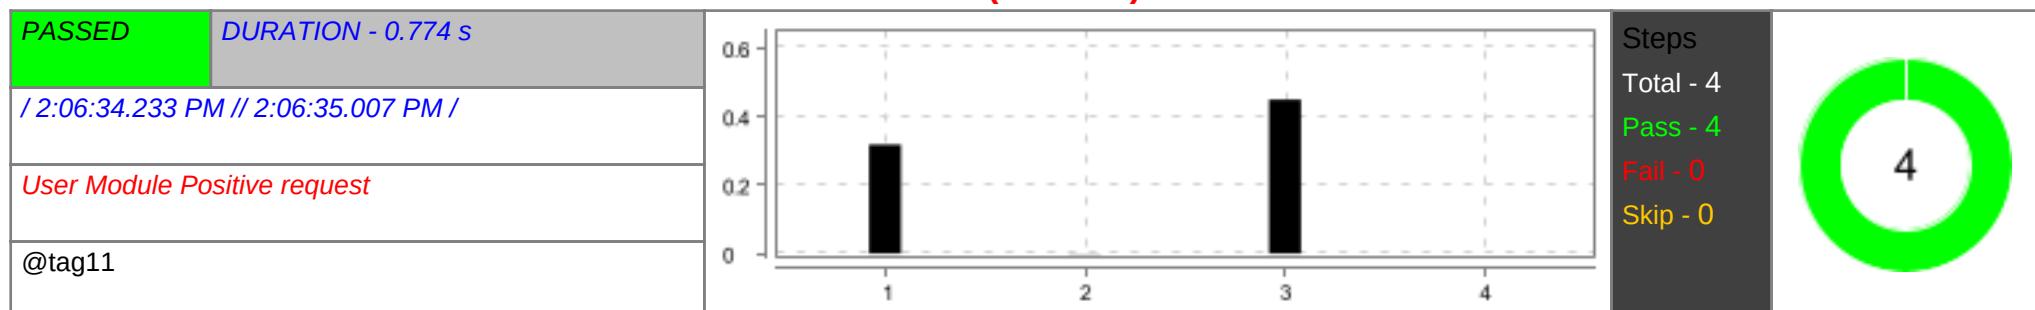

#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization token	PASSED	0.318 s
2	Given Admin creates GET Request	PASSED	0.001 s
3	When Admin sends HTTPS Request with GET All Roles endpoint	PASSED	0.450 s


#	Step / Hook Details	Status	Duration
4	Then Admin receives 200 OK	PASSED	0.000 s

Check if admin able to retrieve a Admin with valid Admin ID

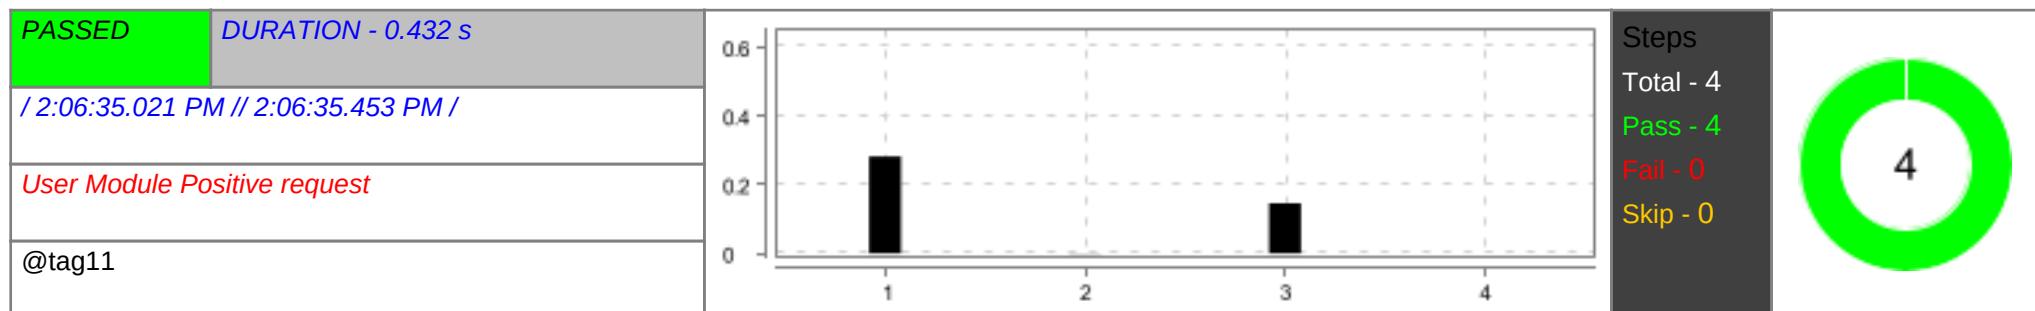


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization token	PASSED	0.282 s
2	Given Admin creates GET Request with valid AdminId	PASSED	0.001 s
3	When Admin sends HTTPS Request with a valid endpoint	PASSED	0.146 s
4	Then Admin receives 200 OK	PASSED	0.000 s

Check if admin able to retrieve all Admins with roles

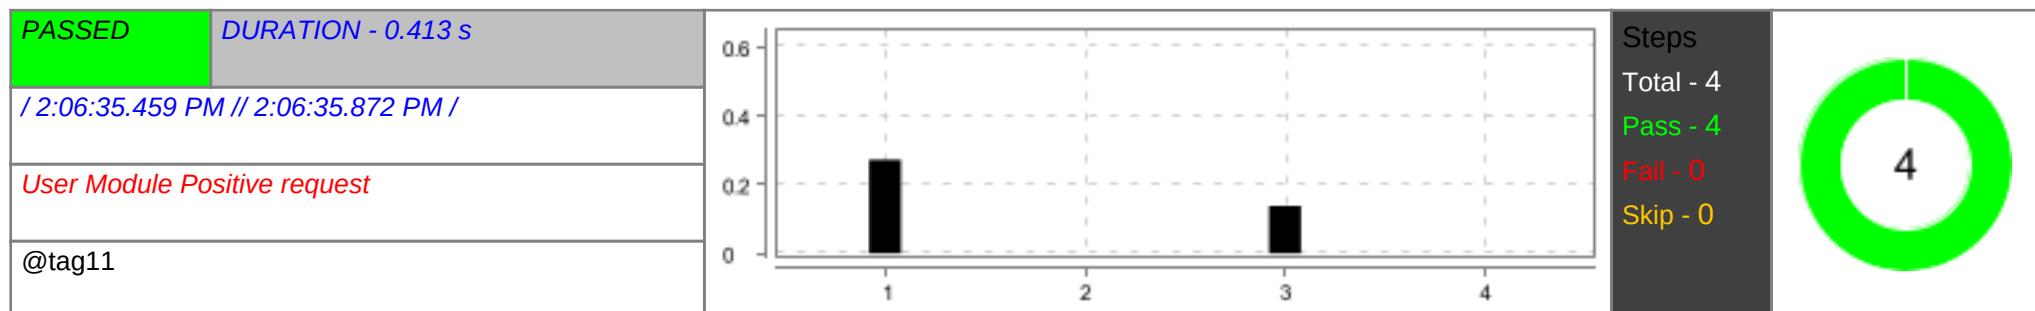


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization token	PASSED	0.273 s
2	Given Admin creates GET Request	PASSED	0.000 s
3	When Admin sends HTTPS Request with an endpoint	PASSED	0.138 s
4	Then Admin receives 200 OK	PASSED	0.000 s

Check if admin is able to get count of active and inactive Admins

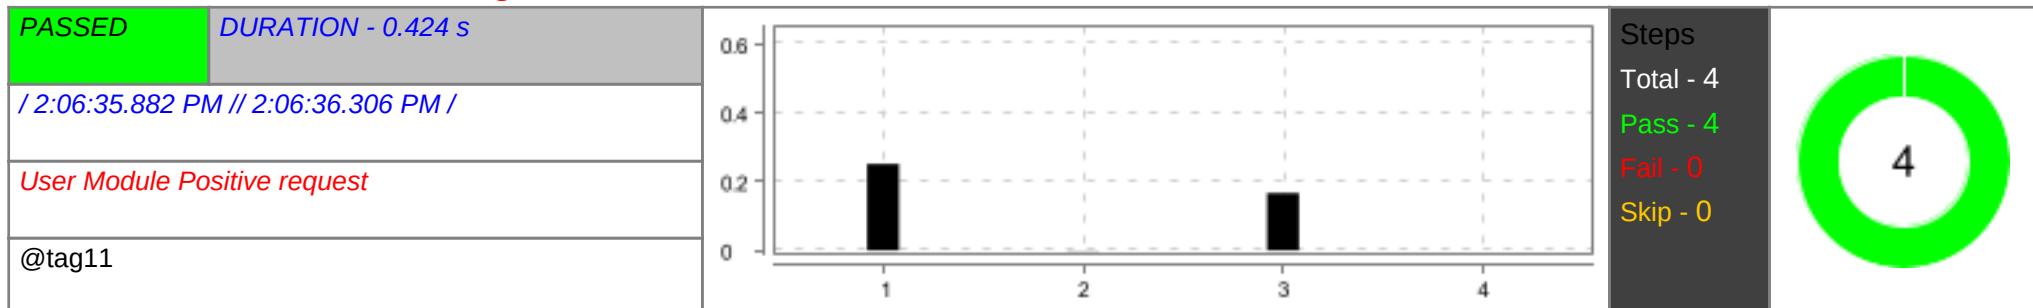


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization token	PASSED	0.252 s
2	Given Admin creates GET Request with active and inactive Admins endpoint	PASSED	0.001 s
3	When Admin sends Get count of active and inactive users HTTPS Request with endpoint	PASSED	0.167 s
4	Then Admin receives 200 OK	PASSED	0.000 s

Check if admin able to retrieve all active Admins

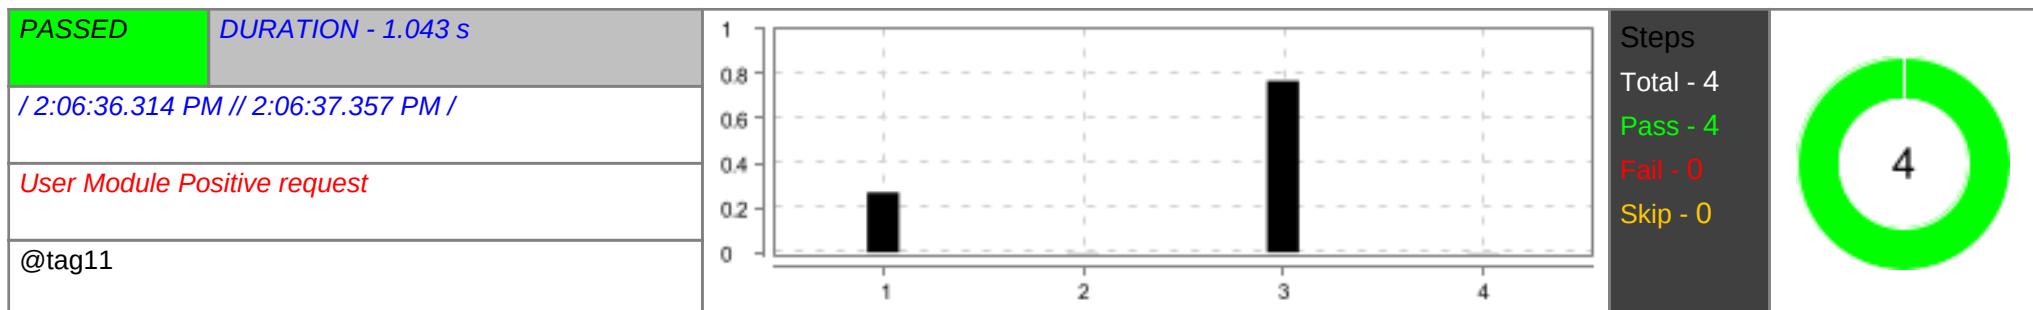


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization token	PASSED	0.268 s
2	Given Admin creates GET Request	PASSED	0.001 s
3	When Admin sends Get All Active Users HTTPS Request with endpoint	PASSED	0.768 s
4	Then Admin receives 200 OK	PASSED	0.001 s

Check if admin is able to assign Admin to with program/batch by Admin Id

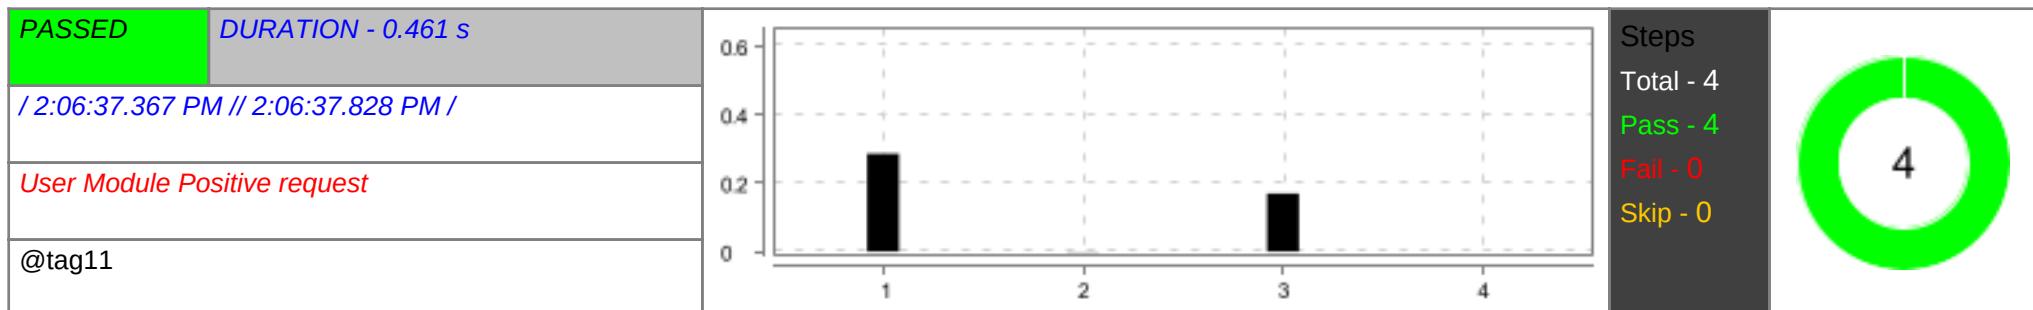


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization token	PASSED	0.286 s
2	Given Admin creates PUT Request with valid data in request body	PASSED	0.001 s
3	When Admin sends PUT HTTPS Request with User Role Program Batch Status endpoint	PASSED	0.170 s
4	Then Admin receives 200 OK	PASSED	0.000 s

Check if admin is able to get the Admins by program batches for valid batch ID

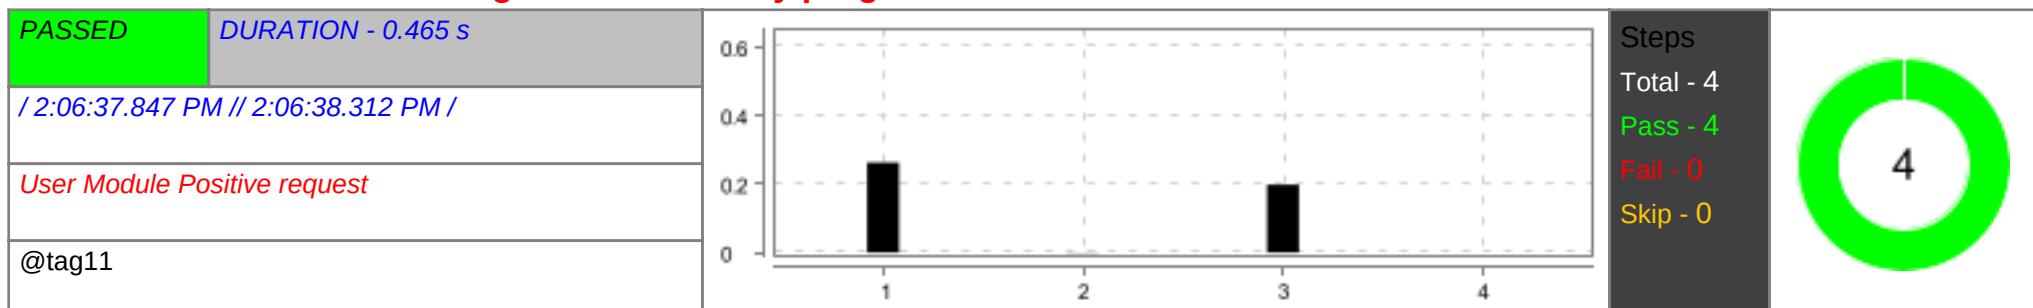


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization token	PASSED	0.263 s
2	Given Admin creates GET Request with valid batch Id	PASSED	0.001 s
3	When Admin sends Get User by Program Batches HTTPS Request with endpoint	PASSED	0.198 s
4	Then Admin receives 200 OK	PASSED	0.000 s

Check if admin is able to get the Admins for valid program Id

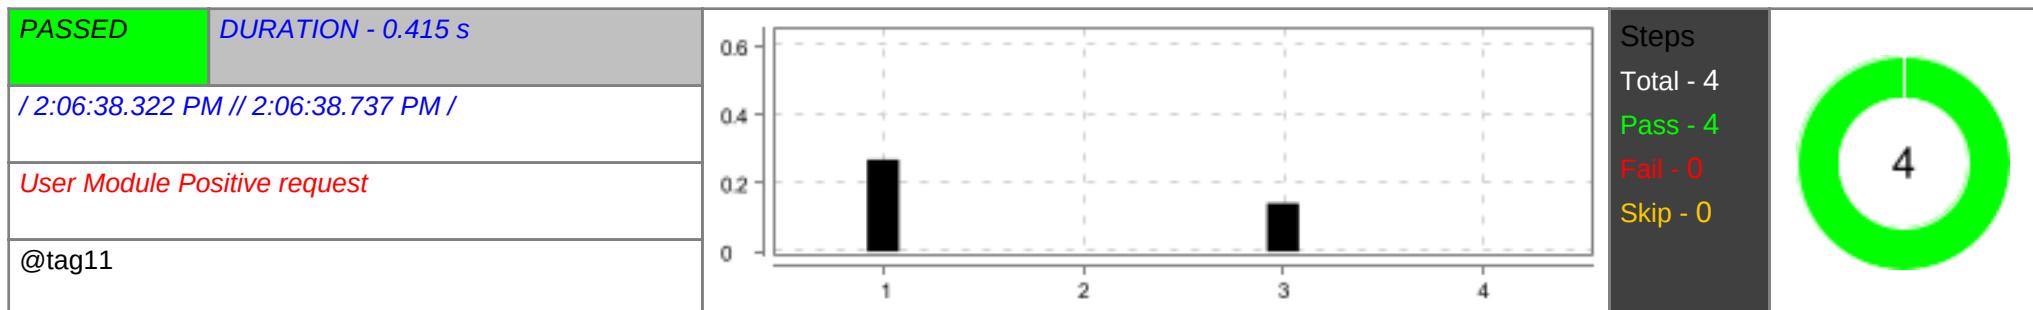


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization token	PASSED	0.269 s
2	Given Admin creates GET Request with valid program Id	PASSED	0.000 s
3	When Admin sends Gets Users for Program HTTPS Request with endpoint	PASSED	0.141 s
4	Then Admin receives 200 OK	PASSED	0.000 s

Check if admin is able to retrieve Admins by valid role ID

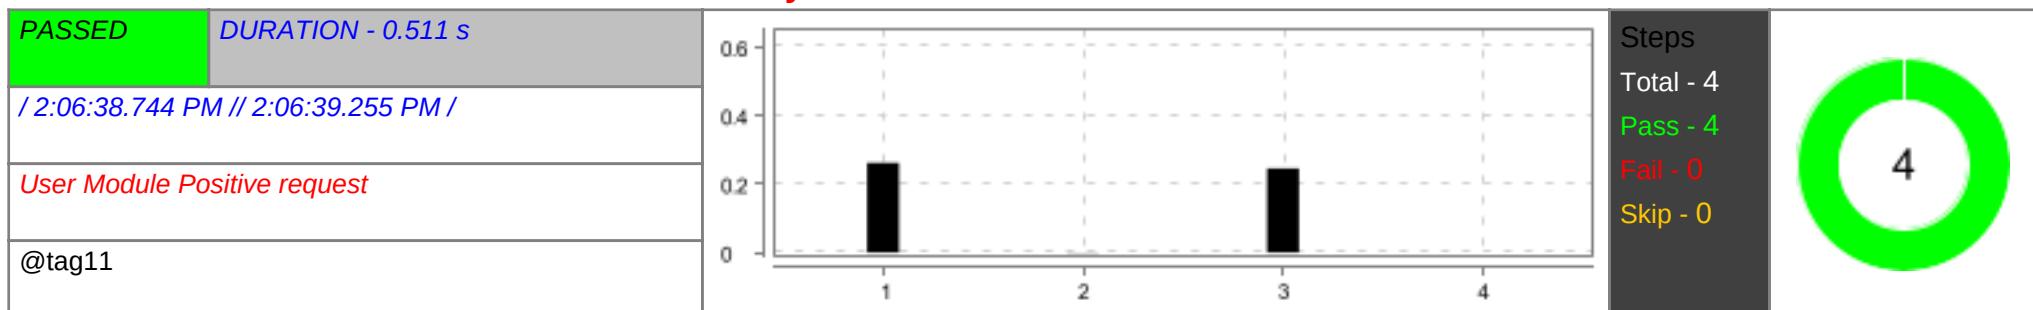


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization token	PASSED	0.262 s
2	Given Admin creates GET Request with valid role ID	PASSED	0.001 s
3	When Admin sends Gets Users by roleId HTTPS Request with endpoint	PASSED	0.246 s
4	Then Admin receives 200 OK	PASSED	0.000 s

Check if admin is able to retrieve all Admins with filters

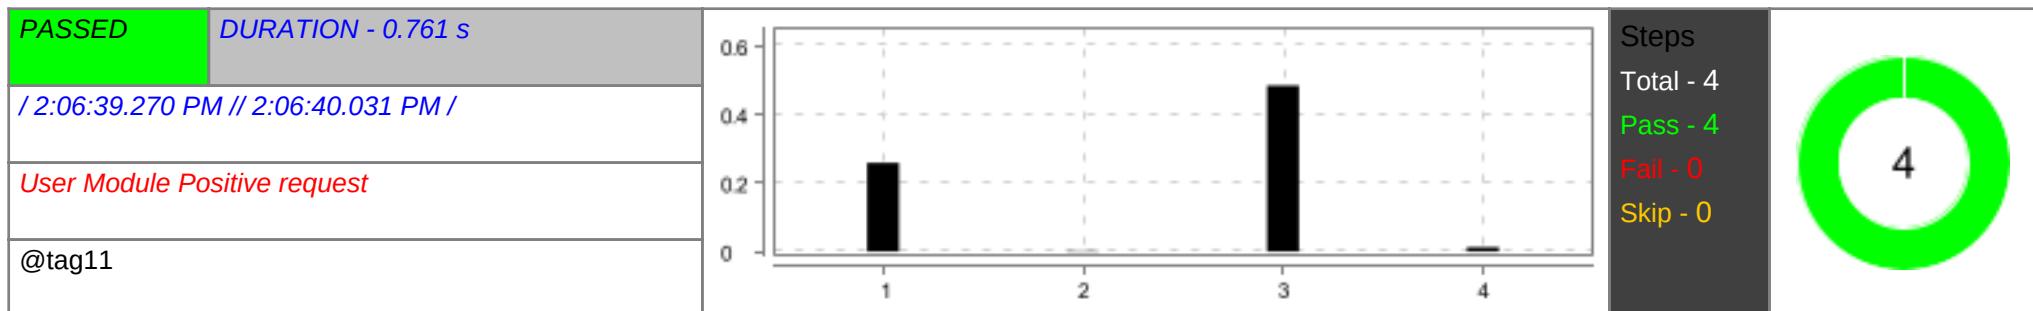


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization token	PASSED	0.259 s
2	Given Admin creates GET Request with filters	PASSED	0.002 s
3	When Admin sends HTTPS Request with filters endpoint	PASSED	0.485 s
4	Then Admin receives "200" OK	PASSED	0.012 s

Check if admin is able to update Admin details with Admin id and mandatory fields

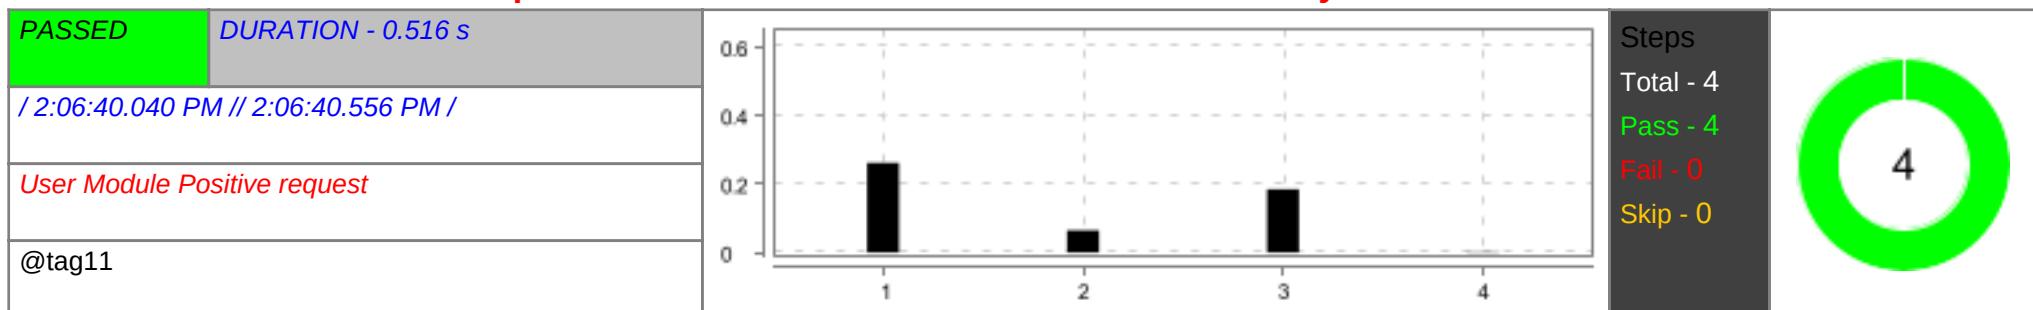


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization token	PASSED	0.262 s
2	Given Admin creates PUT Request with valid data in request body (values only in mandatory fields)	PASSED	0.065 s
3	When Admin sends HTTPS request for update by userId with endpoint	PASSED	0.185 s
4	Then Admin receives "200" OK	PASSED	0.002 s

Check if admin is able to update role status of a Admin with valid Admin id

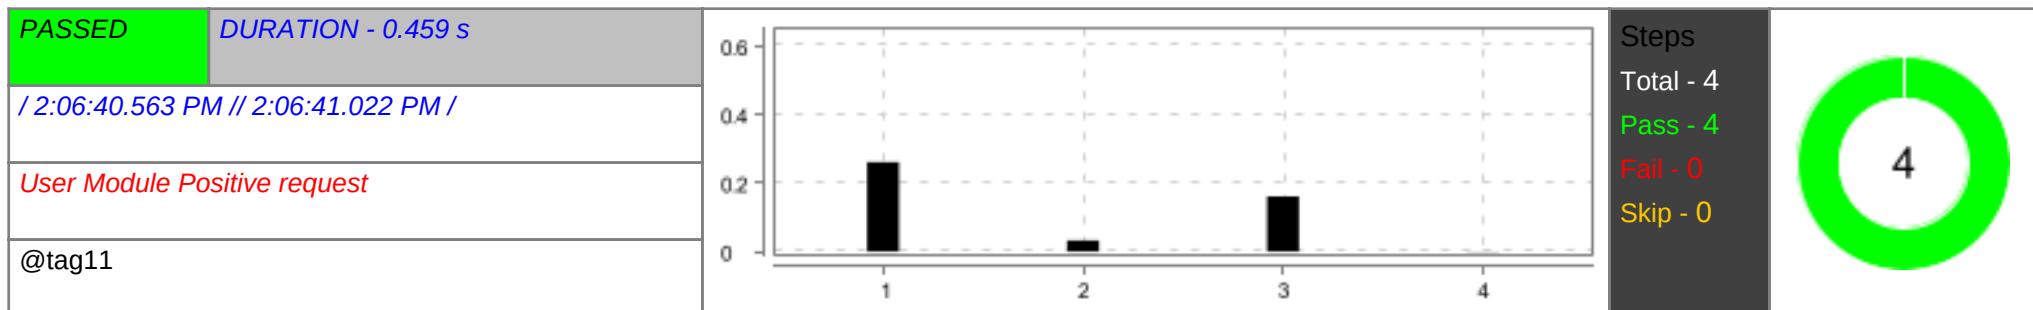


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization token	PASSED	0.261 s
2	Given Admin creates PUT Request with valid user data in request body	PASSED	0.032 s
3	When Admin sends HTTPS Request for update by roleStatus with endpoint	PASSED	0.161 s
4	Then Admin receives "200" OK	PASSED	0.001 s

Check if admin is able to update User by roleId with valid Admin id

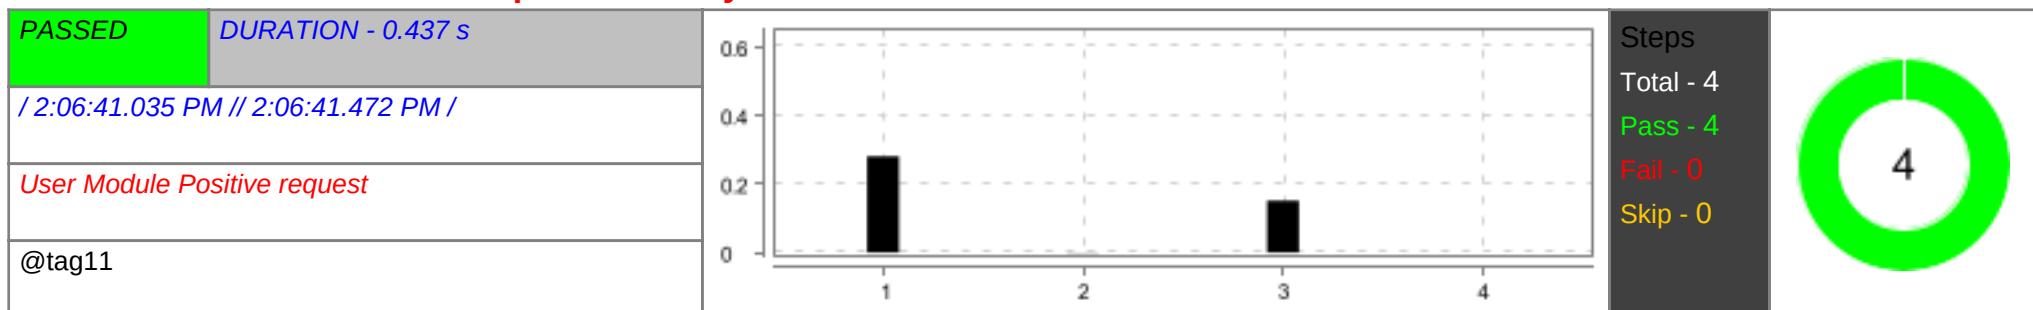


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization token	PASSED	0.281 s
2	Given Admin creates PUT Request with valid user data to with roleId	PASSED	0.001 s
3	When Admin sends HTTPS Request for update User by roleId	PASSED	0.152 s
4	Then Admin receives "200" OK	PASSED	0.000 s

Check if admin is able to update the Admin login status by Admin ID

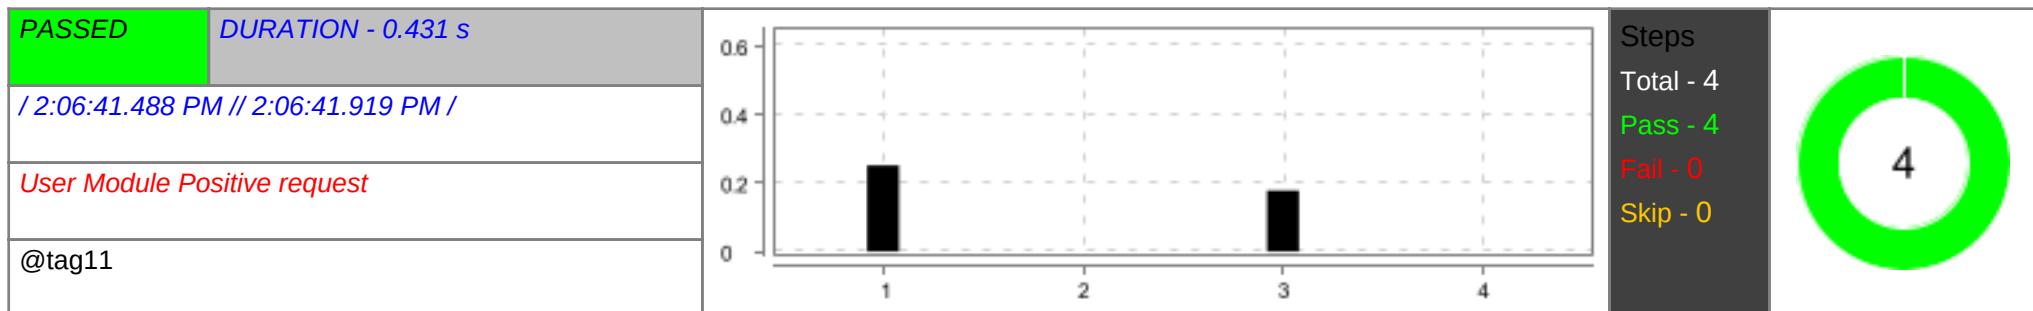


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization token	PASSED	0.252 s
2	Given Admin creates PUT Request with Admin login status by Admin ID	PASSED	0.000 s
3	When Admin sends HTTPS Request for update User with Admin login status by Admin ID	PASSED	0.178 s
4	Then Admin receives "200" OK	PASSED	0.000 s

User Controller Positive

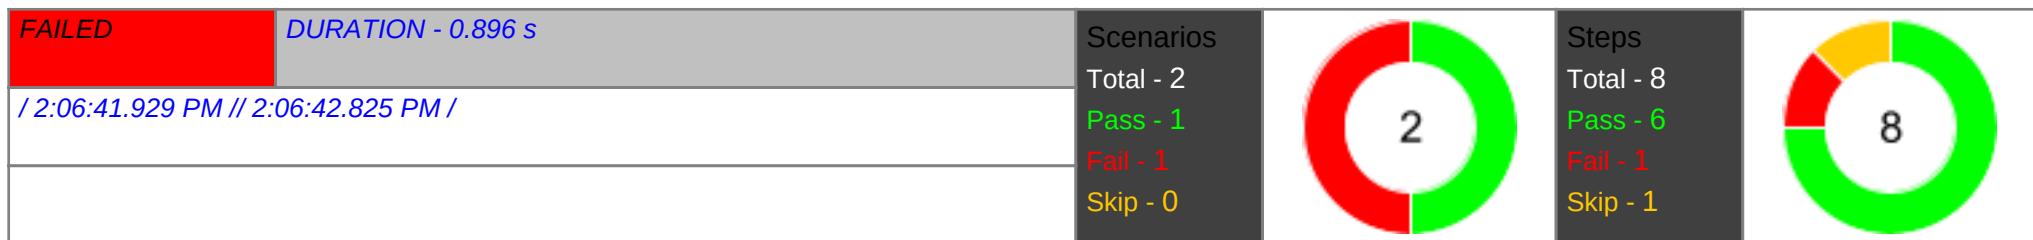


admin is able to retrieve assigned program batches for valid AdminId

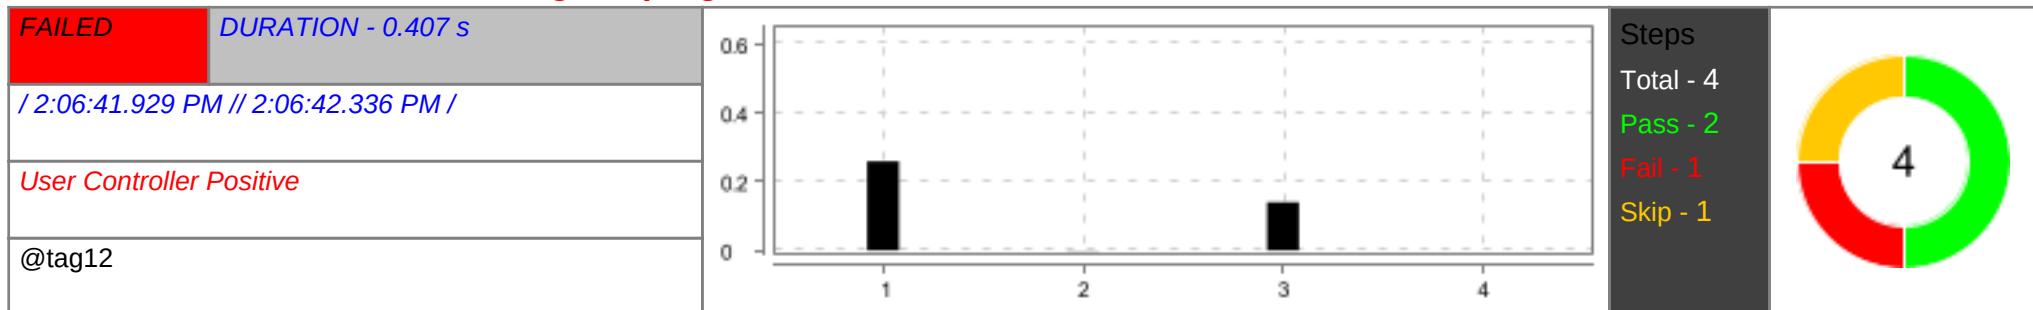

#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization bearer token	PASSED	0.259 s


#	Step / Hook Details	Status	Duration
2	Given Admin creates a GET Request to retrieve Admin assigned to Program or Batch by AdminId	PASSED	0.001 s
3	<p>When Admin sends HTTPS Request to retrieve assigned program batches for valid AdminId</p> <pre>java.lang.AssertionError: 1 expectation failed. Expected status code <200> but was <404>. at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrapNoCoerce.callConstructor(ConstructorSite.java:108) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure.validate(ResponseSpecificationImpl.groovy:512) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure\$validate\$1.call(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.validateResponseIfRequired(ResponseSpecificationImpl.groovy:696) at io.restassured.internal.ResponseSpecificationImpl.this\$2\$validateResponseIfRequired(ResponseSpecificationImpl.groovy) at jdk.internal.reflect.GeneratedMethodAccessor298.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.runtime.callsite.PlainObjectMetaMethodSite.doInvoke(PlainObjectMetaMethodSite.java:43) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite\$PogoCachedMethodSiteNoUnwrapNoCoerce.invoke(PogoMetaMethodSite.java:198) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite.callCurrent(PogoMetaMethodSite.java:62) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:185) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:135) at io.restassured.specification.ResponseSpecification\$statusCode\$0.callCurrent(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:143) at io.restassured.internal.ValidatableResponseOptionsImpl.statusCode(ValidatableResponseOptionsImpl.java:89) at api.stepdefinitions.UserController. admin_sends_https_request_to_retrieve_assigned_program_batches_for_valid_admin_id(UserController.java:72) at ?.Admin sends HTTPS Request to retrieve assigned program batches for valid AdminId(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/12UserControllerPositive.feature:9) * Not displayable characters are replaced by '?'.</pre>	FAILED	0.140 s
4	Then Admin receives a 200 OK response	SKIPPED	0.000 s

admin is able to retrieve all Admins with assigned program batches

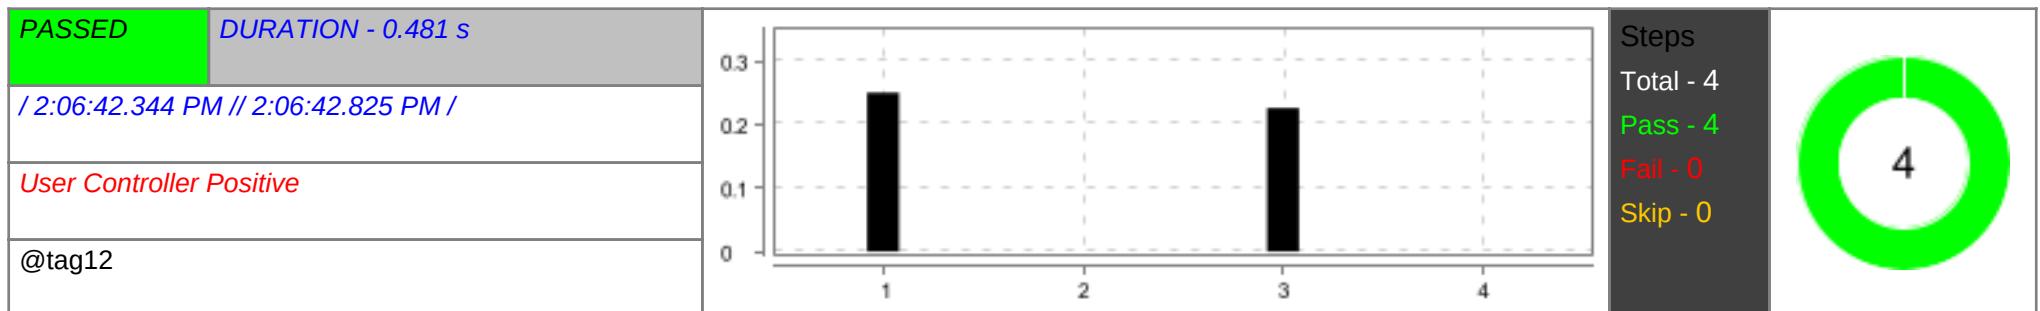


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization bearer token	PASSED	0.250 s
2	Given Admin creates a GET Request to retrieve all Admins assigned to programs or batches	PASSED	0.000 s
3	When Admin sends HTTPS Request	PASSED	0.226 s
4	Then Admin receives a 200 OK response	PASSED	0.000 s

Delete Request for all modules

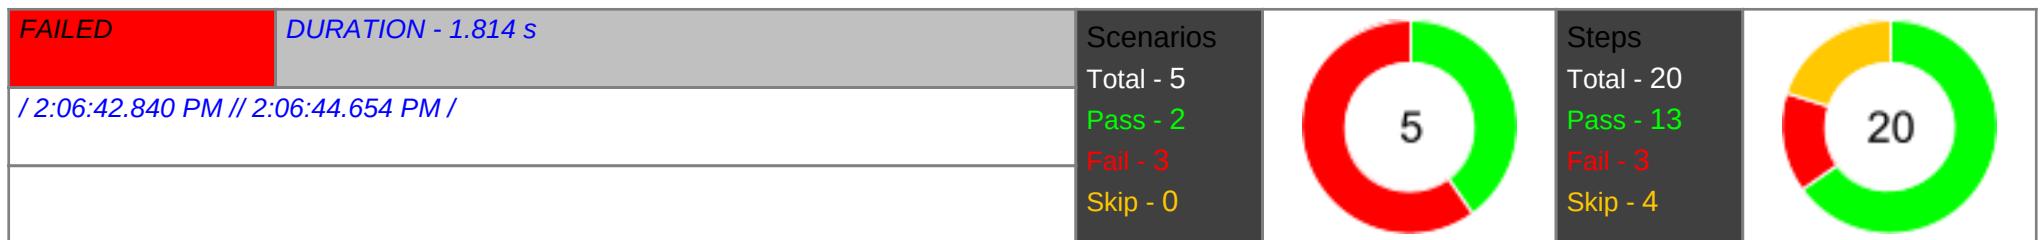


Check if admin is able to delete the program batch for a Admin

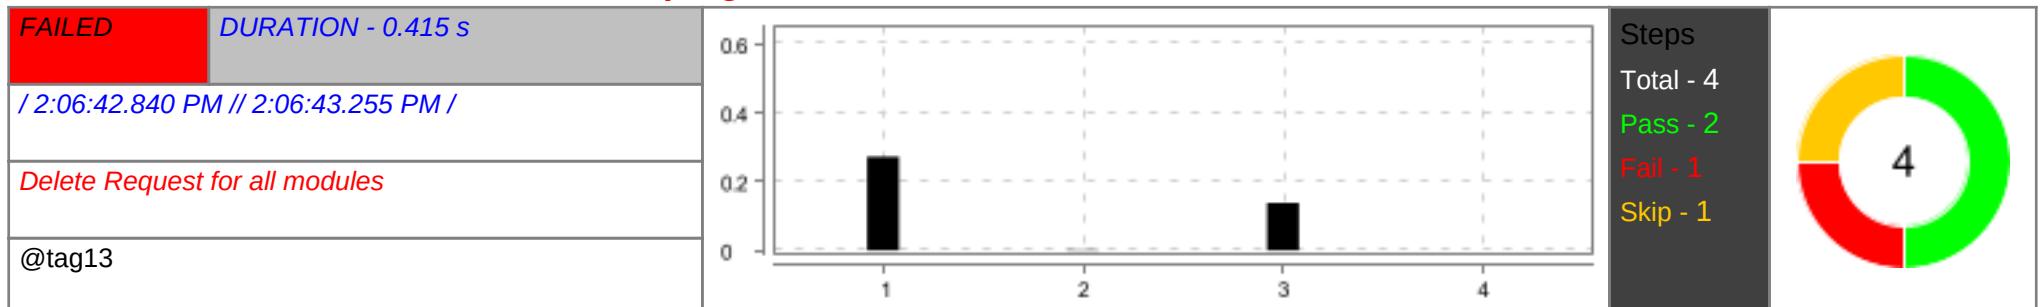

#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization bearer	PASSED	0.273 s

#	Step / Hook Details	Status	Duration
2	Given Admin creates DELETE Request to delete Admin assigned to program/batch by AdminId	PASSED	0.002 s
3	<p>When Admin sends HTTPS Request to delete Admin assigned to program/batch by AdminId</p> <pre>java.lang.AssertionError: 1 expectation failed. Expected status code <200> but was <405>. at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrapNoCoerce.callConstructor(ConstructorSite.java:108) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure.validate(ResponseSpecificationImpl.groovy:512) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure\$validate\$1.call(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.validateResponseIfRequired(ResponseSpecificationImpl.groovy:696) at io.restassured.internal.ResponseSpecificationImpl.this\$2\$validateResponseIfRequired(ResponseSpecificationImpl.groovy) at jdk.internal.reflect.GeneratedMethodAccessor298.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.runtime.callsite.PlainObjectMetaMethodSite.doInvoke(PlainObjectMetaMethodSite.java:43) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite\$PogoCachedMethodSiteNoUnwrapNoCoerce.invoke(PogoMetaMethodSite.java:198) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite.callCurrent(PogoMetaMethodSite.java:62) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:185) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:135) at io.restassured.specification.ResponseSpecification\$statusCode\$0.callCurrent(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:143) at io.restassured.internal.ValidatableResponseOptionsImpl.statusCode(ValidatableResponseOptionsImpl.java:89) at api.stepdefinitions.AllDeleteRequest. admin_sends_https_request_to_delete_admin_assigned_to_program_batch_by_admin_id(AllDeleteRequest.java:54) at ?.Admin sends HTTPS Request to delete Admin assigned to program/batch by AdminId(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/13AllDeleteRequest.feature:11) * Not displayable characters are replaced by '?'.</pre>	FAILED	0.138 s
4	Then Admin receives 200 OK	SKIPPED	0.000 s

Check if Admin able to delete a Admin with valid Admin Id

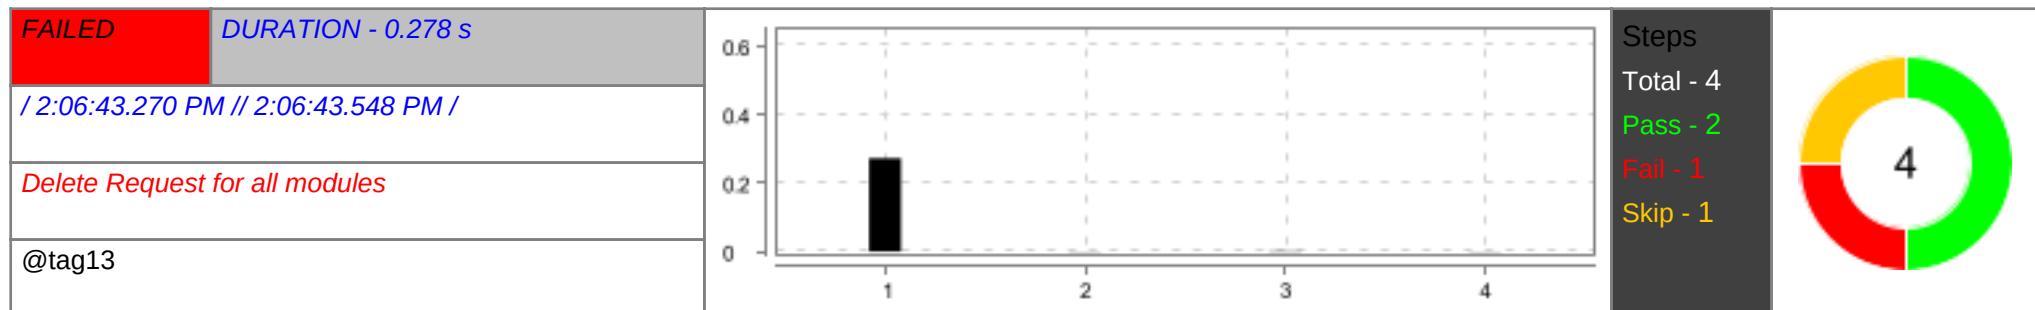


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization bearer	PASSED	0.273 s
2	Given Admin creates DELETE Request to delete Admin details	PASSED	0.001 s
3	<p>When Admin sends HTTPS request with valid Admin Id</p> <p>java.lang.IllegalArgumentException: Path parameters were not correctly defined. Redundant path parameters are: userId=U448. Undefined path parameters are: userID.</p> <pre>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73) at org.codehaus.groovy.reflection.CachedConstructor.doConstructorInvoke(CachedConstructor.java:60) at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrap.callConstructor(ConstructorSite.java:86) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.RequestSpecificationImpl.assertCorrectNumberOfPathParams(RequestSpecificationImpl.groovy:1277) at jdk.internal.reflect.GeneratedMethodAccessor236.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:343) at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:328) at groovy.lang.MetaClassImpl.doInvokeMethod(MetaClassImpl.java:1331) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1086) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1006) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:789) at io.restassured.internal.RequestSpecificationImpl.invokeMethod(RequestSpecificationImpl.groovy) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.call(PogoInterceptableSite.java:46) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.callCurrent(PogoInterceptableSite.java:57) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:176) at io.restassured.internal.RequestSpecificationImpl.sendRequest(RequestSpecificationImpl.groovy:1161) at io.restassured.internal.RequestSpecificationImpl.this\$2\$sendRequest(RequestSpecificationImpl.groovy)</pre>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	at jdk.internal.reflect.GeneratedMethodAccessor234.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:343) at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:328) at groovy.lang.MetaClassImpl.doInvokeMethod(MetaClassImpl.java:1331) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1086) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1006) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:789) at io.restassured.internal.RequestSpecificationImpl.invokeMethod(RequestSpecificationImpl.groovy) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.call(PogoInterceptableSite.java:46) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:166) at io.restassured.internal.filter.SendRequestFilter.filter(SendRequestFilter.groovy:30) at io.restassured.filter.Filter\$filter\$0.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.time.TimingFilter.filter(TimingFilter.java:56) at io.restassured.filter.Filter\$filter.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter\$0.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.FilterContext\$next.call(Unknown Source) at io.restassured.internal.filter.CsrfFilter.filter(CsrfFilter.groovy:70) at io.restassured.filter.Filter\$filter\$0.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.log.StatusCodeBasedLoggingFilter.filter(StatusCodeBasedLoggingFilter.java:112) at io.restassured.filter.log.ResponseLoggingFilter.filter(ResponseLoggingFilter.java:31) at io.restassured.filter.Filter\$filter.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.log.RequestLoggingFilter.filter(RequestLoggingFilter.java:146) at io.restassured.filter.Filter\$filter.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at io.restassured.filter.Filter\$filter\$0.call(Unknown Source) at io.restassured.internal.filter.FilterContextImpl.next(FilterContextImpl.groovy:72) at io.restassured.filter.FilterContext\$next.call(Unknown Source) at io.restassured.internal.RequestSpecificationImpl.applyPathParamsAndSendRequest(RequestSpecificationImpl.groovy:1704)		


#	Step / Hook Details	Status	Duration
	at io.restassured.internal.RequestSpecificationImpl.this\$2\$applyPathParamsAndSendRequest(RequestSpecificationImpl.groovy) at jdk.internal.reflect.GeneratedMethodAccessor225.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:343) at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:328) at groovy.lang.MetaClassImpl.doInvokeMethod(MetaClassImpl.java:1331) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1086) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1006) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:789) at io.restassured.internal.RequestSpecificationImpl.invokeMethod(RequestSpecificationImpl.groovy) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.call(PogoInterceptableSite.java:46) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.callCurrent(PogoInterceptableSite.java:57) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:203) at io.restassured.internal.RequestSpecificationImpl.applyPathParamsAndSendRequest(RequestSpecificationImpl.groovy:1710) at io.restassured.internal.RequestSpecificationImpl.this\$2\$applyPathParamsAndSendRequest(RequestSpecificationImpl.groovy) at jdk.internal.reflect.GeneratedMethodAccessor224.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.codehaus.groovy.reflection.CachedMethod.invoke(CachedMethod.java:343) at groovy.lang.MetaMethod.doMethodInvoke(MetaMethod.java:328) at groovy.lang.MetaClassImpl.doInvokeMethod(MetaClassImpl.java:1331) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1086) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:1006) at groovy.lang.MetaClassImpl.invokeMethod(MetaClassImpl.java:789) at io.restassured.internal.RequestSpecificationImpl.invokeMethod(RequestSpecificationImpl.groovy) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.call(PogoInterceptableSite.java:46) at org.codehaus.groovy.runtime.callsite.PogoInterceptableSite.callCurrent(PogoInterceptableSite.java:57) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:203) at io.restassured.internal.RequestSpecificationImpl.delete(RequestSpecificationImpl.groovy:184) at io.restassured.internal.RequestSpecificationImpl.delete(RequestSpecificationImpl.groovy) at api.stepdefinitions.AllDeleteRequest.admin_sends_https_request_with_valid_admin_id(AllDeleteRequest.java:68) at ?.Admin sends HTTPS request with valid Admin Id(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/13AllDeleteRequest.feature:17) * Not displayable characters are replaced by '?'.		
4	Then Admin receives 200 Ok	SKIPPED	0.001 s

Check if admin able to delete a Batch with valid Batch ID

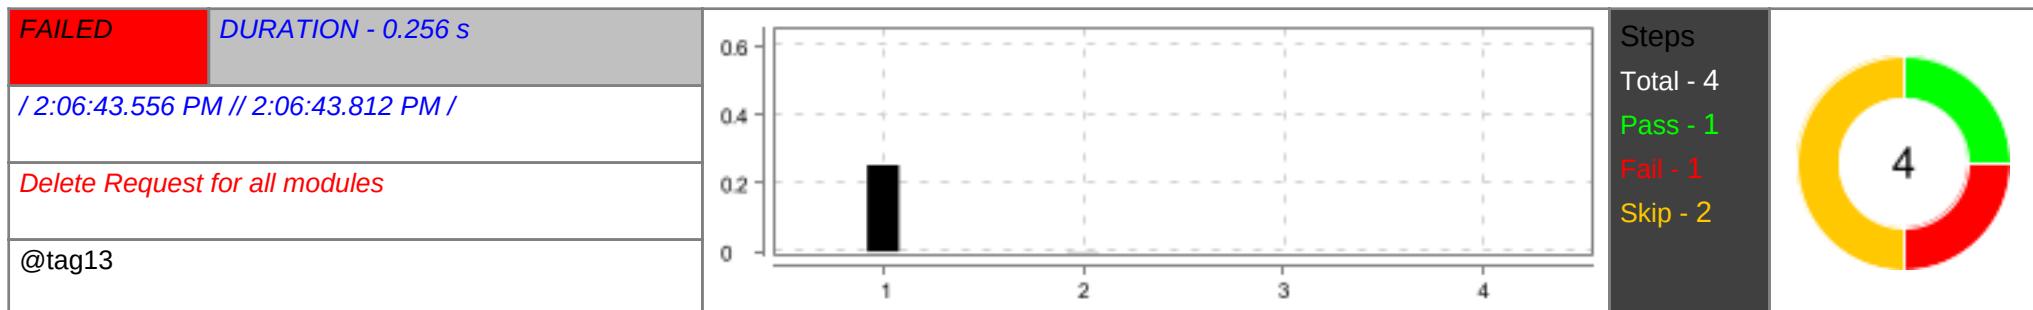


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization bearer	PASSED	0.253 s
2	Given Admin creates DELETE Request with valid BatchId Step undefined	FAILED	0.001 s
3	When Admin sends HTTPS Request with endpoint for delete batch	SKIPPED	0.000 s
4	Then Admin receives 200 Ok status with message for delete batch.	SKIPPED	0.000 s

Check if Admin able to delete a program with valid programName

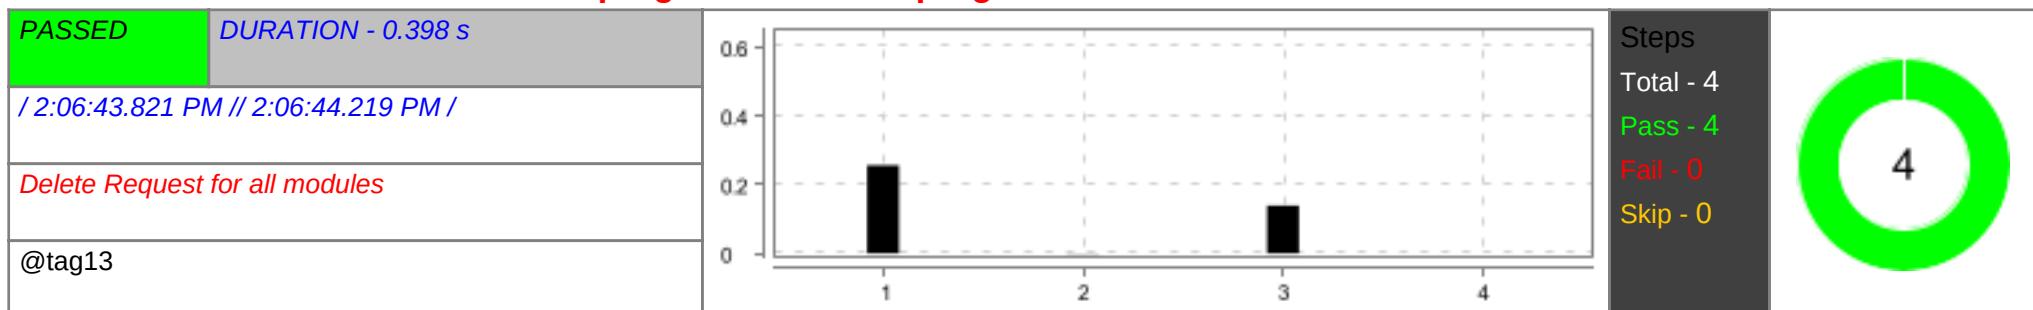


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization bearer	PASSED	0.256 s
2	Given Admin creates DELETE Request for the LMS API endpoint and valid programName	PASSED	0.001 s
3	When Admin sends HTTPS Request with endpoint to delete a program with program name	PASSED	0.139 s
4	Then Admin receives 200 Ok status with message	PASSED	0.000 s

Check if Admin able to delete a program with valid program ID

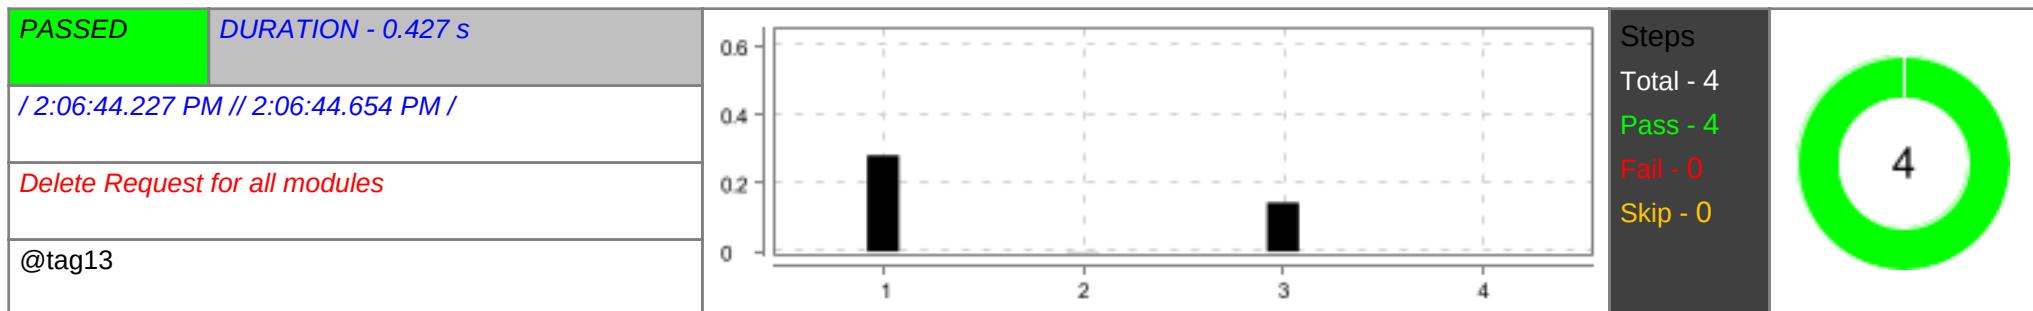


#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization bearer	PASSED	0.281 s
2	Given Admin creates DELETE Request for the LMS API endpoint and valid program ID	PASSED	0.001 s
3	When Admin sends HTTPS Request with endpoint to delete a program with program ID	PASSED	0.143 s
4	Then Admin receives 200 Ok and validates the status	PASSED	0.000 s

User Logout

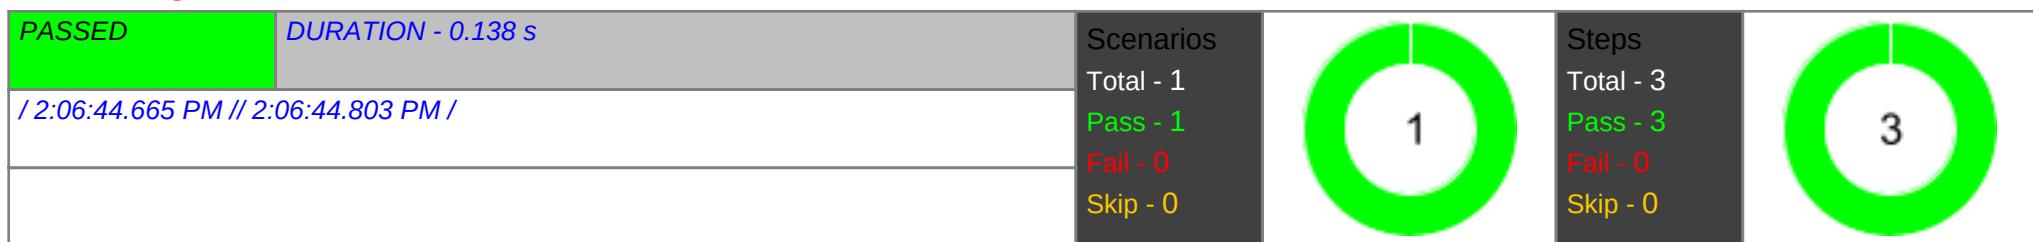

Check if Admin able to logout with valid endpoint

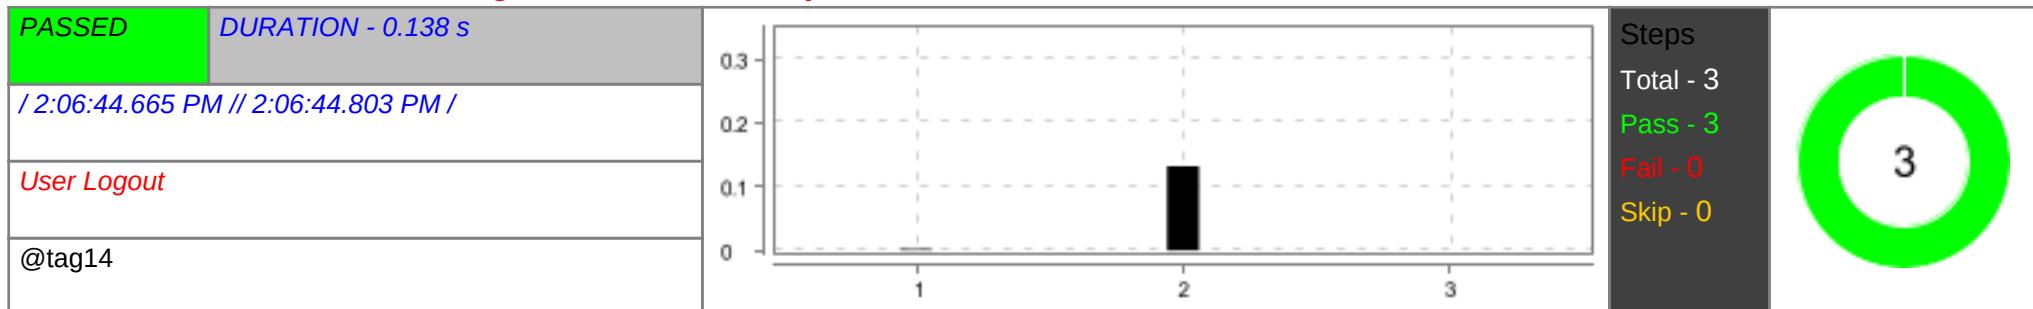


#	Step / Hook Details	Status	Duration
1	Given Admin sets authorization to bearer Token with token	PASSED	0.002 s

#	Step / Hook Details	Status	Duration
2	When Admin calls Get Https method with valid endpoint	PASSED	0.132 s
3	Then Admin receives 200 ok and response with "Logout successful"	PASSED	0.000 s

User Logout Negative




Check if Admin able to logout with invalid endpoint

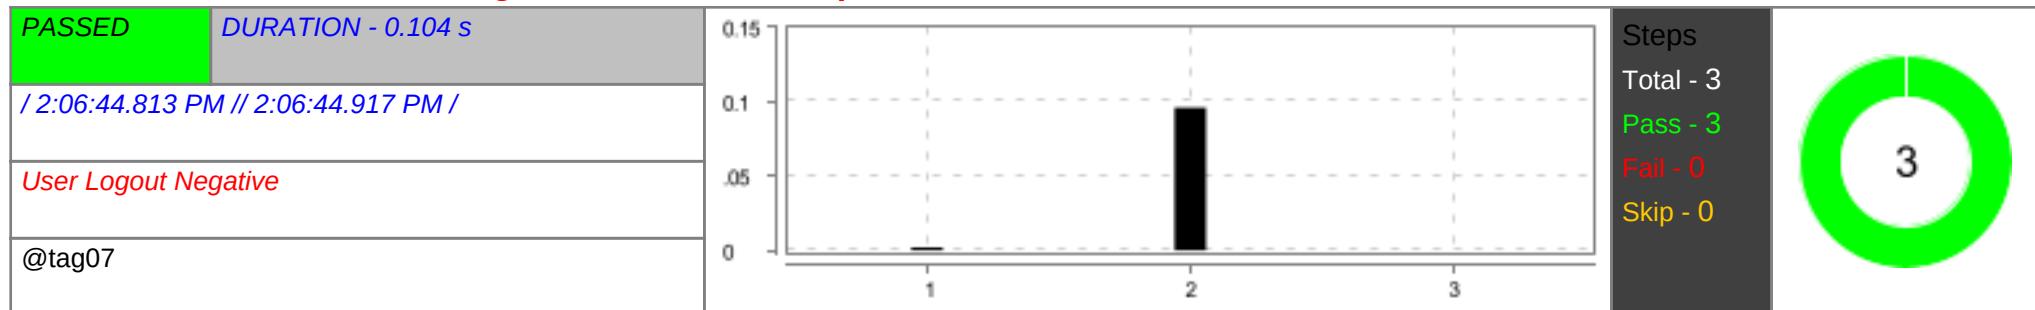

#	Step / Hook Details	Status	Duration
1	Given Admin sets authorization to bearer Token with token	PASSED	0.002 s
2	When Admin calls Get Https method with invalid endpoint	PASSED	0.096 s
3	Then Admin receives 404 Not found	PASSED	0.000 s

Check if Admin able to logout with valid endpoint with NoAuth

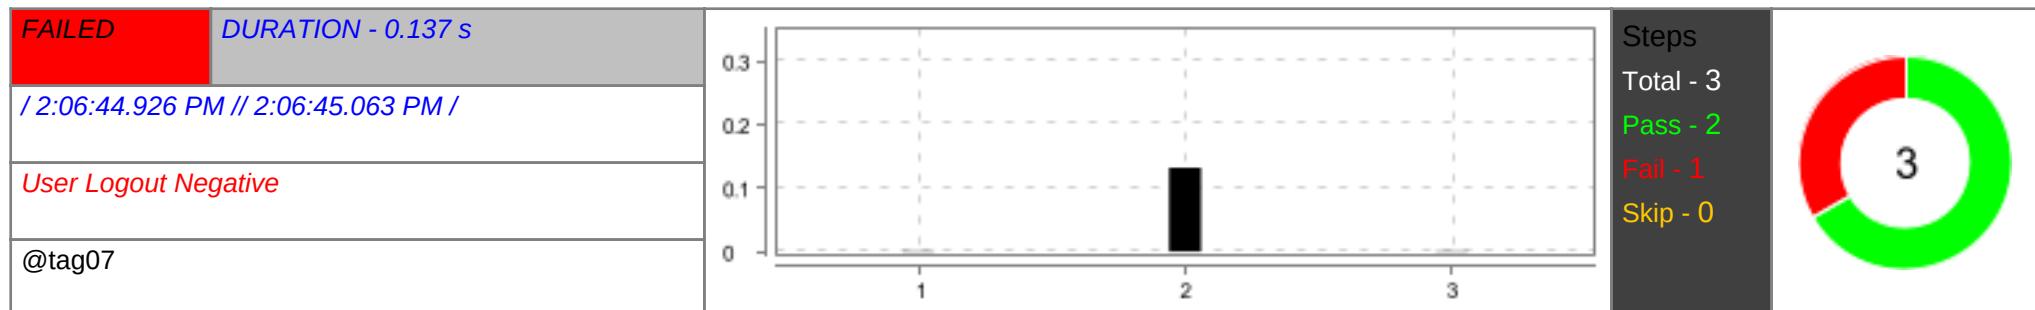

#	Step / Hook Details	Status	Duration
1	Given Admin sets No authorization	PASSED	0.001 s
2	When Admin calls Get Https method with valid endpoint	PASSED	0.132 s
3	Then Admin receives status 401 with unauthorized error message Negative <i>java.lang.NullPointerException: Cannot invoke "io.restassured.response.Response.getStatusCode()" because "this.response" is null</i> <i>at api.stepdefinitions.UserModule.admin_receives_status_with_unauthorized_error_message_negative(UserModule.java:454)</i> <i>at ?.Admin receives status 401 with unauthorized error message Negative(file:///C:/Users/shanj/git/Team05_APITesters/Team05_APITesters/src/test/resources/features/15LogoutNegative.feature:16)</i> <i>* Not displayable characters are replaced by '?'.</i>	FAILED	0.001 s