

Placement Empowerment Program

Cloud Computing and DevOps Centre

Back Up and Restore a Cloud Instance : Take a snapshot of your cloud VM. Terminate the VM and restore it from the snapshot.

Name: Shana R S

Department: IT

Introduction

In today's cloud-driven world, ensuring data availability and reliability is paramount. This Proof of Concept (POC) focuses on the **Backup and Restore** process for a cloud instance, showcasing how critical data can be safeguarded and restored efficiently in AWS. By taking a snapshot, terminating the instance, and restoring it from the snapshot, this POC demonstrates the ease and reliability of AWS Elastic Block Store (EBS).

Overview

This POC involves working with Amazon Web Services (AWS) to perform the following tasks:

1. Launching an EC2 instance.
2. Creating an EBS snapshot of the instance's volume to back up its data.
3. Terminating the instance to simulate a failure or cost-saving scenario.
4. Restoring the instance using the snapshot by creating a new volume and attaching it to a new EC2 instance.

The step-by-step approach ensures no unnecessary charges while maintaining data integrity and availability.

Objective

The objective of this POC is to:

1. Demonstrate the process of creating and managing backups in AWS.
2. Explore the capabilities of EBS snapshots for disaster recovery.
3. Understand how to restore a terminated instance and verify data integrity.
4. Highlight cost-saving techniques using AWS Free Tier while ensuring operational readiness.


Importance

- 1. Disaster Recovery:** Ensures that critical data can be restored quickly in case of an unexpected failure.
- 2. Cost Optimization:** Demonstrates terminating unused instances and restoring them only when required.
- 3. Scalability and Flexibility:** Showcases AWS's ability to manage snapshots and volumes across regions and availability zones.
- 4. Practical Knowledge:** Provides hands-on experience in working with EC2, EBS, and snapshot-based recovery processes.

Step-by-Step Overview


Step 1:

1. Go to [AWS Management Console](#).
2. Enter your username and password to log in.

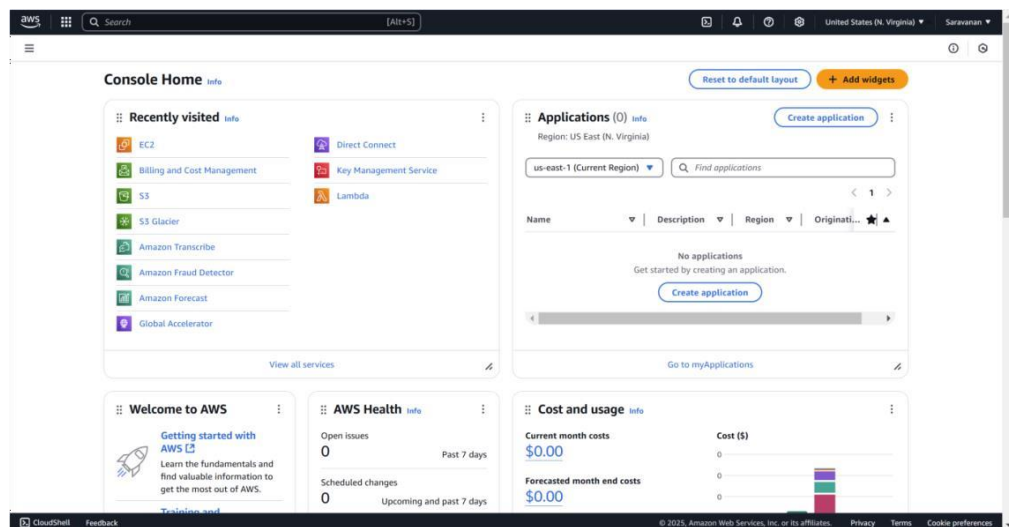



Step 2:

Launch an Ec2 instance.(Backup Instance)

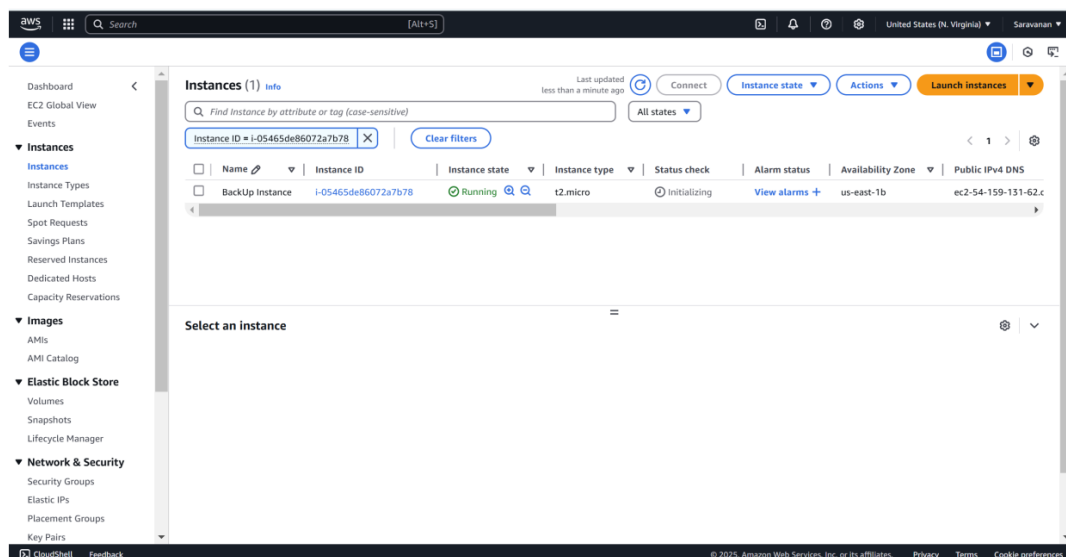

Step 3:

To create a new EBS volume in AWS, go to the EC2 Dashboard in the AWS Management Console by selecting **EC2** from the Services menu. In the left-hand menu, under **Elastic Block Store**, click on **Volumes**, then click the **Create Volume** button. Select **General Purpose SSD (gp3)** for the volume type, set the size (e.g., 8 GiB, within Free Tier limits), and choose the availability zone that matches your EC2 instance (e.g., us-east-1b). Leave the other options as default, then click **Create Volume**. Be sure to note the Volume ID for future reference.

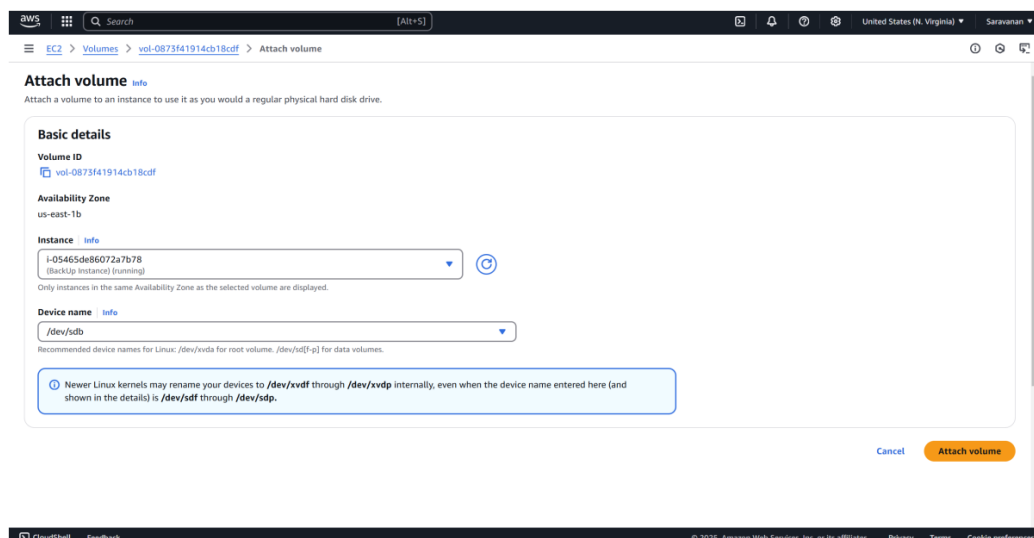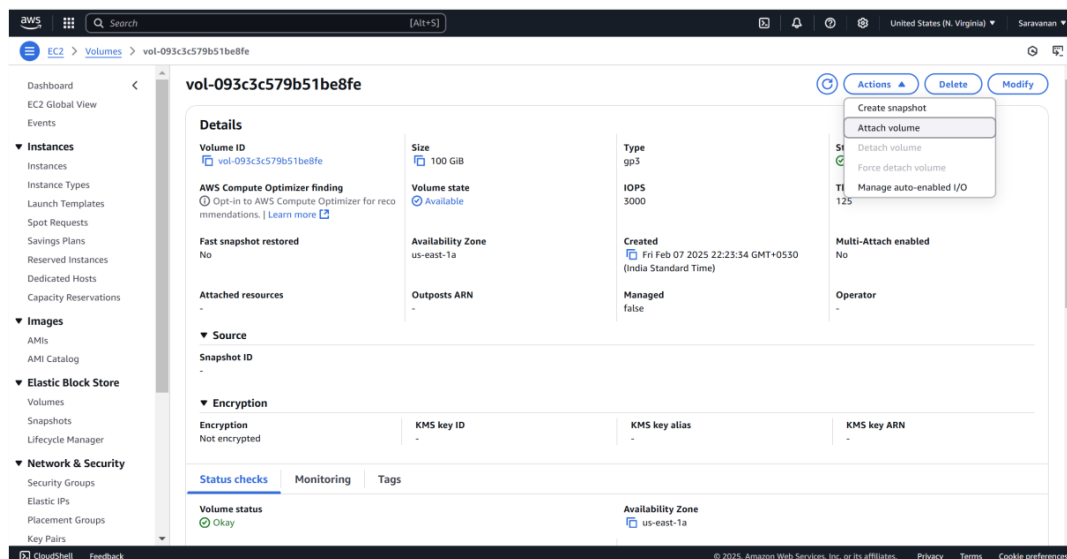

Step 4:

To create a snapshot of your EBS volume, navigate to the EC2 Dashboard in the AWS Management Console and click on **Volumes** under the **Elastic Block Store** section. Locate the volume attached to your instance (it should match the instance name or ID), select it, then click **Actions** > **Create Snapshot**. Add a meaningful description (e.g., "Snapshot of Backup Instance on Feb 7") and click **Create Snapshot**. To monitor its status, go to **Snapshots** under Elastic Block Store in the left menu and wait for the status to change to **Completed**.

The screenshot shows the 'Create snapshot' page in the AWS Management Console. The page is titled 'Create snapshot' and includes a sub-header 'Create a point-in-time snapshot to back up the data on an Amazon EBS volume to Amazon S3.' The page is divided into three main sections: 'Source volume', 'Snapshot details', and 'Tags'.

- Source volume:** Displays the 'Volume ID' as 'vol-0873f41914cb18c0f' and the 'Availability Zone' as 'us-east-1b'.
- Snapshot details:** Includes a 'Description' field with the text 'Snapshot of Backup Instance on Feb 7' and a note '255 characters maximum.' Below this is the 'Encryption' status, which is 'Not encrypted'.
- Tags:** A section for adding tags, with a note 'No tags associated with the resource.' and an 'Add tag' button.

At the bottom right of the form, there are two buttons: 'Cancel' and 'Create snapshot'.


The screenshot shows the 'Snapshots' page in the AWS Management Console. The page displays a table of snapshots, with one snapshot listed. The table has columns for 'Name', 'Snapshot ID', 'Volume size', 'Description', 'Storage tier', 'Snapshot status', and 'Started'.

Name	Snapshot ID	Volume size	Description	Storage tier	Snapshot status	Started
-	snap-0662b0255596f851	100 GiB	Snapshot of Backup Instan...	Standard	Completed	2025/02/07 22:32 GMT+5...

Below the table, there is a message: 'Select a snapshot above.'



Step 5:

To terminate an EC2 instance, navigate to the EC2 Dashboard in the AWS Management Console and click on **Instances** under the **Instances** section. Locate the instance you want to terminate, then select it and click **Actions** > **Instance State** > **Terminate Instance**. Confirm the termination by clicking **Terminate**, and refresh the page after a few moments to see the instance state change to **Terminated**.

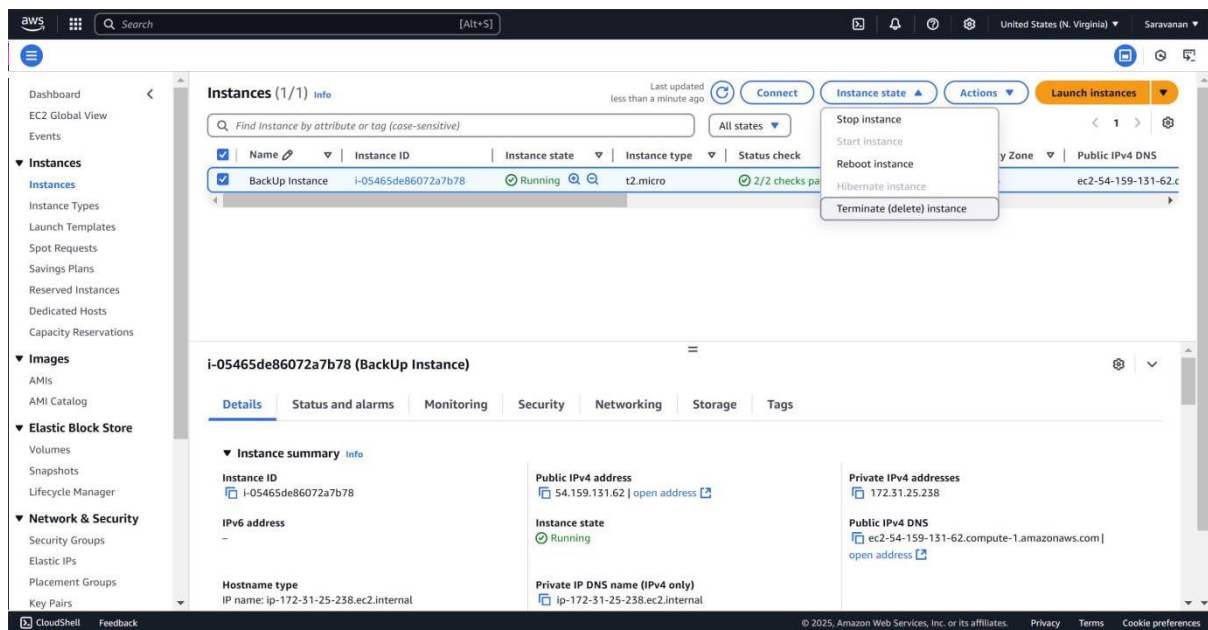


Step 6:

To create a new volume from the snapshot, go to the EC2 Dashboard and click on **Snapshots** under the **Elastic Block Store** section in the left menu. Select the snapshot you created earlier, then click **Actions** at the top and choose **Create Volume**. In the configuration settings, leave the **Size** as is (it will match the snapshot size) and select the same **Availability Zone** where you want to restore your instance (e.g., us-east-1a). Finally, click **Create Volume** to complete the process.

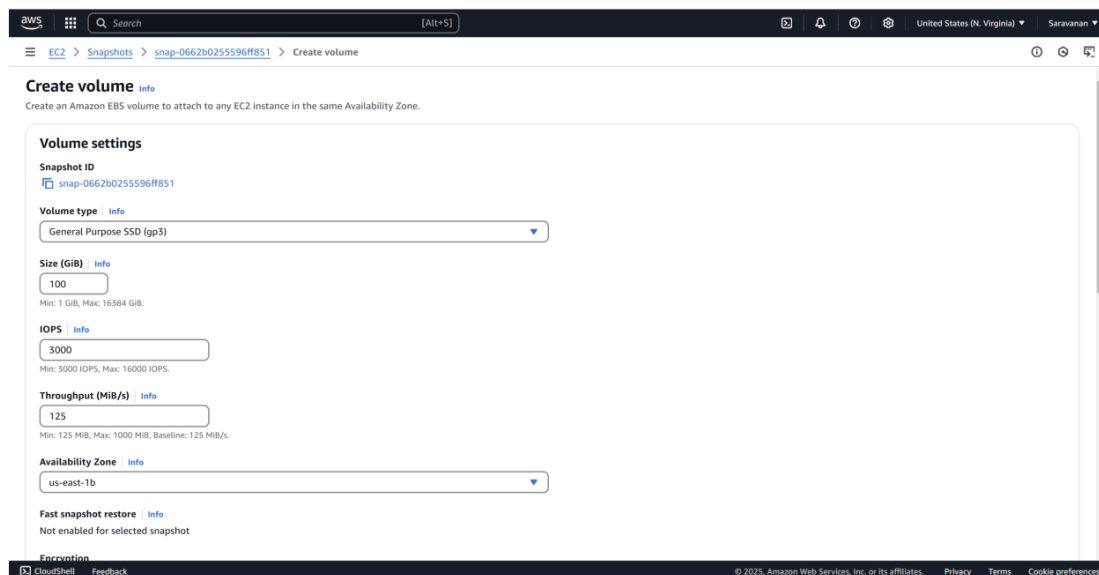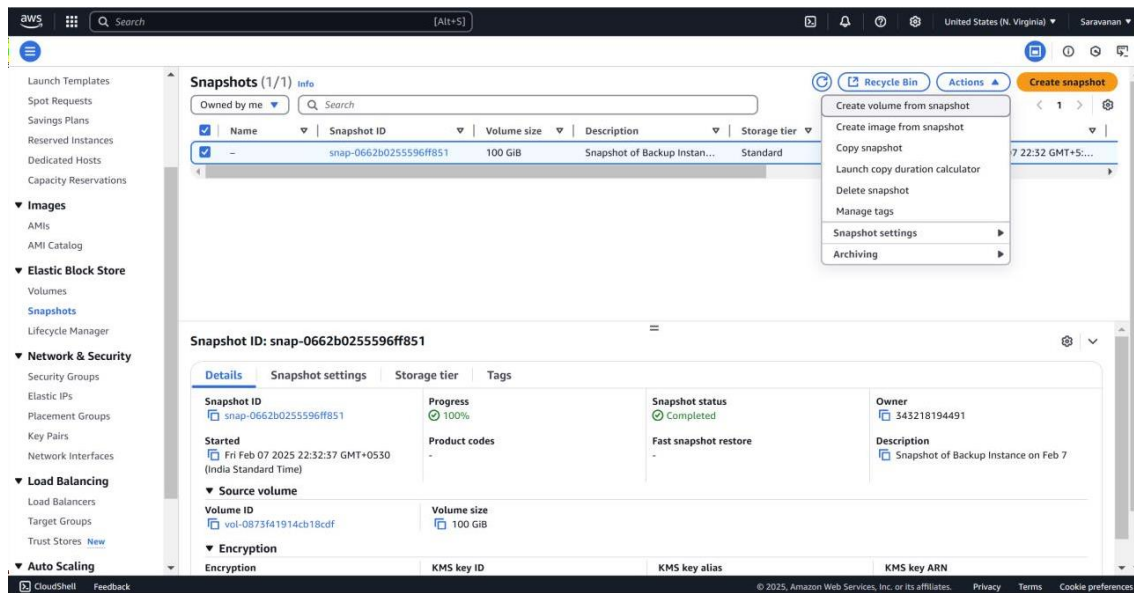


Step 7:



To launch a new instance, go to the EC2 Dashboard and click **Launch Instances**. Set the name of the new instance (e.g., **Restored-POC-VM**) and choose the same AMI (e.g., **Amazon Linux 2023 Free Tier eligible**) as the original instance. Select **t2.micro** for the instance type (Free Tier eligible). Configure the instance as needed, but skip the storage section for now.

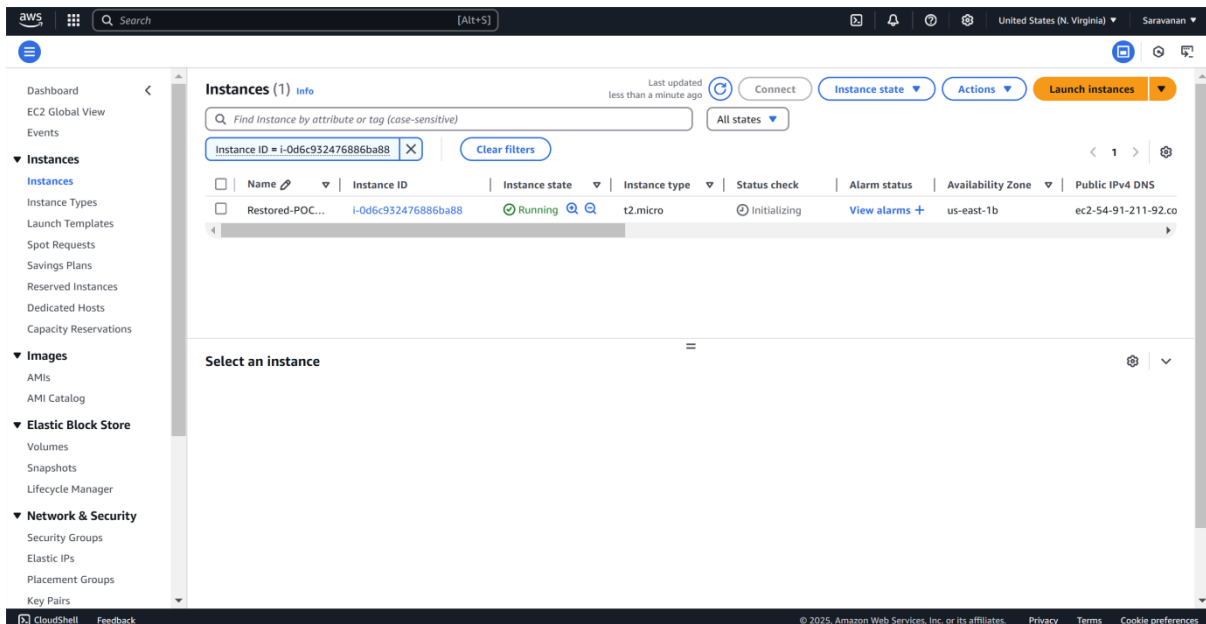

Step 8:

To attach the volume to the instance, first, stop the instance temporarily after it is launched by selecting the new instance, then click **Actions** > **Instance State** > **Stop Instance**. Next, go to **Volumes** in the left menu and select the new volume created from the snapshot. Click **Actions** > **Attach Volume**, and in the pop-up window, choose the new instance to attach the volume.

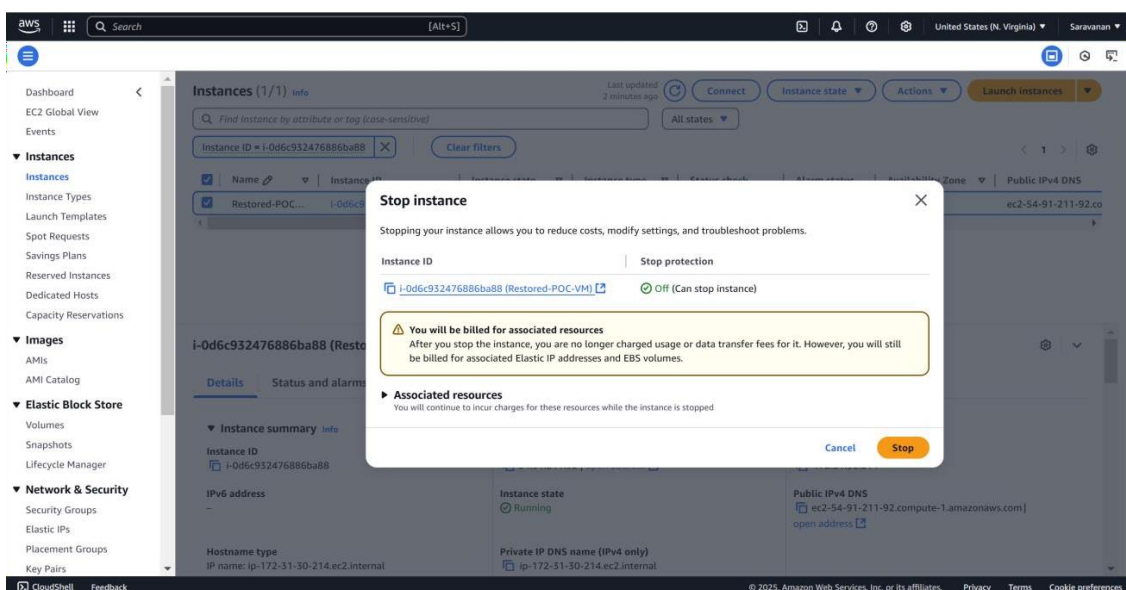

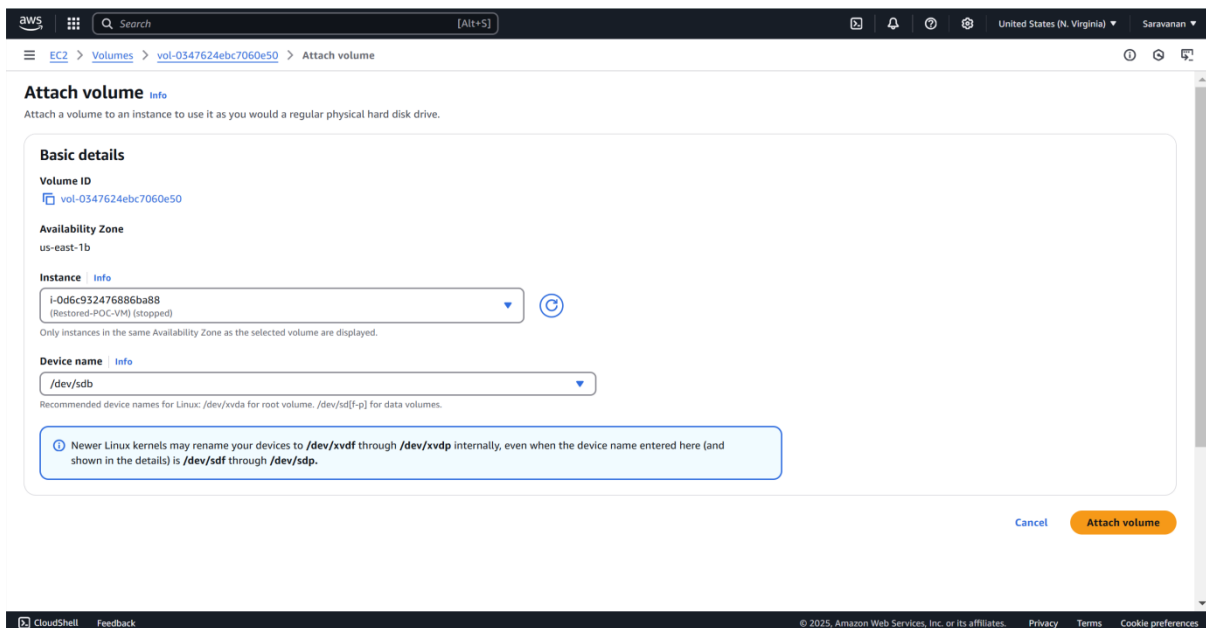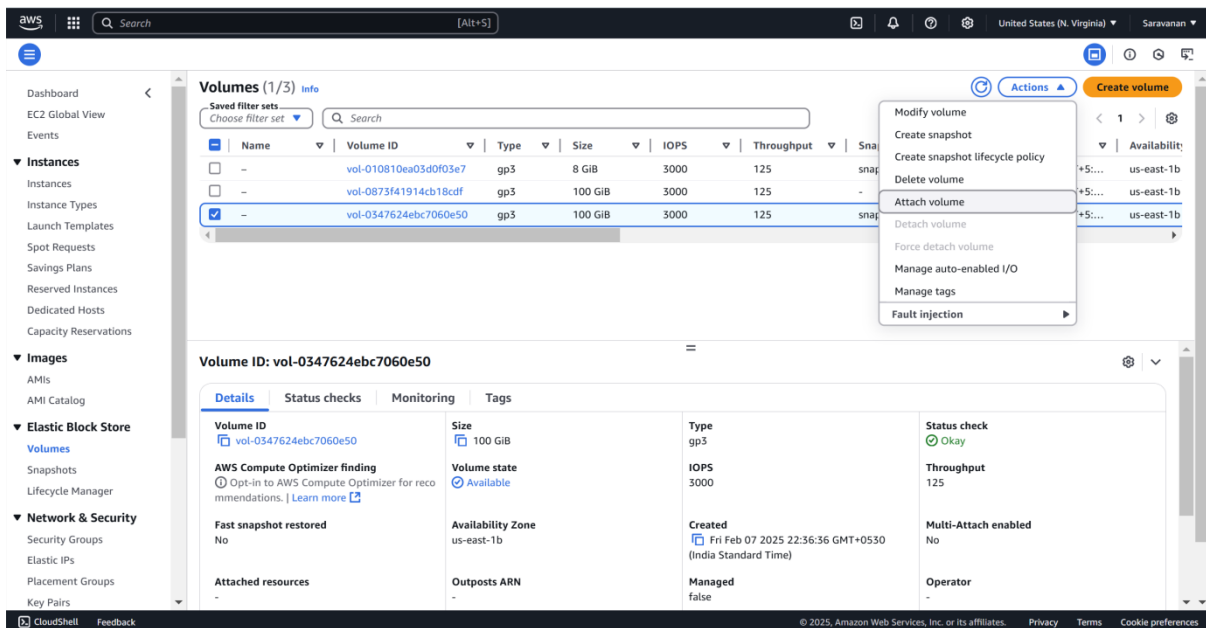

Verify the Restoration

1. Connect to the instance using SSH or other methods.
2. Check if the files, data, and configurations match the original setup.

POC is **completed** successfully:

1. **Created a Snapshot** of your instance.
2. **Terminated the Instance** to avoid extra charges.
3. **Restored the Instance** using the snapshot by creating a volume and attaching it to a new VM.

Outcome

By completing this POC of **Back Up and Restore a Cloud Instance** in AWS, you will:

1. **Create and manage snapshots** of EC2 instances, enabling easy backup of instance data without manual intervention.
2. **Terminate instances** while ensuring that important data remains intact through the backup snapshot.
3. **Restore an instance** from a snapshot by creating a new EBS volume and attaching it to a fresh EC2 instance.
4. **Verify the restoration process**, ensuring data integrity and proper functionality after the instance is restored.
5. **Gain practical knowledge** of AWS services like EC2, EBS snapshots, and how to use them for backup and recovery, which is vital for disaster recovery and business continuity in the cloud.