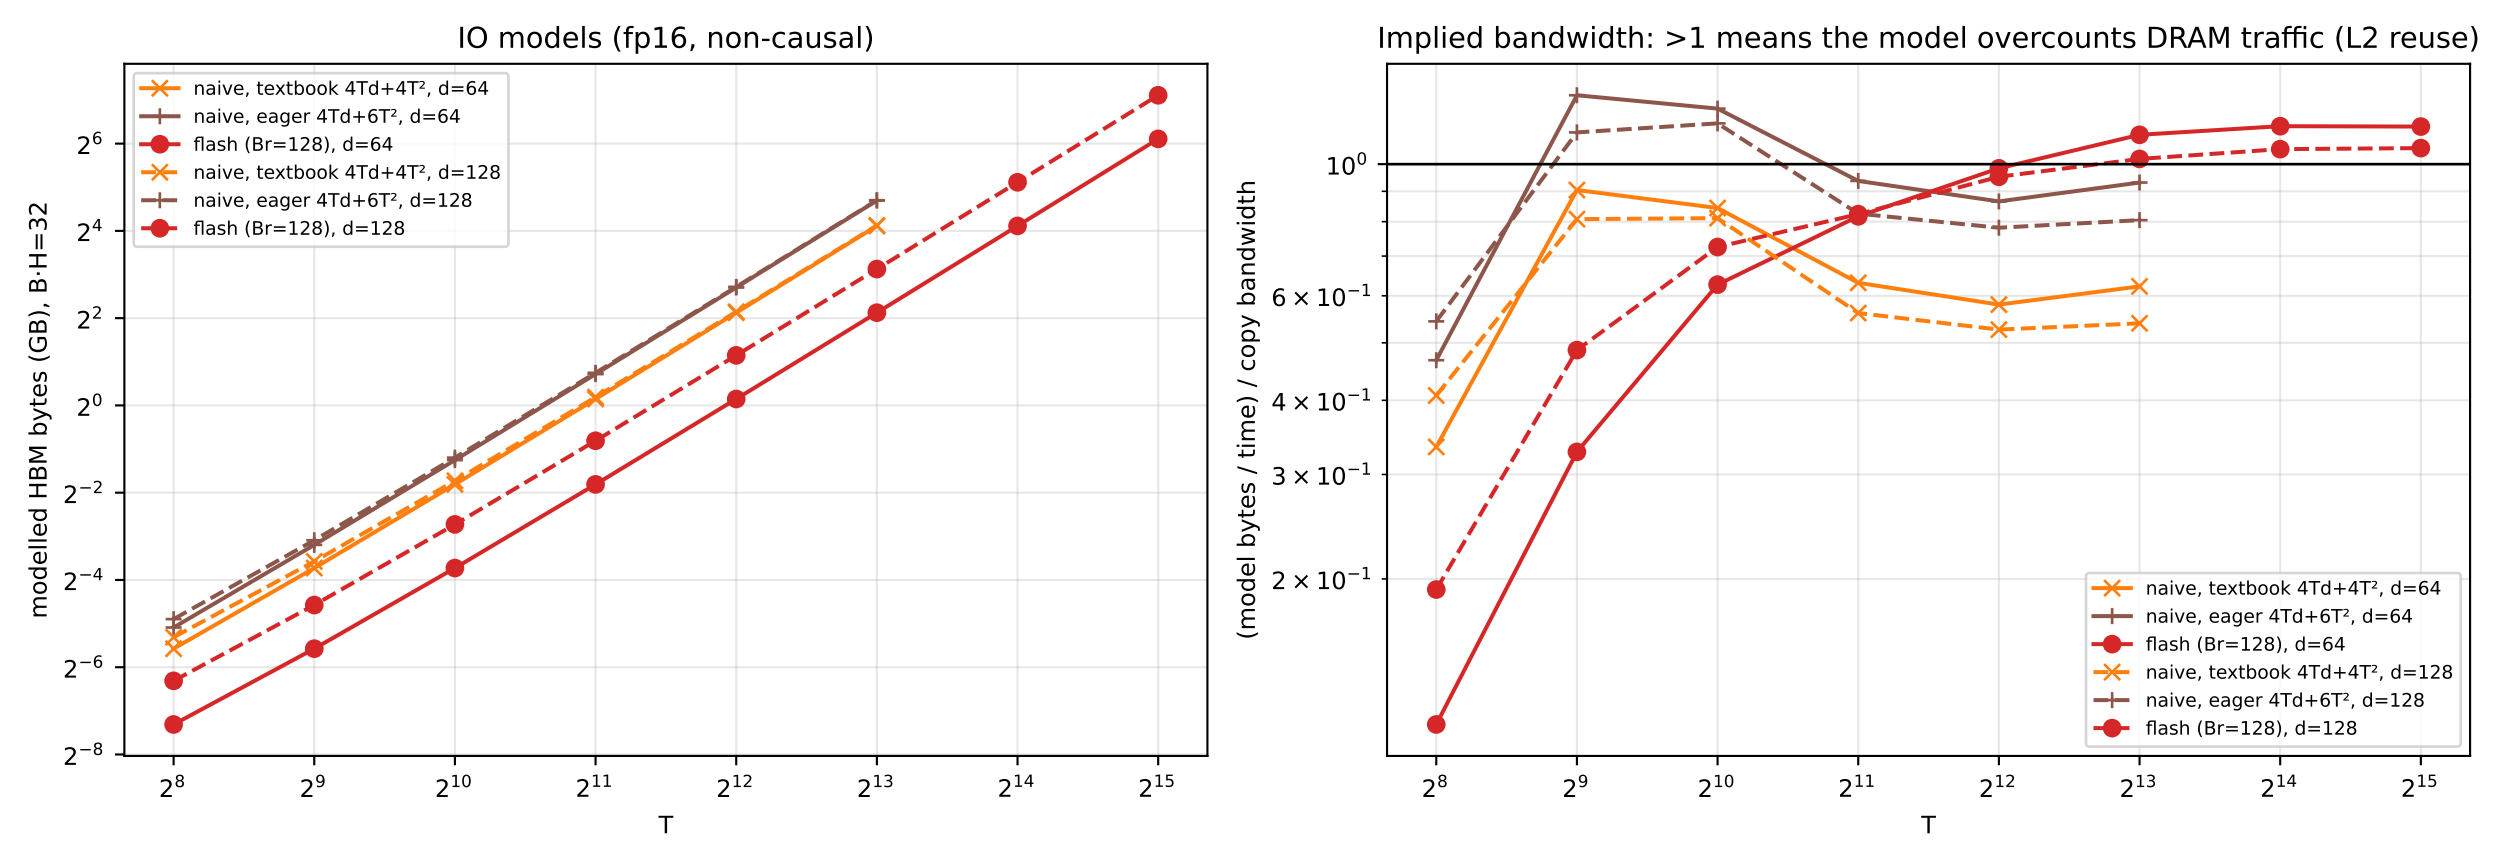
IO models (fp16, non-causal)
modelled HBM bytes (GB), B·H=32
T
naive, textbook 4Td+4T², d=64
naive, eager 4Td+6T², d=64
flash (Br=128), d=64
naive, textbook 4Td+4T², d=128
naive, eager 4Td+6T², d=128
flash (Br=128), d=128
Implied bandwidth: >1 means the model overcounts DRAM traffic (L2 reuse)
(model bytes / time) / copy bandwidth
T