

Lab 3 Submission


Question 1

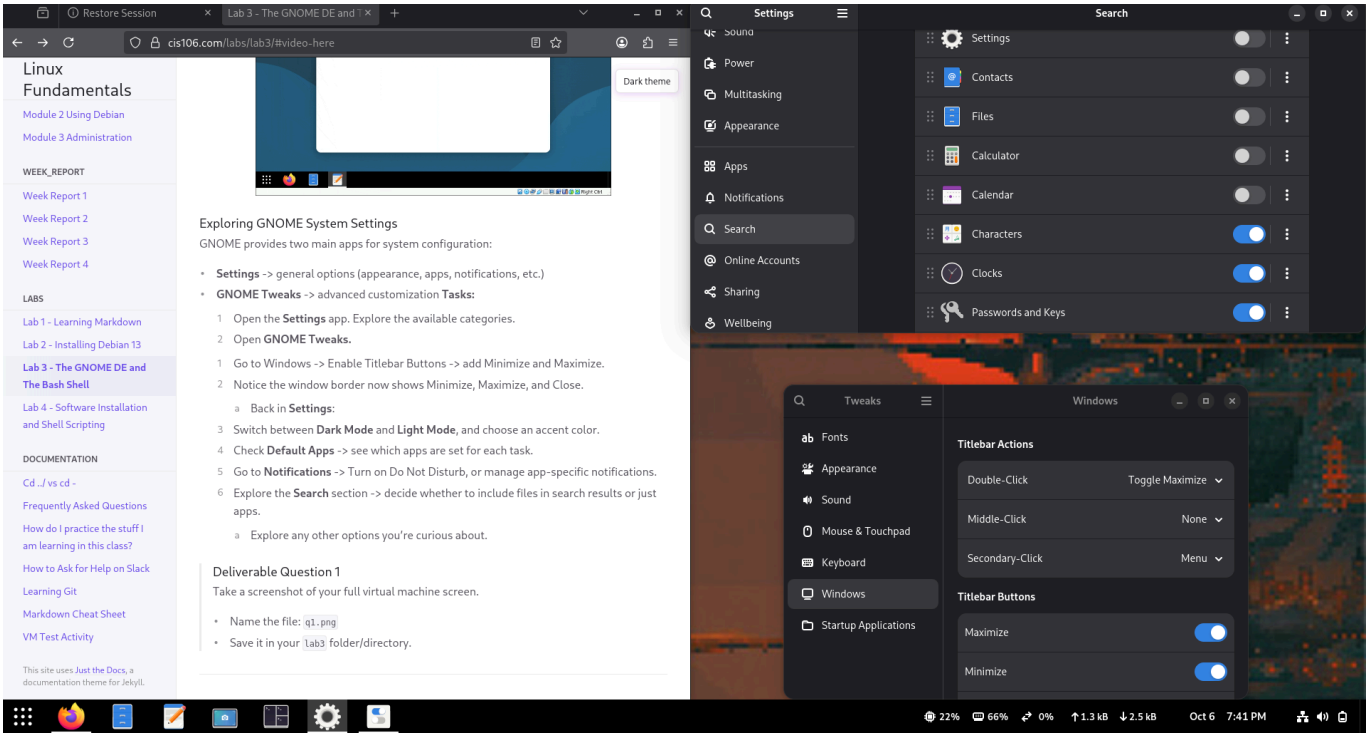


Question 2

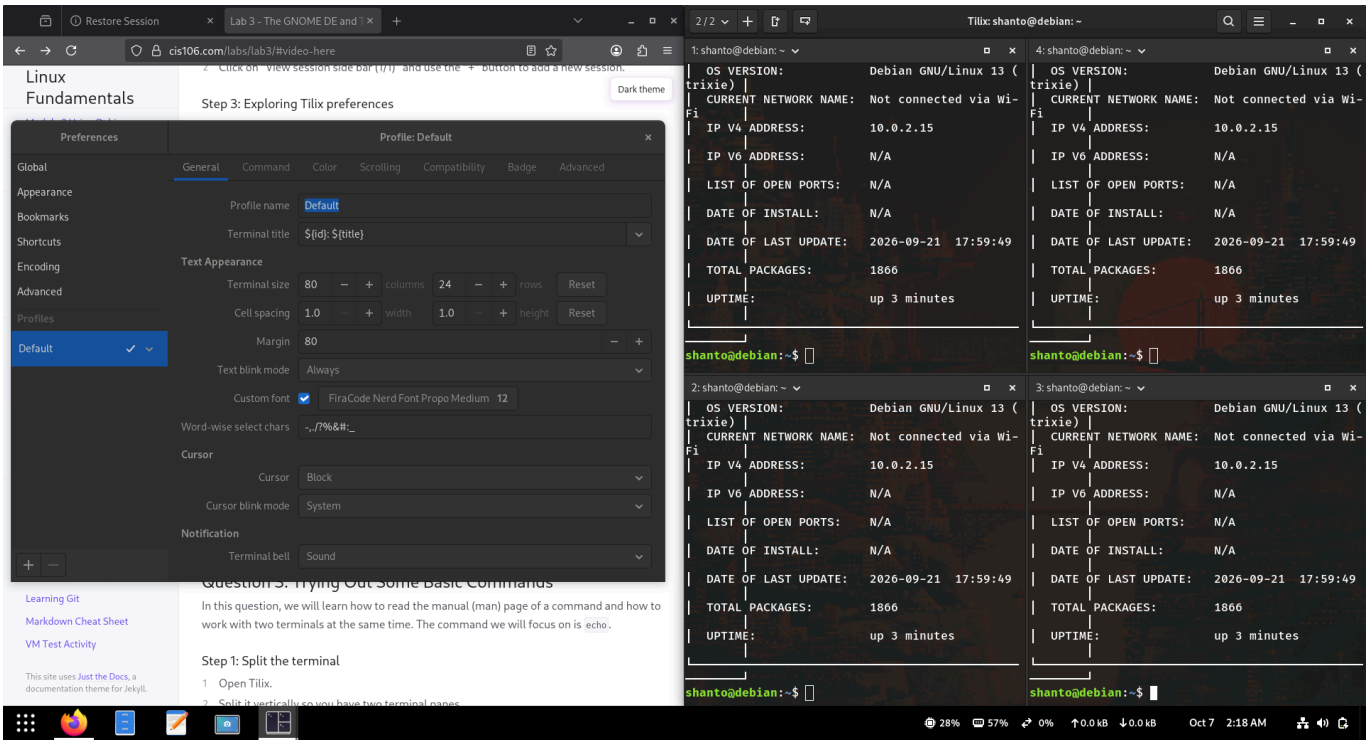



Question 3

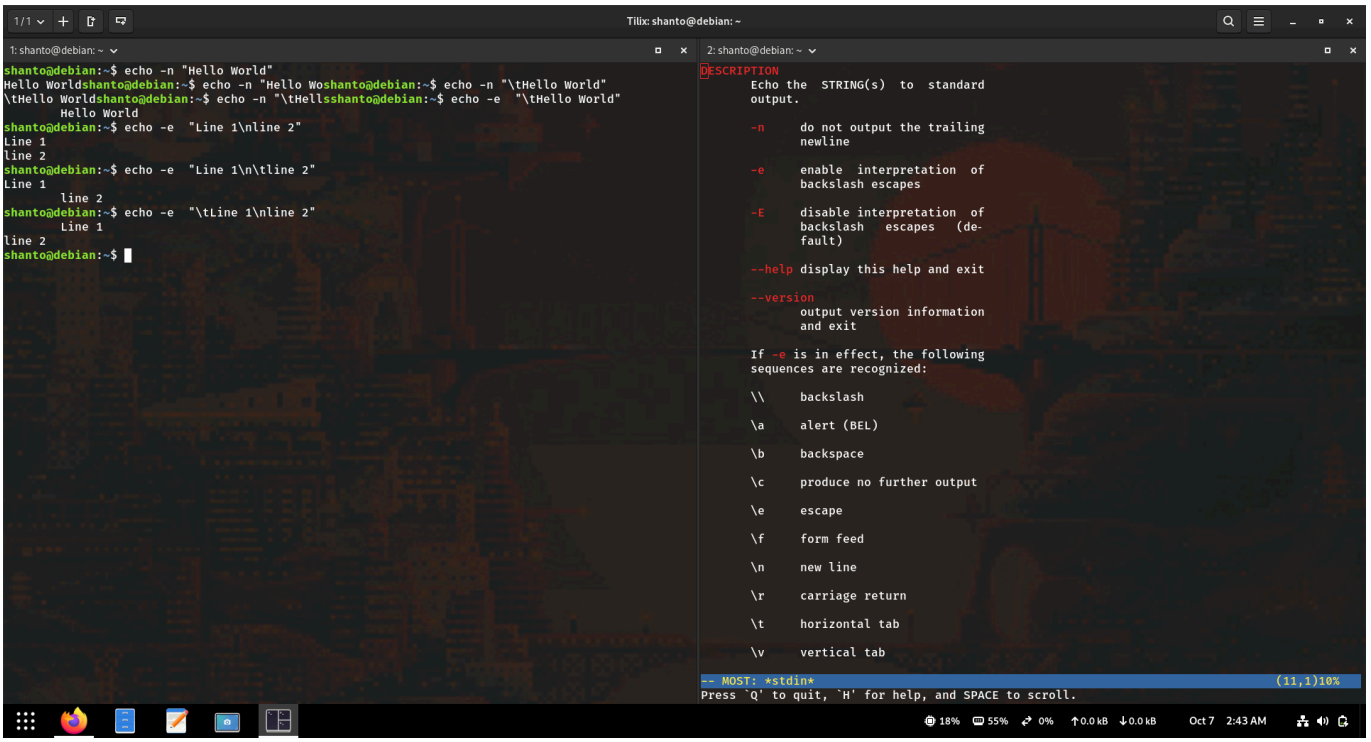

Challenge Question

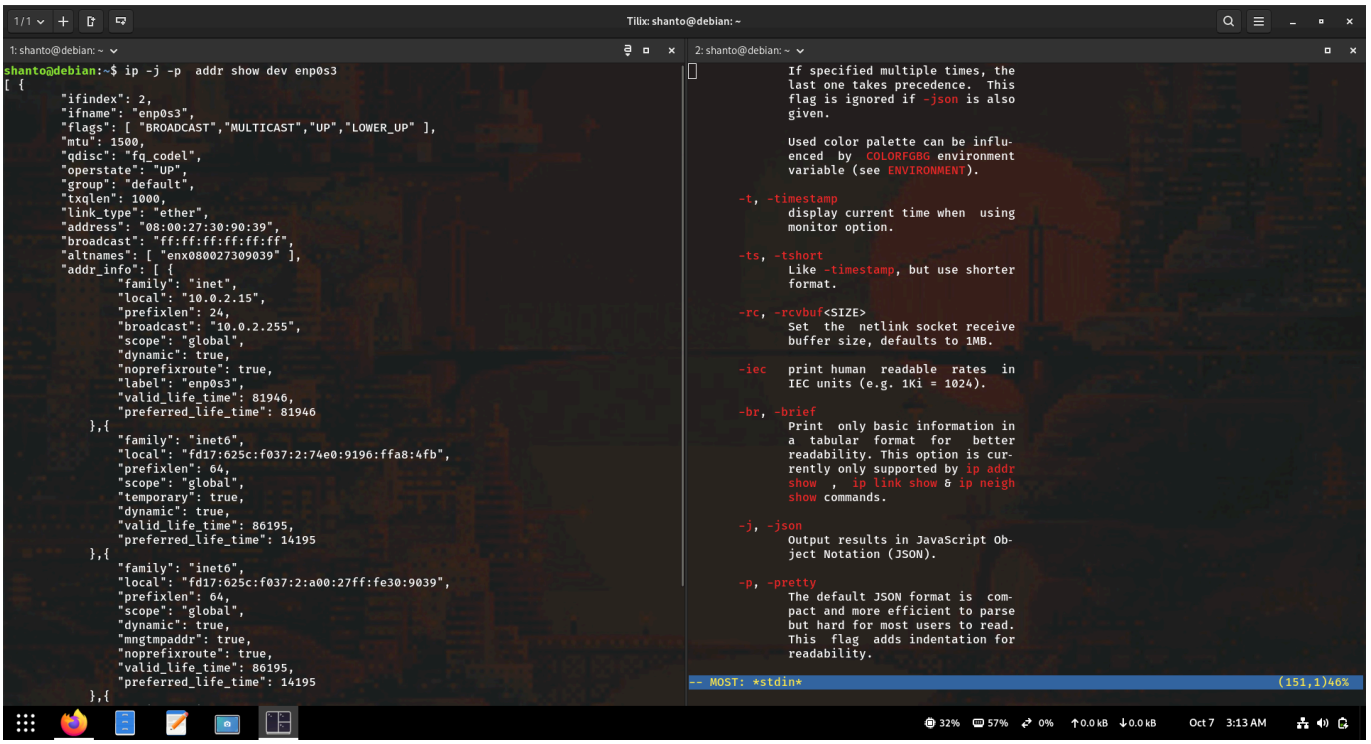
Tilix: shanto@debian: ~
1: shanto@debian: ~
2: shanto@debian: ~
shanto@debian:~$ ip -j -p addr show dev enp0s3
[{
"ifindex": 2,
"ifname": "enp0s3",
"flags": ["BROADCAST","MULTICAST","UP","LOWER_UP"],
"mtu": 1500,
"qdisc": "fq_codel",
"operstate": "UP",
"group": "default",
"txqlen": 1000,
"link_type": "ether",
"address": "08:00:27:30:90:39",
"broadcast": "ff:ff:ff:ff:ff:ff",
"altnames": ["enx080027309039"],
"addr_info": [{
"family": "inet",
"local": "10.0.2.15",
"prefixlen": 24,
"broadcast": "10.0.2.255",
"scope": "global",
"dynamic": true,
"noprefixroute": true,
"label": "enp0s3",
"valid_life_time": 81946,
"preferred_life_time": 81946
},{
"family": "inet6",
"local": "fd17:625c:f037:2:74e0:9196:ffa8:4fb",
"prefixlen": 64,
"scope": "global",
"temporary": true,
"dynamic": true,
"valid_life_time": 86195,
"preferred_life_time": 14195
},{
"family": "inet6",
"local": "fd17:625c:f037:2:a00:27ff:fe30:9039",
"prefixlen": 64,
"scope": "global",
"dynamic": true,
"mngtmpaddr": true,
"noprefixroute": true,
"valid_life_time": 86195,
"preferred_life_time": 14195
},{
If specified multiple times, the last one takes precedence. This flag is ignored if -json is also given.
Used color palette can be influenced by COLORFGBG environment variable (see ENVIRONMENT).
-t, -timestamp
display current time when using monitor option.
-ts, -tshort
Like -timestamp, but use shorter format.
-rc, -rcvbuf<SIZE>
Set the netlink socket receive buffer size, defaults to 1MB.
-iec
print human readable rates in IEC units (e.g. 1Ki = 1024).
-br, -brief
Print only basic information in a tabular format for better readability. This option is currently only supported by ip addr show , ip link show & ip neigh show commands.
-j, -json
Output results in JavaScript Object Notation (JSON).
-p, -pretty
The default JSON format is compact and more efficient to parse but hard for most users to read. This flag adds indentation for readability.
-- MOST: *stdin* (151,1)46%
32% 57% 0% 0.0 kB 0.0 kB Oct 7 3:13 AM

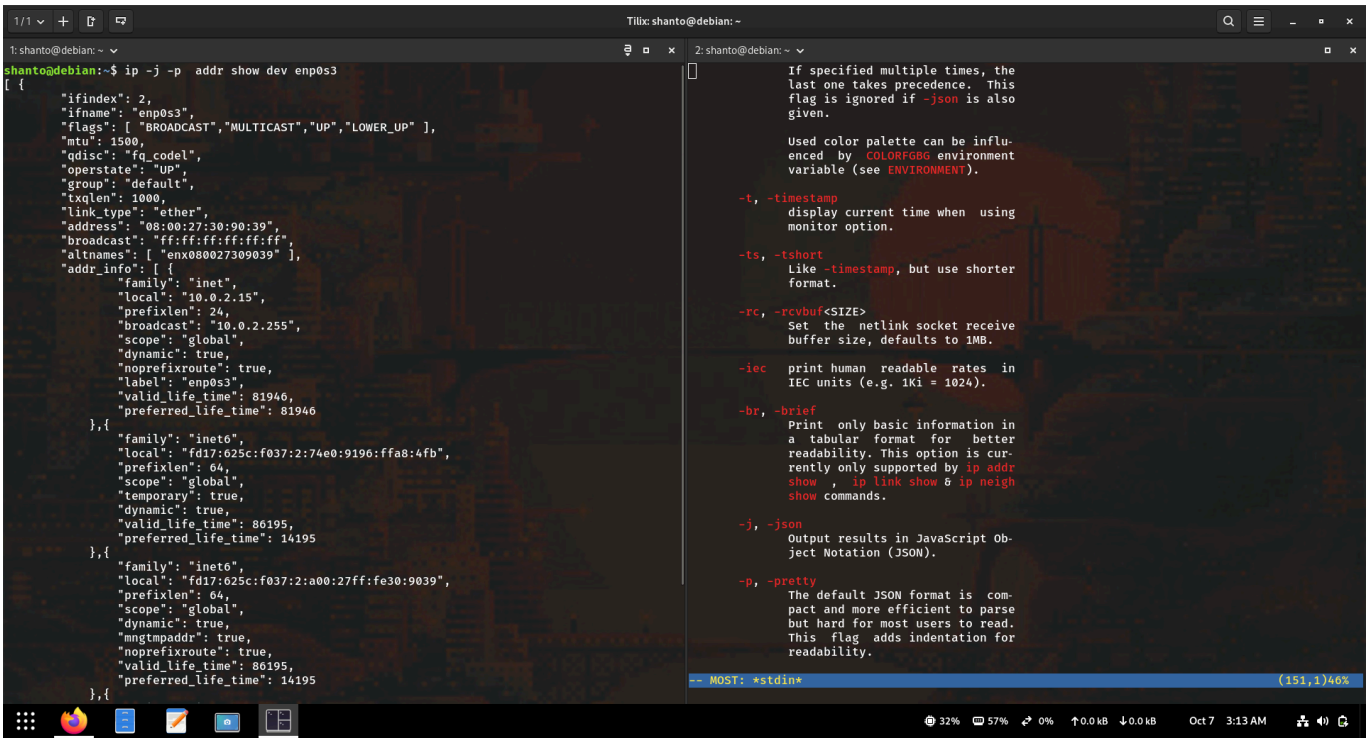
Tilix: shanto@debian: ~
1: shanto@debian: ~
2: shanto@debian: ~
shanto@debian:~$ ip -j -p addr show dev enp0s3
[{
"ifindex": 2,
"ifname": "enp0s3",
"flags": ["BROADCAST","MULTICAST","UP","LOWER_UP"],
"mtu": 1500,
"qdisc": "fq_codel",
"operstate": "UP",
"group": "default",
"txqlen": 1000,
"link_type": "ether",
"address": "08:00:27:30:90:39",
"broadcast": "ff:ff:ff:ff:ff:ff",
"altnames": ["enx080027309039"],
"addr_info": [{
"family": "inet",
"local": "10.0.2.15",
"prefixlen": 24,
"broadcast": "10.0.2.255",
"scope": "global",
"dynamic": true,
"noprefixroute": true,
"label": "enp0s3",
"valid_life_time": 81946,
"preferred_life_time": 81946
},{
"family": "inet6",
"local": "fd17:625c:f037:2:74e0:9196:ffa8:4fb",
"prefixlen": 64,
"scope": "global",
"temporary": true,
"dynamic": true,
"valid_life_time": 86195,
"preferred_life_time": 14195
},{
"family": "inet6",
"local": "fd17:625c:f037:2:a00:27ff:fe30:9039",
"prefixlen": 64,
"scope": "global",
"dynamic": true,
"mngtmpaddr": true,
"noprefixroute": true,
"valid_life_time": 86195,
"preferred_life_time": 14195
},{
If specified multiple times, the last one takes precedence. This flag is ignored if -json is also given.
Used color palette can be influenced by COLORFGBG environment variable (see ENVIRONMENT).
-t, -timestamp
display current time when using monitor option.
-ts, -tshort
Like -timestamp, but use shorter format.
-rc, -rcvbuf<SIZE>
Set the netlink socket receive buffer size, defaults to 1MB.
-iec
print human readable rates in IEC units (e.g. 1Ki = 1024).
-br, -brief
Print only basic information in a tabular format for better readability. This option is currently only supported by ip addr show , ip link show & ip neigh show commands.
-j, -json
Output results in JavaScript Object Notation (JSON).
-p, -pretty
The default JSON format is compact and more efficient to parse but hard for most users to read. This flag adds indentation for readability.
-- MOST: *stdin* (151,1)46%
32% 57% 0% 0.0 kB 0.0 kB Oct 7 3:13 AM

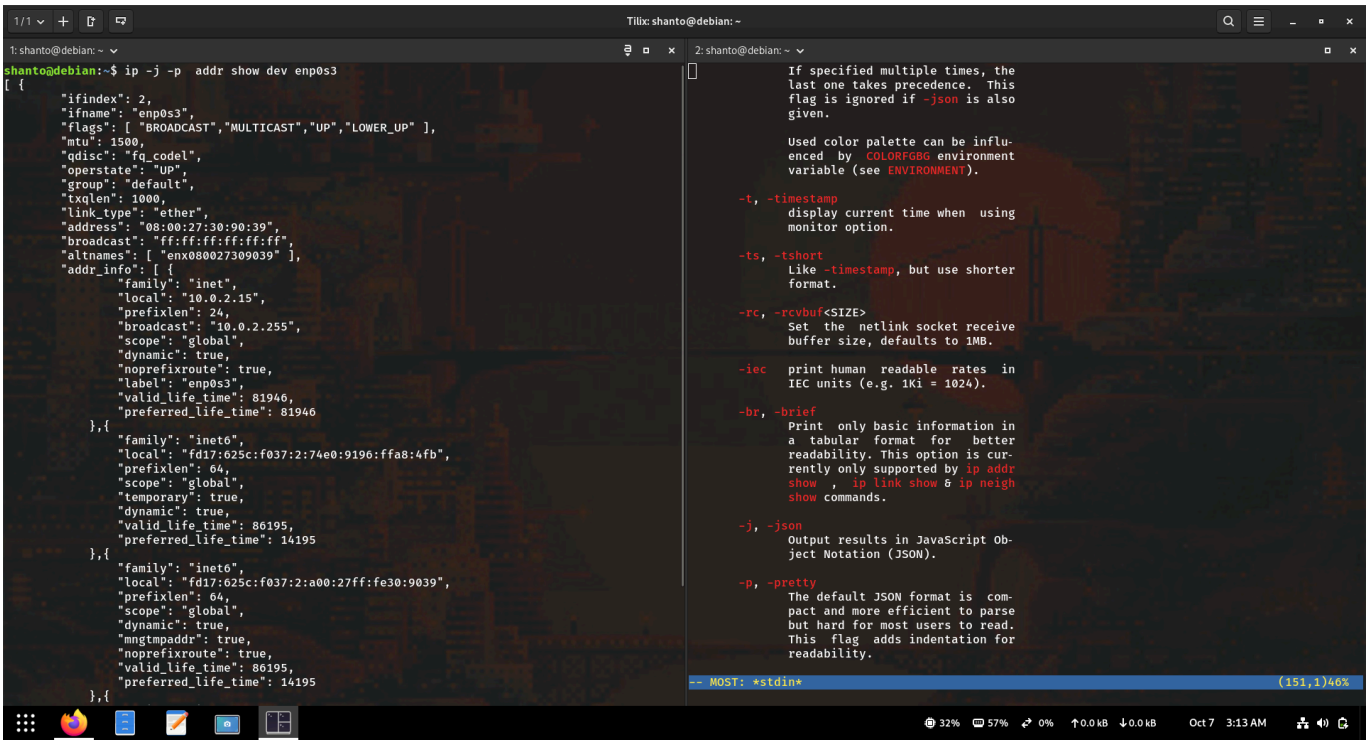
Tilix: shanto@debian: ~
1: shanto@debian: ~
2: shanto@debian: ~
shanto@debian:~$ ip -j -p addr show dev enp0s3
[{
"ifindex": 2,
"ifname": "enp0s3",
"flags": ["BROADCAST","MULTICAST","UP","LOWER_UP"],
"mtu": 1500,
"qdisc": "fq_codel",
"operstate": "UP",
"group": "default",
"txqlen": 1000,
"link_type": "ether",
"address": "08:00:27:30:90:39",
"broadcast": "ff:ff:ff:ff:ff:ff",
"altnames": ["enx080027309039"],
"addr_info": [{
"family": "inet",
"local": "10.0.2.15",
"prefixlen": 24,
"broadcast": "10.0.2.255",
"scope": "global",
"dynamic": true,
"noprefixroute": true,
"label": "enp0s3",
"valid_life_time": 81946,
"preferred_life_time": 81946
},{
"family": "inet6",
"local": "fd17:625c:f037:2:74e0:9196:ffa8:4fb",
"prefixlen": 64,
"scope": "global",
"temporary": true,
"dynamic": true,
"valid_life_time": 86195,
"preferred_life_time": 14195
},{
"family": "inet6",
"local": "fd17:625c:f037:2:a00:27ff:fe30:9039",
"prefixlen": 64,
"scope": "global",
"dynamic": true,
"mngtmpaddr": true,
"noprefixroute": true,
"valid_life_time": 86195,
"preferred_life_time": 14195
},{
If specified multiple times, the last one takes precedence. This flag is ignored if -json is also given.
Used color palette can be influenced by COLORFGBG environment variable (see ENVIRONMENT).
-t, -timestamp
display current time when using monitor option.
-ts, -tshort
Like -timestamp, but use shorter format.
-rc, -rcvbuf<SIZE>
Set the netlink socket receive buffer size, defaults to 1MB.
-iec
print human readable rates in IEC units (e.g. 1Ki = 1024).
-br, -brief
Print only basic information in a tabular format for better readability. This option is currently only supported by ip addr show , ip link show & ip neigh show commands.
-j, -json
Output results in JavaScript Object Notation (JSON).
-p, -pretty
The default JSON format is compact and more efficient to parse but hard for most users to read. This flag adds indentation for readability.
-- MOST: *stdin* (151,1)46%
32% 57% 0% 0.0 kB 0.0 kB Oct 7 3:13 AM