




MySQL - RDBMS

Trainer: Mr. Nilesh Ghule

- Any enterprise application need to manage data.
- In early days of software development, programmers store data into files and does operation on it. However data is highly application specific.
- Even today many software manage their data in custom formats e.g. Tally, Address book, etc.
- As data management became more common, DBMS systems were developed to handle the data. This enabled developers to focus on the business logic e.g. FoxPro, DBase, Excel, etc.
- At least CRUD (Create, Retrieve, Update and Delete) operations are supported by all databases.
Insert Select Edit Remove
- Traditional databases are file based, less secure, single-user, non-distributed, manage less amount of data (MB), complicated relation management, file-locking and need number of lines of code to use in applications.

RDBMS

- RDBMS is relational DBMS.
- It organizes data into Tables, rows and columns. The tables are related to each other.
- RDBMS follow table structure, more secure, multi-user, server-client architecture, server side processing, clustering support, manage huge data (TB), built-in relational capabilities, table-locking or row-locking and can be easily integrated with applications.
- e.g. DB2, Oracle, MS-SQL, MySQL, MS-Access, SQLite, ...
- RDBMS design is based on Codd's rules developed at IBM (in 1970).

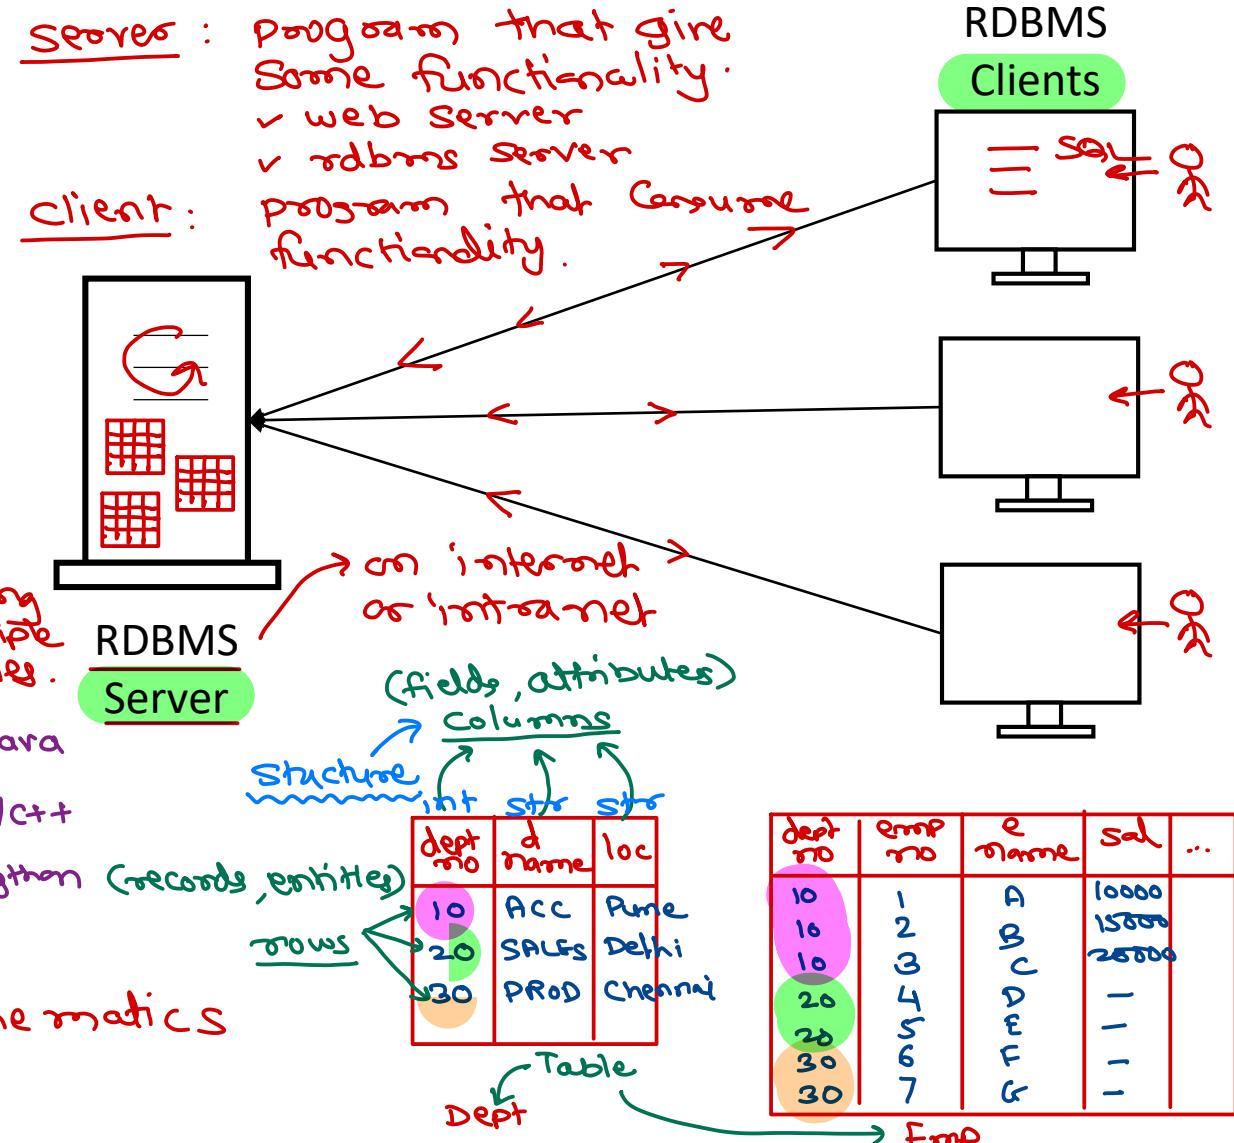

SQL - Structured Query Language (wiki)

- Clients send SQL queries to RDBMS server and operations are performed accordingly.
- Originally it was named as RQBE (Relational Query By Example).
- SQL is ANSI standardised in 1987 and then revised multiple times adding new features. Recent revision in 2016.
- SQL is case insensitive. *db name & table name are case sensitive on Linux.* *MySQL* *select* *SELECT*
- There are five major categories: *table structure*
 - DDL: Data Definition Language e.g. CREATE, ALTER, DROP, RENAME.
 - DML: Data Manipulation Language e.g. INSERT, UPDATE, DELETE. *rows/records*
 - DQL: Data Query Language e.g. SELECT. *rows/records*
 - DCL: Data Control Language e.g. CREATE USER, GRANT, REVOKE. *security*
 - TCL: Transaction Control Language e.g. SAVEPOINT, COMMIT, ROLLBACK. *concurrent users*
- Table & column names allows alphabets, digits & few special symbols.
- If name contains special symbols then it should be back-quotes.
- e.g. Tbl1, T1#, T2\$ etc. Names can be ~~max~~ 30 chars long. 



- Developed by Michael Widenius in 1995. It is named after his daughter name Myia.
- Sun Microsystems acquired MySQL in 2008.
- Oracle acquired Sun Microsystem in 2010.
- MySQL is free and open-source database under GPL. However some enterprise modules are close sourced and available only under commercial version of MySQL.
- MariaDB is completely open-source clone of MySQL.
- MySQL support multiple database storage and processing engines.
- MySQL versions:
 - < 5.5: MyISAM storage engine
 - 5.5: InnoDB storage engine
 - 5.6: SQL Query optimizer improved, memcached style NoSQL
 - 5.7: Windowing functions, JSON data type added for flexible schema
 - 8.0: CTE, NoSQL document store.
- MySQL is database of year 2019 (in database engine ranking).

MySQL → Community (Free)
Enterprise (Paid)

MySQL installation on Ubuntu/Linux

mysql-server

mysql-client

- terminal> sudo apt-get install mysql-community-server mysql-community-client


- This installs MySQL server (mysqld) and MySQL client (mysql).

- MySQL Server (mysqld)

- Run as background process.
- Implemented in C/C++.
- Process SQL queries and generate results.
- By default run on port 3306.
- Controlled via systemctl. (Ubuntu)
 - terminal> sudo systemctl start/stop/status/enable/disable mysql

(networking)

Socket
"ip addr
+ port"

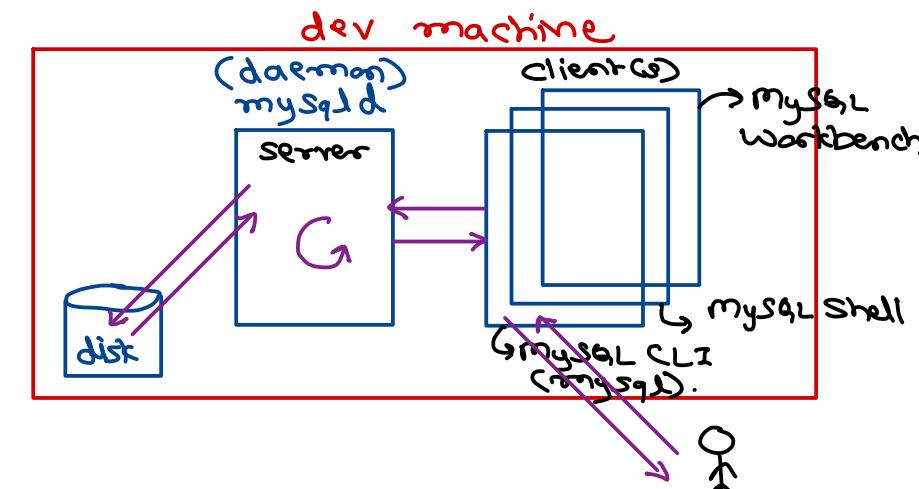

- MySQL client (mysql)

- Command line interface
- Send SQL queries to server and display its results.
- terminal> mysql -u root -p

- Additional MySQL clients

- MySQL workbench
- PHPMyAdmin ✗

Getting started

- root login can be used to perform CRUD as well as admin operations.
- It is recommended to create users for performing non-admin tasks.
 - mysql> CREATE DATABASE db;
 - mysql> SHOW DATABASES;
 - mysql> CREATE USER dbuser@localhost IDENTIFIED BY 'dbpass';
 - mysql> SELECT user, host FROM mysql.user;
 - mysql> GRANT ALL PRIVILEGES ON db.* TO dbuser@localhost;
 - mysql> FLUSH PRIVILEGES;
 - mysql> EXIT;
- terminal> mysql –u dbuser –pdbpass
 - mysql> SHOW DATABASES;
 - mysql> SELECT USER(), DATABASE();
 - mysql> USE db;
 - mysql> SHOW TABLES;
 - mysql> CREATE TABLE student(id INT, name VARCHAR(20), marks DOUBLE);
 - mysql> INSERT INTO student VALUES(1, 'Abc', 89.5);
 - mysql> SELECT * FROM student;



Database physical layout

- In MySQL, the data is stored on disk in its data directory i.e. /var/lib/mysql
- Each database/schema is a separate sub-directory in data dir.
- Each table in the db, is a file on disk.
- e.g. student table in current db is stored in file /var/lib/mysql/db/student.ibd.
- Data is stored in binary format.
- A file may not be contiguously stored on hard disk.
- Data rows are not contiguous. They are scattered in the hard disk.
- In one row, all fields are consecutive.
- When records are selected, they are selected in any order.



INSERT – DML

- Insert a new row (all columns, fixed order).
 - `INSERT INTO table VALUES (v1, v2, v3);`
- Insert a new row (specific columns, arbitrary order).
 - `INSERT INTO table(c3, c1, c2) VALUES (v3, v1, v2);`
 - `INSERT INTO table(c1, c2) VALUES (v1, v2);`
 - Missing columns data is `NULL`.
 - `NULL` is special value and it is not stored in database.
- Insert multiple rows.
 - `INSERT INTO table VALUES (av1, av2, av3), (bv1, bv2, bv3), (cv1, cv2, cv3).`
- Insert rows from another table.
 - `INSERT INTO table SELECT c1, c2, c3 FROM another-table;`
 - `INSERT INTO table (c1,c2) SELECT c1, c2 FROM another-table;`





Thank you!

Nilesh Ghule <nilesh@sunbeaminfo.com>




MySQL - RDBMS

Trainer: Mr. Nilesh Ghule




Database logical layout

- Database/schema is like a namespace/container that stores all db objects related to a project.
 - It contains tables, constraints, relations, stored procedures, functions, triggers, ...
 - There are some system databases e.g. mysql, performance_schema, information_schema, sys, ... They contains db internal/system information.
 - e.g. SELECT user, host FROM mysql.user;
 - A database contains one or more tables.
 - Tables have multiple columns.
 - Each column is associated with a data-type.
 - Columns may have zero or more constraints.
 - The data in table is in multiple rows.
 - Each row have multiple values (as per columns).
- columns* *db* *table* *row* *login*

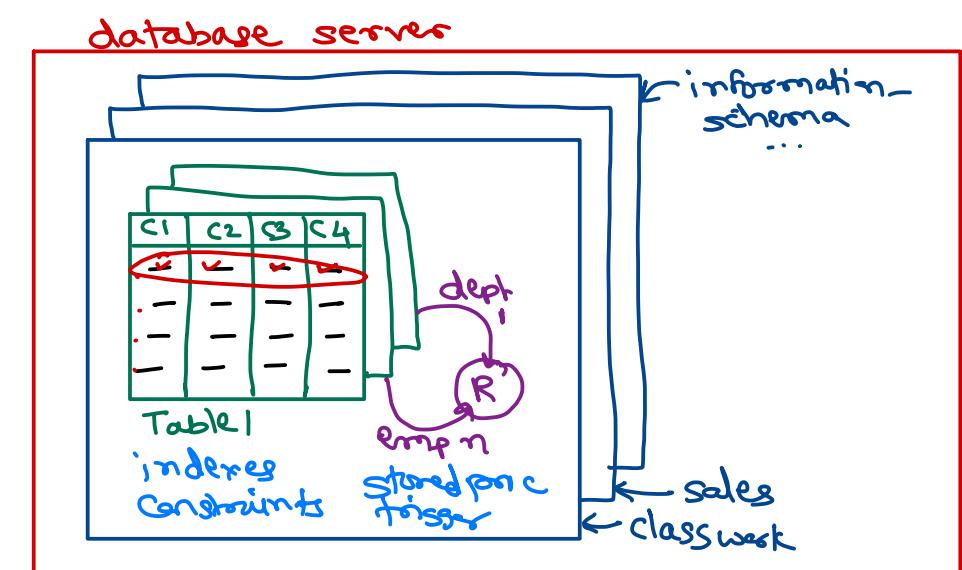

- In MySQL, the data is stored on disk in its data directory i.e. /var/lib/mysql
- Each database/schema is a separate sub-directory in data dir. *↳ Ubuntu*
- Each table in the db, is a file on disk. *↳ Stud.ibd*
- e.g. student table in current db is stored in file /var/lib/mysql/db/student.ibd.
- Data is stored in binary format.
- A file may not be contiguously stored on hard disk.
- Data rows are not contiguous. They are scattered in the hard disk.
- In one row, all fields are consecutive.
- When records are selected, they are selected in any order.

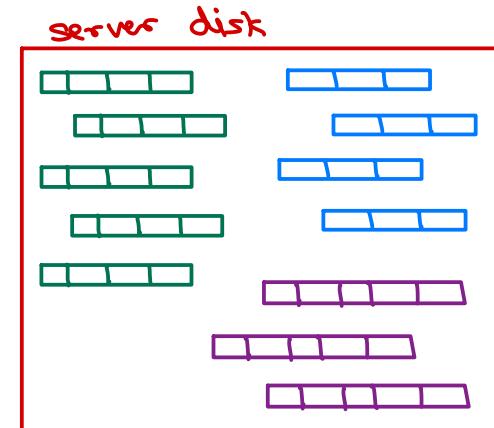

MySQL data types

- RDBMS have similar data types (but not same).
- MySQL data types can be categorised as follows

- Numeric types (Integers)

- TINYINT (1 byte), SMALLINT (2 byte), MEDIUMINT (3 byte), INT (4 byte), BIGINT (8 byte), BIT(n bits)
 - integer types can be signed (default) or unsigned.

- Numeric types (Floating point)

- approx. precision – FLOAT (4 byte), DOUBLE (8 byte) | DECIMAL(m, n) – exact precision

- Date/Time types

duration
± 839 hrs
2021-10-05 09:52:00
java.util.Date
num of seconds from
1-1-1970 00:00:00 ← epoch
1901 to
2155


- DATE, TIME, DATETIME, TIMESTAMP, YEAR

1-1-1000
to
31-12-9999

- String types – size = number of chars * size of char

→ 4 bytes = 32-bits
signed = 1 bit sign + 31 bit data = $\pm 2^{31}$
unsigned = 32 bit data = 2^{32}

- CHAR(1-255) – Fixed length, Very fast access. → char or var(1@);



- VARCHAR(1-65535) – Variable length, Stores length + chars.

- TINYTEXT (255), TEXT (64K), MEDIUMTEXT (16M), LONGTEXT (4G) – Variable length, Slower access.

- Binary types – size = number of bytes → images, mp3, video, ...

- BINARY, VARBINARY, TINYBLOB, BLOB, MEDIUMBLOB, LONGBLOB

- Miscellaneous types

- ENUM, SET

CHAR vs VARCHAR vs TEXT

- CHAR

- Fixed inline storage.
 - If smaller data is given, rest of space is unused.
 - Very fast access.

- VARCHAR

- Variable inline storage.
 - Stores length and characters.
 - Slower access than CHAR.

- TEXT

- Variable external storage.
 - Very slow access.
 - Not ideal for indexing.


- CREATE TABLE temp(c1 CHAR(4), c2 VARCHAR(4), c3 TEXT(4));

size of a char

- ascii = 1 byte
 - unicode = 2 byte
 - UTF16 BE
 - UTF16 LE
 - UTF ..
 - ebcdf = 4 byte


CHAR(4) → max 4 chars

- ASCII - 4 bytes
 - Unicode - 8 bytes.

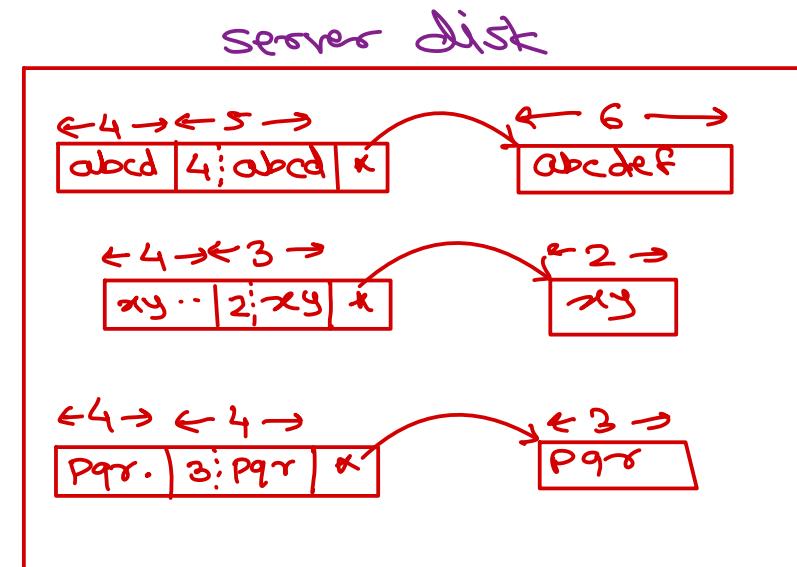

SQL scripts *collection of sql commands in a text file (.sql)*

- SQL script is multiple SQL queries written into a .sql file.
- SQL scripts are mainly used while database backup and restore operations.
- SQL scripts can be executed from terminal as:
 - terminal> mysql –u user –password db < /path/to/sqlfile
- SQL scripts can be executed from command line as:
 - ✓ mysql> SOURCE /path/to/sqlfile
- Note that SOURCE is MySQL CLI client command.
- It reads commands one by one from the script and execute them on server.

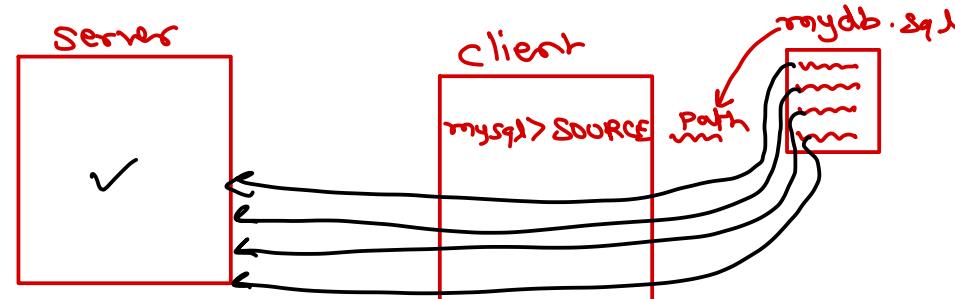

SELECT – DQL


- Select all columns (in fixed order).
 - SELECT * FROM table;
- Select specific columns / in arbitrary order. *as Per table Creation* *projection*
 - SELECT c1, c2, c3 FROM table;
- Column alias *optional*
 - SELECT c1 AS col1, c2 col2 FROM table;
- Computed columns.
 - SELECT c1, c2, c3, expr1, expr2 FROM table;
 - SELECT c1,
CASE WHEN condition1 THEN value1,
WHEN condition2 THEN value2,
...
ELSE value
END
FROM table;



SELECT – DQL

- Distinct values in column.
 - `SELECT DISTINCT c1 FROM table;`
 - `SELECT DISTINCT c1, c2 FROM table;`

- Select limited rows.

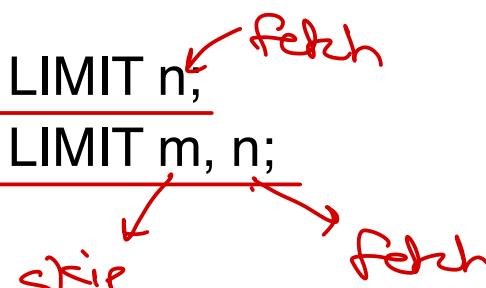- `SELECT * FROM table LIMIT n;`

- `SELECT * FROM table LIMIT m, n;`

SELECT – DQL – WHERE

- ~~BETWEEN~~ operator (include both ends)

- c1 BETWEEN val1 AND val2

- ~~IN~~ operator (equality check with multiple values)

- c1 IN (val1, val2, val3)

- LIKE operator (similar strings)

- c1 LIKE 'pattern'.
 - % represent any number of any characters.
 - _ represent any single character.





Thank you!

Nilesh Ghule <nilesh@sunbeaminfo.com>





MySQL - RDBMS

Trainer: Mr. Nilesh Ghule

SELECT – DQL – WHERE

- ~~BETWEEN~~ operator (include both ends)

- c1 BETWEEN val1 AND val2

- ~~IN~~ operator (equality check with multiple values)

- c1 IN (val1, val2, val3)

- LIKE operator (similar strings)

- c1 LIKE 'pattern'.
 - % represent any number of any characters.
 - _ represent any single character.



UPDATE – DML

- To change one or more rows in a table.
- Update row(s) single column.
 - UPDATE table SET c2=new-value WHERE c1=some-value;
- Update multiple columns.
 - UPDATE table SET c2=new-value, c3=new-value WHERE c1=some-value;
- Update all rows single column.
 - UPDATE table SET c2=new-value;



DELETE – DML vs TRUNCATE – DDL vs DROP – DDL

• DELETE


- To delete one or more rows in a table.
- Delete row(s)
 - DELETE FROM table WHERE c1=value;
- Delete all rows
 - DELETE FROM table ;

• TRUNCATE

- Delete all rows.
 - TRUNCATE TABLE table;
- Truncate is faster than DELETE.

• DROP

- Delete all rows as well as table structure.
 - DROP TABLE table;
 - DROP TABLE table IF EXISTS;
- Delete database/schema.
 - DROP DATABASE db;

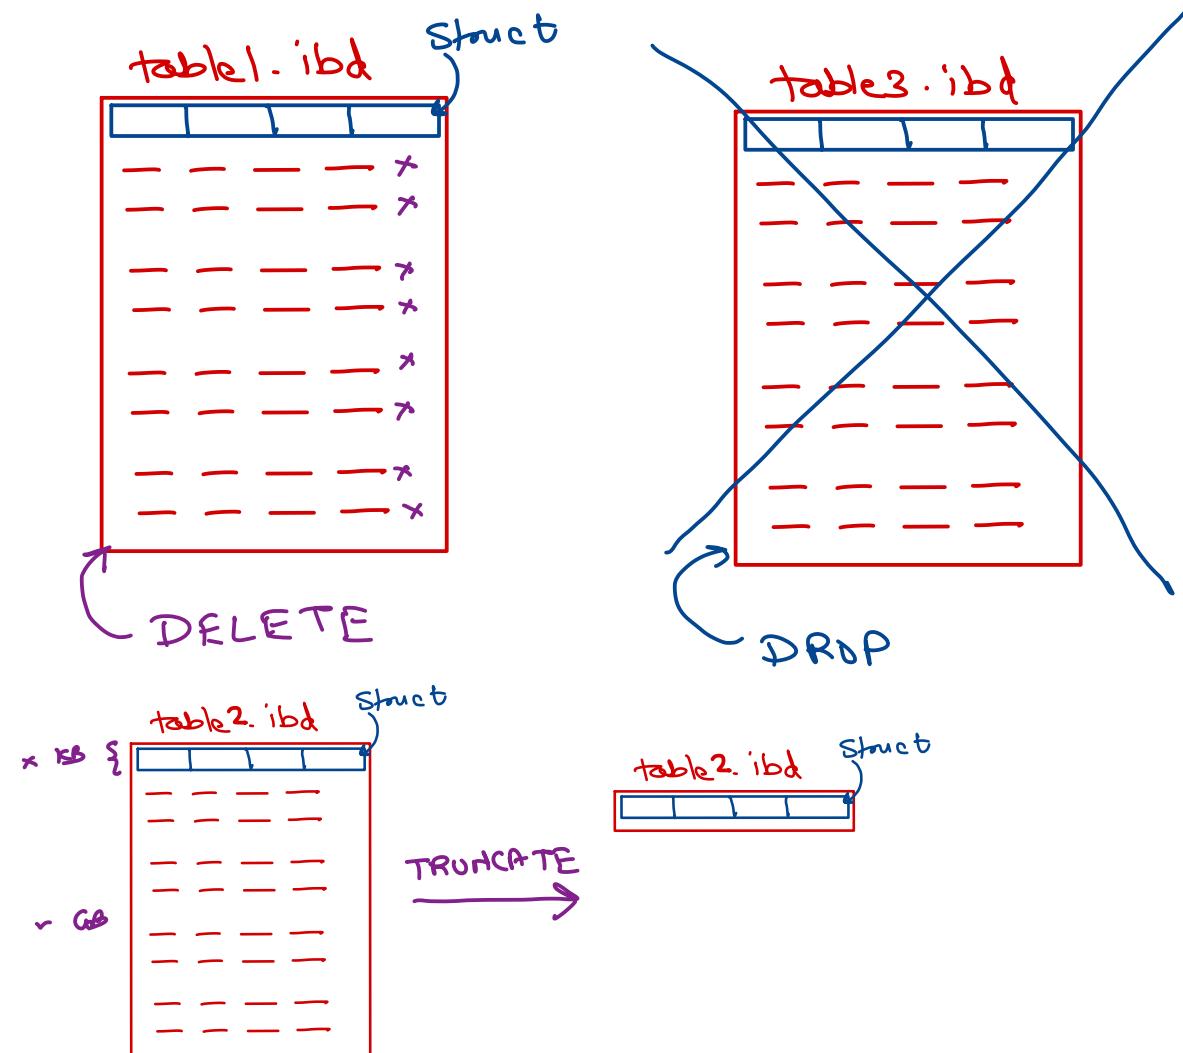

Seeking HELP

- HELP is client command to seek help on commands/functions.
 - HELP SELECT;
 - HELP Functions;
 - HELP SIGN;



DUAL table

- A dummy/in-memory a table having single row & single column.
- It is used for arbitrary calculations, testing functions, etc.
 - `SELECT 2 + 3 * 4 FROM DUAL;`
 - `SELECT NOW() FROM DUAL;`
 - `SELECT USER(), DATABASE() FROM DUAL;`
- In MySQL, DUAL keyword is optional.
 - `SELECT 2 + 3 * 4;`
 - `SELECT NOW();`
 - `SELECT USER(), DATABASE();`



SQL functions

- RDBMS provides many built-in functions to process the data.
- These functions can be classified as:
 - Single row functions
 - One row input produce one row output.
 - e.g. ABS(), CONCAT(), IFNULL(), ...
 - Multi-row or Group functions
 - Values from multiple rows are aggregated to single value.
 - e.g. SUM(), MIN(), MAX(), ...
- These functions can also be categorized based on data types or usage.
 - Numeric functions
 - String functions
 - Date and Time functions
 - Control flow functions
 - Information functions
 - Miscellaneous functions



Numeric & String functions

- ABS()
- POWER()
- ROUND(), FLOOR(), CEIL()

- ASCII(), CHAR()
- CONCAT()
- SUBSTRING()
- LOWER(), UPPER()
- TRIM(), LTRIM(), RTRIM()
- LPAD(), RPAD()
- REGEXP_LIKE()





Thank you!

Nilesh Ghule <nilesh@sunbeaminfo.com>





MySQL - RDBMS

Trainer: Mr. Nilesh Ghule



SQL functions

- RDBMS provides many built-in functions to process the data.
- These functions can be classified as:
 - Single row functions
 - One row input produce one row output.
 - e.g. ABS(), CONCAT(), IFNULL(), ...
 - Multi-row or Group functions
 - Values from multiple rows are aggregated to single value.
 - e.g. SUM(), MIN(), MAX(), ...
- These functions can also be categorized based on data types or usage.
 - Numeric functions
 - String functions
 - Date and Time functions
 - Control flow functions
 - Information functions
 - Miscellaneous functions



Numeric & String functions

- ABS()
- POWER()
- ROUND(), FLOOR(), CEIL()

- ASCII(), CHAR()
- CONCAT()
- SUBSTRING()
- LOWER(), UPPER()
- TRIM(), LTRIM(), RTRIM()
- LPAD(), RPAD()
- REGEXP_LIKE()



Date-Time and Information functions

- VERSION()
- USER(), DATABASE()
- MySQL supports multiple date time related data types
 - DATE (3), TIME (3), DATETIME (5), TIMESTAMP (4), YEAR (1)
- SYSDATE(), NOW()
- DATE(), TIME()
- DAYOFMONTH(), MONTH(), YEAR(), HOUR(), MINUTE(), SECOND(), ...
- DATEDIFF(), DATE_ADD(), TIMEDIFF()
- MAKEDATE(), MAKETIME()



Control and NULL and List functions

- NULL is special value in RDBMS that represents absence of value in that column.
- NULL values do not work with relational operators and need to use special operators.
- Most of functions return NULL if NULL value is passed as one of its argument.
- ISNULL()
- IFNULL()
- NULLIF()
- COALESCE()


- GREATEST(), LEAST()

- IF(condition, true-value, false-value)




Group functions



- Work on group of rows of table.
- Input to function is data from multiple rows & then output is single row. Hence these functions are called as "Multi Row Function" or "Group Functions".
- These functions are used to perform aggregate ops like sum, avg, max, min, count or std dev, etc. Hence these fns are also called as "Aggregate Functions".
- Example: SUM(), AVG(), MAX(), MIN(), COUNT().
- NULL values are ignored by group functions.
- Limitations of GROUP functions:
 - Cannot select group function along with a column.
 - Cannot select group function along with a single row fn.
 - Cannot use group function in WHERE clause/condition.
 - Cannot nest a group function in another group fn.

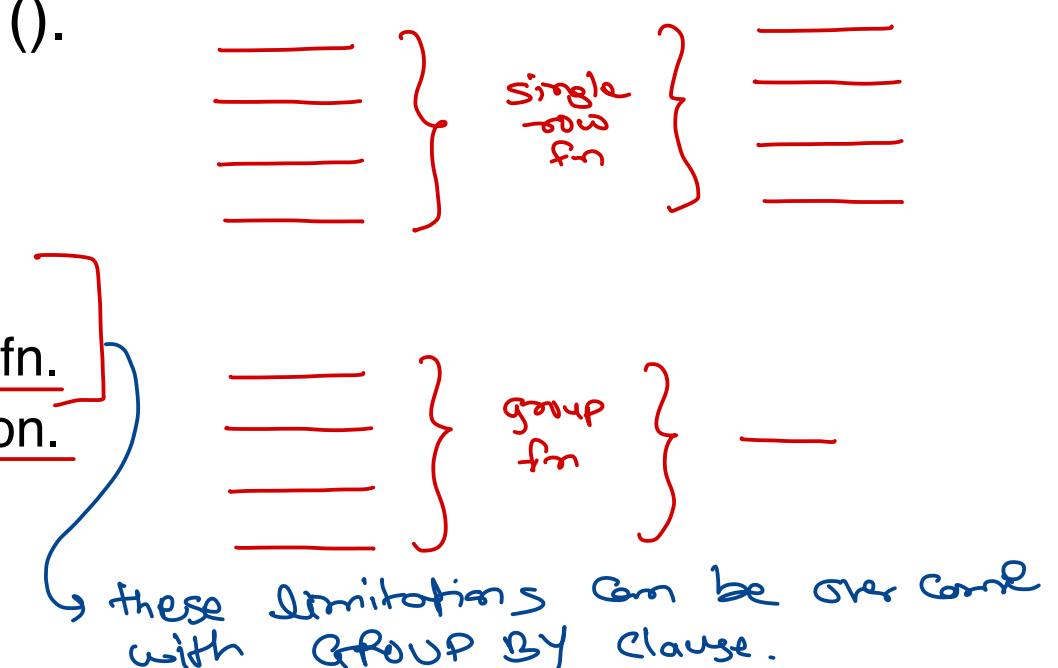


GROUP BY clause

- GROUP BY is used for analysis of data i.e. generating reports & charts.
- When GROUP BY single column, generated output can be used to plot 2-D chart.
When GROUP BY two column, generated output can be used to plot 3-D chart and so on.
- GROUP BY queries are also called as Multi-dimensional / Spatial queries.
- Syntactical Characteristics:
 - If a column is used for GROUP BY, then it may or may not be used in SELECT clause.
 - If a column is in SELECT, it must be in GROUP BY.
- When GROUP BY query is fired on database server, it does following:
 - ✓ Load data from server disk into server RAM.
 - ✓ Sort data on group by columns.
 - ✓ Group similar records by group columns.
 - ✓ Perform given aggregate ops on each column.
 - ✓ Send result to client.

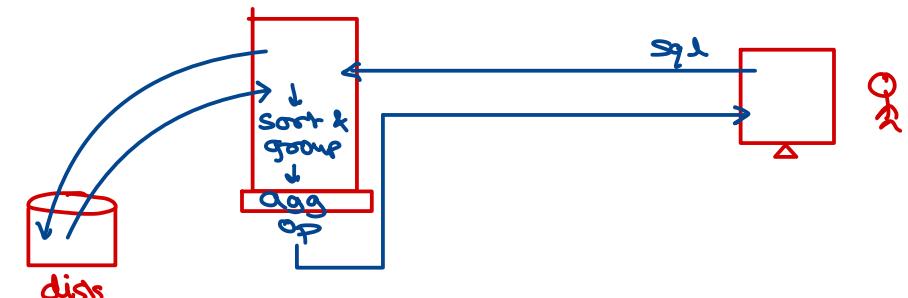

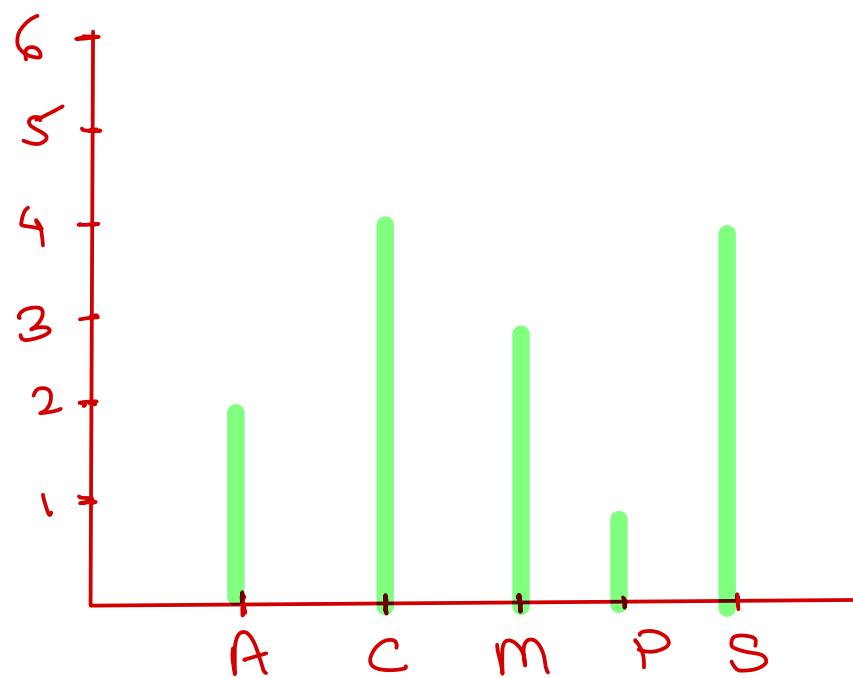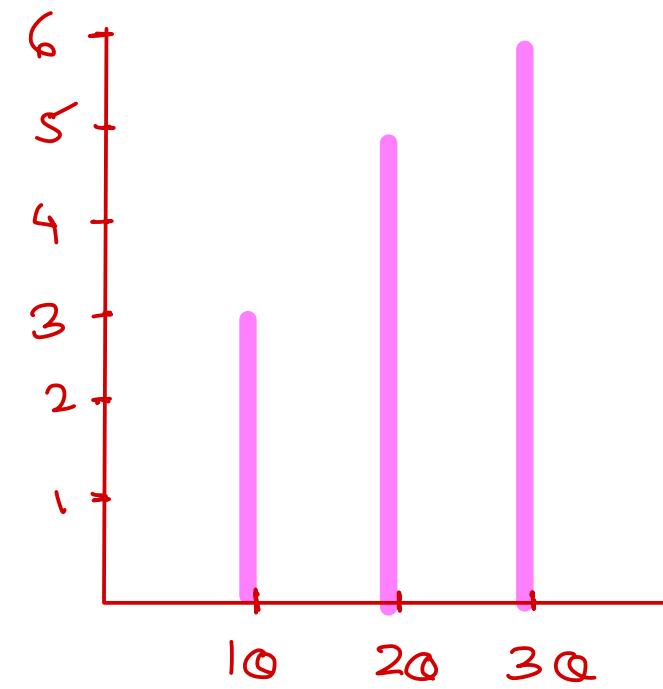

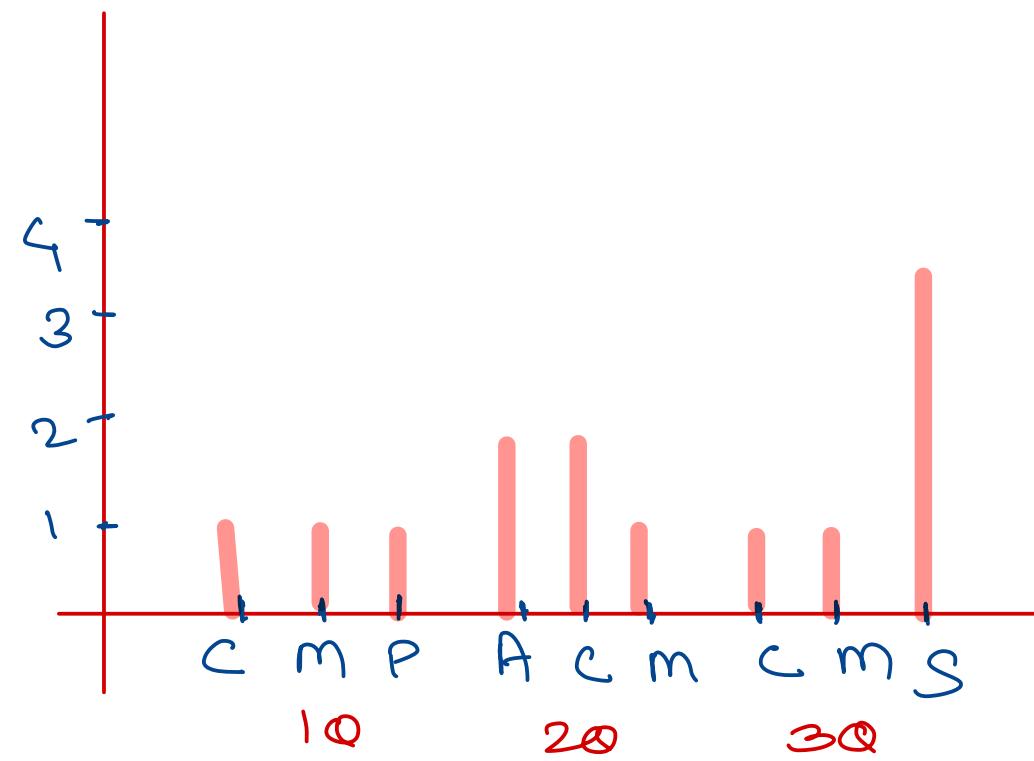

HAVING clause

- HAVING clause cannot be used without GROUP BY clause.
- HAVING clause is used to specify condition on aggregate values.
- Examples:
 - SELECT deptno, SUM(sal) FROM EMP GROUP BY deptno HAVING SUM(sal) > 9000;
- Syntactical Characteristics:
 - WHERE clause executed for each record; while HAVING is executed for each group.
 - HAVING clause can be used to specify condition on group fn or grouped columns.
 - However using HAVING to specify condition of group col reduce the performance. Use WHERE clause for the same.
- Examples:
 - SELECT deptno, SUM(sal) FROM EMP GROUP BY deptno HAVING deptno = 20; ✓
 - SELECT deptno, SUM(sal) FROM EMP WHERE deptno = 20 GROUP BY deptno; ✓
- We may use GROUP BY with WHERE, ORDER BY & LIMIT. ✓





Thank you!

Nilesh Ghule <nilesh@sunbeaminfo.com>




MySQL - RDBMS

Trainer: Mr. Nilesh Ghule




Entity Relations

- To avoid redundancy of the data, data should be organized into multiple tables so that tables are related to each other.
- The relations can be one of the following
 - One to One
 - One to Many
 - Many to One
 - Many to Many
- Entity relations is outcome of Normalization process.

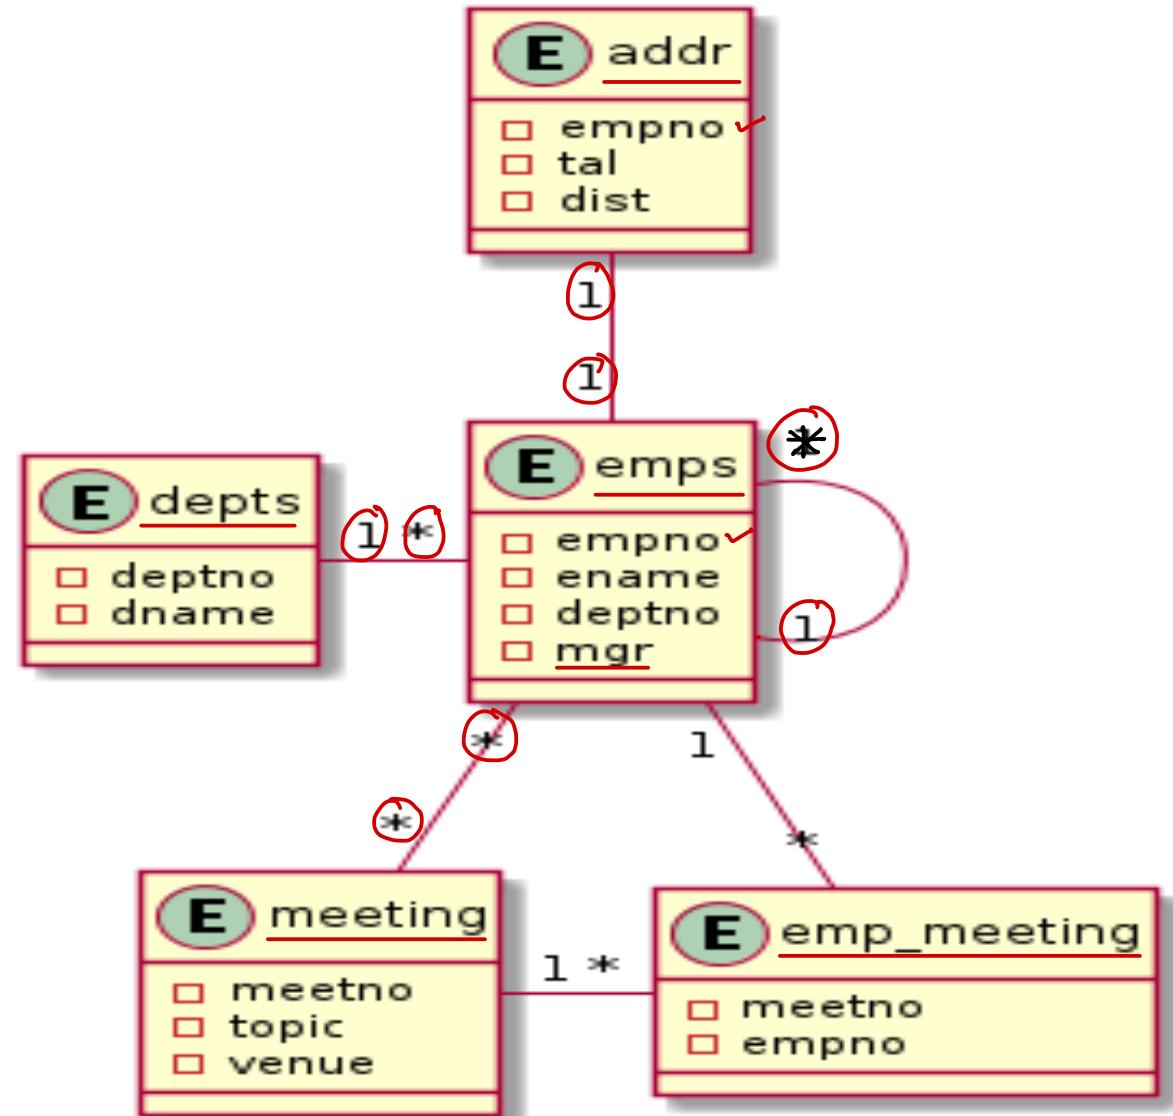

SQL Joins

- Join statements are used to SELECT data from multiple tables using single query.
- Typical RDBMS supports following types of joins:
 - Cross Join
 - Inner Join
 - Left Outer Join
 - Right Outer Join
 - Full Outer Join
 - Self join

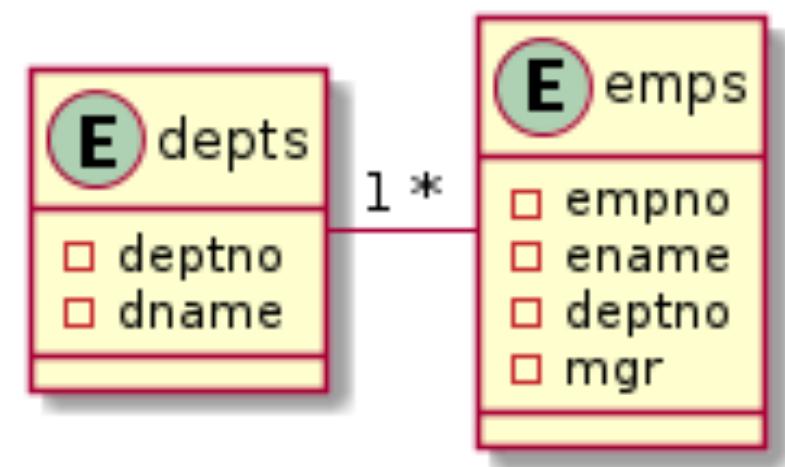

Cross Join

dept 4		emp 5	
deptno	dname	empno	ename
10	DEV	1	Amit
20	QA	2	Rahul
30	OPS	3	Nilesh
40	ACC	4	Nitin
		5	Sarang

```

for (Emp e: emp) { driving table (outer loop)
    for (Dept d: dept) { driven table (inner loop)
        point (e.ename, d.dname);
    }
}

```

- Compares each row of Table1 with every row of Table2.
 - Yields all possible combinations of Table1 and Table2.
 - In MySQL, The larger table is referred as "Driving Table", while smaller table is referred as "Driven Table". Each row of Driving table is combined with every row of Driven table.
 - Cross join is the fastest join, because there is no condition check involved.

Inner Join

dept (4)


deptno	dname
10	DEV
20	QA
30	OPS
40	ACC

emp (5)

empno	ename	deptno
1	Amit	10
2	Rahul	10
3	Nilesh	20
4	Nitin	50
5	Sarang	50



Amit Dev
Rahul Dev
Nilesh QA

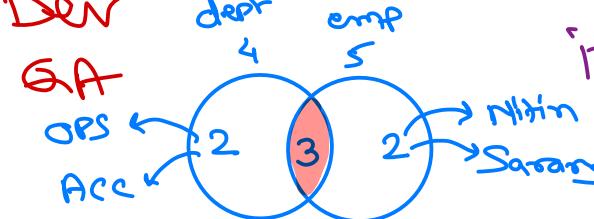

```
for(Emp e: emp) {  
    for(Dept d: dept) {  
        if(e.deptno == d.deptno)  
            point(e.ename, d.dname);  
    }  
}
```


3 3
3

Select e.ename, d.dname from empss e
inner join dept d on e.deptno= d.deptno;

- The inner JOIN is used to return rows from both tables that satisfy the join condition.
- Non-matching rows from both tables are skipped.
- If join condition contains equality check, it is referred as equi-join; otherwise it is non-equi-join.

Left Outer Join

deptno	dname
10	DEV
20	QA
30	OPS
40	ACC

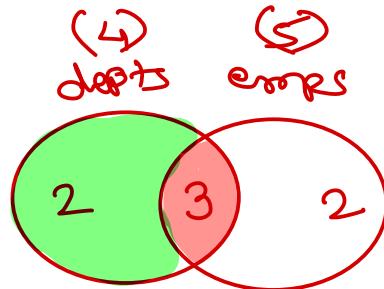

empno	ename	deptno
1	Amit	10
2	Rahul	10
3	Nilesh	20
4	Nitin	50
5	Sarang	50


select e.ename, d.dname
from dept d
left outer join emp e
on d.deptno = e.deptno;

```
for(Dept d:dept) {  
    found=false;  
    for(Emp e:emp) {  
        if(e.deptno == d.deptno){  
            point(e.ename,d.dname)  
            found=true;  
        }  
        if(found == false)  
            point(NULL,d.dname);  
    }  
}
```

- Left outer join is used to return matching rows from both tables along with additional rows in left table.
- Corresponding to additional rows in left table, right table values are taken as NULL.
- OUTER keyword is optional.

Right Outer Join

deptno	dname
10	DEV
20	QA
30	OPS
40	ACC

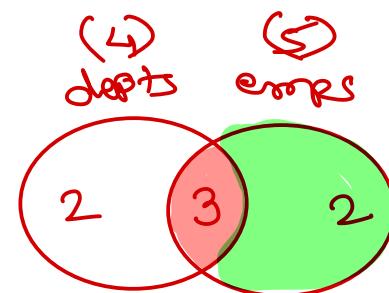

empno	ename	deptno
1	Amit	10
2	Rahul	10
3	Nilesh	20
4	Nitin	50
5	Sarang	50

select e.ename, d.dname
from depts d
right outer join emps e
on d.deptno = e.deptno;

- Right outer join is used to return matching rows from both tables along with additional rows in right table.
- Corresponding to additional rows in right table, left table values are taken as NULL.
- OUTER keyword is optional.

Full Outer Join

deptno	dname
10	DEV
20	QA
30	OPS
40	ACC

empno	ename	deptno
1	Amit	10
2	Rahul	10
3	Nilesh	20
4	Nitin	50
5	Sarang	50

- Full join is used to return matching rows from both tables along with additional rows in both tables.
- Corresponding to additional rows in left or right table, opposite table values are taken as NULL.
- Full outer join is not supported in MySQL, but can be simulated using set operators.

Set operators

query1 output + query2 output = union or union all

ename	dname
Amit	DEV
Rahul	DEV
Nilesh	QA
NULL	OPS
NULL	ACC

join1

ename	dname
Amit	DEV
Rahul	DEV
Nilesh	QA
Nitin	NULL
Sarang	NULL

join2

num of columns must be same.

- UNION operator is used to combine results of two queries. The common data is taken only once. It can be used to simulate full outer join.
- UNION ALL operator is used to combine results of two queries. Common data is repeated.

Self Join

- When join is done on same table, then it is known as "Self Join". The both columns in condition belong to the same table.
- Self join may be an inner join or outer join.

empno	ename	deptno	mgr
1	Amit	10	4
2	Rahul	10	3
3	Nilesh	20	4
4	Nitin	50	5
5	<u>Sarang</u>	50	NULL


emps e

empno	ename	deptno
1	Amit	10
2	Rahul	10
3	<u>Nilesh</u>	20
4	<u>Nitin</u>	50
5	Sarang	50

emps m

select e.ename, m.ename from emps e
inner join emps m on e.mgr = m.empno;
select e.ename, m.ename from emps e
left join emps m on e.mgr = m.empno;

Multi-Table Joins

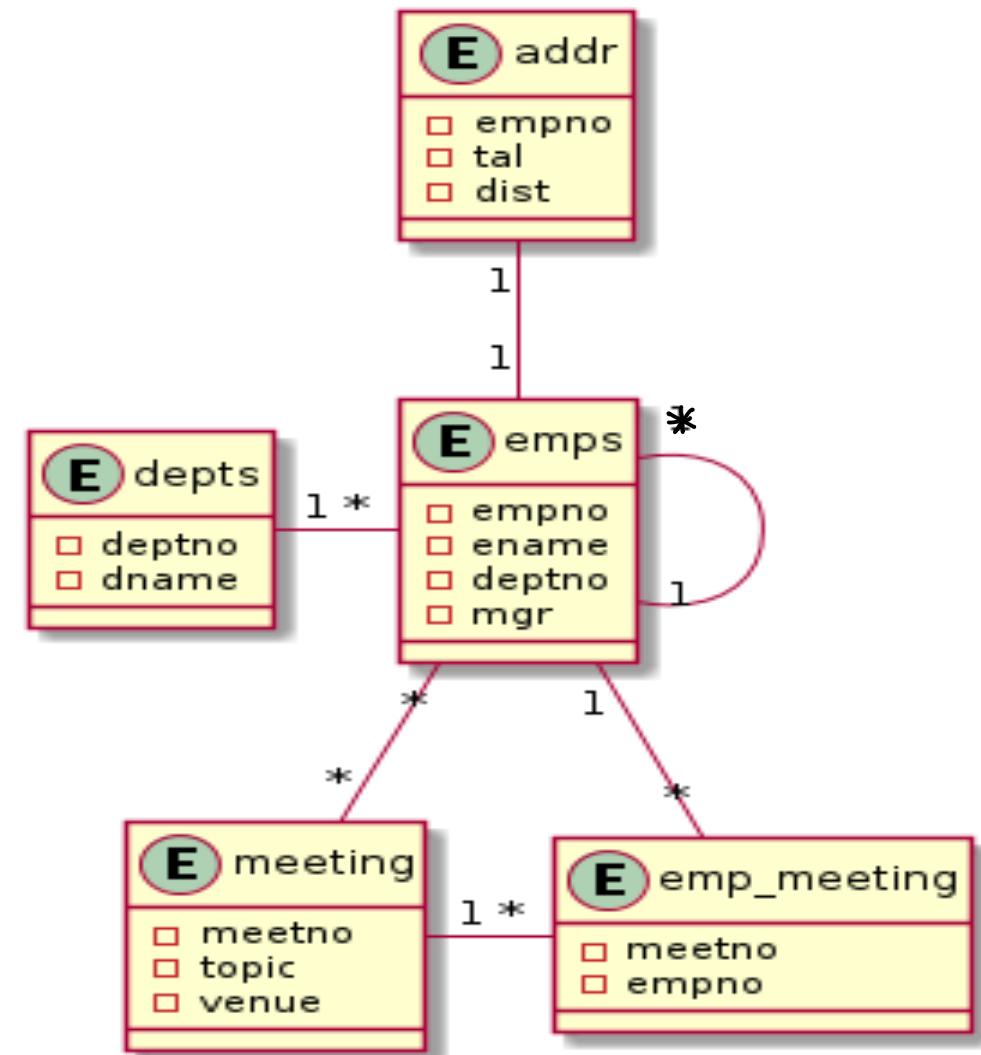



Thank you!

Nilesh Ghule <nilesh@sunbeaminfo.com>





MySQL - RDBMS

Trainer: Mr. Nilesh Ghule



Sub queries

- Sub-query is query within query. Typically it work with SELECT statements.
- Output of inner query is used as input to outer query.
- If no optimization is enabled, for each row of outer query result, sub-query is executed once. This reduce performance of sub-query.
- Single row sub-query
 - Sub-query returns single row.
 - Usually it is compared in outer query using relational operators.



Sub queries

- Multi-row sub-query
 - Sub-query returns multiple rows.
 - Usually it is compared in outer query using operators like IN, ANY or ALL.
 - IN operator compare for equality with results from sub-queries (at least one result should match)..
 - ANY operator compares with the results from sub-queries (at least one result should match).
 - ALL operator compares with the results from sub-queries (all results should match).
- OR } { 3 AND*



Sub queries

- Correlated sub-query

- If number of results from sub-query are reduced, query performance will increase.
- This can be done by adding criteria (WHERE clause) in sub-query based on outer query row.
- Typically correlated sub-query use IN, ALL, ANY and EXISTS operators.

EXISTS → 'inner query returns 1 or more rows.'

NOT EXISTS → 'inner query returns 0 rows.'

Sub query

- Sub queries with UPDATE and DELETE are not supported in all RDBMS.
- In MySQL, Sub-queries in UPDATE/DELETE is allowed, but sub-query should not SELECT from the same table, on which UPDATE/DELETE operation is in progress.



Views

- RDBMS view represents view (projection) of the data.
- View is based on SELECT statement.
- Typically it is restricted view of the data (limited rows or columns) from one or more tables (joins and/or sub-queries) or summary of the data (grouping).
- Data of view is not stored on server hard-disk; but its SELECT statement is stored in compiled form. It speed up execution of view.

Views

- Views are of two types: Simple view and Complex view
- Usually if view contains computed columns, group by, joins or sub-queries, then the views are said to be complex. DML operations are not supported on these views.
- DML operations on view affects underlying table.
- View can be created with CHECK OPTION to ensure that DML operations can be performed only the data visible in that view.

- Views can be differentiated with: SHOW FULL TABLES.
- Views can be dropped with DROP VIEW statement.
- View can be based on another view.
- Applications of views
 - Security: Providing limited access to the data.
 - Hide source code of the table.
 - Simplifies complex queries.



Thank you!

Nilesh Ghule <nilesh@sunbeaminfo.com>




MySQL - RDBMS

Trainer: Mr. Nilesh Ghule



Transaction

- Transaction is set of DML queries executed as a single unit.
- Transaction examples
 - accounts table [id, type, balance]
 - UPDATE accounts SET balance=balance-1000 WHERE id = 1;
 - UPDATE accounts SET balance=balance+1000 WHERE id = 2;
- RDBMS transaction have ACID properties.
 - Atomicity
 - All queries are executed as a single unit. If any query is failed, other queries are discarded.
 - Consistency
 - When transaction is completed, all clients see the same data.
 - Isolation
 - Multiple transactions (by same or multiple clients) are processed concurrently.
 - Durable
 - When transaction is completed, all data is saved on disk.

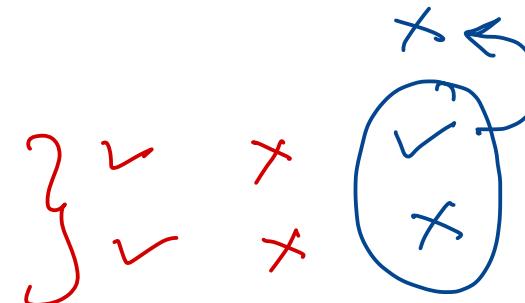

Transaction

- Transaction management
 - START TRANSACTION;
 - ...
 - COMMIT WORK;
- START TRANSACTION;
- ...
- ROLLBACK WORK;
- In MySQL autocommit variable is by default 1. So each DML command is auto-committed into database.
 - SELECT @@autocommit;
- Changing autocommit to 0, will create new transaction immediately after current transaction is completed. This setting can be made permanent in config file.
 - SET autocommit=0;



Views

- RDBMS view represents view (projection) of the data.
- View is based on SELECT statement.
- Typically it is restricted view of the data (limited rows or columns) from one or more tables (joins and/or sub-queries) or summary of the data (grouping).
- Data of view is not stored on server hard-disk; but its SELECT statement is stored in compiled form. It speed up execution of view.

Views

- Views are of two types: Simple view and Complex view
- Usually if view contains computed columns, group by, joins or sub-queries, then the views are said to be complex. DML operations are not supported on these views.
- DML operations on view affects underlying table.
- View can be created with CHECK OPTION to ensure that DML operations can be performed only the data visible in that view.


View

- Views can be differentiated with: SHOW FULL TABLES.
- Views can be dropped with DROP VIEW statement.
- View can be based on another view.

- Applications of views

- Security: Providing limited access to the data.
- Hide source code of the table.
- Simplifies complex queries.

Example joins/subqueries are added into view - select.

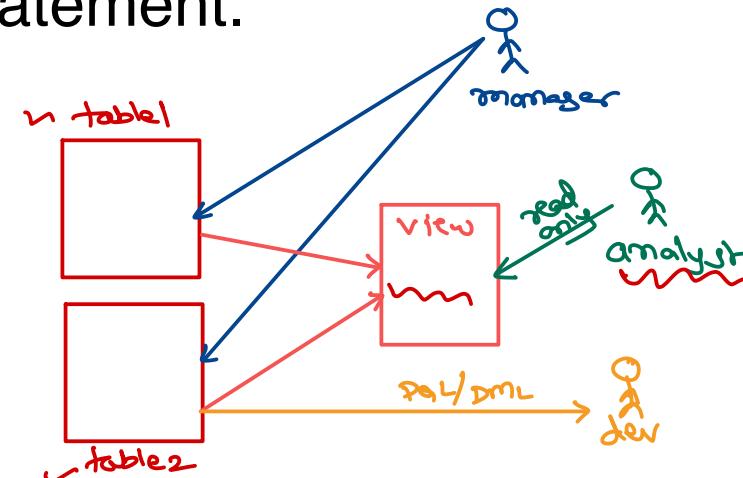

Data Control Language

- Security is built-in feature of any RDBMS. It is implemented in terms of permissions (a.k.a. privileges).
- There are two types of privileges.
- System privileges
 - Privileges for certain commands i.e. CREATE, ALTER, DROP, ...
 - Typically these privileges are given to the database administrator or higher authority user.
- Object privileges
 - RDBMS objects are table, view, stored procedure, function, triggers, ...
 - Can perform operations on the objects i.e. INSERT, UPDATE, DELETE, SELECT, CALL, ...
 - Typically these privileges are given to the database users.





User Management

- User management is responsibility of admin (root).
- New user can be created using CREATE USER.
 - ✓ CREATE USER user@host IDENTIFIED BY 'password';
 - host can be hostname of server, localhost (current system) or '%' for all client systems.
- Permissions for the user can be listed using SHOW GRANTS command.
 - ✓ SHOW GRANTS FOR user@host;
- Users can be deleted using DROP USER.
 - ✓ DROP USER 'user'@'host';
- Change user password.
 - ALTER USER user@host IDENTIFIED BY 'new_password';
To reload security settings if they are modified using DML ops on system tables.
 - FLUSH PRIVILEGES;

In RDBMS, all config/settings/meta data is stored in system tables/databases.

mysql.user
db table

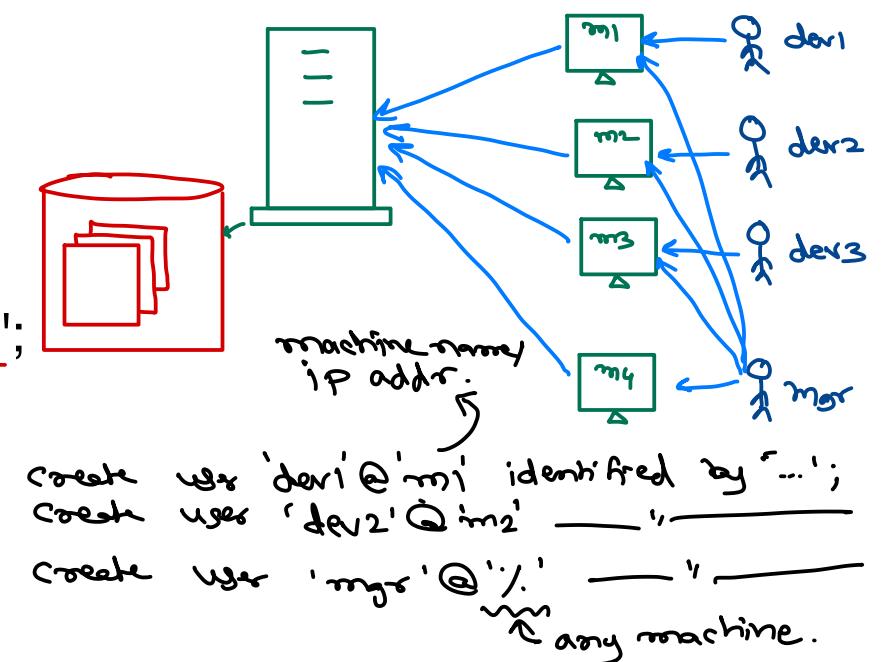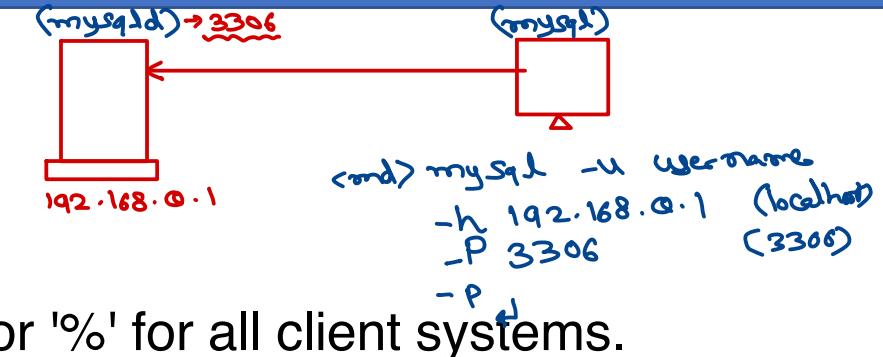

Data Control Language

everything in db.

- Permissions are given to user using GRANT command.
 - GRANT CREATE ON db.* TO user@host;
 - GRANT CREATE ON *.* TO user1@host, ~~user2@host~~;
 - GRANT SELECT ON db.table TO user@host;
 - GRANT SELECT, INSERT, UPDATE ON db.table TO user@host;
 - GRANT ALL ON db.* TO user@host;
- By default one user cannot give permissions to other user. This can be enabled using **WITH GRANT OPTION**.
 - GRANT ALL ON *.* TO user@host WITH GRANT OPTION;
- Permissions assigned to any user can be withdrawn using REVOKE command.
 - REVOKE SELECT, INSERT ON db.table FROM user@host;
- Permissions can be activated by FLUSH PRIVILEGES.
 - System GRANT tables are reloaded by this command. Auto done after GRANT, REVOKE.
 - Command is necessary if GRANT tables are modified using DML operations.





Thank you!

Nilesh Ghule <nilesh@sunbeaminfo.com>






MySQL - RDBMS

Trainer: Mr. Nilesh Ghule




Transaction

- Transaction is set of DML queries executed as a single unit.
- Transaction examples
 - accounts table [id, type, balance]
 - UPDATE accounts SET balance=balance-1000 WHERE id = 1;
 - UPDATE accounts SET balance=balance+1000 WHERE id = 2;
- RDBMS transaction have ACID properties.
 - Atomicity
 - All queries are executed as a single unit. If any query is failed, other queries are discarded.
 - Consistency
 - When transaction is completed, all clients see the same data.
 - Isolation
 - Multiple transactions (by same or multiple clients) are processed concurrently.
 - Durable
 - When transaction is completed, all data is saved on disk.

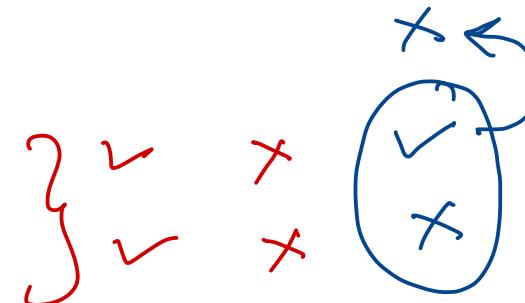

Transaction

- Transaction management
 - START TRANSACTION;
 - ...
 - COMMIT WORK;
 - START TRANSACTION;
 - ...
 - ROLLBACK WORK;
- In MySQL autocommit variable is by default 1. So each DML command is auto-committed into database.
 - SELECT @@autocommit; 
- Changing autocommit to 0, will create new transaction immediately after current transaction is completed. This setting can be made permanent in config file.
 - SET autocommit=0;

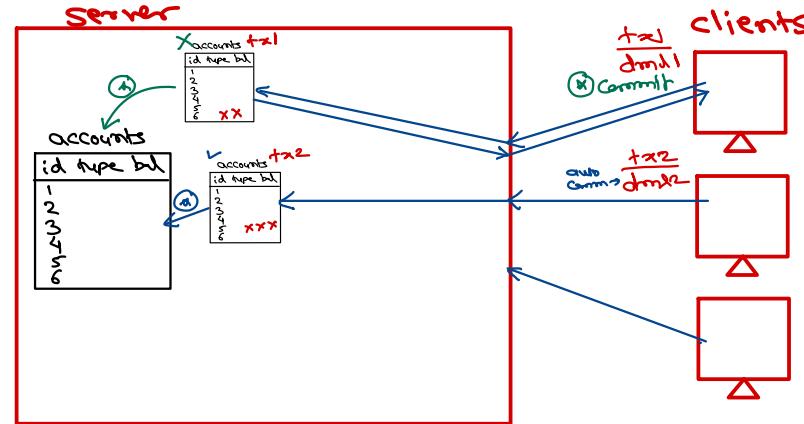

Transaction

- Save-point is state of database tables (data) at the moment (within a transaction).
- It is advised to create save-points at end of each logical section of work.
- Database user may choose to rollback to any of the save-point.
- Transaction management with Save-points
 - START TRANSACTION;
 - ...
 - SAVEPOINT sa1;
 - ...
 - SAVEPOINT sa2;
 - ...
 - ROLLBACK TO sa1;
 - ...
 - COMMIT; // or ROLLBACK
- Commit always commit the whole transaction.
- ROLLBACK or COMMIT clears all save-points.




Transaction

- Transaction is set of DML statements.
- If any DDL statement is executed, current transaction is automatically committed.
- Any power failure, system or network failure automatically rollback current state.
- Transactions are isolated from each other and are consistent.



Row locking

- When an user update or delete a row (within a transaction), that row is locked and becomes read-only for other users.
- The other users see old row values, until transaction is committed by first user.
- If other users try to modify or delete such locked row, their transaction processing is blocked until row is unlocked.
- Other users can INSERT into that table. Also they can UPDATE or DELETE other rows.
- The locks are automatically released when COMMIT/ROLLBACK is done by the user. *or timeout occurs.*
- This whole process is done automatically in MySQL. It is called as "OPTIMISTIC LOCKING".

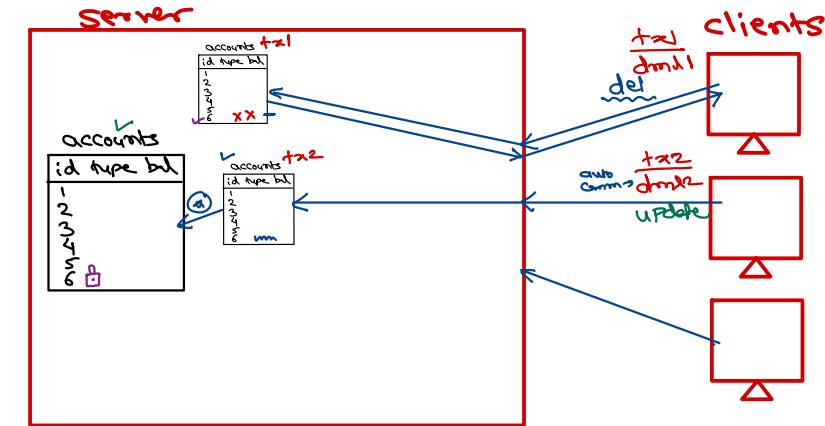

Row locking

- Manually locking the row in advanced before issuing UPDATE or DELETE is known as "PESSIMISTIC LOCKING".
- This is done by appending FOR UPDATE to the SELECT query.
- It will lock all selected rows, until transaction is committed or rolled back. *or timeout*.
- If these rows are already locked by another users, the SELECT operation is blocked until rows lock is released.
- By default MySQL does table locking. Row locking is possible only when table is indexed on the column. *(pri key)*



Index

- Index enable faster searching in tables by indexed columns.
 - CREATE INDEX idx_name ON table(column);
- One table can have multiple indexes on different columns/order.
- Typically indexes are stored as some data structure (like BTREE or HASH) on disk.
- Indexes are updated during DML operations. So DML operation are slower on indexed tables.



Index

- Index can be ASC or DESC.
 - It cause storage of key values in respective order (MySQL 8.x onwards).
 - ASC/DESC index is used by optimizer on ORDER BY queries.
- There are four types of indexes:
 - Simple index
 - `CREATE INDEX idx_name ON table(column [ASC|DESC]);`
 - Unique index
 - `CREATE UNIQUE INDEX idx_name ON table(column [ASC|DESC]);`
 - Doesn't allow duplicate values.
 - Composite index
 - `CREATE INDEX idx_name ON table(column1 [ASC|DESC], column2 [ASC|DESC]);`
 - Composite index can also be unique. Do not allow duplicate combination of columns.
 - Clustered index
 - PRIMARY index automatically created on Primary key for row lookup.
 - If primary key is not available, hidden index is created on synthetic column.
 - It is maintained in tabular form and its reference is used in other indexes.



Index

- Indexes should be created on shorter (INT, CHAR, ...) columns to save disk space.
- Few RDBMS do not allow indexes on external columns i.e. TEXT, BLOB.
- MySQL support indexing on TEXT/BLOB up to n characters.
 - CREATE TABLE test (blob_col BLOB, ..., INDEX(blob_col(10)));
- To list all indexes on table:
 - SHOW INDEXES FROM table;
- To drop an index:
 - DROP INDEX idx_name ON table;
- When table is dropped, all indexes are automatically dropped.
- Indexes should not be created on the columns not used frequent search, ordering or grouping operations.
- Columns in join operation should be indexed for better performance.



Query performance

- Few RDBMS features ensure better query performance.
 - Index speed up execution of SELECT queries (search operations).
 - Correlated sub-queries execute faster.
- Query performance can be observed using EXPLAIN statement.
 - EXPLAIN FORMAT=JSON SELECT ...;
- EXPLAIN statement shows
 - Query cost (Lower is the cost, faster is the query execution).
 - Execution plan (Algorithm used to execute query e.g. loop, semi-join, materialization, etc).
- Optimizations can be enabled or disabled by optimizer_switch system variable.
 - SELECT @@optimizer_switch;
 - SET @@optimizer_switch='materialization=off';



Constraints

- Constraints are restrictions imposed on columns.
- There are five constraints
 - NOT NULL
 - UNIQUE
 - PRIMARY KEY
 - FOREIGN KEY
 - CHECK
- Few constraints can be applied at either column level or table level. Few constraints can be applied on both.
- Optionally constraint names can be mentioned while creating the constraint. If not given, it is auto-generated.
- Each DML operation check the constraints before manipulating the values. If any constraint is violated, error is raised.





Thank you!

Nilesh Ghule <nilesh@sunbeaminfo.com>





MySQL - RDBMS

Trainer: Mr. Nilesh Ghule



Constraints

- Constraints are restrictions imposed on columns.
- There are five constraints
 - NOT NULL
 - UNIQUE
 - PRIMARY KEY
 - FOREIGN KEY
 - CHECK
- Few constraints can be applied at either column level or table level. Few constraints can be applied on both.
- Optionally constraint names can be mentioned while creating the constraint. If not given, it is auto-generated.
- Each DML operation check the constraints before manipulating the values. If any constraint is violated, error is raised.



Constraints

- **PRIMARY KEY**

- Column or set of columns that uniquely identifies a row.
- Only one primary key is allowed for a table.
- Primary key column cannot have duplicate or NULL values.
- Internally index is created on PK column.
- TEXT/BLOB cannot be primary key.
- If no obvious choice available for PK, composite or surrogate PK can be created.
- Creating PK for a table is a good practice.
- PK can be created at table level or column level.
- CREATE TABLE table(c1 TYPE PRIMARY KEY, ...);
- CREATE TABLE table(c1 TYPE, ..., PRIMARY KEY(c1));
- CREATE TABLE table(c1 TYPE, ..., CONSTRAINT constraint_name PRIMARY KEY(c1));
- CREATE TABLE table(c1 TYPE, c2 TYPE, ..., PRIMARY KEY(c1, c2));



Constraints

- **FOREIGN KEY**

- Column or set of columns that references a column of some table.
- If column belongs to the same table, it is "self referencing".
- Foreign key constraint is specified on child table column.
- FK can have duplicate values as well as null values.
- FK constraint is applied on column of child table (not on parent table).
- Child rows cannot be deleted, until parent rows are deleted.
- MySQL have ON DELETE CASCADE clause to ensure that child rows are automatically deleted, when parent row is deleted. ON UPDATE CASCADE clause does same for UPDATE operation.
- By default foreign key checks are enabled. They can be disabled by
 - `SET @@foreign_key_checks = 0;`
- FK constraint can be applied on table level as well as column level.
- `CREATE TABLE child(c1 TYPE, ..., FOREIGN KEY (c1) REFERENCES parent(col))`



Constraints

- **CHECK**
 - CHECK is integrity constraint in SQL.
 - CHECK constraint specifies condition on column.
 - Data can be inserted/updated only if condition is true; otherwise error is raised.
 - CHECK constraint can be applied at table level or column level.
 - `CREATE TABLE table(c1 TYPE, c2 TYPE CHECK condition1, ..., CHECK condition2);`



DDL – ALTER statement

- ALTER statement is used to do modification into table, view, function, procedure, ...
- ALTER TABLE is used to change table structure.
- Add new column(s) into the table.
 - ALTER TABLE table ADD col TYPE;
 - ALTER TABLE table ADD c1 TYPE, c2 TYPE;
- Modify column of the table.
 - ALTER TABLE table MODIFY col NEW_TYPE;
- Rename column.
 - ALTER TABLE CHANGE old_col new_col TYPE;
- Drop a column *table name*
 - ALTER TABLE *table name* DROP COLUMN col;
- Rename table
 - ALTER TABLE table RENAME TO new_table;




MySQL Programming

- RDBMS Programming is an ISO standard – part of SQL standard – since 1992.
- SQL/PSM stands for Persistent Stored Module.
- Inspired from PL/SQL - Programming language of Oracle.
- PSM allows writing programs for RDBMS. The program contains set of SQL statements along with programming constructs e.g. variables, if-else, loops, case, ...
- PSM is a block language. Blocks can be nested into another block.
- MySQL program can be a stored procedure, function or trigger.

MySQL Programming

- MySQL PSM program is written by db user (programmers).
- It is submitted from client, server check syntax & store them into db in compiled form.
- The program can be executed by db user when needed.
- Since programs are stored on server in compiled form, their execution is very fast.
- All these programs will run in server memory.

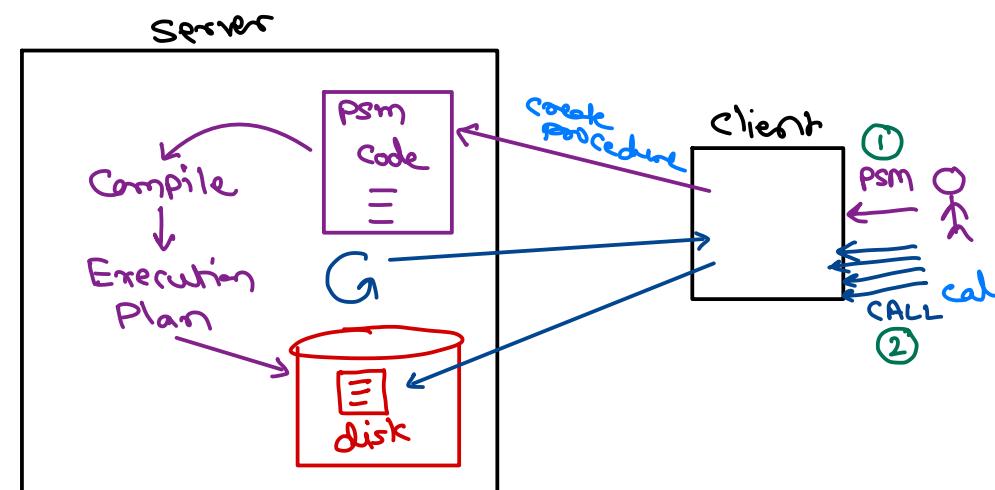

Stored Procedure

- Stored Procedure is a routine. It contains multiple SQL statements along with programming constructs. *→ no RETURN value Keyword.*
- Procedure doesn't return any value (like void fns in C).
- Procedures can take zero or more parameters.
- Procedures are created using CREATE PROCEDURE and deleted using DROP PROCEDURE.
- Procedures are invoked/called using CALL statement.
- Result of stored procedure can be
 - returned via OUT parameter.
 - inserted into another table.
 - produced using SELECT statement (at end of SP).
- Delimiter should be set before writing procedure.



Stored Procedure

```
CREATE TABLE result(v1 DOUBLE, v2 VARCHAR(50));          -- 01_hello.sql (using editor)
DELIMITER $$                                           DROP PROCEDURE IF EXISTS sp_hello;
                                                       DELIMITER $$

CREATE PROCEDURE sp_hello()                           CREATE PROCEDURE sp_hello()
BEGIN                                              BEGIN
    INSERT INTO result VALUES(1, 'Hello World');    SELECT 1 AS v1, 'Hello World' AS v2;
END;                                                 END;
$$                                                 $$

DELIMITER ;                                         DELIMITER ;
                                                       SOURCE /path/to/01_hello.sql
CALL sp_hello();                                     CALL sp_hello();

SELECT * FROM result;
```



Stored Procedure – PSM Syntax

VARIABLES

```
DECLARE varname DATATYPE;  
DECLARE varname DATATYPE DEFAULT init_value;  
SET varname = new_value;  
SELECT new_value INTO varname;  
SELECT expr_or_col INTO varname FROM table_name;
```

PARAMETERS

```
CREATE PROCEDURE sp_name(PARAMTYPE p1 DATATYPE)  
BEGIN  
...  
END;  
  
-- IN param: Initialized by calling program.  
-- OUT param: Initialized by called procedure.  
-- INOUT param: Initialized by calling program and  
modified by called procedure  
-- OUT & INOUT param declared as session variables.  
  
CREATE PROCEDURE sp_name(OUT p1 INT)  
BEGIN  
    SELECT 1 INTO p1;  
END;  
  
SET @res = 0;  
CALL sp_name(@res);  
SELECT @res;
```

IF-ELSE

```
IF condition THEN  
    body;  
END IF;  
-----  
IF condition THEN  
    if-body;  
ELSE  
    else-body;  
END IF;  
-----  
IF condition THEN  
    if1-body;  
ELSE  
    IF condition THEN  
        if2-body;  
    ELSE  
        else2-body;  
    END IF;  
END IF;  
-----  
IF condition THEN  
    if1-body;  
ELSEIF condition THEN  
    if2-body;  
ELSE  
    else-body;  
END IF;
```

LOOPS

```
WHILE condition DO  
    body;  
END WHILE;  
-----  
REPEAT  
    body;  
UNTIL condition  
END REPEAT;  
-----  
label: LOOP  
IF condition THEN  
    ...  
    LEAVE label;  
END IF;  
...  
END LOOP;
```

SHOW PROCEDURE

```
SHOW PROCEDURE STATUS  
LIKE 'sp_name';  
  
SHOW CREATE PROCEDURE sp_name;
```

DROP PROCEDURE

```
DROP PROCEDURE  
IF EXISTS sp_name;
```

CASE-WHEN

```
CASE  
WHEN condition THEN  
    body;  
WHEN condition THEN  
    body;  
ELSE  
    body;  
END CASE;
```





Thank you!

Nilesh Ghule <nilesh@sunbeaminfo.com>