



IBM Developer
SKILLS NETWORK

Winning Space Race with Data Science

Sharaf Mukhtar
15/02/2022



Outline

- Executive Summary
- Introduction
- Methodology
- Results
- Conclusion
- Appendix

Executive Summary

- Summary of methodologies
 - Data collection
 - Data wrangling
 - EDA with data visualization
 - EDA with SQL
 - Building an interactive map with Folium
 - Building a Dashboard with Plotly Dash
 - Predictive analysis (Classification)
- Summary of all results
 - Exploratory data analysis results
 - Interactive analytics demo in screenshots
 - Predictive analysis results

Introduction

- **Project background and context**

The era of commercial space has arrived, and there are several companies that are making space travel affordable for everyone. Perhaps the most successful of them is SpaceX, and one of the reasons is that their rocket launch is relatively inexpensive.

SpaceX advertises Falcon 9 rocket launches on its website, with a cost of 62 million dollars;

other providers cost upward of 165 million dollars each, much of the savings is because SpaceX can reuse the first stage.

Therefore, we will predict if the Falcon 9 first stage will land successfully. If we can determine if the first stage will land, we can determine the cost of a launch. This information can be used if an alternate company wants to bid against SpaceX for a rocket launch.

- **Problems you want to find answers**

- ❖ Correlations between each rocket variables and successful landing rate
- ❖ Conditions to get the best results and ensure the best successful landing rate

Section 1

Methodology

Methodology


Executive Summary

- Data collection methodology:
 - SpaceX API & Web Scraping Falcon 9 and [Falcon Heavy Launches Records from Wikipedia](#)
- Perform data wrangling
 - Convert outcomes into Training Labels with the booster successfully/unsuccessful landed
- Perform exploratory data analysis (EDA) using visualization and SQL
- Perform interactive visual analytics using Folium and Plotly Dash
- Perform predictive analysis using classification models
 - Find best Hyperparameter for SVM, Classification Trees and Logistic Regression


Data Collection

- The data collection process includes a combination of API requests from the SpaceX API and web scraping data from a table in the Wikipedia page of SpaceX, Falcon 9 and Falcon Heavy Launches Records.
 - SpaceX API Data Columns: FlightNumber, Date, BoosterVersion, PayloadMass, Orbit, LaunchSite, Outcome, Flights, GridFins, Reused, Legs, LandingPad, Block, ReusedCount, Serial, Longitude, Latitude
 - Wikipedia Web Scrape Data Columns: Flight No., Launch site, Payload, PayloadMass, Orbit, Customer, Launch outcome, Version Booster, Booster landing, Date, Time

SpaceX API

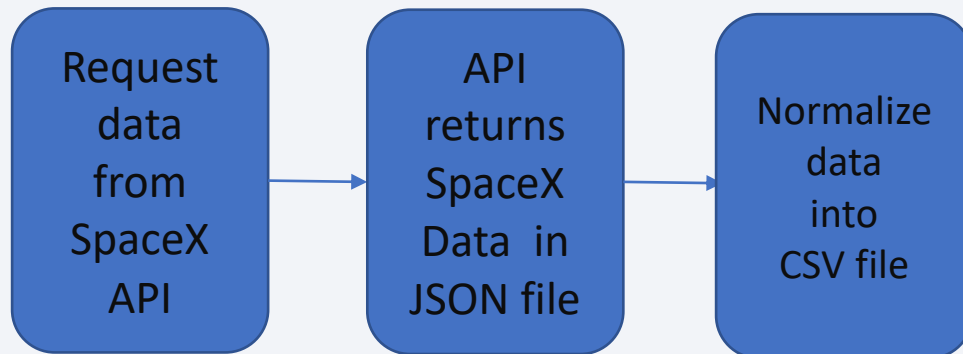

Web Scraping

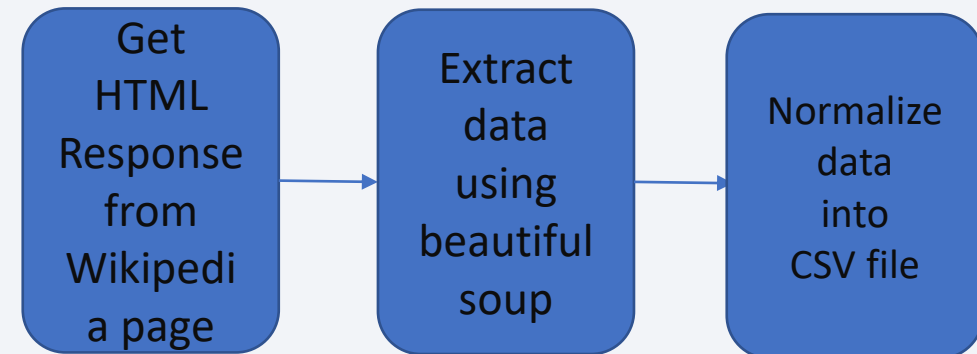

Data Collection – SpaceX API

- Requesting rocket launch data from SpaceX API

```
spacex_url="https://api.spacexdata.com/v4/launches/past"

response = requests.get(spacex_url)
```

- Converting Response to a JSON file

```
# Use json_normalize meethod to convert the json result into a dataframe
data = pd.json_normalize(response.json())
```

- Using custom functions to clean data

```
# Call getBoosterVersion
getBoosterVersion(data)
```

```
# Call getLaunchSite
getLaunchSite(data)
```

```
# Call getPayloadData
getPayloadData(data)
```

```
# Call getCoreData
getCoreData(data)
```

[GitHub URL](#)

- Combining the columns into a dictionary to create data frame

```
launch_dict = {'FlightNumber': list(data['flight_number']),
               'Date': list(data['date']),
               'BoosterVersion':BoosterVersion,
               'PayloadMass':PayloadMass,
               'Orbit':Orbit,
               'LaunchSite':LaunchSite,
               'Outcome':Outcome,
               'Flights':Flights,
               'GridFins':GridFins,
               'Reused':Reused,
               'Legs':Legs,
               'LandingPad':LandingPad,
               'Block':Block,
               'ReusedCount':ReusedCount,
               'Serial':Serial,
               'Longitude': Longitude,
               'Latitude': Latitude}
```

- Combining the columns into a dictionary to create data frame

```
# Hint data['BoosterVersion']!='Falcon 1'
data_falcon9 = data[data.BoosterVersion == 'Falcon 9']
data_falcon9
```

```
data_falcon9.to_csv('dataset_part\1.csv', index=False)
```


Data Collection - Scraping

- Getting response from HTML

```
html_data = requests.get(static_url).text
```

- Creating a BeautifulSoup object

```
# Use BeautifulSoup() to create a BeautifulSoup object from a  
soup = BeautifulSoup(html_data, 'html5lib')
```

- Finding all tables and assigning the result to a list

```
# Assign the result to a list called 'html_tables'  
html_tables = soup.find_all('table')
```

- Extracting column name one by one

```
column_names = []  
  
# Apply find_all() function with 'th' element on first_launch_  
# Iterate each th element and apply the provided extract_column  
# Append the Non-empty column name (if name is not None and 1  
for row in first_launch_table.find_all('th'):  
    name = extract_column_from_header(row)  
    if (name != None and len(name) > 0):  
        column_names.append(name)
```

[GitHub URL](#)

- Creating an empty dictionary with keys

```
launch_dict= dict.fromkeys(column_names)  
  
# Remove an irrelevant column  
del launch_dict['Date and time ( )']  
  
# Let's initial the launch_dict with  
launch_dict['Flight No.'] = []  
launch_dict['Launch site'] = []  
launch_dict['Payload'] = []  
launch_dict['Payload mass'] = []  
launch_dict['Orbit'] = []  
launch_dict['Customer'] = []  
launch_dict['Launch outcome'] = []  
# Added some new columns  
launch_dict['Version Booster']=[]  
launch_dict['Booster landing']=[]  
launch_dict['Date']=[]  
launch_dict['Time']=[]
```

- Filling up the launch_dict with launch records (*refer to the notebook*)
- Creating a Dataframe and exporting it to a CSV

```
df=pd.DataFrame(launch_dict)
```

```
df.to_csv('spacex_web_scraped.csv', index=False)
```

Data Wrangling

- There are several cases in which the booster failed to successfully land on the dataset, and sometimes it attempted to land but failed because of accident.
 - ❖ True Ocean: the mission result has successfully landed in a specific area of the ocean
 - ❖ False Ocean: the mission result has not successfully landed in a specific area of the ocean
 - ❖ True RTLS: the mission result successfully landed on the ground pad
 - ❖ False RTLS: the mission result has not successfully landed on the ground pad
 - ❖ True ASDS: the mission result has successfully landed on the drone ship
 - ❖ False ASDS: the mission result has not landed on the drone ship
- Converting these results into training labels:
 - ❖ 1 = successful / 0 = failure

[GitHub URL](#)

Data Wrangling

- Calculating the number of launches at each site

```
# Apply value_counts() on column LaunchSite
df['LaunchSite'].value_counts()
```

- Calculating the number and occurrence of each orbit

```
# Apply value_counts on Orbit column
df['Orbit'].value_counts()
```

- Calculating the number and occurrence of mission outcome per orbit type

```
# landing_outcomes = values on Outcome column
landing_outcomes = df.Outcome.value_counts()
landing_outcomes
```

- Creating a landing outcome label from Outcome column

```
landing_class = []
for outcome in df.Outcome:
    if outcome in bad_outcomes:
        landing_class.append(0)
    else:
        landing_class.append(1)

df['Class'] = landing_class
```

- Calculating the success rate for every landing in dataset

```
df["Class"].mean()
0.6666666666666666
```

- Exporting dataset to a CSV

```
df.to_csv("dataset_part_2.csv", index=False)
```

EDA with Data Visualization

- Scatter chart:
 - ❖ Flight Number vs. Launch Site
 - ❖ Payload vs. Launch Site
 - ❖ Flight Number vs. Orbit Type
 - ❖ Payload vs. Orbit Type
 - ❖ A scatter plot shows how much one variable is affected by another. The relationship between two variables is called a correlation. This plot is generally composed of large data bodies.
- Bar chart:
 - ❖ Orbit Type vs. Success Rate
 - ❖ A Bar chart makes it easy to compare datasets between multiple groups briefly. One axis represents a category, and the other axis represents a discrete value. The purpose of this chart is to indicate the relationship between the two axes.
- Line chart:
 - Year vs. Success Rate
 - A Line chart shows data variables and trends very clearly and helps predict the results of data that has not yet been recorded.

EDA with SQL

- Loading the dataset into the corresponding table in a Db2 database, and executing SQL queries to answer following questions:
 - ❖ Displaying the names of the unique launch sites in the space mission
 - ❖ Displaying 5 records where launch sites begin with the string 'CCA'
 - ❖ Displaying the total payload mass carried by boosters launched by NASA (CRS)
 - ❖ Displaying average payload mass carried by booster version F9 v1.1.
 - ❖ Listing the date when the first successful landing outcome in ground pad was achieved
 - ❖ Listing the names of the boosters which have success in drone ship and have payload mass greater than 4000 but less than 6000
 - ❖ Listing the total number of successful and failure mission outcomes
 - ❖ Listing the names of the booster_versions which have carried the maximum payload mass
 - ❖ Listing the failed landing_outcomes in drone ship, their booster versions, and launch site names for in year 2015
 - ❖ Ranking the count of landing outcomes (such as Failure (drone ship) or Success (ground pad)) between the date 2010-06-04 and 2017-03-20, in descending order

Build an Interactive Map with Folium

- Objects created and added to a folium map:
 - ❖ Markers that show all launch sites on a map
 - ❖ Markers that show the success/failed launches for each site on the map
 - ❖ Lines that show the distances between a launch site to its proximities
- By adding these objects, following geographical patterns about launch sites are found:
 - ❖ Are launch sites near railways? Yes
 - ❖ Are launch sites near highways? Yes
 - ❖ Are launch sites near coastline? Yes
 - ❖ Do launch sites keep certain distance away from cities? Yes

[GitHub URL](#)

Build a Dashboard with Plotly Dash


- The dashboard application contains a pie chart and a scatter point chart.
 - ❖ Pie chart
 - Lines that show the distances between a launch site to its proximities
 - This chart can be selected to indicate a successful landing distribution across all launch sites or to indicate the success rate of individual launch sites.
 - ❖ Scatter chart
 - For showing the relationship between Outcomes and Payload mass (Kg) by different boosters
 - Has 2 inputs: All sites/individual site & Payload mass on a slider between 0 and 10000 Kg
 - This chart helps determine how success depends on the launch point, payload mass, and booster version categories.

[GitHub URL](#)

Predictive Analysis (Classification)

- Perform exploratory Data Analysis
 - Create a column for the class
 - Standardize the data
 - Split into training data and test data
- Find best Hyperparameter for SVM, Classification Trees and Logistic ,Regression
 - Find the method performs best using test data

[GitHub URL](#)

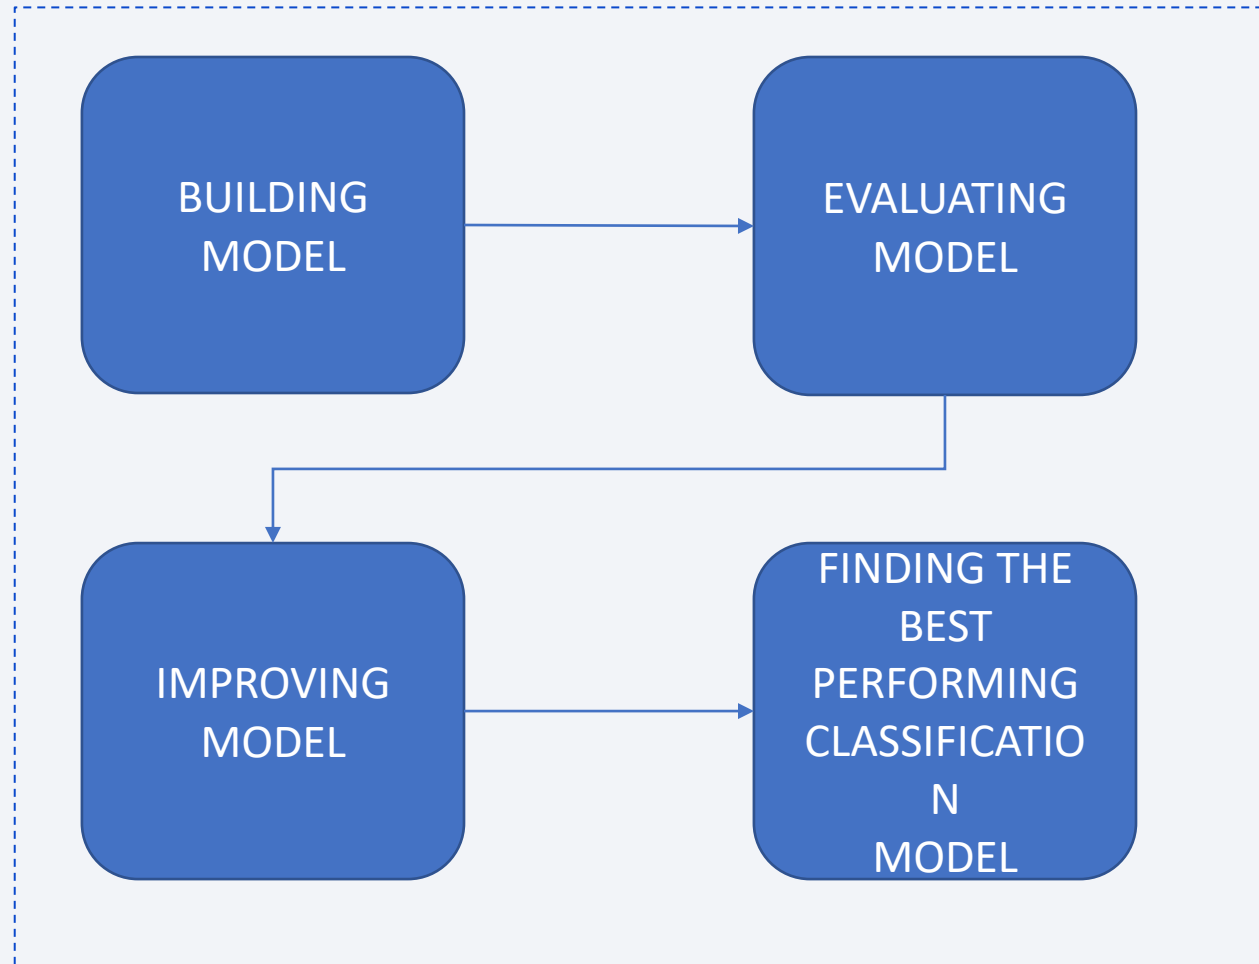

Results

SpaceX Launch Records Dashboard


All Sites

Total Success Launches By Site



Payload range (Kg):

Correlation between Payload and Success for all Sites

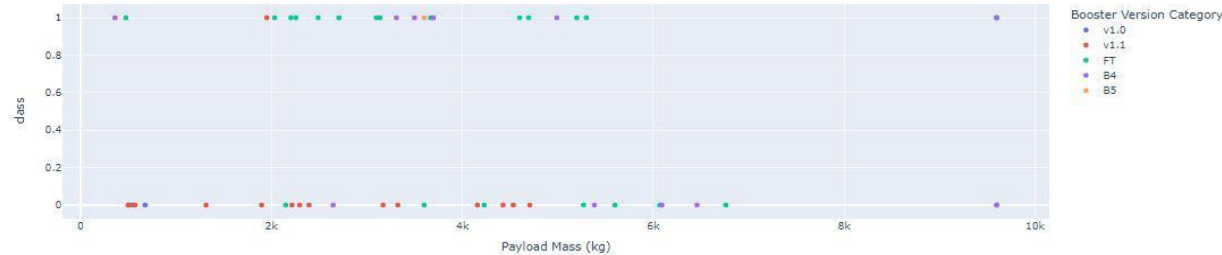


- ❖ The left screenshot is a preview of the Dashboard with Plotly Dash.
- ❖ The results of EDA with visualization, EDA with SQL, Interactive Map with Folium, and Interactive Dashboard will be shown in the next slides.

The background of the slide is an abstract composition. It features a solid blue area on the left side, which transitions into a dynamic pattern of diagonal streaks in shades of blue and red on the right. These streaks are layered over a fine, light-colored grid, creating a sense of depth and movement, reminiscent of a digital or data visualization theme.

Section 2


Insights drawn from EDA

Flight Number vs. Launch Site

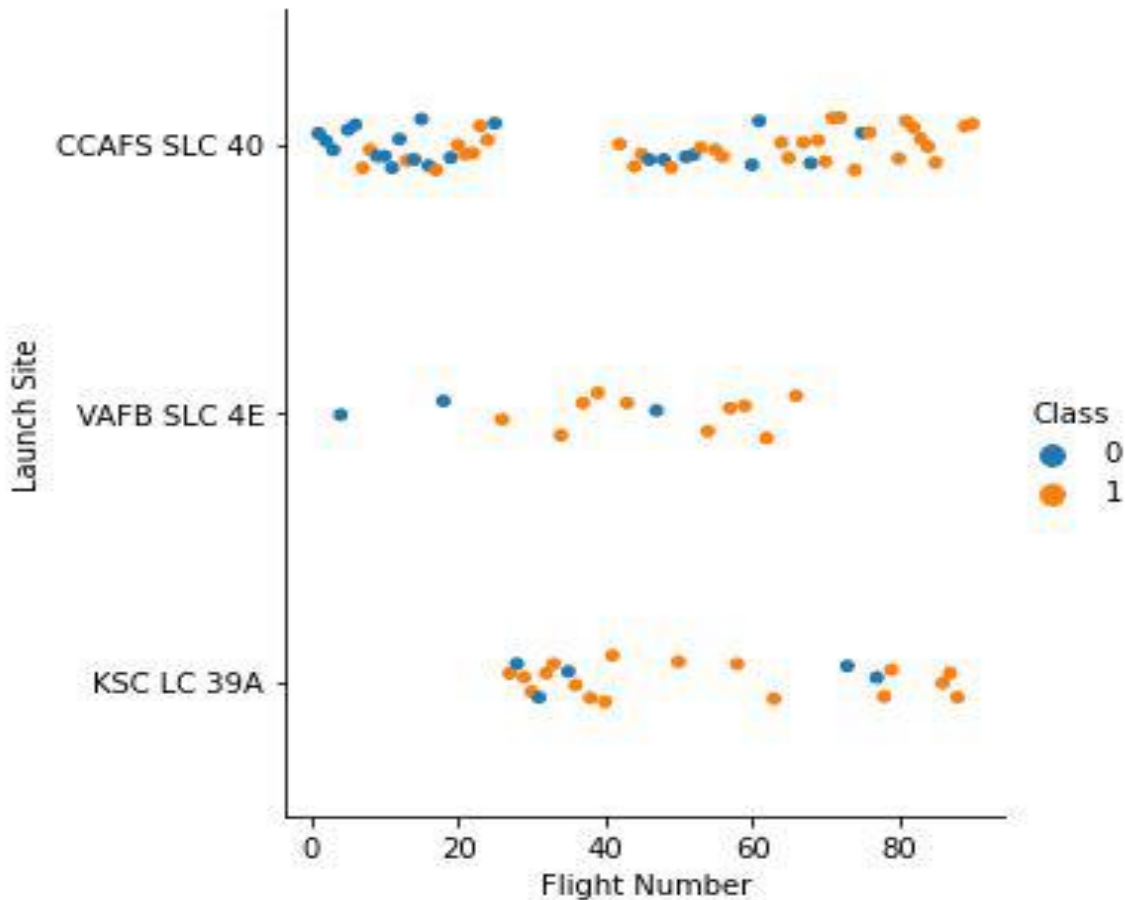


- ❖ Class 0 (blue) represents unsuccessful launch, and Class 1 (orange) represents successful launch.
- ❖ This figure shows that the success rate increased as the number of flights increased.
- ❖ As the success rate has increased considerably since the 20th flight, this point seems to be a big breakthrough.

Payload vs. Launch Site

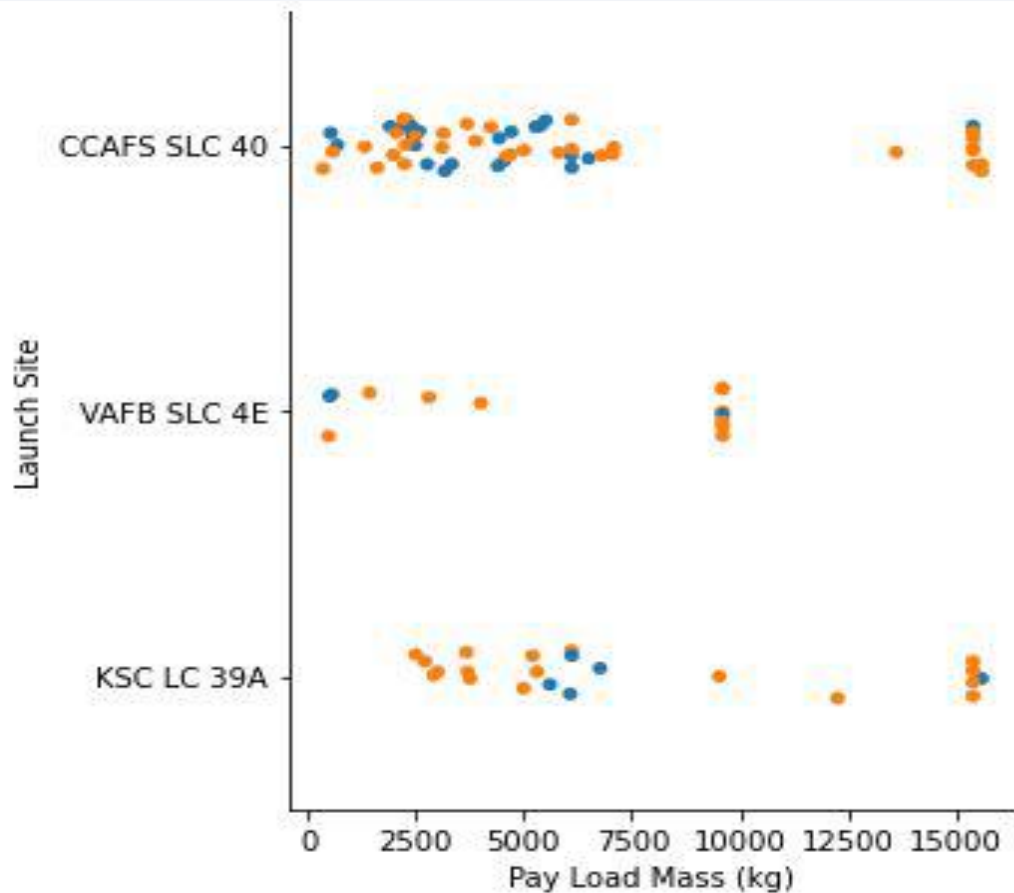


- ❖ Class 0 (blue) represents unsuccessful launch, and Class 1 (orange) represents successful launch.
- ❖ At first glance, the larger pay load mass, the higher the rocket's success rate, but it seems difficult to make decisions based on this figure because no clear pattern can be found between successful launch and Pay Load Mass.

Success Rate vs. Orbit Type

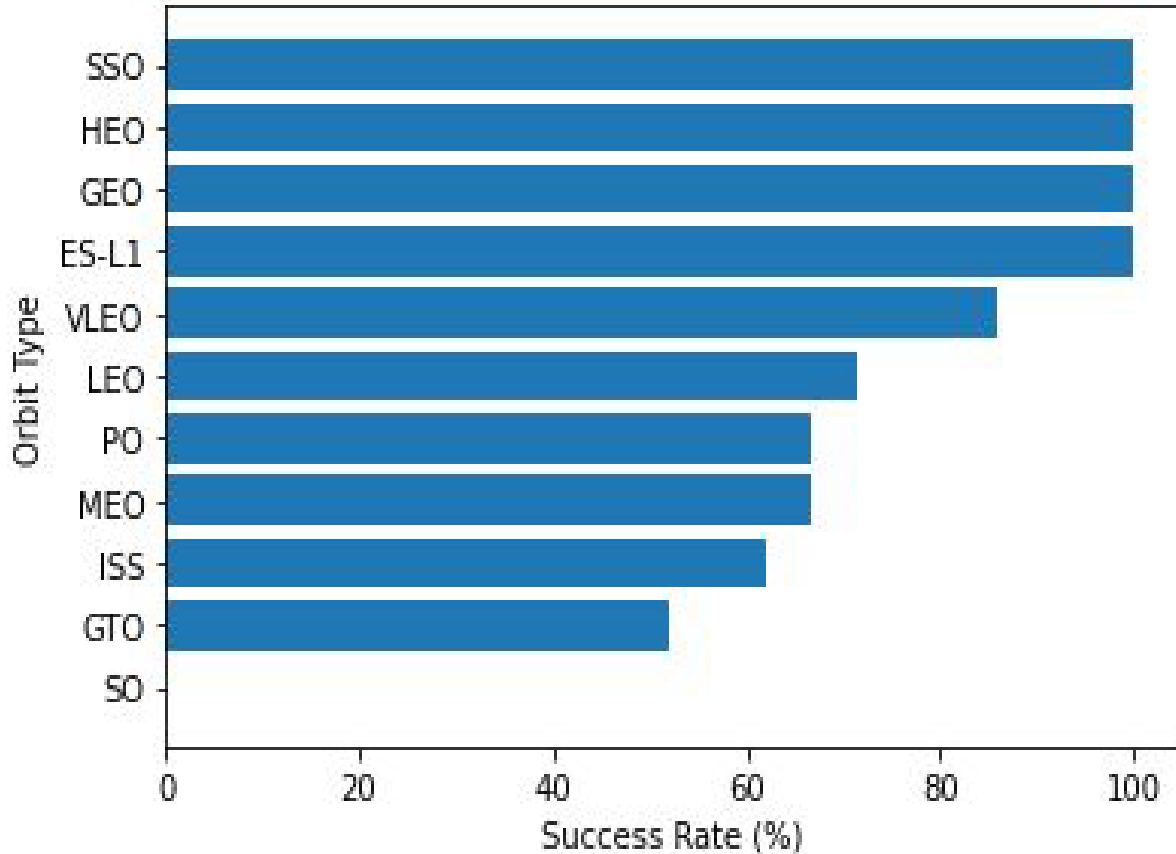


- ❖ Orbit types SSO, HEO, GEO, and ES-L1 have the highest success rates (100%).
- ❖ On the other hand, the success rate of orbit type GTO is only 50%, and it is the lowest except for type SO, which recorded failure in a single attempt.

Flight Number vs. Orbit Type

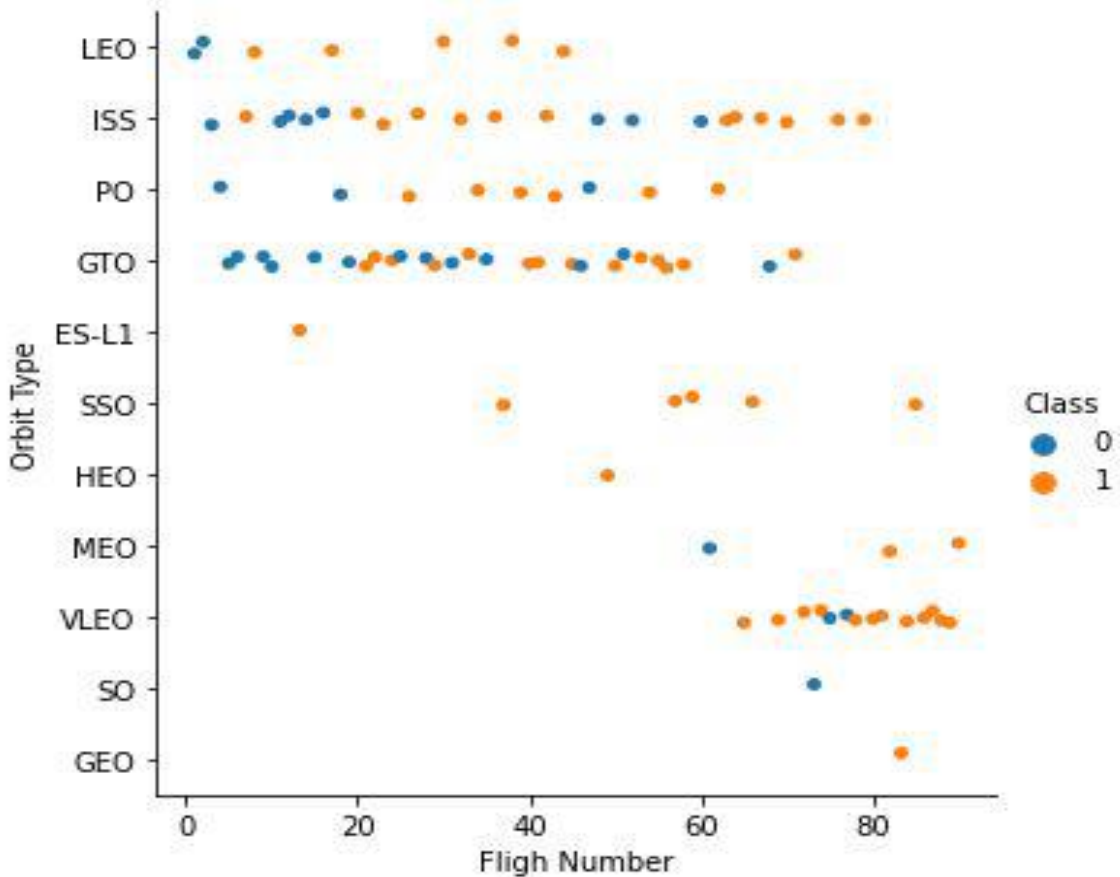


- ❖ Class 0 (blue) represents unsuccessful launch, and Class 1 (orange) represents successful launch.
- ❖ In most cases, the launch outcome seems to be correlated with the flight number.
- ❖ On the other hand, in GTO orbit, there seems to be no relationship between flight numbers and success rate.
- ❖ SpaceX starts with LEO with a moderate success rate, and it seems that VLEO, which has a high success rate, is used the most in recent launches.

Payload vs. Orbit Type

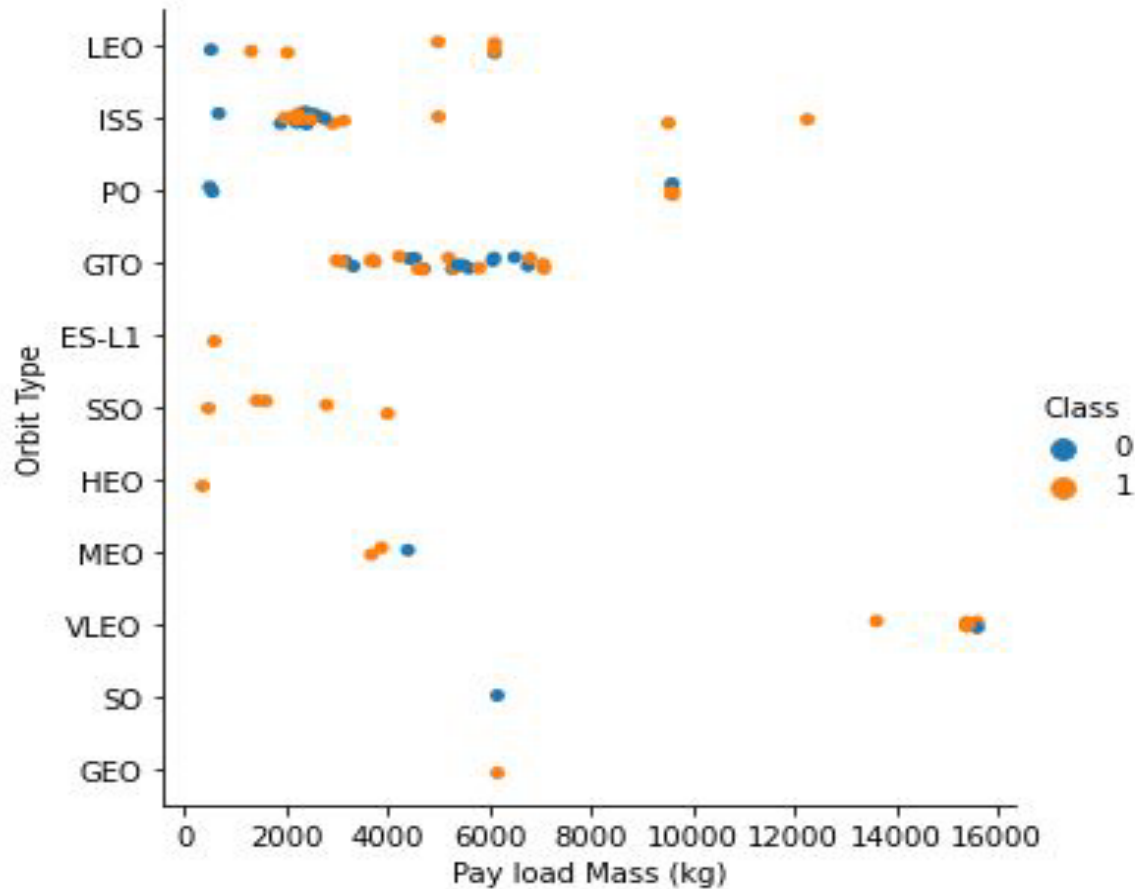

- ❖ Class 0 (blue) represents unsuccessful launch, and Class 1 (orange) represents successful launch.
- ❖ With heavy payloads the successful landing or positive landing rate are more for LEO and ISS.
- ❖ However, in the case of GTO, it is hard to distinguish between the positive landing rate and the negative landing because they are all gathered together.

Launch Success Yearly Trend

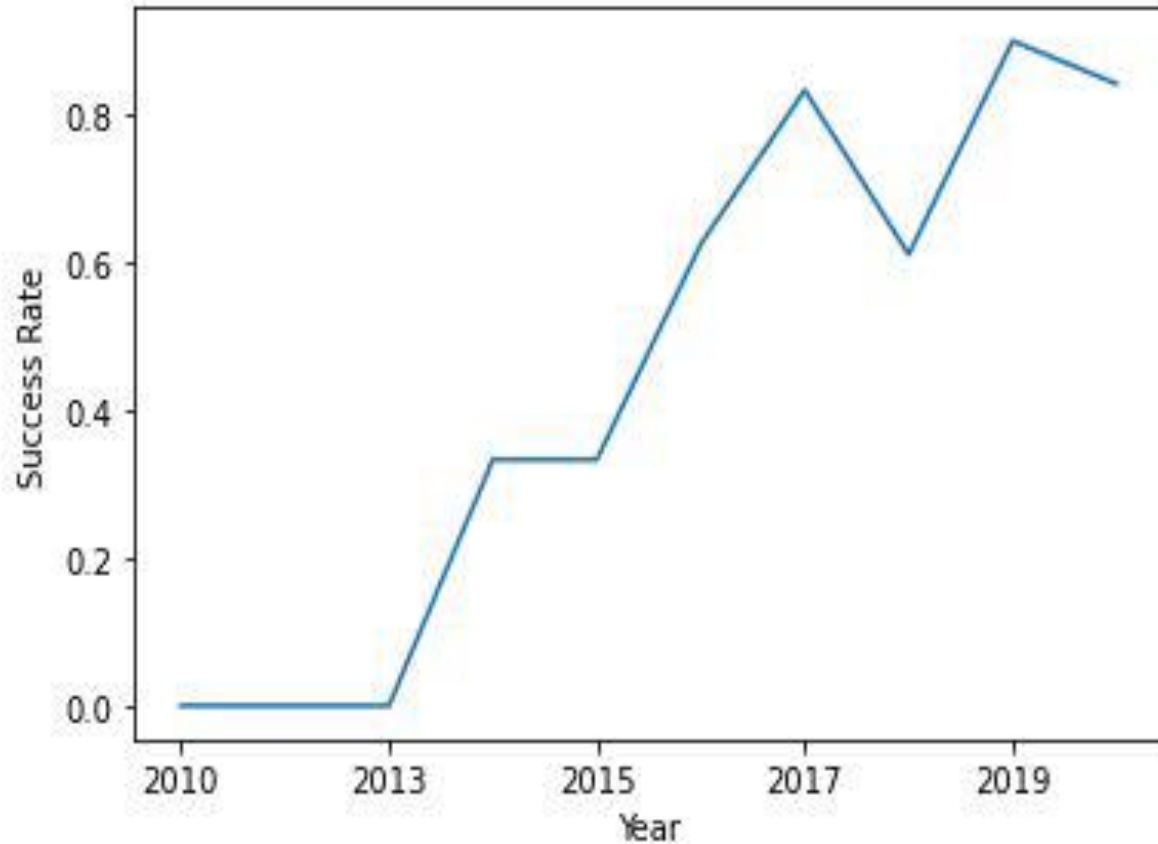

- ❖ Since 2013, the success rate has continued to increase until 2017.
- ❖ The rate decreased slightly in 2018.
- ❖ Recently, it has shown a success rate of about 80%.



Section 3

EDA with SQL

All Launch Site Names

❖ Query

```
SELECT DISTINCT LAUNCH_SITE  
FROM SPACEXTBL
```

❖ Result

| launch_site |
|--------------|
| CCAFS LC-40 |
| CCAFS SLC-40 |
| KSC LC-39A |
| VAFB SLC-4E |

- ❖ When the SQL DISTINCT clause is used in the query, only unique values are displayed in the Launch_Site column from the SpaceX table.
- ❖ There are four unique launch sites: CCAFS LC-40, CCAFS SLC-40, KSC LC-39A, VAFB SLC-4E

Launch Site Names Begin with 'CCA'

❖ Query

```
SELECT * FROM SPACEXTBL
WHERE LAUNCH_SITE LIKE 'CCA%'
LIMIT 5
```

- ❖ Only five records of the SpaceX table were displayed using LIMIT 5 clause in the query.
- ❖ Using the LIKE operator and the percent sign (%) together, the Launch_Site name starting with CAA could be called.

❖ Result

| DATE | time__utc_ | booster_version | launch_site | payload | payload_mass__kg_ | orbit | customer | mission_outcome | landing__outcome |
|------------|------------|-----------------|-------------|---------------------------------------------------------------|-------------------|-----------|-----------------|-----------------|---------------------|
| 2010-06-04 | 18:45:00 | F9 v1.0 B0003 | CCAFS LC-40 | Dragon Spacecraft Qualification Unit | 0 | LEO | SpaceX | Success | Failure (parachute) |
| 2010-12-08 | 15:43:00 | F9 v1.0 B0004 | CCAFS LC-40 | Dragon demo flight C1, two CubeSats, barrel of Brouere cheese | 0 | LEO (ISS) | NASA (COTS) NRO | Success | Failure (parachute) |
| 2012-05-22 | 07:44:00 | F9 v1.0 B0005 | CCAFS LC-40 | Dragon demo flight C2 | 525 | LEO (ISS) | NASA (COTS) | Success | No attempt |
| 2012-10-08 | 00:35:00 | F9 v1.0 B0006 | CCAFS LC-40 | SpaceX CRS-1 | 500 | LEO (ISS) | NASA (CRS) | Success | No attempt |
| 2013-03-01 | 15:10:00 | F9 v1.0 B0007 | CCAFS LC-40 | SpaceX CRS-2 | 677 | LEO (ISS) | NASA (CRS) | Success | No attempt |

Total Payload Mass

❖ Query

```
SLECT SUM(PAYLOAD_MASS__KG_)
AS total_payload_mass_kg
FROM SPACEXTBL
WHERE CUSTOMER = 'NASA (CRS)'
```

❖ Result

| total_payload_mass_kg |
|-----------------------|
| 45596 |

- ❖ Using the SUM() function to calculate the sum of column PAYLOAD_MASS__KG_.
- ❖ In the WHERE clause, filter the dataset to perform calculations only if Customer is NASA (CRS).

Average Payload Mass by F9 v1.1

❖ Query

```
SELECT AVG(PAYLOAD_MASS__KG_)
AS avg_payload_mass_kg
FROM SPACEXTBL
WHERE BOOSTER_VERSION = 'F9 v1.1'
```

❖ Result

| avg_payload_mass_kg |
|---------------------|
| 2928 |

- ❖ Using the AVG() function to calculate the average value of column PAYLOAD_MASS__KG_.
- ❖ In the WHERE clause, filter the dataset to perform calculations only if Booster_version is F9 v1.1.

First Successful Ground Landing Date

❖ Query

```
SELECT MIN(DATE)
AS first_successful_landing_date
FROM SPACEXTBL
WHERE LANDING__OUTCOME
= 'Success (ground pad)'
```

❖ Result

| first_successful_landing_date |
|-------------------------------|
| 2015-12-22 |

- ❖ Using the MIN() function to find out the earliest date in the column DATE.
- ❖ In the WHERE clause, filter the dataset to perform a search only if Landing__outcome is Success (ground pad).

Successful Drone Ship Landing with Payload between 4000 and 6000

❖ Query

```
SELECT BOOSTER_VERSION  
FROM SPACEXTBL  
WHERE LANDING__OUTCOME = 'Success (drone  
ship)' AND (PAYLOAD_MASS__KG_ BETWEEN 4000  
AND 6000)
```

❖ Result

| booster_version |
|-----------------|
| F9 FT B1022 |
| F9 FT B1026 |
| F9 FT B1021.2 |
| F9 FT B1031.2 |

- ❖ In the WHERE clause, filter the dataset to perform a search if Landing__outcome is Success (drone ship).
 - Using the AND operator to display a record if additional condition PAYLOAD_MASS__KG_ is between 4000 and 6000.

Total Number of Successful and Failure Mission Outcomes

❖ Query

```
SELECT MISSION_OUTCOME,  
COUNT(*) AS total_number  
FROM SPACEXTBL  
GROUP BY MISSION_OUTCOME
```

❖ Result

| mission_outcome | total_number |
|----------------------------------|--------------|
| Failure (in flight) | 1 |
| Success | 99 |
| Success (payload status unclear) | 1 |

- ❖ Using the COUNT() function to calculate the total number of columns.
- ❖ Using the GROUP BY statement, groups rows that have the same values into summary rows to find the total number in each Mission_outcome.
- ❖ According to the result, SpaceX seems to have successfully completed nearly 99% of its missions.

Boosters Carried Maximum Payload

❖ Query

```
SELECT DISTINCT BOOSTER_VERSION,  
PAYLOAD_MASS__KG_  
FROM SPACEXTBL  
WHERE PAYLOAD_MASS__KG_ = (  
SELECT MAX(PAYLOAD_MASS__KG_)  
FROM SPACEXTBL)
```

- ❖ Using a subquery, first, find the maximum value of the payload by using MAX() function, and second, filter the dataset to perform a search if PAYLOAD_MASS__KG_ is the maximum value of the payload.
- ❖ According to the result, version F9 B5 B10xx.x boosters could carried the maximum payload.

❖ Result

| booster_version | payload_mass__kg_ |
|-----------------|-------------------|
| F9 B5 B1048.4 | 15600 |
| F9 B5 B1048.5 | 15600 |
| F9 B5 B1049.4 | 15600 |
| F9 B5 B1049.5 | 15600 |
| F9 B5 B1049.7 | 15600 |
| F9 B5 B1051.3 | 15600 |
| F9 B5 B1051.4 | 15600 |
| F9 B5 B1051.6 | 15600 |
| F9 B5 B1056.4 | 15600 |
| F9 B5 B1058.3 | 15600 |
| F9 B5 B1060.2 | 15600 |
| F9 B5 B1060.3 | 15600 |

2015 Launch Records

❖ Query

```
SELECT LANDING__OUTCOME,  
BOOSTER_VERSION,  
LAUNCH_SITE  
FROM SPACEXTBL  
WHERE LANDING__OUTCOME  
= 'Failure (drone ship)'  
AND YEAR(DATE) = '2015'
```

- ❖ In the WHERE clause, filter the dataset to perform a search if Landing__outcome is Failure (drone ship).
 - Using the AND operator to display a record if additional condition YEAR is 2015.
- ❖ In 2015, there were two landing failures on drone ships.

❖ Result

| landing__outcome | booster_version | launch_site |
|----------------------|-----------------|-------------|
| Failure (drone ship) | F9 v1.1 B1012 | CCAFS LC-40 |
| Failure (drone ship) | F9 v1.1 B1015 | CCAFS LC-40 |

Rank Landing Outcomes Between 2010-06-04 and 2017-03-20

❖ Query

```
SELECT LANDING__OUTCOME,  
COUNT(LANDING__OUTCOME) AS total_number  
FROM SPACEXTBL  
WHERE DATE BETWEEN '2010-06-04' AND '2017-  
03-20'  
GROUP BY LANDING__OUTCOME  
ORDER BY total_number DESC
```

- ❖ In the WHERE clause, filter the dataset to perform a search if the date is between 2010-06-04 and 2017-03-20.
- ❖ Using the ORDER BY keyword to sort the records by total number of landing, and using DESC keyword to sort the records in descending order.
- ❖ According to the results, the number of successes and failures between 2010-06-04 and 2017-03-20 was similar.

❖ Result


| landing__outcome | total_number |
|------------------------|--------------|
| No attempt | 10 |
| Failure (drone ship) | 5 |
| Success (drone ship) | 5 |
| Controlled (ocean) | 3 |
| Success (ground pad) | 3 |
| Failure (parachute) | 2 |
| Uncontrolled (ocean) | 2 |
| Precluded (drone ship) | 1 |

A satellite view of Earth from space, showing the curvature of the planet and city lights at night. The image is a composite of a dark blue sky with stars and a view of the Earth's surface from space. The Earth's surface is mostly dark, with a thin layer of atmosphere visible as a light blue arc. The city lights are concentrated in the lower right quadrant, showing a dense network of urban areas. The text "Section 4" is located in the upper left quadrant.

Section 4

Launch Sites Proximities Analysis

All Launch Sites' Locations

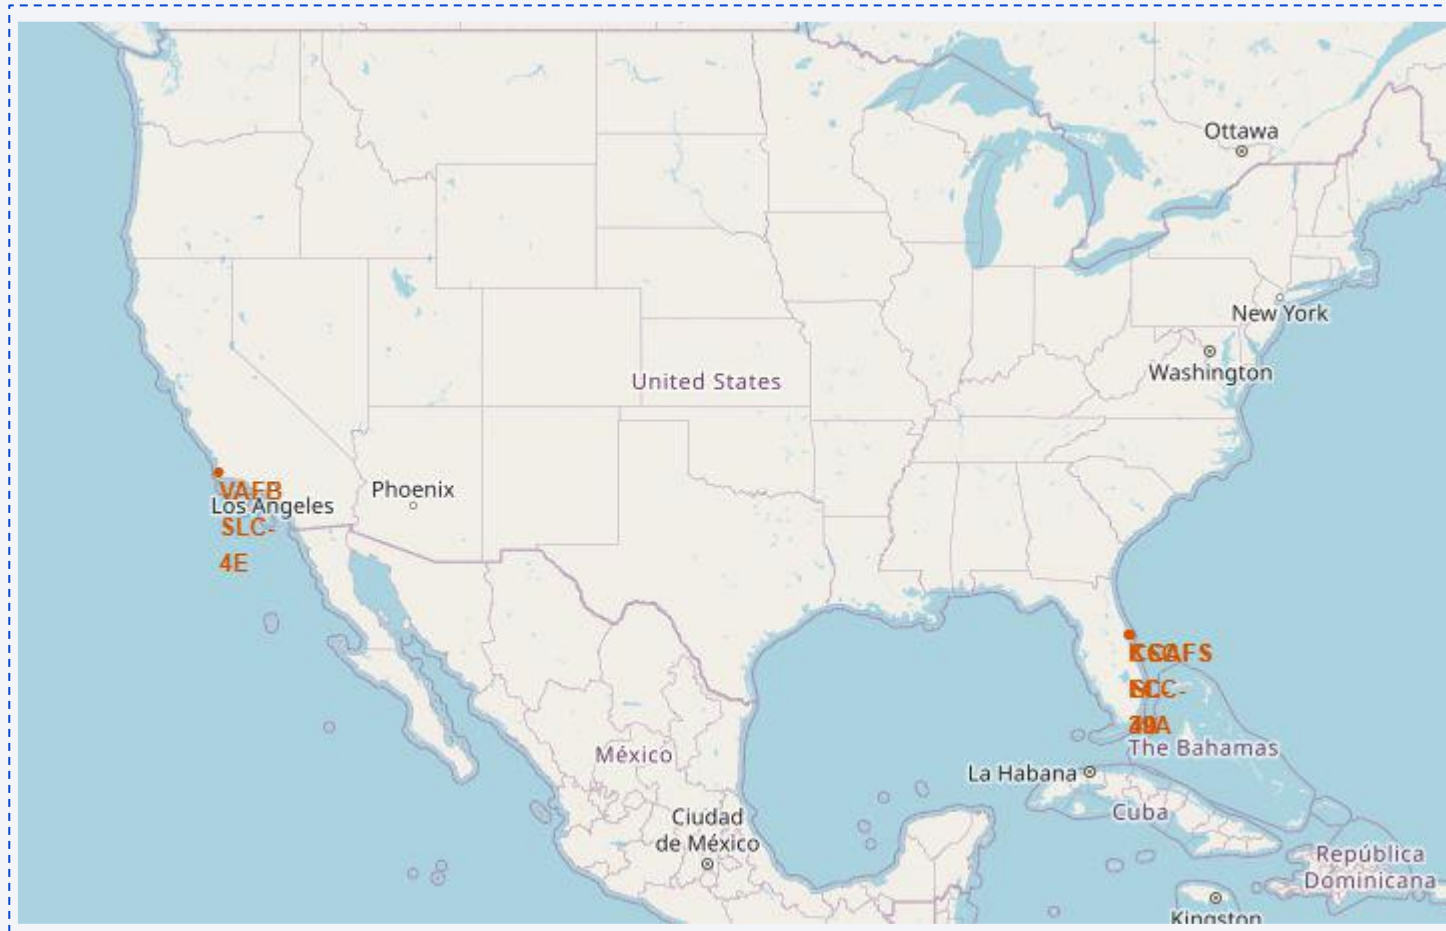

- ❖ The left map shows all SpaceX launch sites, and the right map also shows that all launch sites are in the United States.
- ❖ As can be seen on the map, all launch sites are near the coast.

Color-labeled Launch Outcomes




Launch site in California




Launch sites in Florida

- ❖ By clicking on the marker clusters, successful landing (**green**) or failed landing (**red**) are displayed.

Proximities of Launch Sites

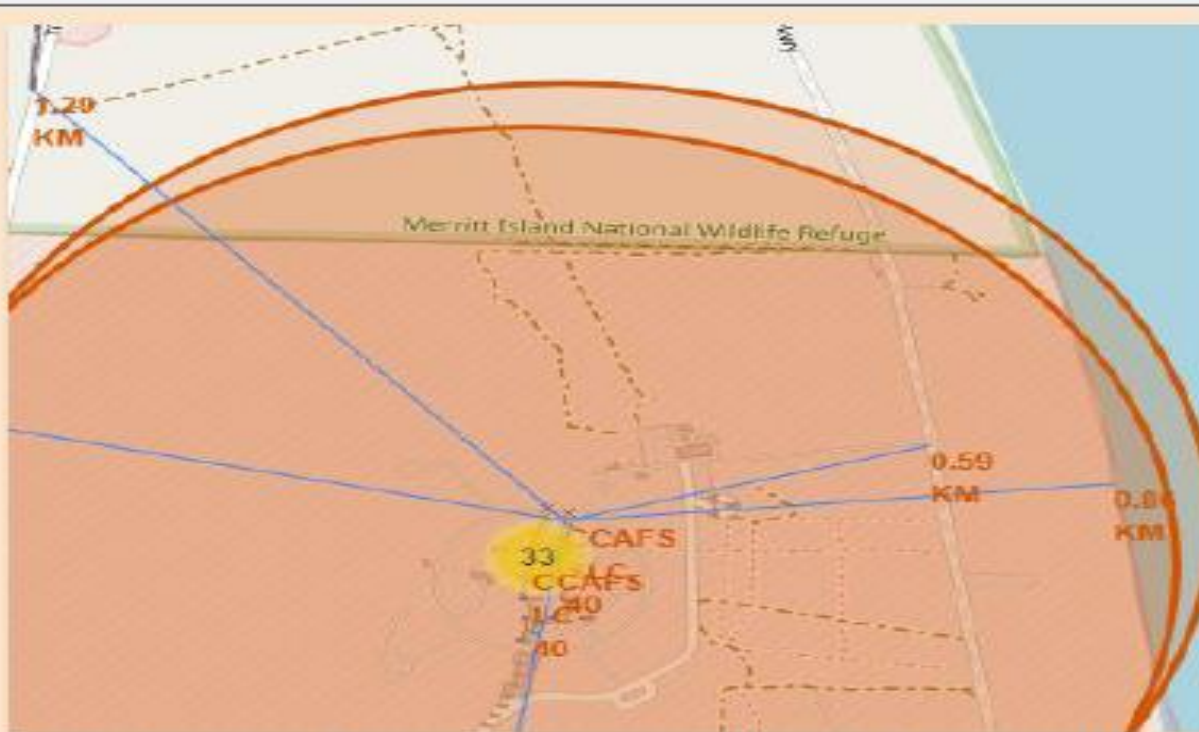

Are launch sites in close proximity to railways? **Yes**
Are launch sites in close proximity to highways? **Yes**
Are launch sites in close proximity to coastline? **Yes**

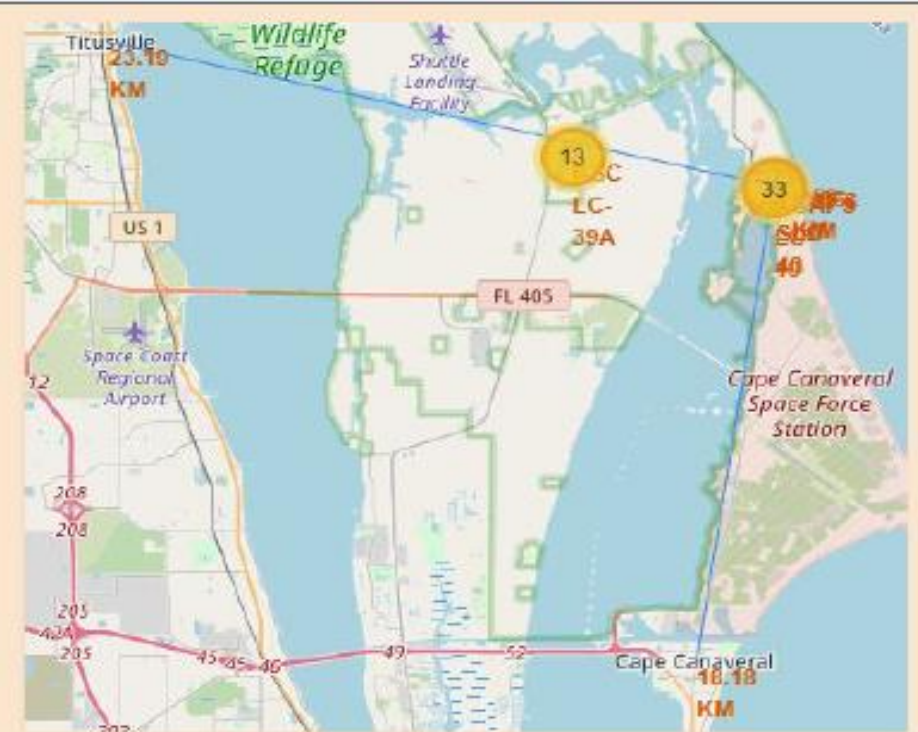

Do launch sites keep certain distance away from cities? **Yes**


- ❖ It can be found that the launch site is close to railways and highways for transportation of equipment or personnel, and is also close to coastline and relatively far from the cities so that launch failure does not pose a threat.



Section 5

Build a Dashboard with Plotly Dash

Total Success Launches By all sites

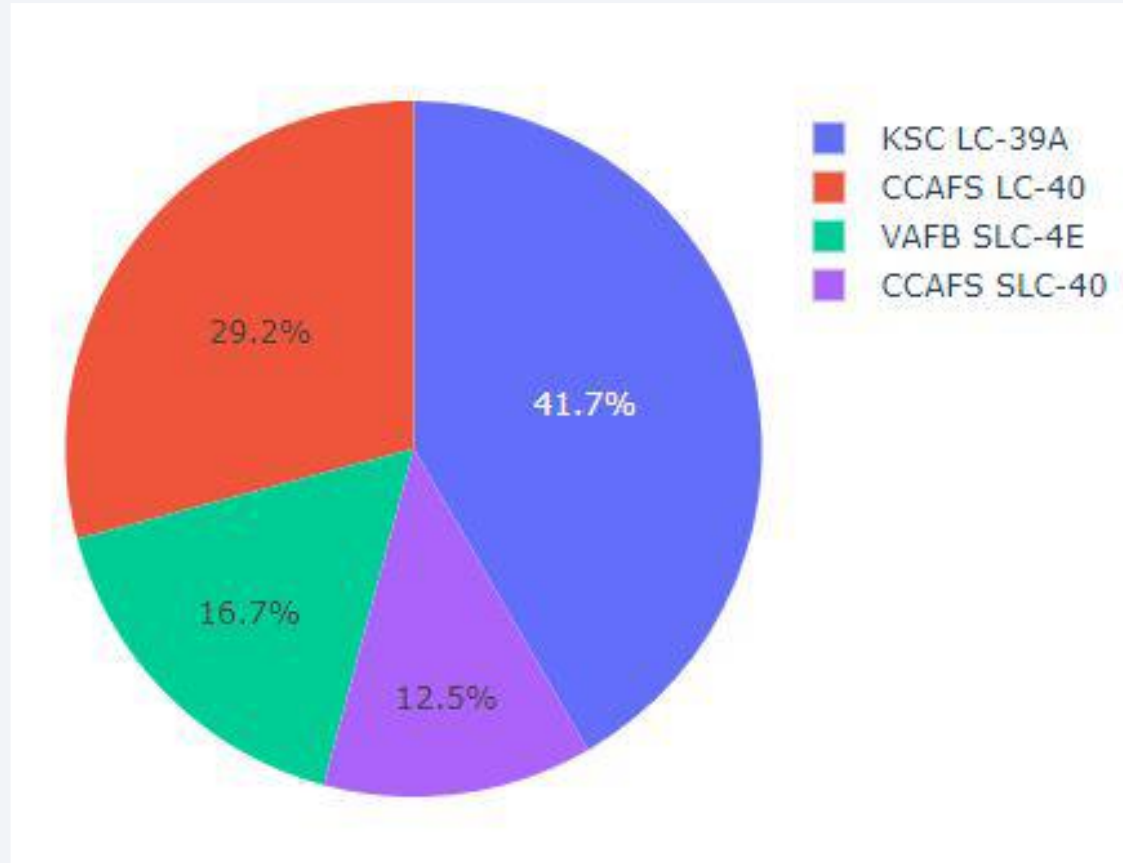


- ❖ KSLC-39A records the most launch success among all sites.
- ❖ The VAFB SLC-4E has the fewest launch success, possibly because:
 - the data sample is small
 - it is the only site located in California, so the launch difficulty on the west coast may be higher than on the east coast.

Launch Site with Highest Launch Success Ratio



- ❖ KSLC-39A has the highest success rate with 10 landing successes (76.9%) and 3 landing failures (23.1%).

Payload vs. Launch Outcome Scatter Plot for all sites

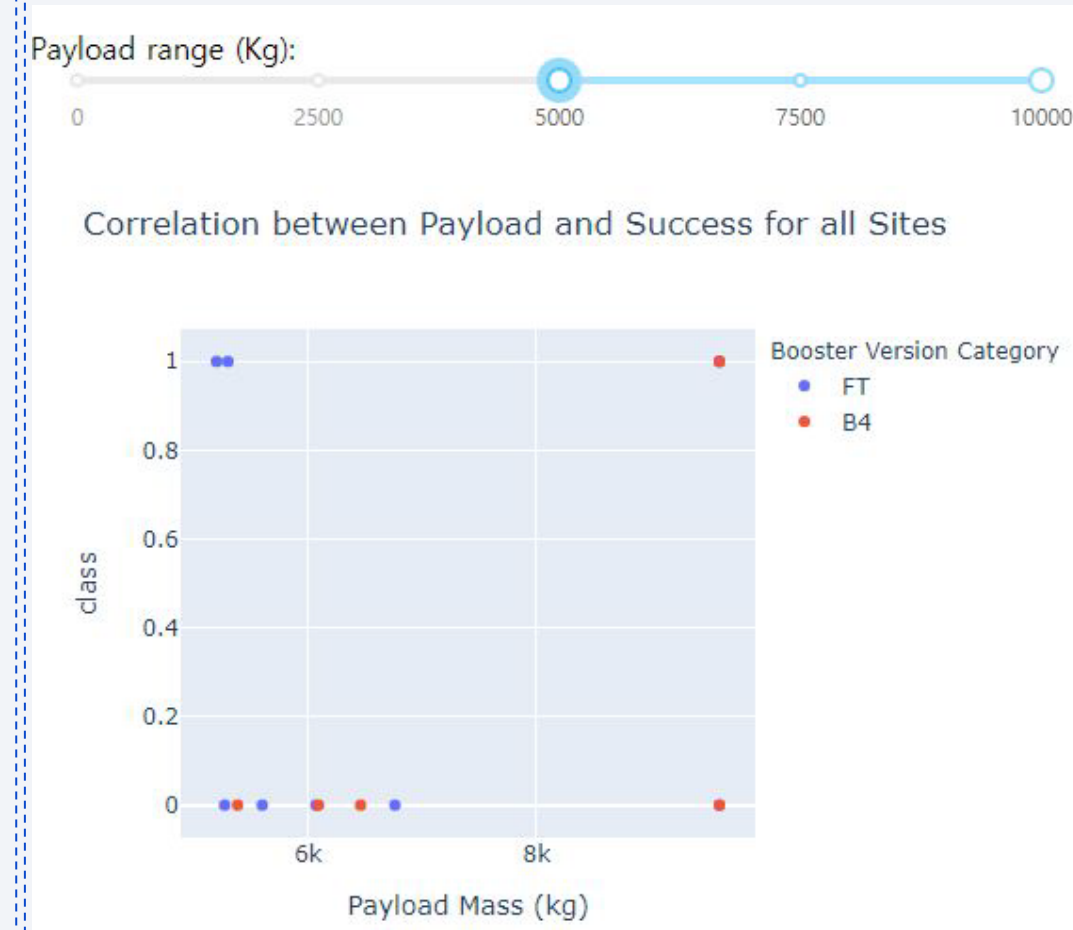


- ❖ These figures show that the launch success rate (class 1) for low weighted
- ❖ payloads(0-5000 kg) is higher than that of heavy weighted payloads(5000-10000 kg).

Section 6

Predictive Analysis (Classification)


Classification Accuracy

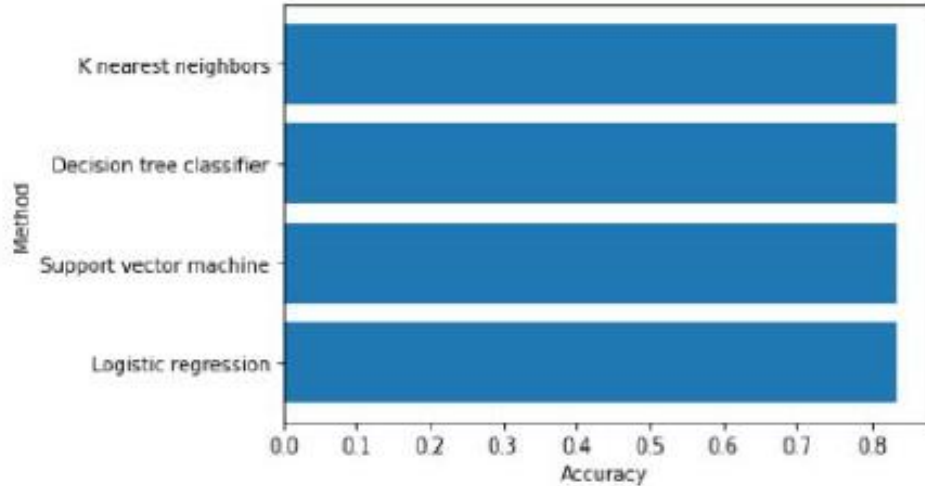

| | Method | Accuracy |
|---|--------------------------|----------|
| 0 | Logistic regression | 0.833333 |
| 1 | Support vector machine | 0.833333 |
| 2 | Decision tree classifier | 0.833333 |
| 3 | K nearest neighbors | 0.833333 |

- ❖ In the test set, the accuracy of all models was virtually the same at 83.33%.
- ❖ It should be noted that the test size was small at 18.
- ❖ Therefore, more data is needed to determine the optimal model.

Confusion Matrix

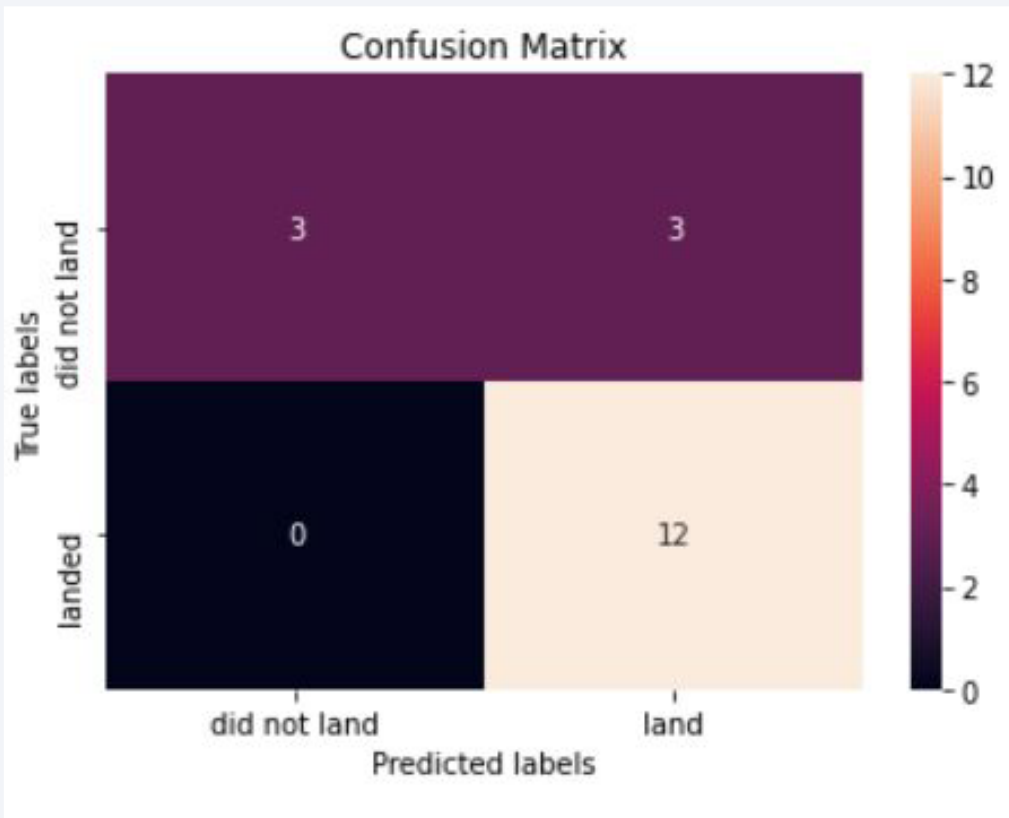

- ❖ The confusion matrix is the same for all models because all models performed the same for the test set.
- ❖ The models predicted 12 successful landings when the true label was successful and 3 failed landings when the true label was failure. But there were also 3 predictions that said successful landings when the true label was failure (false positive).
- ❖ Overall, these models predict successful landings.

Conclusions

- ❖ As the number of flights increased, the success rate increased, and recently it has exceeded 80%.
- ❖ Orbital types SSO, HEO, GEO, and ES-L1 have the highest success rate (100%).
- ❖ The launch site is close to railways, highways, and coastline, but far from cities.
- ❖ KSLC-39A has the highest number of launch successes and the highest success rate among all sites.
- ❖ The launch success rate of low weighted payloads is higher than that of heavy weighted payloads.
- ❖ In this dataset, all models have the same accuracy (83.33%), but it seems that more data is needed to determine the optimal model due to the small data size.

Appendix

❖ GitHub URL

❖ Coursera Applied Data Science Capstone
Course URL

Thank you!

