

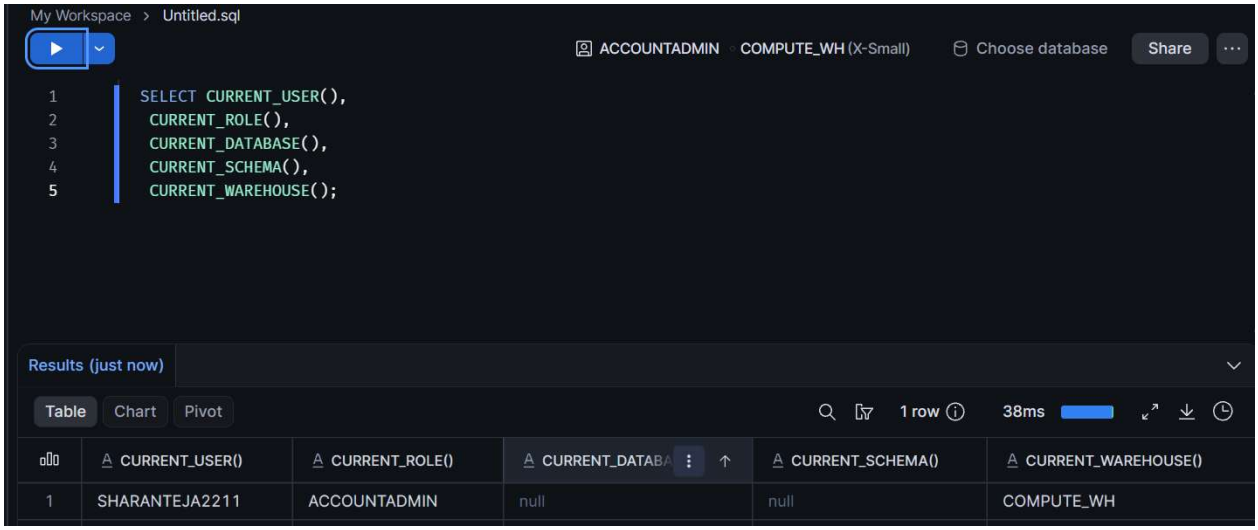


Warehouse creation

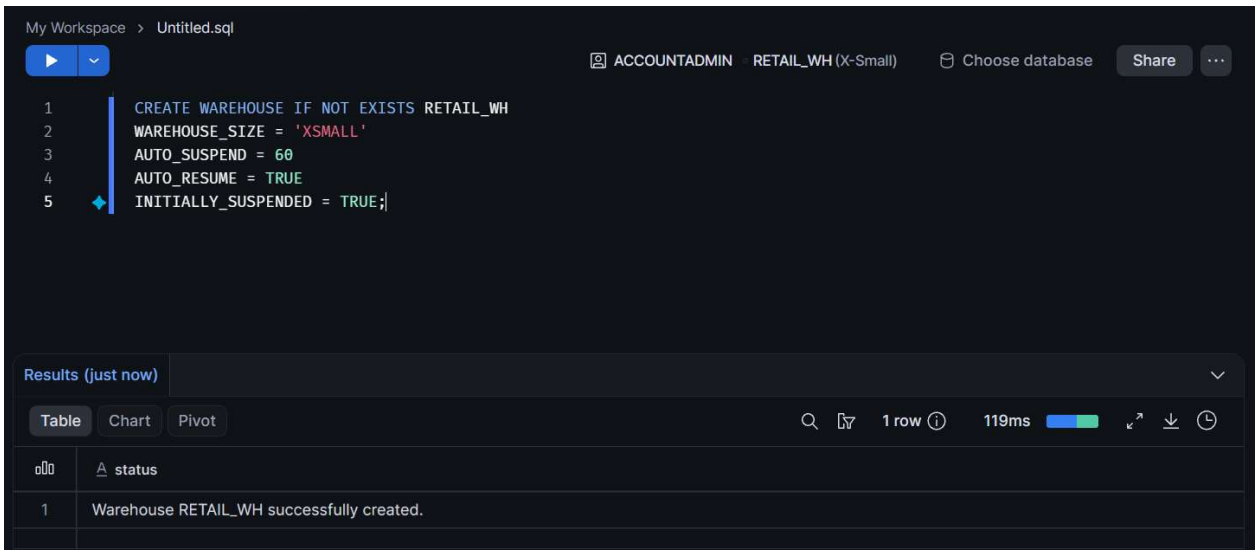

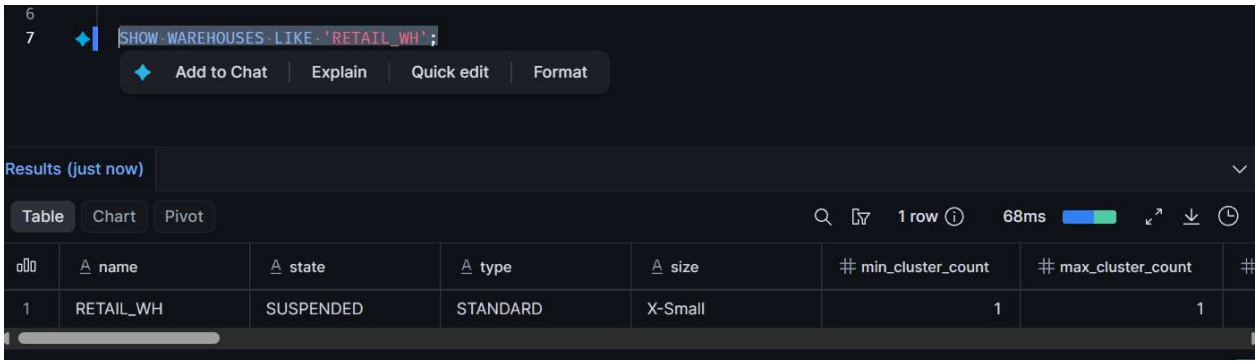

Create Database

```
11
12    CREATE DATABASE IF NOT EXISTS RETAIL_DB;
13    SHOW DATABASES LIKE 'RETAIL_DB';
14    USE DATABASE RETAIL_DB;
15    SELECT CURRENT_DATABASE();
```

Results (just now)

Table | Chart | Pivot

	CURRENT_DATABASE()
1	RETAIL_DB

Create Schema

```
18
19    CREATE SCHEMA IF NOT EXISTS RETAIL_DB.RAW;
20    USE SCHEMA RETAIL_DB.RAW;
21    SHOW SCHEMAS IN DATABASE RETAIL_DB;
```

Results (just now)

Table | Chart | Pivot — 3 rows — 43ms

	created_on	name	is_default	is_current	database_name	owner
1	2026-11-01 17:48:44.372 -0800	INFORMATION_SCHEMA	N	N	RETAIL_DB	
2	2026-11-01 17:47:12.855 -0800	PUBLIC	N	N	RETAIL_DB	ACCOUNTADMIN
3	2026-11-01 17:48:33.993 -0800	RAW	N	Y	RETAIL_DB	ACCOUNTADMIN

Create Table

```
CREATE TABLE IF NOT EXISTS RETAIL_DB.RAW.SALES (
    ORDER_ID NUMBER(10,0),
    PRODUCT VARCHAR(100),
    QUANTITY NUMBER(10,0),
    UNIT_PRICE NUMBER(12,2),
    CITY VARCHAR(100)
);

SHOW TABLES LIKE 'SALES'
IN SCHEMA RETAIL_DB.RAW;

DESCRIBE TABLE RETAIL_DB.RAW.SALES;
```

Results (just now)

Table | Chart | Pivot — 5 rows — 38ms

	name	type	kind	null?	default	primary key	unique key	chec
1	ORDER_ID	NUMBER(10,0)	COLUMN	Y	null	N	N	null
2	PRODUCT	VARCHAR(100)	COLUMN	Y	null	N	N	null
3	QUANTITY	NUMBER(10,0)	COLUMN	Y	null	N	N	null

Create File Format

```
CREATE FILE FORMAT IF NOT EXISTS
RETAIL_DB.RAW.RETAIL_CSV_FORMAT
TYPE = CSV
SKIP_HEADER = 1
FIELD_OPTIONALLY_ENCLOSED_BY = '"'
EMPTY_FIELD_AS_NULL = TRUE;

SHOW FILE FORMATS IN SCHEMA RETAIL_DB.RAW;

DESCRIBE FILE FORMAT RETAIL_DB.RAW.RETAIL_CSV_FORMAT;
```

lts (just now)

ble | Chart | Pivot — 24 rows — 24ms

property	property_type	property_value	property_defau
BINARY_FORMAT 4.2%	String 54.2%	true 20.8%	true
COMPRESSION 4.2%	Boolean 37.5%	AUTO 16.7%	AUTO
+22 more	+2 more	+12 more	+11 more
TYPE	String	CSV	CSV

Create Stage

```
CREATE STAGE IF NOT EXISTS
RETAIL_DB.RAW.RETAIL_STAGE
FILE_FORMAT = RETAIL_DB.RAW.RETAIL_CSV_FORMAT;


SHOW STAGES IN SCHEMA RETAIL_DB.RAW;

DESCRIBE STAGE RETAIL_DB.RAW.RETAIL_STAGE;
```

esults (just now)

Table | Chart | Pivot | 11 rows | 31ms

	parent_property	property	property_type	property_value
	STAGE_COPY_OP... 63.6%	AUTO_REFR... 9.1%	Boolean 63.6%	false 54.5%
	DIRECTORY 18.2%	ENABLE 9.1%	String 27.3%	18.2%
	+2 more	+9 more	+1 more	+3 more
1	STAGE_FILE_FORMAT	FORMAT_NAME	String	RETAIL_DB.RAW.RETAIL_CSV_FORMAT

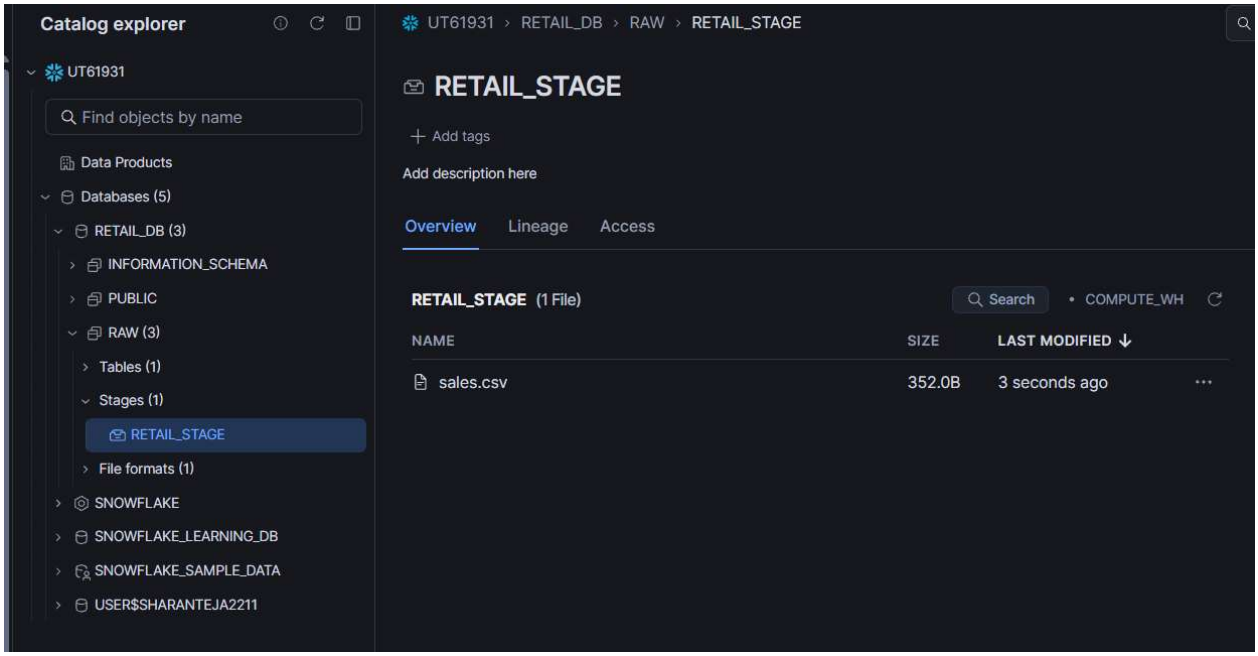

```
62
63  LIST @RETAIL_DB.RAW.RETAIL_STAGE;
```

Results (just now)

Table | Chart | Pivot — 1 row — 44ms

	name	size	md5	last_modified
1	retail_stage/sales.csv	352	e0d4272a44b53cf692fa1af28f2ed1	Mon, 2 Nov 2026 01:57:07

```
78
79  SELECT COUNT(*) AS TOTAL_RECORDS
80  FROM RETAIL_DB.RAW.SALES;
```

Results (just now)

Table | Chart | Pivot

	TOTAL_RECORDS
1	10

```
84  SELECT *
85  FROM RETAIL_DB.RAW.SALES
86  ORDER BY ORDER ID:
```

Results (just now)

Table | Chart | Pivot — 10 rows — 94ms

	ORDER_ID (1001 – 1010)	PRODUCT (Headphones 10.0%, Keyboard 10.0%, +8 more)	QUANTITY (1 – 5)	UNIT_PRICE (750 – 55000)	CITY (Bangalore 20.0, Chennai 20.0, +4 more)
1	1001	Laptop	2	55000.00	Chennai
2	1002	Mouse	5	750.00	Hyderabad
3	1003	Keyboard	3	1200.00	Bangalore
4	1004	Monitor	2	12000.00	Mumbai
5	1005	Headphones	4	2500.00	Delhi


Ctrl+I to generate
SELECT
ORDER_ID,
COUNT(*) AS RECORD_COUNT
FROM RETAIL_DB.RAW.SALES
GROUP BY ORDER_ID
HAVING COUNT(*) > 1;
Results (just now)
Table
Chart
Pivot
ORDER_ID
Query produced no results

```sql
SELECT
    CITY,
    COUNT(*) AS TOTAL_ORDERS
FROM RETAIL_DB.RAW.SALES
GROUP BY CITY
ORDER BY TOTAL_ORDERS DESC;
```

Results (just now)

Table | Chart | Pivot

	CITY	TOTAL_ORDE
1	Chennai	
2	Hyderabad	
3	Bangalore	
4	Mumbai	
5	Delhi	
6	Pune	