```sql
CREATE WAREHOUSE IF NOT EXISTS TEJA_STREAMING_WH
WAREHOUSE_SIZE = 'XSMALL'
AUTO_SUSPEND = 60
AUTO_RESUME = TRUE
INITIALLY_SUSPENDED = TRUE;


CREATE DATABASE IF NOT EXISTS TEJA_STREAMING_DB;
```

Results (just now)

Table | Chart | Pivot

	status
1	TEJA_STREAMING_WH already exists, statement succeeded.

```sql
CREATE DATABASE IF NOT EXISTS TEJA_STREAMING_DB;
```

Results (just now)

Table | Chart | Pivot

	status
1	Database TEJA_STREAMING_DB successfully created

```
11
12  CREATE SCHEMA IF NOT EXISTS TEJA_RAW;
```

Results (just now)

Table | Chart | Pivot

	status
1	Schema TEJA_RAW successfully created.

```
25  SELECT
26      CURRENT_DATABASE() AS DATABASE_NAME,
27      CURRENT_SCHEMA() AS SCHEMA_NAME,
28      CURRENT_WAREHOUSE() AS WAREHOUSE_NAME;
```

Results (just now)

Table | Chart | Pivot — 1 row — 19ms

	DATABASE_NAME	SCHEMA_NAME	WAREHOUSE_NAME
1	TEJA_STREAMING_DB	TEJA_RAW	TEJA_STREAMING_WH

```
30
31  CREATE TABLE IF NOT EXISTS TEJA_VIEWERS (
32      VIEWER_ID VARCHAR(20),
33      VIEWER_NAME VARCHAR(100),
34      AGE VARCHAR(10),
35      COUNTRY VARCHAR(100),
36      SUBSCRIPTION_TYPE VARCHAR(30),
37      SIGNUP_DATE VARCHAR(30),
38      DEVICE_TYPE VARCHAR(30)
39  );
```

Results (1 minute ago)

Table | Chart | Pivot

	status
1	Table TEJA_VIEWERS successfully created.

```sql
CREATE TABLE IF NOT EXISTS TEJA_VIEWING_ACTIVITY (
    ACTIVITY_ID VARCHAR(20),
    VIEWER_ID VARCHAR(20),
    MOVIE_ID VARCHAR(20),
    WATCH_DATE VARCHAR(30),
    WATCH_MINUTES VARCHAR(15),
    COMPLETION_PERCENTAGE VARCHAR(15),
    DEVICE_TYPE VARCHAR(30),
    RATING_GIVEN VARCHAR(15)
);
```

Results (just now)

Table | Chart | Pivot

	status
1	Table TEJA_VIEWING_ACTIVITY successfully created.

```
64  CREATE FILE FORMAT TEJA_CSV_FORMAT
65      TYPE = 'CSV'
66      FIELD_DELIMITER = ','
67      SKIP_HEADER = 1
68      FIELD_OPTIONALLY_ENCLOSED_BY = '"'
69      EMPTY_FIELD_AS_NULL = TRUE
70      NULL_IF = ('', 'NULL', 'null')
71      TRIM_SPACE = TRUE
72      ERROR_ON_COLUMN_COUNT_MISMATCH = TRUE;
```

Results (just now)

Table | Chart | Pivot


	status
1	Table TEJA_VIEWING_ACTIVITY successfully created.

```
    CREATE STAGE IF NOT EXISTS TEJA_STREAMING_STAGE
    FILE_FORMAT = TEJA_CSV_FORMAT;
```

ults (just now)

able | Chart | Pivot

	status
	Stage area TEJA_STREAMING_STAGE successfully created.

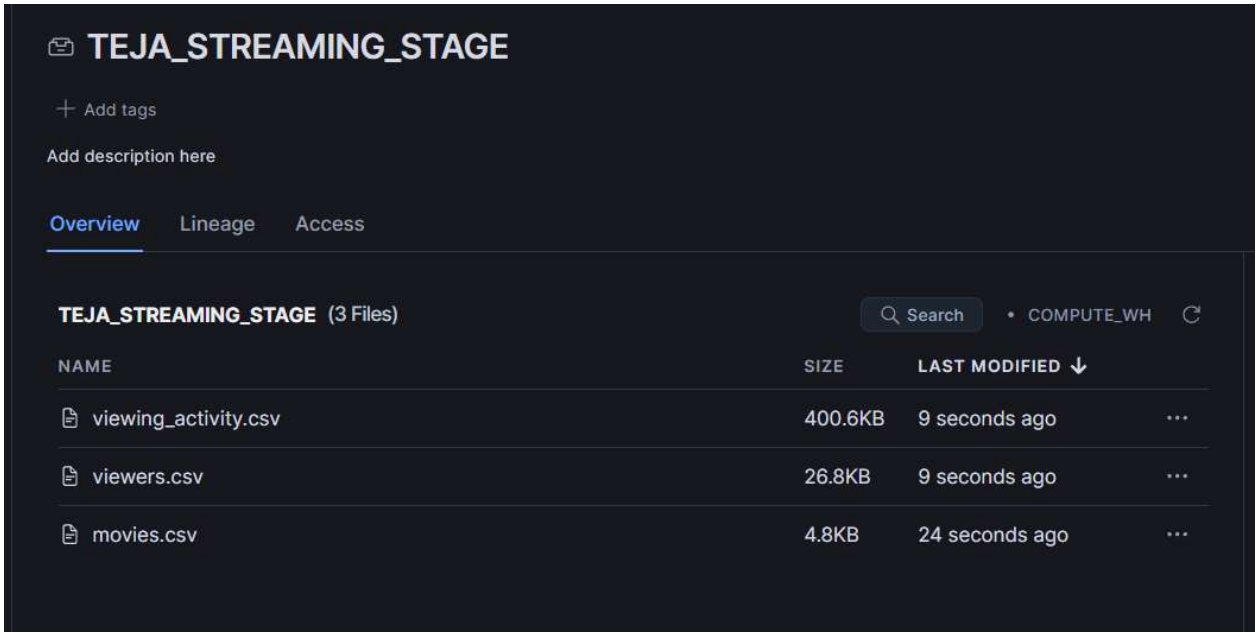


```
83
84  LIST @TEJA_STREAMING_STAGE;
```

Results (just now)

Table | Chart | Pivot — 3 rows — 34ms

	name	size	md5	last_modified
1	teja_streaming_stage/movies.csv	4912	38dff12150a81652740158460ad97b5f	Wed, 4 Nov 2026 11:03:52 GMT
2	teja_streaming_stage/viewers.csv	27488	8b3005ffda034ca9fff6be5b45994395	Wed, 4 Nov 2026 11:04:07 GMT
3	teja_streaming_stage/viewing_activity.csv	410224	f5aa87d707a3e6a21e2b41fb20d580ee	Wed, 4 Nov 2026 11:04:07 GMT

```
85
86  COPY INTO TEJA_VIEWERS
87  FROM @TEJA_STREAMING_STAGE/viewers.csv
88  FILE_FORMAT = (FORMAT_NAME = 'TEJA_CSV_FORMAT')
89  ON_ERROR = 'ABORT_STATEMENT';
```

Results (just now)

Table | Chart | Pivot — Sort ascending

	file	status	rows_parsed	rows_loaded
1	teja_streaming_stage/v	LOADED	500	500

```
92  COPY INTO TEJA_MOVIES
93  FROM @TEJA_STREAMING_STAGE/movies.csv
94  FILE_FORMAT = (FORMAT_NAME = 'TEJA_CSV_FORMAT')
95  ON_ERROR = 'ABORT_STATEMENT';
```

Results (just now)

Table | Chart | Pivot — 1 row

	file	status	rows_parsed	rows_loaded	error_limit
1	teja_streaming_stage/n	LOADED	100	100	

```
97  COPY INTO TEJA_VIEWING_ACTIVITY
98  FROM @TEJA_STREAMING_STAGE/viewing_activity.csv
99  FILE_FORMAT = (FORMAT_NAME = 'TEJA_CSV_FORMAT')
100 ON_ERROR = 'ABORT_STATEMENT';
```

Results (just now)

Table | Chart | Pivot

	file	status	rows_parsed	rows_loaded	error_
1	teja_streaming_stage/v	LOADED	10000	10000	

```
103 SELECT *
104 FROM TABLE(
105     TEJA_STREAMING_DB.INFORMATION_SCHEMA.COPY_HISTORY(
106         TABLE_NAME => 'TEJA_STREAMING_DB.TEJA_RAW.TEJA_VIEWERS',
107         START_TIME => DATEADD('HOUR', -2, CURRENT_TIMESTAMP())
108     )
109 );
```

Results (just now)

Table | Chart | Pivot — 1 row — 165ms

	FILE_NAME	STAGE_LOCATION	LAST_LOAD_TIME	ROW_COUNT	ROW_PARSED	
1	viewers.csv	stages/0620114c-9a31-	2026-11-04 03:40:39.9	500	500	

```
122 FROM TEJA_MOVIES
123
124 UNION ALL
125
126 SELECT
127     'VIEWING_ACTIVITY',
128     COUNT(*)
129 FROM TEJA_VIEWING_ACTIVITY;
```

Results (just now)

Table | Chart | Pivot — 3 rows — 205ms

	DATASET	TOTAL_RECORDS
1	VIEWERS	500
2	MOVIES	100
3	VIEWING_ACTIVITY	10000

```
132 SELECT
133     COUNT_IF(VIEWER_ID IS NULL) AS NULL_VIEWER_ID,
134     COUNT_IF(VIEWER_NAME IS NULL) AS NULL_VIEWER_NAME,
135     COUNT_IF(AGE IS NULL) AS NULL_AGE,
136     COUNT_IF(COUNTRY IS NULL) AS NULL_COUNTRY,
137     COUNT_IF(SUBSCRIPTION_TYPE IS NULL) AS NULL_SUBSCRIPTION,
138     COUNT_IF(SIGNUP_DATE IS NULL) AS NULL_SIGNUP_DATE,
139     COUNT_IF(DEVICE_TYPE IS NULL) AS NULL_DEVICE
140 FROM TEJA_VIEWERS;
```

Results (just now)

Table | Chart | Pivot — 1 row — 114ms

	L_VIEWER_NAME	NULL_AGE	NULL_COUNTRY	NULL_SUBSCRIPTION	NULL_SIGNUP_DATE	NULL_DEVICE
1	0	8	0	0	0	2

```
144 SELECT
145     COUNT_IF(MOVIE_ID IS NULL) AS NULL_MOVIE_ID,
146     COUNT_IF(MOVIE_TITLE IS NULL) AS NULL_TITLE,
147     COUNT_IF(GENRE IS NULL) AS NULL_GENRE,
148     COUNT_IF(IMDB_RATING IS NULL) AS NULL_RATING
149 FROM TEJA_MOVIES;
```

Results (just now)

Table | Chart | Pivot — 1 row — 354ms

	NULL_MOVIE_ID	NULL_TITLE	NULL_GENRE	NULL_RATING
1	0	0	0	3

```
152 SELECT
153     COUNT_IF(ACTIVITY_ID IS NULL) AS NULL_ACTIVITY_ID,
154     COUNT_IF(VIEWER_ID IS NULL) AS NULL_VIEWER_ID,
155     COUNT_IF(MOVIE_ID IS NULL) AS NULL_MOVIE_ID,
156     COUNT_IF(WATCH_DATE IS NULL) AS NULL_WATCH_DATE,
157     COUNT_IF(RATING_GIVEN IS NULL) AS NULL_RATING
158 FROM TEJA_VIEWING_ACTIVITY;
```

Results (just now)

Table | Chart | Pivot — 1 row — 164ms

	NULL_ACTIVITY_ID	NULL_VIEWER_ID	NULL_MOVIE_ID	NULL_WATCH_DATE	NULL_RATING
1	0	0	0	2	5099

```sql
SELECT
    ACTIVITY_ID,
    COUNT(*) AS RECORD_COUNT
FROM TEJA_VIEWING_ACTIVITY
GROUP BY ACTIVITY_ID
HAVING COUNT(*) > 1;
```

Results (just now)

Table | Chart | Pivot — 2 rows — 78ms

	ACTIVITY_ID	RECORD_COUNT
1	9000	2
2	9500	2

```sql
SELECT COUNT(*)
FROM TEJA_VIEWERS
WHERE TRY_TO_NUMBER(AGE) NOT BETWEEN 18 AND 100
   OR TRY_TO_NUMBER(AGE) IS NULL;
```

Results (just now)

Table | Chart | Pivot — 1 row

	COUNT(*)
1	11

```sql
CREATE OR REPLACE TABLE TEJA_VIEWERS_CLEAN AS
SELECT
    TRY_TO_NUMBER(VIEWER_ID) AS VIEWER_ID,

    INITCAP(TRIM(VIEWER_NAME)) AS VIEWER_NAME,

    CASE
        WHEN TRY_TO_NUMBER(AGE) BETWEEN 18 AND 100
        THEN TRY_TO_NUMBER(AGE)
        ELSE NULL
    END AS AGE,

    INITCAP(LOWER(TRIM(COUNTRY))) AS COUNTRY,

    INITCAP(LOWER(TRIM(SUBSCRIPTION_TYPE)))
        AS SUBSCRIPTION_TYPE,

    TRY_TO_DATE(SIGNUP_DATE, 'YYYY-MM-DD') AS SIGNUP_DATE,

    COALESCE(
        NULLIF(INITCAP(TRIM(DEVICE_TYPE)), ''),
        'UNKNOWN'
    ) AS DEVICE_TYPE

FROM TEJA_STREAMING_DB.TEJA_RAW.TEJA_VIEWERS

QUALIFY ROW_NUMBER() OVER (
    PARTITION BY VIEWER_ID
    ORDER BY SIGNUP_DATE
) = 1;
```

Results (just now)

```sql
CREATE OR REPLACE TABLE TEJA_MOVIES_CLEAN AS
SELECT
    TRY_TO_NUMBER(MOVIE_ID) AS MOVIE_ID,

    TRIM(MOVIE_TITLE) AS MOVIE_TITLE,

    INITCAP(LOWER(TRIM(GENRE))) AS GENRE,

    CASE
        WHEN TRY_TO_NUMBER(RELEASE_YEAR) BETWEEN 1900 AND 2026
        THEN TRY_TO_NUMBER(RELEASE_YEAR)
        ELSE NULL
    END AS RELEASE_YEAR,

    UPPER(TRIM(LANGUAGE)) AS LANGUAGE,

    CASE
        WHEN TRY_TO_NUMBER(DURATION_MINUTES) > 0
        THEN TRY_TO_NUMBER(DURATION_MINUTES)
        ELSE NULL
    END AS DURATION_MINUTES,

    CASE
        WHEN TRY_TO_DOUBLE(IMDB_RATING) BETWEEN 0 AND 10
        THEN TRY_TO_DOUBLE(IMDB_RATING)
        ELSE NULL
    END AS IMDB_RATING

FROM TEJA_STREAMING_DB.TEJA_RAW.TEJA_MOVIES

QUALIFY ROW_NUMBER() OVER (
    PARTITION BY MOVIE_ID
    ORDER BY MOVIE_ID
) = 1;
```

ults (just now)

```
399
400   UNION ALL
401
402   SELECT 'REJECTED_ACTIVITY',
403          COUNT(*)
404   FROM TEJA_REJECTED_ACTIVITY;
```

Results (just now)

Table | Chart | Pivot — 4 rows — 167ms

	TABLE_NAME	TOTAL_RECORDS
1	VIEWERS_CLEAN	500
2	MOVIES_CLEAN	100
3	VIEWING_ACTIVITY_CLEAN	9988
4	REJECTED_ACTIVITY	10

```
522   SELECT
523       GENRE,
524       COUNT(*) AS TOTAL_SESSIONS,
525       ROUND(AVG(WATCH_MINUTES), 2) AS AVG_WATCH_TIME,
526       SUM(WATCH_MINUTES) AS TOTAL_WATCH_TIME
527
528   FROM TEJA_STREAMING_ANALYTICS
529
530   GROUP BY GENRE
531
532   ORDER BY AVG_WATCH_TIME DESC;
```

Results (just now) | Results (just now)

Table | Chart | Pivot — 10 rows — 117ms

	GENRE	TOTAL_SESSIONS	AVG_WATCH_TIME	TOTAL_WATCH_TIME
	Action 10.0% Adventure 10.0% +8 more	463 – 1721	97.75 – 104.75	45258 – 17918
1	Comedy	1220	104.75	12779
2	Animation	1721	104.12	17918
3	Mystery	804	104.00	8361

```sql
SELECT
    GENRE,
    COUNT(*) AS TOTAL_SESSIONS,
    ROUND(AVG(WATCH_MINUTES), 2) AS AVG_WATCH_TIME,
    SUM(WATCH_MINUTES) AS TOTAL_WATCH_TIME

FROM TEJA_STREAMING_ANALYTICS

GROUP BY GENRE

ORDER BY AVG_WATCH_TIME DESC;
```

Results (just now) | Results (just now)

Table | Chart | Pivot — 10 rows — 117ms

	GENRE	TOTAL_SESSIONS	AVG_WATCH_TIME	TOTAL_WATCH_TIME
	Action 10.0% Adventure 10.0% +8 more	463 – 1721	97.75 – 104.75	45258 – 17918
1	Comedy	1220	104.75	12779
2	Animation	1721	104.12	17918
3	Mystery	804	104.00	8361

```sql
SELECT
    SUBSCRIPTION_TYPE,
    COUNT(DISTINCT VIEWER_ID) AS TOTAL_VIEWERS,
    COUNT(ACTIVITY_ID) AS TOTAL_SESSIONS,
    ROUND(AVG(WATCH_MINUTES), 2) AS AVG_WATCH_MINUTES,
    ROUND(AVG(COMPLETION_PERCENTAGE), 2) AS AVG_COMPLETION

FROM TEJA_STREAMING_ANALYTICS

GROUP BY SUBSCRIPTION TYPE
```

Results (just now) | Results (just now)

Table | Chart | Pivot — 3 rows — 122ms

	SUBSCRIPTION_TYPE	TOTAL_VIEWERS	TOTAL_SESSIONS	AVG_WATCH_MINUTES	AVG_COMPLETION
1	Basic	155	3039	103.33	52.94
2	Premium	170	3335	103.14	52.68
3	Standard	175	3614	102.31	52

	SQL TEXT	E SIZE	DURATION	STARTED	END TIME
1	WITH ACTIVITY_AGG AS (SELECT VIEWER_ID,…		388ms	Nov 04, 2026, 05:29:05 PM	Nov 04, 2026, 0
2	SELECT M.GENRE, V.COUNTRY, COUNT(A.ACTIV…		141ms	Nov 04, 2026, 05:27:30 PM	Nov 04, 2026, 0