Column Name	Data Type	Description
OOO_USER_ID	VARCHAR2(32 CHAR) NOT NULL	User ID – May be the person. User id of the user who initiated the process
OOO_WS_ID	VARCHAR2(32 CHAR) NOT NULL	workstation ID/channel ID/IP Address
OOO_LOCAL_TS	TIMESTAMP NOT NULL	This is an Operation Timestamp. When the Transaction is initiated. This is in UTC. same timestamp will carry for a transaction.
OOO_HOST_TS	TIMESTAMP NOT NULL	This is UTC timestamp when the row got updated in the table. Each row of the table will have diff timestamp.
RULE_SYSTEM_ID	VARCHAR2(32 CHAR) NOT NULL	Business process/Module that initiated the process
LDBID	NUMBER(6) NOT NULL	The logical database identifier for the financial institution.
OOO_ACPT_TS	TIMESTAMP NOT NULL	This is NOT UTC time. this is a local/client system timestamp. This can be passed from the channel also. If not passed, then this will contain the LOCAL_TS values but NOT in UTC.
OOO_ACPT_TS_UTC_OFST	CHAR(6 CHAR) NOT NULL	This is offset time-zone for the ACPT_TS. So that ACPT_TS can also convert to UTC.
UUID	VARCHAR2(36 CHAR)	Unique Service Request Identifier

https://start.spring.io/

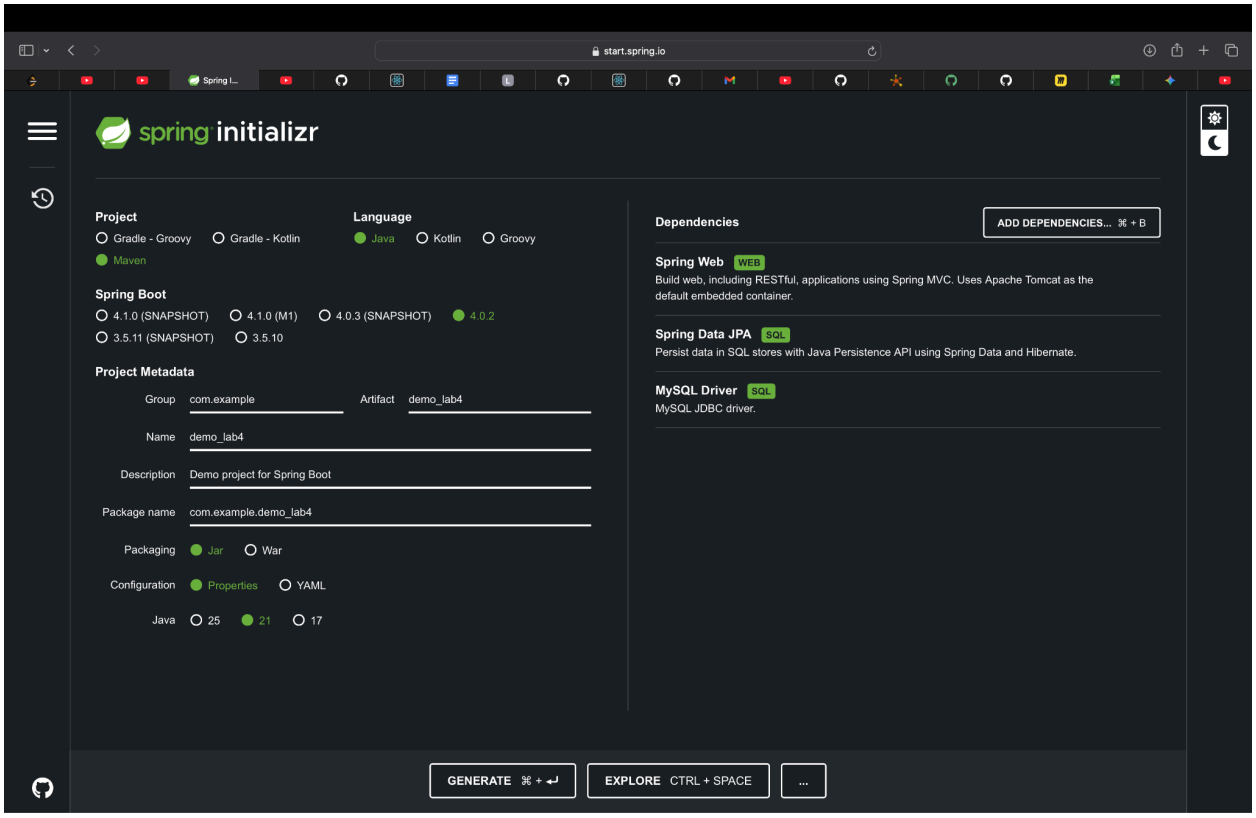

Then open pom.xml and add the dependency

```
<dependency>
        <groupId>org.springframework.boot</groupID>
        <artifactId>spring-boot_starter-validation</artifactId>
<dependency>
```