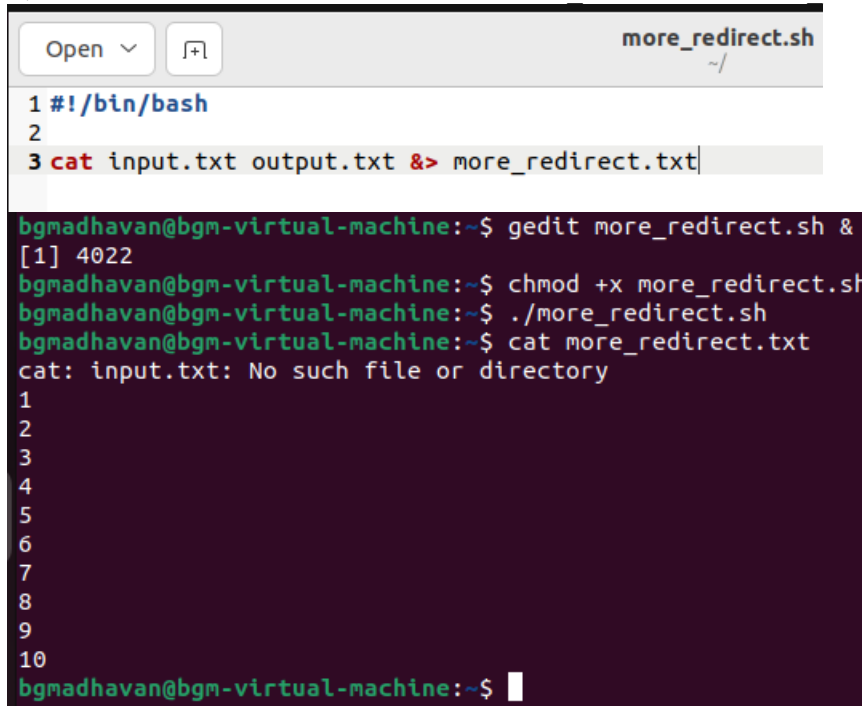# More on Redirection

1) Create X_file.txt file with some content.
2) Redirect the content of both out_file.txt and X_file.txt to a new file

```
Open ∨    [+]                          more_redirect.sh
                                            ~/

1 #!/bin/bash
2
3 cat input.txt output.txt &> more_redirect.txt
```

```
bgmadhavan@bgm-virtual-machine:~$ gedit more_redirect.sh &
[1] 4022
bgmadhavan@bgm-virtual-machine:~$ chmod +x more_redirect.sh
bgmadhavan@bgm-virtual-machine:~$ ./more_redirect.sh
bgmadhavan@bgm-virtual-machine:~$ cat more_redirect.txt
cat: input.txt: No such file or directory
1
2
3
4
5
6
7
8
9
10
bgmadhavan@bgm-virtual-machine:~$ 
```