

1) Make a directory structure like this in your home directory

2) Remove the also_inside_demo directory

#commands in terminal

```
mkdir demodir
```

```
mkdir demodir/inside_demo
```

```
mkdir demodir/also_inside_demo/abc
```

```
mkdir demodir/also_inside_demo/abc_123
```


```
rm -r demodir/also_inside_demo
```

```
ls
```

```
cd demodir
```

```
ls
```

```
ls -all
```

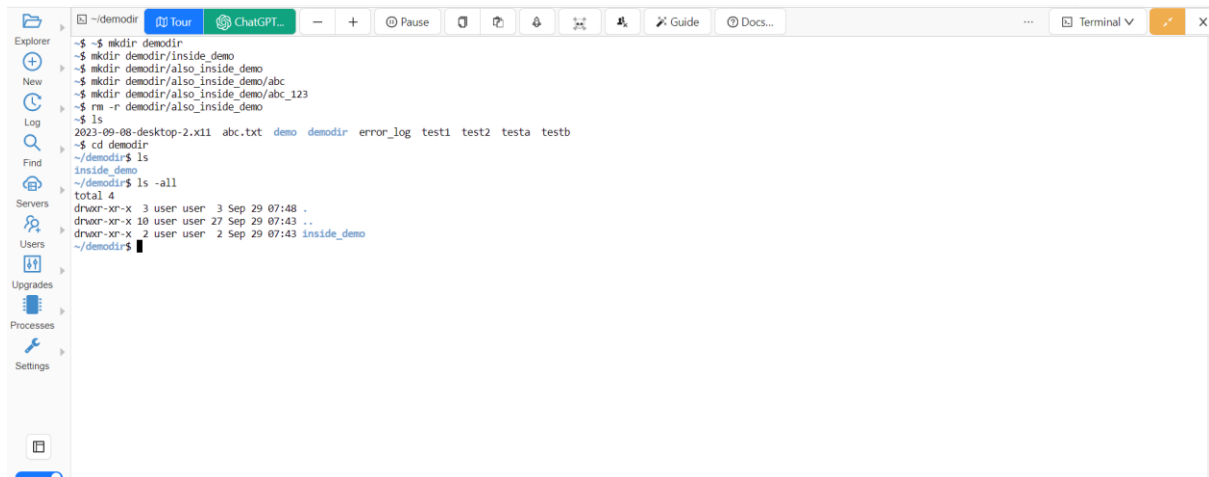

```
~$ - $ mkdir demodir
~$ - $ mkdir demodir/inside_demo
~$ - $ mkdir demodir/also_inside_demo
~$ - $ mkdir demodir/also_inside_demo/abc
~$ - $ mkdir demodir/also_inside_demo/abc_123
~$ - $ rm -r demodir/also_inside_demo
~$ - $ ls
2023-09-08-desktop-2.x11  abc.txt  demo  demodir  error_log  test1  test2  testa  testb
~$ - $ cd demodir
~/demodir$ ls
inside_demo
~/demodir$ ls -all
total 4
drwxr-xr-x  3 user user  3 Sep 29 07:48 .
drwxr-xr-x 10 user user 27 Sep 29 07:43 ..
drwxr-xr-x  2 user user  2 Sep 29 07:43 inside_demo
~/demodir$
```